

N. H. E. REG. COMMISSION  
 P. O. BOX 1077  
 HOBBS, NEW MEXICO 88240

Form 9-331  
 Dec. 1973

Form Approved.  
 Budget Bureau No. 42-R1424

UNITED STATES  
 DEPARTMENT OF THE INTERIOR  
 GEOLOGICAL SURVEY

**SUNDRY NOTICES AND REPORTS ON WELLS**

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well  gas well  other

2. NAME OF OPERATOR  
 Amoco Production Company

3. ADDRESS OF OPERATOR  
 P. O. Box 68, Hobbs, New Mexico 88240

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
 AT SURFACE: 1980' FSL X 1980' FWL, Unit K  
 AT TOP PROD. INTERVAL: Sec. 11, T-18-S, R-32-E  
 AT TOTAL DEPTH:

5. LEASE  
 NM 40452

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME  
 Federal BS

9. WELL NO.  
 1

10. FIELD OR WILDCAT NAME  
 Und. Bone Springs

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
 11-18-32

12. COUNTY OR PARISH  
 Lea

13. STATE  
 NM

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)  
 3867.8' RDB

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:		SUBSEQUENT REPORT OF:	
TEST WATER SHUT-OFF	<input type="checkbox"/>		<input type="checkbox"/>
FRACTURE TREAT	<input type="checkbox"/>		<input type="checkbox"/>
SHOOT OR ACIDIZE	<input type="checkbox"/>		<input checked="" type="checkbox"/>
REPAIR WELL	<input type="checkbox"/>		<input type="checkbox"/>
PULL OR ALTER CASING	<input type="checkbox"/>		<input type="checkbox"/>
MULTIPLE COMPLETE	<input type="checkbox"/>		<input type="checkbox"/>
CHANGE ZONES	<input type="checkbox"/>		<input type="checkbox"/>
ABANDON*	<input type="checkbox"/>		<input type="checkbox"/>
(other)			

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

Moved in service unit 6-9-82. Set a packer at 6703'. Pumped 6000 gal 15% NE-HCL acid with additives and 2500 gal 10# gelled brine water with 2000# graded rock salt block. Tagged acid with radioactive material. Flushed with 31 BFW. Pulled packer. Ran 6 joints 2-3/8" tubing, seating nipple, and tubing anchor. Seating nipple landed at 6949' and anchor set at 6776'. Ran rods and pump. Moved out service unit 6-13-82. Pump tested for 72 hrs. and pumped 183 BLW. Moved in service unit 6-21-81. Found pump unseated. Reset pump. Pump tested for 328 hrs. and pumped 67 BO and 443 BW. Returned well to production.

0+4-USGS,R 1-HOU 1-SUSP 1-CLF

Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Set @ \_\_\_\_\_ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Cathy L. Jorman TITLE Ast. Adm. Analyst DATE 9-15-82

ACCEPTED FOR RECORD


(This space for Federal or State office use)

APPROVED BY \_\_\_\_\_ DATE \_\_\_\_\_  
 CONDITIONS OF APPROVAL \_\_\_\_\_

(ORIG. SGD.) DAVID R. GLASS

NOV 1 1982

U.S. GEOLOGICAL SURVEY  
 POSWELL, NEW MEXICO

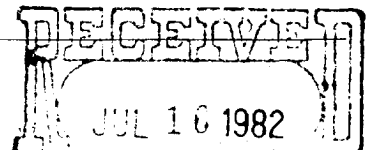

\*See Instructions on Reverse Side

OIL & GAS  
 U.S. GEOLOGICAL SURVEY  
 POSWELL, NEW MEXICO