


N.

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

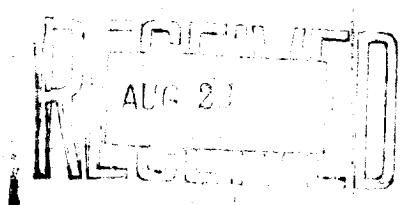

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

AREA 640 ACRES
LOCATE WELL CORRECTLY

Repollo Oil Company

Hobbs, New Mexico

Company or Operator W. W. White Well No. 1 in E/2SE/4 of Sec. 24, T. 20S
 Lease 30E N. M. P. M. Denise Field, Lea County.
 Well is 590 feet North of the 3/4 line and 550 feet West of the East line of S/2SE/4 Sec. 20
 If State land the oil and gas lease is No. _____ Assignment No. _____
 If patented land the owner is W. W. White Address _____ ?
 If Government land the permittee is _____ Address _____
 The Lessee is _____ Address _____
 Drilling commenced July 12 19 37 Drilling was completed August 11 19 37
 Name of drilling contractor Loffland Bros., Address Tulsa, Okla.
 Elevation above sea level at top of casing 5546 feet.
 The information given is to be kept confidential until _____ 19 _____

OIL SANDS OR ZONES

No. 1, from 3750 to 3861 No. 4, from _____ to _____
 No. 2, from _____ to _____ No. 5, from _____ to _____
 No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.
 No. 1, from _____ to _____ feet.
 No. 2, from _____ to _____ feet.
 No. 3, from _____ to _____ feet.
 No. 4, from _____ to _____ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
1 3/4"	45	8	?	255	none			
9 5/8"	45	8	?	1107	Float			
7" OD	24	10	?	5727	Float			
2" Reg. Seamless Tubing				3849				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
1 3/4"	1 3/4"	251	300	Halliburton		
1 1/2"	9 5/8"	1126	400	Do		
8 5/8"	7" OD	3738	300	Do		
	2"	3855		Reg. Seamless Tubing		

PLUGS AND ADAPTERS

Heaving plug—Material None Length _____ Depth Set _____
 Adapters—Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Denise Dewell "X1"	3000 Gal.	8/11/37	3760-3861	
		Do	3000 "	8/16/37	3760-3861	

Results of shooting or chemical treatment 1st treatment- Flowed 145 Bbl. oil 12 hours
2nd " " " 180 " " 12 "

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 3861 feet, and from _____ feet to _____ feet
 Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing _____ 19 _____
 The production of the first 12 hours was 145 barrels of fluid of which 100 % was oil; _____ % emulsion; _____ % water; and _____ % sediment. Gravity, Be. _____
 If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____
 Rock pressure, lbs. per sq. in. _____

EMPLOYEES

John Wells Driller J. W. Wandewort Driller
R. F. Bahlow Driller _____ Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 21 day of Aug. 19 37 at Hobbs, New Mexico Date Aug. 17, 1937
Catharine Mahoney Notary Public Name L. Sured Position Dist. Supt.
 My Commission expires 10-24-39 Representing Repollo Oil Company Company or Operator
 Address Hobbs, N. M.

FORMATION RECORD

WATERBURY, VERMONT, 1912

FROM	TO	THICKNESS IN FEET	FORMATION
0	140	140	Red Rock
140	260	120	Red Rock & Shells
260	1042	782	Red Bed & Shells
1042	1140	98	Gyp & Anhydrite
1140	1255	715	Anhydrite & Salt
1255	2091	836	Salt & Shells
2091	2235	144	Anhydrite & Salt
2235	2480	245	Salt & Shells
2480	2500	20	Anhydrite
2500	2569	69	Gyp & Anhydrite
2569	2645	76	Lime & Anhydrite
2645	2661	16	Lime