
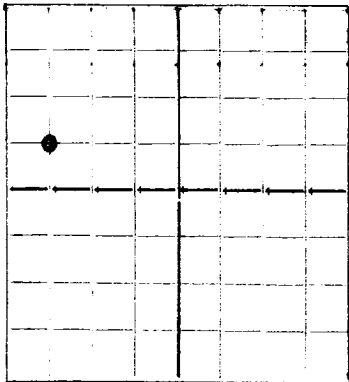


N.

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico



WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

AREA 640 ACRES
LOCATE WELL CORRECTLY

DUPLICATE

Gulf Oil Corporation

Tulsa, Oklahoma

Company or Operator R. R. Bell F Address Tulsa, Oklahoma
 Well No. 7 in SW NW of Sec. 36, T. 20S
 Lease 36E N. M. P. M. Eunice Field, Lea County.
 Well is 1980 feet south of the North line and 1980 feet west of the East line of SW NW
 If State land the oil and gas lease is No. B-230 Assignment No. _____
 If patented land the owner is _____ Address _____
 If Government land the permittee is _____ Address _____
 The Lessee is Gulf Oil Corporation Address Tulsa, Oklahoma
 Drilling commenced 3-15- 1938 Drilling was completed 4-9- 1938
 Name of drilling contractor Loffland Brothers Address Tulsa, Oklahoma
 Elevation above sea level at top of casing 3552 feet.
 The information given is to be kept confidential until ? 19

OIL SANDS OR ZONES

No. 1, from Pay 3778' to TD 3855' No. 4, from _____ to _____
 No. 2, from _____ to _____ No. 5, from _____ to _____
 No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.
 No. 1, from Rotary hole to _____ feet.
 No. 2, from _____ to _____ feet.
 No. 3, from _____ to _____ feet.
 No. 4, from _____ to _____ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
13-3/8	27.8	--	Arneo	37'				
7-5/8	26.4	8	SC LW	1206				
5-1/2	20	10	SMLS.	3698				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17-3/4	13-3/8	37'	60	By hand		
9-7/8	7-5/8	1206	610	Halliburton		
6-3/4	5-1/2	3698	125	Halliburton		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____
 Adapters—Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		<u>Hydrochloric acid</u>	<u>2000 gal.</u>	<u>4-13-38</u>	<u>3855'</u>	

Results of shooting or chemical treatment _____

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0' feet to 3855' feet, and from _____ feet to _____ feet
 Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing April 16, 1938
 The production of the first 24 hours was 303 barrels of fluid of which _____% was oil; _____% emulsion; _____% water; and _____% sediment. Gravity, Be _____
 If gas well, cu. ft. per 24 hours 430,000 Gallons gasoline per 1,000 cu. ft. of gas _____
 Rock pressure, lbs. per sq. in. _____

EMPLOYEES

Driller _____ Driller _____
 Driller _____ Driller _____

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 2 day of April 1938
Bill Evans
 Notary Public
 My Commission expires March 10, 1940

Tulsa, Oklahoma April 21, 1938
 Place Date
 Name D. Dander
 Position General Superintendent
 Representing Gulf Oil Corporation
 Company or Operator
 Address Tulsa, Oklahoma

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0'	38'		Surface
	690		Sand & red bed
	740		Red bed
	992		Red rock
	1137		Red rock & shells
	1201		Red rock & anhydrite
	1310		Anhydrite
	2356		Salt & shells
	2635		Salt & anhydrite
	2702		Anhydrite
	2723		Anhydrite & lime shells
	2743		Anhydrite & lime
	2772		Anhydrite & lime shells
	2815		Anhydrite & lime
	2868		Lime
	2928		Sandy lime
Total depth	3855		Lime

Formation tops:

Anhydrite	1180'
Salt Base	2640
Pay	3778