


NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

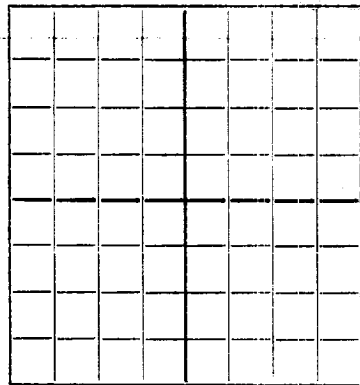

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

AREA 640 ACRES
LOCATE WELL CORRECTLY

Shell Petroleum Corporation State **G**
Company or Operator.
Well No. **1** in **S W 1/4** of Sec. **16**, T. **20 S**
R. **37 E**, N. M. P. M., **Monument** Field, **Lea** County.
Well is **330** feet ~~SW~~ **N** of the ~~North~~ **S** line and **330** feet ~~SW~~ **E** of the ~~SW~~ **N** line of **16**
If State land the oil and gas lease is No. **N.M. 519** Assignment No. _____
If patented land the owner is _____, Address _____
If Government land the permittee is _____, Address _____
The Lessee is **Shell Petroleum Corporation**, Address **Box 2099 Houston, Texas**
Drilling commenced **7-19-36** 19____ Drilling was completed **3-25-36** 19____
Name of drilling contractor **Oil Well Drlg. Company**, Address **Hobbs, New Mexico**
Elevation above sea level at top of casing **3521** feet.
The information given is to be kept confidential until **Not confidential** 19____

OIL SANDS OR ZONES

No. 1, from _____ to _____ No. 4, from _____ to _____
No. 2, from _____ to _____ No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.
No. 1, from _____ to _____ feet.
No. 2, from _____ to _____ feet.
No. 3, from _____ to _____ feet.
No. 4, from _____ to _____ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
12 1/2	50	8	S H	155	-	Cemented		W S O
9 5/8	36	8	New	1110	Float	"		"
7	24	10	New	3601		"		"

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17 1/2	12 1/2	155	150	Halliburton		
12	9 5/8	1110	400	"		
8 3/4	7	3601	275	"		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____
Adapters—Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Acid	2000 Gal.	8-27-36	3601-3641	

Results of shooting or chemical treatment **Increased from 77 Bbls. oil per hour to 167 barrels oil per hour .**

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet
Cable toops were used from _____ feet to _____ feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing **9-1** **3 1/2** 19**36**
The production of the first **24** hours was **585** barrels of fluid of which **99.8** % was oil; _____ % emulsion; _____ % water; and **2/10** % sediment. Gravity, Be. **32.8 Baume at 60 Fahr .**
If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____
Rock pressure, lbs. per sq. in. _____

EMPLOYEES

V. Beasley, Driller _____, Driller _____
J. Rehan, Driller _____, Driller _____

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this **18** day of _____, 19**36**

Hobbs, New Mexico
Name _____
Position **District Engineer**
Representing **Shell Petroleum Corporation**
Company or Operator _____
Address **Box 1457 Hobbs, New Mexico**

Notary Public _____
My Commission expires **12-29-37**

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	115		Surface sand and caliche
115	1088		Red beds w/ hard streaks
1088	1182		Anhydrite
1182	2409		Anhydrite and salt
2409	2753		Anhydrite
2753	3242		Anhydrite w/ streaks lime
3242	3341		Hard grey lime w/ streaks sdy lime w/ streaks soft lime .