



NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

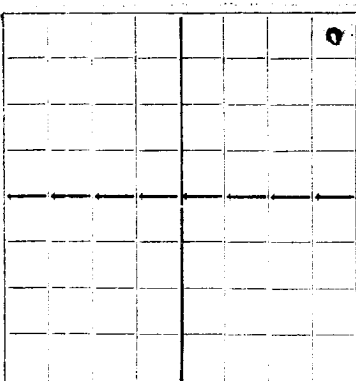


AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

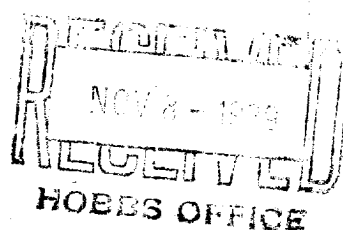

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

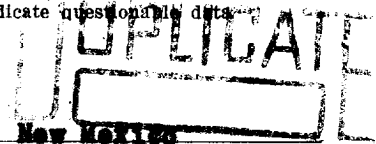

The Ohio Oil Company Company or Operator **Hobbs, New Mexico** Address
State McDonald Well No. **11** in **NE 1/4 NE 1/4** of Sec. **13**, T. **22 S**
 Lease
 R. **36 E**, N. M. P. M., **South Eunice** Field, **Lea** County.
 Well is **330** feet south of the North line and **330** feet west of the East line of **Sec. 13**
 If State land the oil and gas lease is No. **A-2614** Assignment No. _____
 If patented land the owner is _____ Address _____
 If Government land the permittee is _____ Address _____
 The Lessee is _____ Address _____
 Drilling commenced **Nov. 19** 19 **39** Drilling was completed **November 7,** 19 **39**
 Name of drilling contractor **Noble Drilling Company**, Address **Tulsa, Oklahoma**
 Elevation above sea level at top of casing **3452** feet.
 The information given is to be kept confidential until _____ 19 _____

OIL SANDS OR ZONES

No. 1, from **3632** to **3735** No. 4, from _____ to _____
 No. 2, from _____ to _____ No. 5, from _____ to _____
 No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.
 No. 1, from _____ to _____ feet.
 No. 2, from _____ to _____ feet.
 No. 3, from _____ to _____ feet.
 No. 4, from _____ to _____ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM	TO	PURPOSE
9 5/8				362	Reg				
7				3632	Float				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
11	9 5/8	362	175	Halliburt	10	40
8 3/4	7	3632	600	"	10	40

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____
 Adapters—Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment _____

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from **0** feet to **3735** feet, and from _____ feet to _____ feet
 Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing **Nov. 16, 1939** 19 _____
 The production of the first **24** hours was **38** barrels of fluid of which **100** % was oil; _____ % emulsion; _____ % water; and _____ % sediment. Gravity, Be. _____
 If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____
 Rock pressure, lbs. per sq. in. _____

NOBLE DRILLING COMPANY

EMPLOYEES

Red Davis Driller **Bill Clark** Driller
S. N. Petest Driller _____ Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this **7th** day of **November**, 19 **39**

 Notary Public

Hobbs, New Mexico, Nov. 7, 1939
 Name **Walter Pish**
 Position **Supt**
 Representing **The Ohio Oil Company**
 Address **Hobbs, New Mexico**

My Commission expires **March 2, 1941**

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	135	135	Sand
135	370	235	Red Beds
370	640	270	Red Bed-blue shale
640	828	188	Red beds
828	1112	284	Red rock
1112	1249	137	Anhydrite
1249	1459	210	Salt
1459	1670	211	Salt-anhydrite broken
1670	2025	355	Salt-anhydrite
2025	2045	20	Anhydrite
2045	2107	62	Salt-shells
2107	2260	153	Salt
2260	2280	20	Anhydrite
2280	2402	122	Salt
2402	2455	53	Salt-anhydrite
2455	2595	140	Anhydrite
2595	2617	22	Brown lime
2617	2667	50	Anhydrite-lime
2667	2725	58	Gyp-anhydrite
2725	2735	10	Anhydrite
2735	2820	85	Lime
2820	2880	60	Anhydrite
2880	3440	560	Lime
3440	3452	12	Sand
3452	3677	225	Lime
3677	3735	58	Lime