


CONTINENTAL OIL COMPANY
Blow-out Preventer Specifications

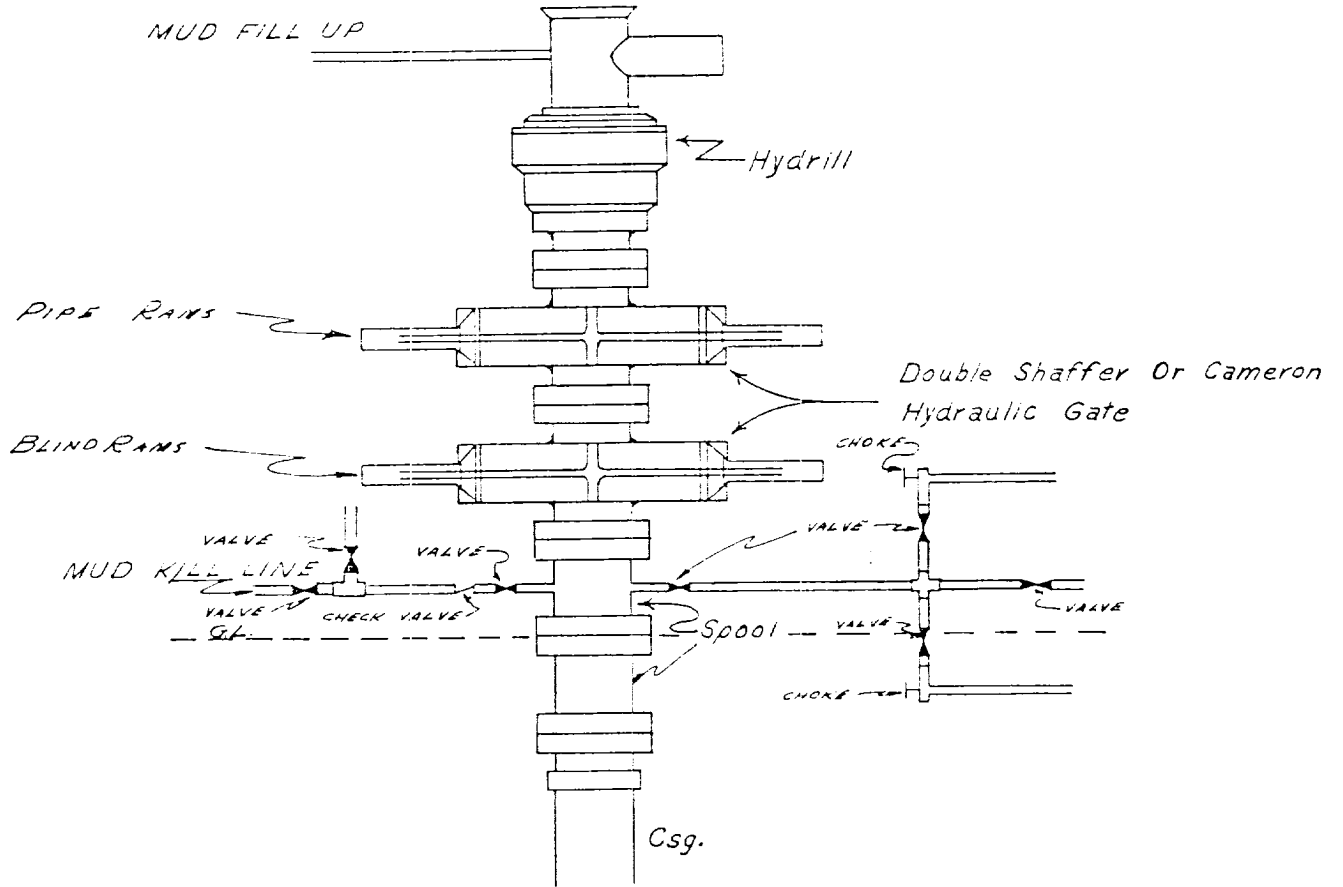

NOTE:

Manual and Hydraulic controls with closing unit no less than 75' from well head.
Remote controls on rig floor.

**DUE TO SUBSTRUCTURE CLEARANCE,
HYDRILL MAY OR MAY NOT BE USED.**

State E' NO. 10

RECEIVED

JUL 24 1978

OIL CONSERVATION COMM.
DOUGLAS, N. M.

17A

17B

17C