

N. M. OIL CONS. COMMISSION
P. O. BOX 1980
HOBBS, NEW MEXICO 88240

**DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY**

5. LEASE
TC-032592 (b)

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME
C.C. Fristoe 'B' Fed. NCT-2

9. WELL NO.
12

10. FIELD OR WILDCAT NAME
Justis Blinebry

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec. 26, T-24-S, R-37-E

12. COUNTY OR PARISH | 13. STATE
Lea | New Mexico

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)
3193' (DF)

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well gas well other


2. NAME OF OPERATOR
Texaco Inc.

3. ADDRESS OF OPERATOR
P.O. Box 728, Hobbs, N.M. 88240

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 2310' FSL & 2310' FEL
AT TOP PROD. INTERVAL: (Unit Letter 'J')
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:	SUBSEQUENT REPORT OF:
TEST WATER SHUT-OFF <input type="checkbox"/>	<input type="checkbox"/>
FRACTURE TREAT <input type="checkbox"/>	<input type="checkbox"/>
SHOOT OR ACIDIZE <input type="checkbox"/>	<input checked="" type="checkbox"/>
REPAIR WELL <input type="checkbox"/>	<input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	<input type="checkbox"/>
MULTIPLE COMPLETE <input type="checkbox"/>	<input type="checkbox"/>
CHANGE ZONES <input type="checkbox"/>	<input type="checkbox"/>
ABANDON* <input type="checkbox"/>	<input type="checkbox"/>
(other)	

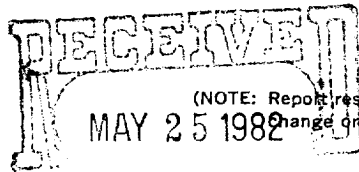

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

OIL & GAS
U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

- Rigged up. Pull rods & pump.
- Set pkr. @ 4555'. Acidize 4 1/2" Csg. perfs. 5205'-5802' w/4000 gals. 15% NEFE Acid in 2-equal stages using 500# rock salt between stages.
- Install pumping equipment on 24 Hr. potential test well pumped 6 B0, 10 Bbls. Water & GOR 25,833.

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED [Signature] TITLE Asst. Dist. Mgr. DATE 5-20-82

APPROVED BY _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:

ACCEPTED FOR RECORD (for Federal or State office use)
PETER W. CHESTER
JUL 14 1982
U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

Instructions on Reverse Side

RECEIVED
JUL 15 1982
O.C.D.
HOBBS OFFICE