


**DRILLING CONTROL**  
**CONDITION II-B 3000 WP**  
**FOR AIR DRILLING OR**  
**WHERE NITROGEN OR AIR BLOWS ARE EXPECTED**

H<sub>2</sub>S TRIM REQUIRED  
 YES  NO

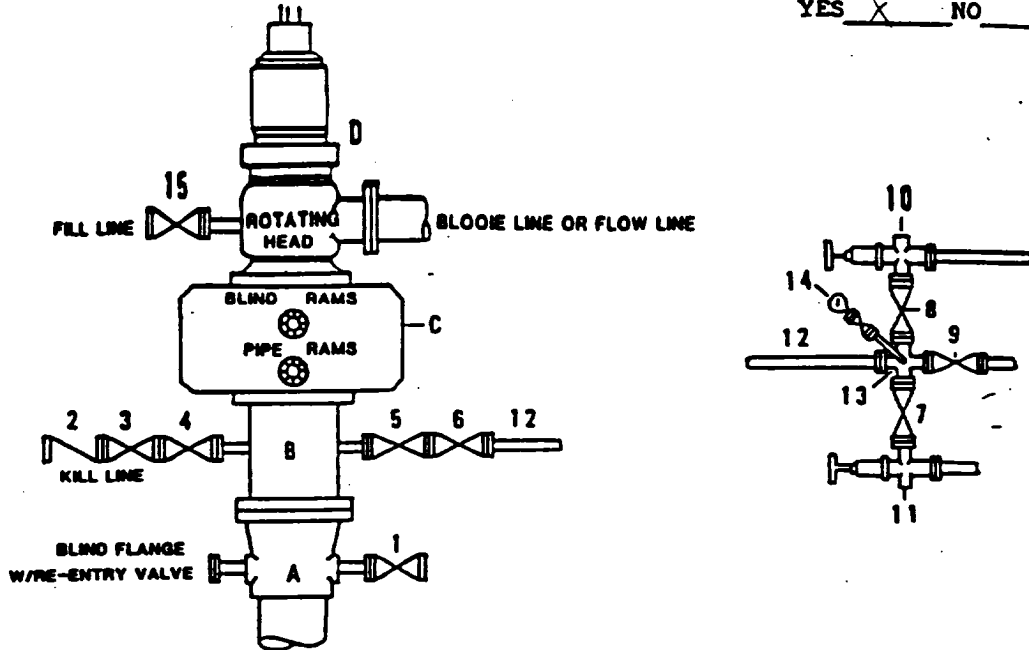

DRILLING CONTROL

MATERIAL LIST - CONDITION II - B

- A        Texaco Wellhead
- B        3000# W.P. drilling spool with a 2" minimum flanged outlet for kill line and 3" minimum flanged outlet for choke line.
- C        3000# W.P. Dual ram type preventer, hydraulic operated with 1" steel, 3000# W.P. control lines (where sub-structure height is adequate, 2 - 3000# W.P. single ram type preventers may be utilized).
- D        Rotating Head with fill up outlet and extended Bleed Line.
- 1,3,4, 7,8,    2" minimum 3000# W.P. flanged full opening steel gate valve, or Halliburton Lo Torc Plug valve.
- 2        2" minimum 3000# W.P. back pressure valve.
- 5,6,9    3" minimum 3000# W.P. flanged full opening steel gate valve, or Halliburton Lo Torc Plug valve.
- 12       3" minimum schedule 80, Grade "B", seamless line pipe.
- 13       2" minimum x 3" minimum 3000# W.P. flanged cross.
- 10,11    2" minimum 3000# W.P. adjustable choke bodies.
- 14       Cameron Mud Gauge or equivalent ( location optional in choke line).
- 15       2" minimum 3000# W.P. flanged or threaded full opening steel gate valve, or Halliburton Lo Torc Plug valve.



**TEXACO, INC.**  
 MIDLAND DIVISION  
 MIDLAND, TEXAS



SCALE	DATE	EST. NO.	DRG. NO.
DRAWN BY			
CHECKED BY			
APPROVED BY			

EXHIBIT C