AE Order Number Banner

Application Number: pMSG2415743653

PMX-355

OCCIDENTAL PERMIAN LTD [157984]

Occidental Permian LTD.
A subsidiary of Occidental Petroleum Corporation

5 Greenway Plaza, Suite 110, Houston, Texas 77046-0521
P.O. Box 27570, Houston, Texas 77227-7570
Phone 713.215.7000

June 4, 2024

State of New Mexico
Energy, Minerals & Natural Resources Department
Oil Conservation Division
1220 S. St. Frances Dr.
Santa Fe, NM 87505

RE: Pressure Maintenance Project
North Hobbs G/SA Unit
Well No. 992
API: Pending - New Drill
Section 32, T-18S, R-38E
Lea County, NM

Occidental Permian Ltd. respectfully requests administrative approval, without hearing, to commence injection (water, CO2, and produced gas) per the authorized Order No. R-6199-F. In support of this request please find the following documentation:

- Administrative Application Checklist
- Form C-108 with required data attached
- An Injection Well Data Sheet with Wellbore Schematic
- Form C-102
- AOR Map

*** Per Order No. R-6199-F, this application is eligible for administrative approval without notice or hearing ***

If you have any questions regarding this application, please contact me at 713-215-7827 or email roni_mathew@oxy.com.

Sincerely,

Roni Mathew

Roni Mathew
Regulatory Advisor

DATE IN	SUSPENSE	ENGINEER	LOGGED IN	TYPE	APP NO.

ABOVE THIS LINE FOR DIVISION USE ONLY

NEW MEXICO OIL CONSERVATION DIVISION
- Engineering Bureau -
1220 South St. Francis Drive, Santa Fe, NM 87505

ADMINISTRATIVE APPLICATION CHECKLIST

THIS CHECKLIST IS MANDATORY FOR ALL ADMINISTRATIVE APPLICATIONS FOR EXCEPTIONS TO DIVISION RULES AND REGULATIONS WHICH REQUIRE PROCESSING AT THE DIVISION LEVEL IN SANTA FE

Application Acronyms:

[NSL-Non-Standard Location] [NSP-Non-Standard Proration Unit] [SD-Simultaneous Dedication]
[DHC-Downhole Commingling] [CTB-Lease Commingling] [PLC-Pool/Lease Commingling]
[PC-Pool Commingling] [OLS - Off-Lease Storage] [OLM-Off-Lease Measurement]
[WFX-Waterflood Expansion] [PMX-Pressure Maintenance Expansion]
[SWD-Salt Water Disposal] [IPI-Injection Pressure Increase]
[EOR-Qualified Enhanced Oil Recovery Certification] [PPR-Positive Production Response]

[1] **TYPE OF APPLICATION** - Check Those Which Apply for [A]

[A] Location - Spacing Unit - Simultaneous Dedication
☐ NSL ☐ NSP ☐ SD

Check One Only for [B] or [C]

[B] Commingling - Storage - Measurement
☐ DHC ☐ CTB ☐ PLC ☐ PC ☐ OLS ☐ OLM

[C] Injection - Disposal - Pressure Increase - Enhanced Oil Recovery
☐ WFX ☒ PMX ☐ SWD ☐ IPI ☐ EOR ☐ PPR

[D] Other: Specify Additional Injector within approved project area (R-6199-G)

[2] **NOTIFICATION REQUIRED TO:** - Check Those Which Apply, or Does Not Apply

[A] ☐ Working, Royalty or Overriding Royalty Interest Owners

[B] ☐ Offset Operators, Leaseholders or Surface Owner

[C] ☐ Application is One Which Requires Published Legal Notice

[D] ☐ Notification and/or Concurrent Approval by BLM or SLO
U.S. Bureau of Land Management - Commissioner of Public Lands, State Land Office

[E] ☐ For all of the above, Proof of Notification or Publication is Attached, and/or,

[F] ☐ Waivers are Attached

[3] **SUBMIT ACCURATE AND COMPLETE INFORMATION REQUIRED TO PROCESS THE TYPE OF APPLICATION INDICATED ABOVE.**

[4] **CERTIFICATION:** I hereby certify that the information submitted with this application for administrative approval is **accurate** and **complete** to the best of my knowledge. I also understand that **no action** will be taken on this application until the required information and notifications are submitted to the Division.

Note: Statement must be completed by an individual with managerial and/or supervisory capacity.

Roni Mathew	Roni Mathew	Regulatory Advisor	06/04/2024
Print or Type Name	Signature	Title	Date

roni_mathew@oxy.com
e-mail Address

STATE OF NEW MEXICO
ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, New Mexico 87505

FORM C-108
Revised June 10, 2003

APPLICATION FOR AUTHORIZATION TO INJECT

I. PURPOSE: _____Secondary Recovery __X__Pressure Maintenance _____Disposal _____Storage
Application qualifies for administrative approval? __X__Yes _____No

II. OPERATOR: OCCIDENTAL PERMIAN LTD

ADDRESS: P.O. Box 4294 Houston, TX 77210-4294

CONTACT PARTY: Roni Mathew PHONE: 713-215-7827

III. WELL DATA: Complete the data required on the reverse side of this form for each well proposed for injection. Additional sheets may be attached if necessary.

IV. Is this an expansion of an existing project? __X__Yes _____No
If yes, give the Division order number authorizing the project: R-6199-F

V. Attach a map that identifies all wells and leases within two miles of any proposed injection well with a one-half mile radius circle drawn around each proposed injection well. This circle identifies the well's area of review.

VI. Attach a tabulation of data on all wells of public record within the area of review which penetrate the proposed injection zone. Such data shall include a description of each well's type, construction, date drilled, location, depth, record of completion, and a schematic of any plugged well illustrating all plugging detail.

VII. Attach data on the proposed operation, including:

1. Proposed average and maximum daily rate and volume of fluids to be injected;
2. Whether the system is open or closed;
3. Proposed average and maximum injection pressure;
4. Sources and an appropriate analysis of injection fluid and compatibility with the receiving formation if other than reinjected produced water; and,
5. If injection is for disposal purposes into a zone not productive of oil or gas at or within one mile of the proposed well, attach a chemical analysis of the disposal zone formation water (may be measured or inferred from existing literature, studies, nearby wells, etc.).

*VIII. Attach appropriate geologic data on the injection zone including appropriate lithologic detail, geologic name, thickness, and depth. Give the geologic name, and depth to bottom of all underground sources of drinking water (aquifers containing waters with total dissolved solids concentrations of 10,000 mg/l or less) overlying the proposed injection zone as well as any such sources known to be immediately underlying the injection interval.

IX. Describe the proposed stimulation program, if any.

*X. Attach appropriate logging and test data on the well. (If well logs have been filed with the Division, they need not be resubmitted).

*XI. Attach a chemical analysis of fresh water from two or more fresh water wells (if available and producing) within one mile of any injection or disposal well showing location of wells and dates samples were taken.

XII. Applicants for disposal wells must make an affirmative statement that they have examined available geologic and engineering data and find no evidence of open faults or any other hydrologic connection between the disposal zone and any underground sources of drinking water.

XIII. Applicants must complete the "Proof of Notice" section on the reverse side of this form.

XIV. Certification: I hereby certify that the information submitted with this application is true and correct to the best of my knowledge and belief.

NAME: Roni Mathew TITLE: Regulatory Advisor

SIGNATURE: Roni Mathew DATE: 6/04/2024

E-MAIL ADDRESS: roni_mathew@oxy.com

* If the information required under Sections VI, VIII, X, and XI above has been previously submitted, it need not be resubmitted. Please show the date and circumstances of the earlier submittal: February 11, 2014 as part of Order No. R-6199-F application

DISTRIBUTION: Original and one copy to Santa Fe with one copy to the appropriate District Office

Side 2

III. WELL DATA

A. The following well data must be submitted for each injection well covered by this application. The data must be both in tabular and schematic form and shall include:

(1) Lease name; Well No.; Location by Section, Township and Range; and footage location within the section.

(2) Each casing string used with its size, setting depth, sacks of cement used, hole size, top of cement, and how such top was determined.

(3) A description of the tubing to be used including its size, lining material, and setting depth.

(4) The name, model, and setting depth of the packer used or a description of any other seal system or assembly used.

Division District Offices have supplies of Well Data Sheets which may be used or which may be used as models for this purpose. Applicants for several identical wells may submit a "typical data sheet" rather than submitting the data for each well.

B. The following must be submitted for each injection well covered by this application. All items must be addressed for the initial well. Responses for additional wells need be shown only when different. Information shown on schematics need not be repeated.

(1) The name of the injection formation and, if applicable, the field or pool name.

(2) The injection interval and whether it is perforated or open-hole.

(3) State if the well was drilled for injection or, if not, the original purpose of the well.

(4) Give the depths of any other perforated intervals and detail on the sacks of cement or bridge plugs used to seal off such perforations.

(5) Give the depth to and the name of the next higher and next lower oil or gas zone in the area of the well, if any.

XIV. PROOF OF NOTICE

All applicants must furnish proof that a copy of the application has been furnished, by certified or registered mail, to the owner of the surface of the land on which the well is to be located and to each leasehold operator within one-half mile of the well location.

Where an application is subject to administrative approval, a proof of publication must be submitted. Such proof shall consist of a copy of the legal advertisement which was published in the county in which the well is located. The contents of such advertisement must include:

(1) The name, address, phone number, and contact party for the applicant;

(2) The intended purpose of the injection well; with the exact location of single wells or the Section, Township, and Range location of multiple wells;

(3) The formation name and depth with expected maximum injection rates and pressures; and,

(4) A notation that interested parties must file objections or requests for hearing with the Oil Conservation Division, 1220 South St. Francis Dr., Santa Fe, New Mexico 87505, within 15 days.

NO ACTION WILL BE TAKEN ON THE APPLICATION UNTIL PROPER PROOF OF NOTICE HAS BEEN SUBMITTED.

NOTICE: Surface owners or offset operators must file any objections or requests for hearing of administrative applications within 15 days from the date this application was mailed to them.

C-108 Application Attachment
Occidental Permian Ltd.
North Hobbs G/SA Unit No. 992
Lea County, New Mexico

I. This is a pressure maintenance project. The project qualifies for administrative approval.

II. OCCIDENTAL PERMIAN Ltd.
P.O. Box 4294 Houston, TX 77210-4294
Contact Party: Roni Mathew, 713-215-7827

III. Injection well data sheet and wellbore schematic has been attached for NORTH HOBBS G/SA UNIT No. 992

IV. This is an expansion of an existing project authorized under Order No. R-6199-F.

V. The map with a two mile radius surrounding the injection well and a one half mile radius for area of review is attached.

VI. In accordance to Order No. R-6199-F Section 4 OCCIDENTAL PERMIAN Ltd certifies that: The area of review for well "NORTH HOBBS G/SA UNIT #992" shows no substantive changes in the information furnished in support of Order No. R-6199-F concerning the status of construction of any well that penetrates the injection interval within the one-half (1/2) mile around the injection well, with the exemption of the wells listed below:

API	Well Name	Operator	Status after Jan 2014
30-025-23173	STATE 1-29 #005	TEXLAND PETROLEUM-HOBBS, LLC	Plugged
30-025-12504	NORTH HOBBS G/SA UNIT #532	OCCIDENTAL PERMIAN LTD	Plugged
30-025-23116	STATE A #005	CONTANGO RESOURCES, LLC	Plugged
30-025-07542	STATE LAND SECTION 32 #008	OXY USA INC	Plugged
30-025-23252	STATE 1-29 #006	TEXLAND PETROLEUM-HOBBS, LLC	Plugged
30-025-41578	NORTH HOBBS G/SA UNIT #948	OCCIDENTAL PERMIAN LTD	Active
30-025-44719	NORTH HOBBS G/SA UNIT #695	OCCIDENTAL PERMIAN LTD	Active
30-025-44718	NORTH HOBBS G/SA UNIT #694	OCCIDENTAL PERMIAN LTD	Active
30-025-49739	NORTH HOBBS G/SA UNIT #965	OCCIDENTAL PERMIAN LTD	Active
30-025-49476	NORTH HOBBS G/SA UNIT #963	OCCIDENTAL PERMIAN LTD	Active
30-025-49477	NORTH HOBBS G/SA UNIT #964	OCCIDENTAL PERMIAN LTD	Active
30-025-49475	NORTH HOBBS G/SA UNIT #962	OCCIDENTAL PERMIAN LTD	Active
30-025-51410	NORTH HOBBS G/SA UNIT #985	OCCIDENTAL PERMIAN LTD	Active

The wellbore diagrams, their tabulated data, and the area of review map are attached.

VII. Proposed Operation

1. Average Injection Rate 3,000 BWPD / 10,000 MCFGPD
   Maximum Injection Rate 8,000 BWPD / 20,000 MCFGPD
2. This will be a closed system.
3. Average Surface Injection Pressure 1,300 PSIG
   Maximum Surface Injection Pressure
   Produced Water 1,150 PSIG

CO2	1,250 PSIG
CO2 w/produced gas	1,650 PSIG

(In accordance with Order No. R-6199-F, effective 7/18/13)

4. Source Water – San Andres Produced Water

(Analysis previously provided at hearing, Case No. 14981)

VIII. The information was previously submitted as part of Order No. R-6199-F application

IX. Stimulation Program

a. Well will be perforated using slick gun system, 3- jspf, 90-degree phasing
b. Acid stimulated using ~ 8000 gals of 15% HCL NEFE, pumped using a straddle packer assembly (PPI – Tool)
c. Acid will be flush with approximately 100 bbls of fresh water
d. Max injection rate per cluster: 4 to 5 bpm.

X. Logs filed at the time of drilling.

XI. There is one water well within the 1-mile radius of the subject well location. See location and dates below. The chemical/water analysis reports are attached to this application.

WATER WELL NAME	LAT	LONG	Date Collected
NM OCD Sprinkler System	32°43'05.88"N	103°09'44.88"W	10/24/2013

XII. N/A. This is a pressure maintenance project, not a disposal well.

XIII. Section 3 of Order No. R-6199-F allows the administrative approval, from the Division Director, of additional injection wells without notice and hearing. Notices to producers and surface owners for the water/CO2 flood area were provided at the time of the application and hearing for Order No. R-6199-F.

MITCHELL ANALYTICAL LABORATORY

2638 Faudree
Odessa, Texas 79765-8538
561-5579

Company: ***Nalco Company***

Well Number:	NM OCD Sprinkler System Well	Sample Temp:	70
Lease:	OXY	Date Sampled:	10/24/2013
Location:		Sampled by:	Bobby Hunt
Date Run:	10/31/2013	Employee #:	27-022
Lab Ref #:	13-nov-n72700	Analyzed by:	GR

Dissolved Gases

			Mg/L	Eq. Wt.	MEq/L
Hydrogen Sulfide	(H2S)		.00	16.00	.00
Carbon Dioxide	(CO2)	**NOT ANALYZED**			
Dissolved Oxygen	(O2)	**NOT ANALYZED**			

Cations

Calcium	(Ca++)		105.89	20.10	5.27
Magnesium	(Mg++)		12.15	12.20	1.00
Sodium	(Na+)		54.56	23.00	2.37
Barium	(Ba++)	**NOT ANALYZED**			
Manganese	(Mn+)		.02	27.50	.00
Strontium	(Sr++)	**NOT ANALYZED**			

Anions

Hydroxyl	(OH-)		.00	17.00	.00
Carbonate	(CO3=)		.00	30.00	.00
BiCarbonate	(HCO3-)		268.84	61.10	4.40
Sulfate	(SO4=)		54.00	48.80	1.11
Chloride	(Cl-)		111.12	35.50	3.13
Total Iron	(Fe)		0	18.60	.00
Total Dissolved Solids			606.58		
Total Hardness as CaCO3			314.54		
Conductivity MICROMHOS/CM			858		

pH 7.960 Specific Gravity 60/60 F. 1.000

CaSO4 Solubility @ 80 F. 18.02MEq/L, CaSO4 scale is unlikely

CaCO3 Scale Index

70.0	.237	100.0	.587	130.0	1.097
80.0	.367	110.0	.827	140.0	1.097
90.0	.587	120.0	.827	150.0	1.327

Nalco Company

NM OCD Sprinklers	32°43’05.88”N	103°09’44.88”W

Side 1

INJECTION WELL DATA SHEET

OPERATOR: Occidental Permian LTD.

WELL NAME & NUMBER: NORTH HOBBS G/SA UNIT 992

WELL LOCATION:	875' FNL 295' FEL	A	32	18 S	38 E
	FOOTAGE LOCATION	UNIT LETTER	SECTION	TOWNSHIP	RANGE

WELLBORE SCHEMATIC

WELL CONSTRUCTION DATA

Surface Casing

Hole Size: 13 1/2" Casing Size: 9 5/8"

Cemented with: ~1000 sx. ***or*** _____ ft^3

Top of Cement: Surface Method Determined: Circulated

Intermediate Casing

Hole Size: _____ Casing Size: _____

Cemented with: _____ sx. ***or*** _____ ft^3

Top of Cement: _____ Method Determined: _____

Production Casing

Hole Size: 8 3/4" Casing Size: 7"

Cemented with: ~1300 sx. ***or*** _____ ft^3

Top of Cement: Surface Method Determined: Circ. + CBL

Total Depth: 4300' TVD / 5484' MD

Injection Interval

3950' TVD (Perforated) feet to 4300' TVD (Perforated)

(Perforated or Open Hole; indicate which)

Side 2

INJECTION WELL DATA SHEET

Tubing Size: 3 - 1/2" Lining Material: IPC

Type of Packer: 7.0" x 3-1/2" AS1-X Packer

Packer Setting Depth: Approx. 3925' TVD (~4925' MD)

Other Type of Tubing/Casing Seal (if applicable): _____

Additional Data

1. Is this a new well drilled for injection? X Yes _____ No

   If no, for what purpose was the well originally drilled? _____

   _____

2. Name of the Injection Formation: San Andres

3. Name of Field or Pool (if applicable): Hobbs; Grayburg - San Andres

4. Has the well ever been perforated in any other zone(s)? List all such perforated intervals and give plugging detail, i.e. sacks of cement or plug(s) used. No

   _____

5. Give the name and depths of any oil or gas zones underlying or overlying the proposed injection zone in this area: _____

   Byers (Queen) @ 280' TVDSS

   Glorieta @ -1660' TVDSS

   _____

DISTRICT I
1625 N. FRENCH DR., HOBBS, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
DISTRICT II
811 S. FIRST ST., ARTESIA, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
DISTRICT III
1000 RIO BRAZOS RD., AZTEC, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
DISTRICT IV
1220 S. ST. FRANCIS DR., SANTA FE, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 SOUTH ST. FRANCIS DR.
Santa Fe, New Mexico 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number	Pool Code	Pool Name
30-025-	31920	HOBBS; GRAYBURG-SAN ANDRES

Property Code	Property Name	Well Number
19520	NORTH HOBBS G/SA UNIT	992

OGRID No.	Operator Name	Elevation
157984	OCCIDENTAL PERMIAN LTD.	3647.1'

Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
A	32	18-S	38-E		875	NORTH	295	EAST	LEA

Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
C	33	18-S	38-E		170	NORTH	2504	WEST	LEA

Dedicated Acres	Joint or Infill	Consolidation Code	Order No.

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

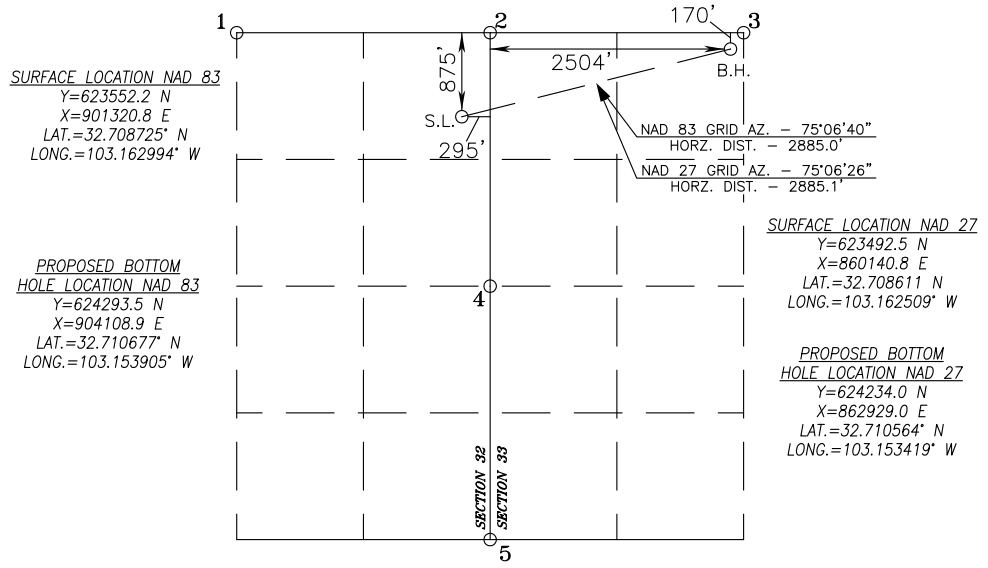

NAD 83 POINT LEGEND	
1	Y=624392.4 N X=898959.7 E
2	Y=624431.5 N X=901602.4 E
3	Y=624465.0 N X=904259.7 E
4	Y=621787.1 N X=901643.1 E

NAD 27 POINT LEGEND	
1	Y=624332.5 N X=857779.7 E
2	Y=624371.8 N X=860422.4 E
3	Y=624405.5 N X=863079.8 E
4	Y=621727.4 N X=860463.0 E

OPERATOR CERTIFICATION

I hereby certify that the information herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Roni Mathew 6/3/2024
Signature Date

Roni Mathew
Printed Name

roni_mathew@oxy.com
E-mail Address

SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

NOVEMEBER 14, 2023
Date of Survey

Signature & Seal of Professional Surveyor

CHAD L. HARCROW
NEW MEXICO
17777
LICENSED PROFESSIONAL SURVEYOR

Chad Harcrow 1/5/24
Certificate No. CHAD HARCROW 17777

W.O. #23-950 DRAWN BY: WN

Proposed WBD

WELL: NORTH HOBBS G/SA UNIT #992

API#: TBD

SECTION: 32

COUNTY: Lea

GL Elevation: 3647.1'

ZONE: San Andres

NHU 32-992

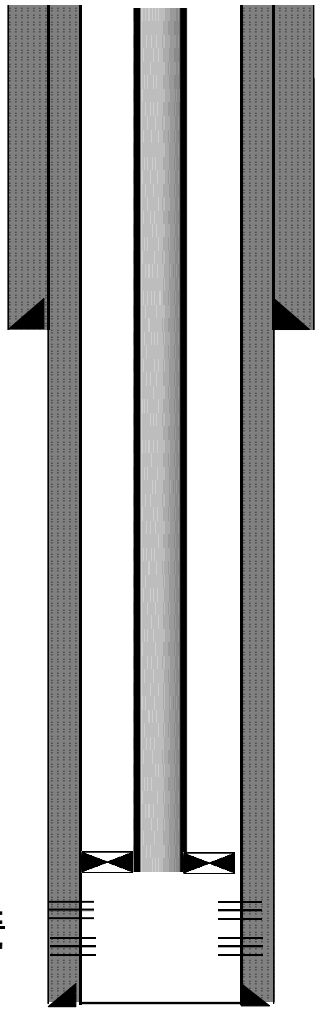

Proposed Wellbore

Active Injector

Surface Casing

13-1/2" Hole Size

9-5/8" 36# Csg @ ~1650'

Cemented with ~1000 sx Class C Cmt

TOC @ Surface (Circulated)

Equipment in the Hole

2-7/8" 6.5# J-55 IPC Tbg

On-Off Tool

F Type Profile Nipple

5-1/2" AS1-X Retrievable Injection Packer set @ ~4925'.

Production Casing

8-3/4" Hole Size

7.0" 23.0# Csg @ ~5484'

Cemented with ~1300 sx Class C Cmt in two stages.

TOC @ Surface (Circulated & CBL)

Open SA Perforations:

Approx. 4,975' - 5,484'

TD @ ~5484' MD (TVD @ ~4300')

North Hobbs G/SA Unit 992 AOR

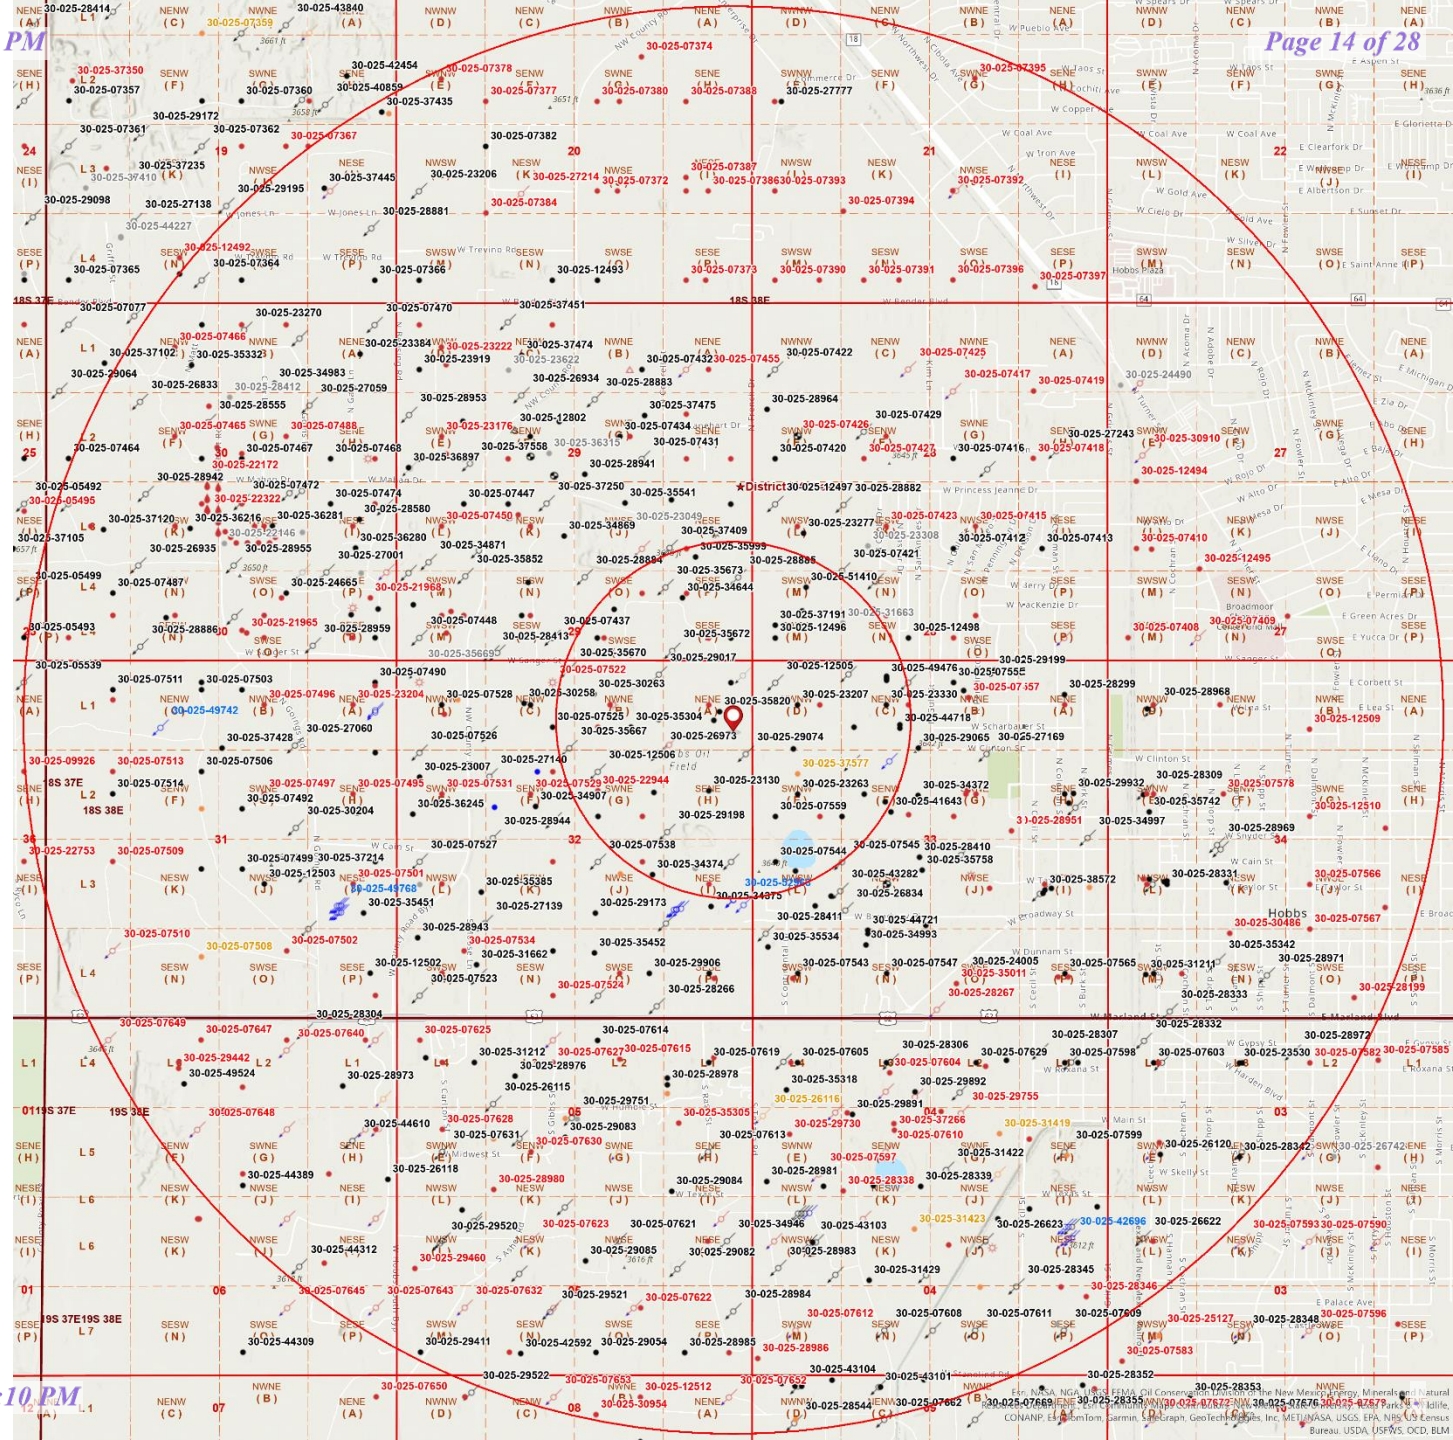

Oil and Gas Wells

Wells - Large Scale

- Miscellaneous
- CO2, Active
- CO2, Cancelled
- CO2, New
- CO2, Plugged
- CO2, Temporarily Abandoned
- Gas, Active
- Gas, Cancelled
- Gas, New
- Gas, Plugged
- Gas, Temporarily Abandoned
- Injection, Active
- Injection, Cancelled
- Injection, New
- Injection, Plugged
- Injection, Temporarily Abandoned
- Oil, Active
- Oil, Cancelled
- Oil, New
- Oil, Plugged
- Oil, Temporarily Abandoned
- Salt Water Injection, Active
- Salt Water Injection, Cancelled
- Salt Water Injection, New
- Salt Water Injection, Plugged
- Salt Water Injection, Temporarily Abandoned
- Water, Active
- Water, Cancelled
- Water, New
- Water, Plugged
- Water, Temporarily Abandoned
- ? undefined

OCD Districts and Offices

OCD District Offices

★

Public Land Survey System

PLSS Second Division

PLSS First Division

API NUMBER	OPERATOR	LEASE NAME	WELL NO.	WELL TYPE	STATUS	FTG. N/S	N/S	FTG. E/W	E/W	UNIT	SEC.	TSHP.	RNG.	DATE DRILLED	TVD (ft)	HOLE SIZE (in)	CSG. SIZE (in)	SET AT (ft)	SX. CMT.	CMT. TOP (ft)	MTD.	COMPLETION	REMARKS
30-025-23173	TEXLAND PETROLEUM-HOBBS, LLC	STATE 1-29	005	Oil	Plugged, Not Released	330	S	2218	E	O	29	18S	38E	6/10/1969	7025	15 11 7.875	11.750 8.625 6.625 & 5.5	364 3808 7022	370 300 530	Surf Surf 3578	Circ Calc Circ	6648'-6930' UPPER BLINEBRY 5917'-5978' DRINKARD	Well Plugged on 01/25/2021

Wellbore Schematic

API/UWI	Operator	Field Name	Area	County	State/Province
30-025-23173	Texland Petroleum - LLC Hobbs	Hobbs		Lea	NM

Drilling Rig	Original KB Elevation (ft)	Ground Elevation (ft)	Spud Date	Rig Release Date	Completion Date
	3,657.00	3,646.00	6/10/1969 00:00		

Surface Legal Location	North/South Distance (ft)	N/S Ref	East/West Distance (ft)	E/W Ref
Unit O-18S, R38E-29	330.0	S	2,218.0	E

Main Hole, 2/23/2021 11:04:06 AM

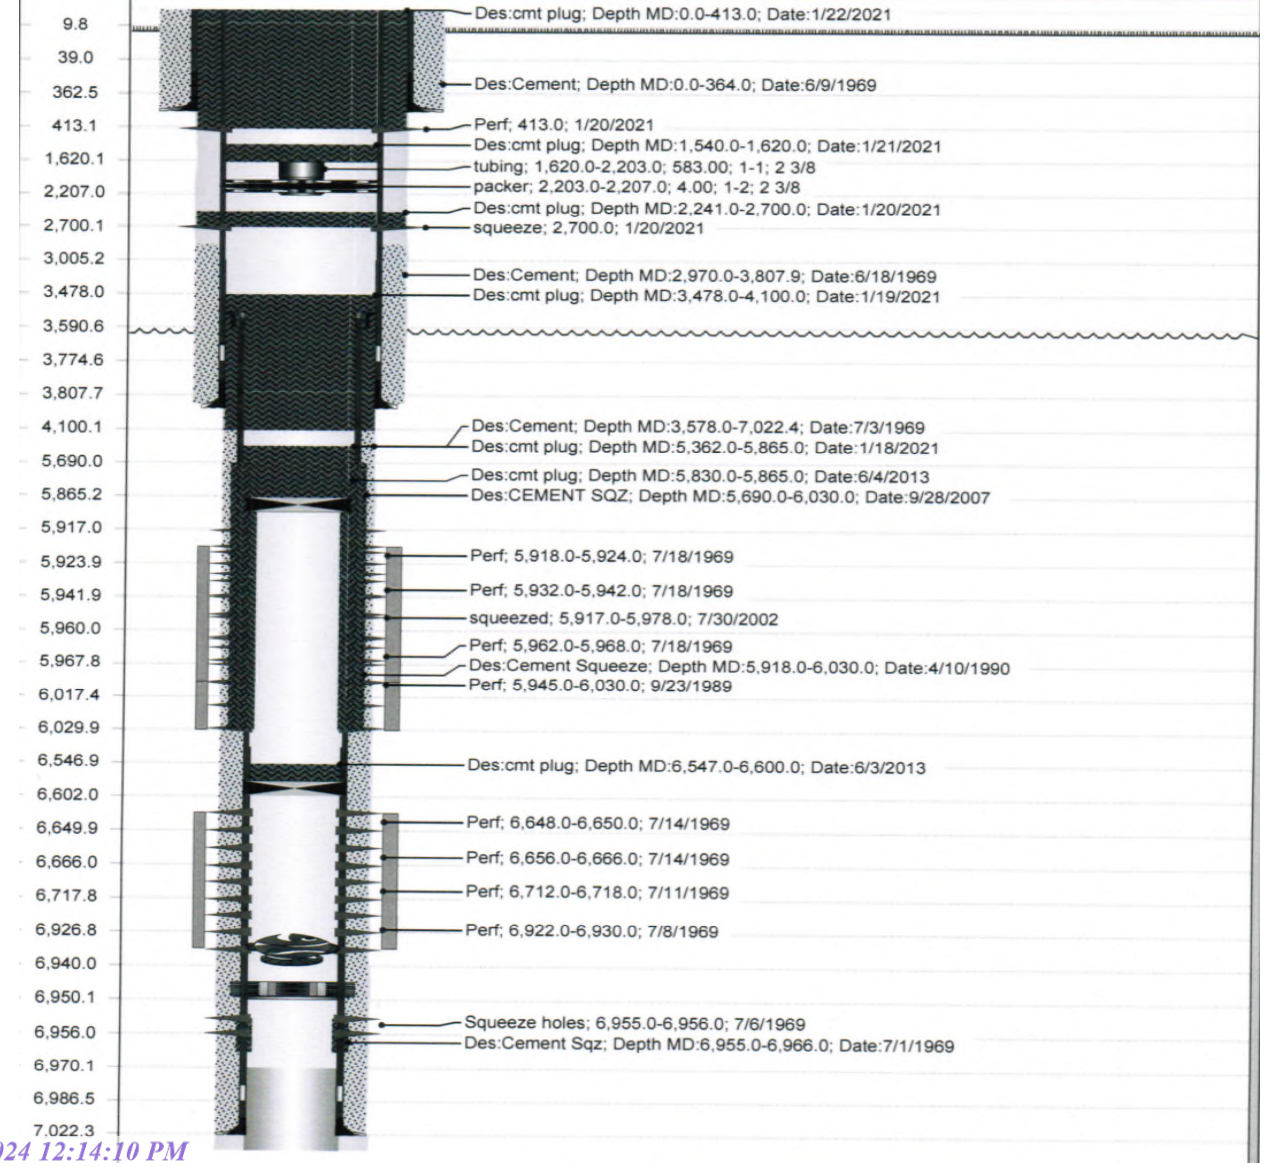

API NUMBER	OPERATOR	LEASE NAME	WELL NO.	WELL TYPE	STATUS	FTG. N/S	N/S	FTG. E/W	E/W	UNIT	SEC.	TSHP.	RNG.	DATE DRILLED	TVD (ft)	HOLE SIZE (in)	CSG. SIZE (in)	SET AT (ft)	SX. CMT.	CMT. TOP (ft)	MTD.	COMPLETION	REMARKS
30-025-12504	OCCIDENTAL PERMIAN LTD	NORTH HOBBS G/SA UNIT	532	Oil	Plugged, Not Released	2310	N	1650	E	G	32	18S	38E	11021	4490	12.250	10.250	222	135	Surf	Circ	4052'-4490'	Well Plugged on 05/26/2022
																9.000	8.625	2755	200	2841	Calc	HOBBS; GRAYBURG-SAN ANDRES	
																7.000	5.500	3850	25	2841	Calc		
																	5.000	4052	25	3790	TL		

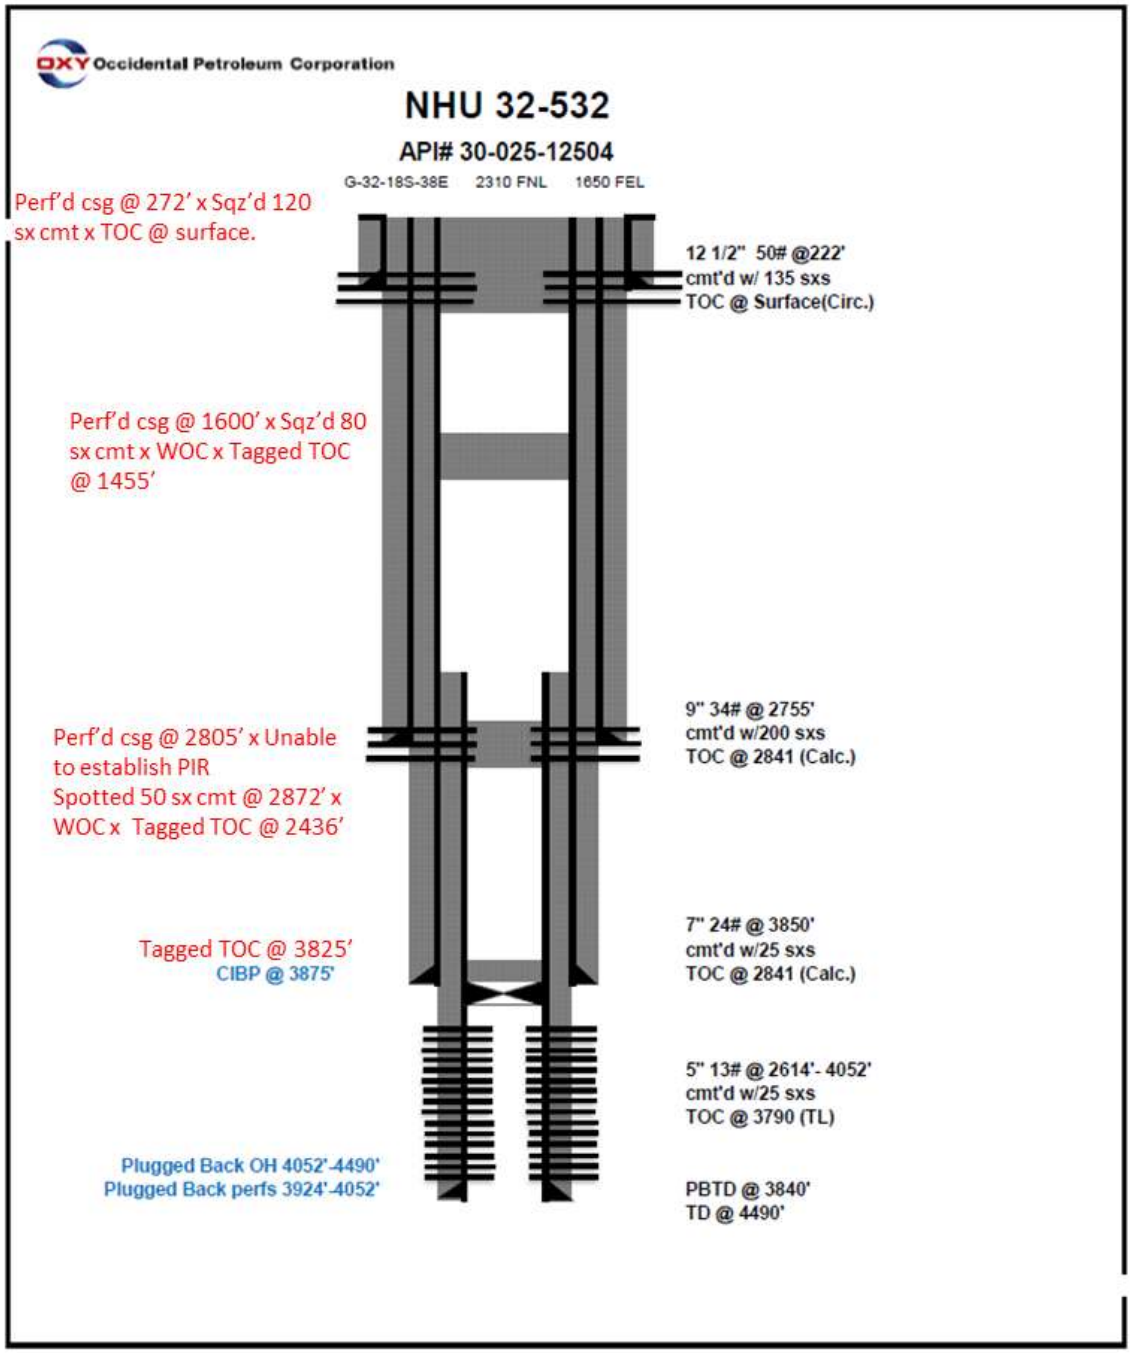

API NUMBER	OPERATOR	LEASE NAME	WELL NO.	WELL TYPE	STATUS	FTG. N/S	N/S	FTG. E/W	E/W	UNIT	SEC.	TSHP.	RNG.	DATE DRILLED	TVD (ft)	HOLE SIZE (in)	CSG. SIZE (in)	SET AT (ft)	SX. CMT.	CMT. TOP (ft)	MTD.	COMPLETION	REMARKS
30-025-23116	Contango Resources, Inc.	STATE A	005	Oil	Plugged, Site Released	660	N	660	E	A	32	18S	38E	4/24/1969	8044	11.750 8.625 7 & 5.5	11.750 8.625 7.000	385 3798 1000	400 590 501	Surf 2800' 5539'	Circ Calc Calc	6674'-6936' LOWER BLINEBRY 5905'-5957' DRINKARD	Well Plugged on 05/08/2018 and site released on 1/26/2021.

STATE A No. 5

669' FNL 660' FEL, SEC 32, T-18S, R-38E
LEA COUNTY, NEW MEXICO
API# 30-025-23116

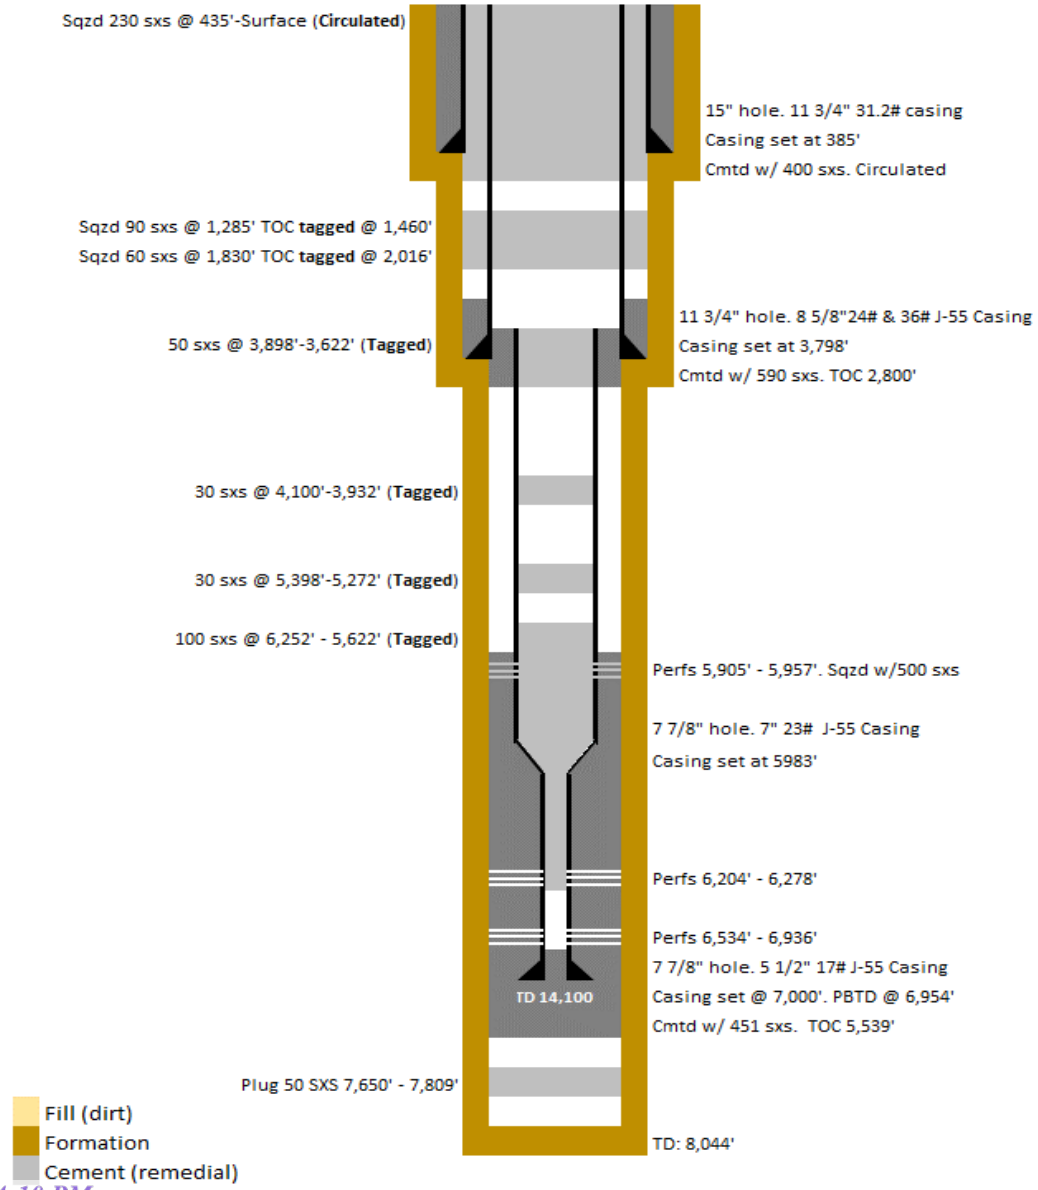

API NUMBER	OPERATOR	LEASE NAME	WELL NO.	WELL TYPE	STATUS	FTG. N/S	N/S	FTG. E/W	E/W	UNIT	SEC.	TSHP.	RNG.	DATE DRILLED	TVD (ft)	HOLE SIZE (in)	CSG. SIZE (in)	SET AT (ft)	SX. CMT.	CMT. TOP (ft)	MTD.	COMPLETION	REMARKS
30-025-07542	OXY USA INC	STATE LAND SECTION 32	008	Oil	Plugged, Site Released	1980	S	660	E	I	32	18S	38E	7/1/1945	3192	11 7.875	8.625 5.5	300 3124	125 1000	Surf 350	Circ Calc	3124'-3192' BOWERS; SEVEN RIVERS	Well Plugged on 09/14/2021

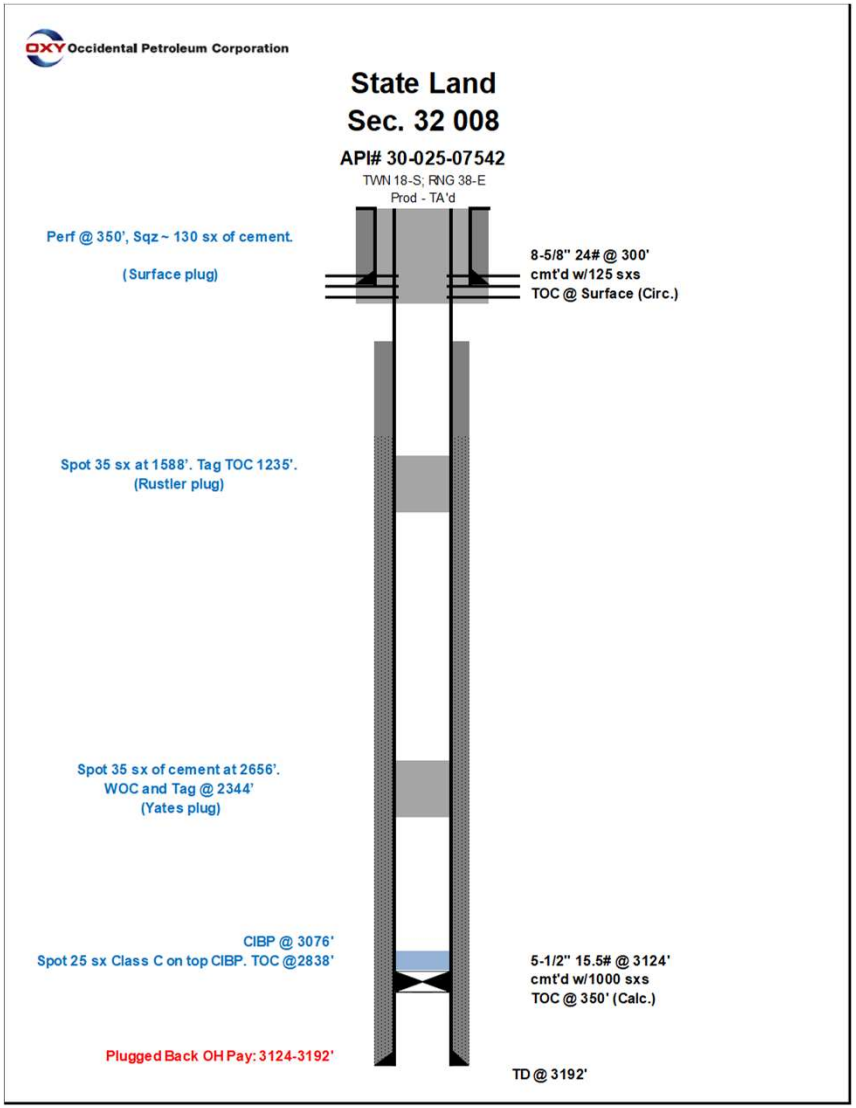

API NUMBER	OPERATOR	LEASE NAME	WELL NO.	WELL TYPE	STATUS	FTG. N/S	N/S	FTG. E/W	E/W	UNIT	SEC.	TSHP.	RNG.	DATE DRILLED	TVD (ft)	HOLE SIZE (in)	CSG. SIZE (in)	SET AT (ft)	SX. CMT.	CMT. TOP (ft)	MTD.	COMPLETION	REMARKS
30-025-23252	TEXLAND PETROLEUM-HOBBS, LLC	STATE 1-29	006	Oil	Plugged, Site Released	330	S	660	E	P	29	18S	38E	8/22/1969	7015	17.5 12.25 7.875	13.375 9.625 7 x 5-1/2	378 3800 3549-7015	400 600 700	Surf 1300 3549	Circ Calc Circ	6540'-6829' HOBBS; UPPER BLINEBRY	Well Plugged on 07/19/2021

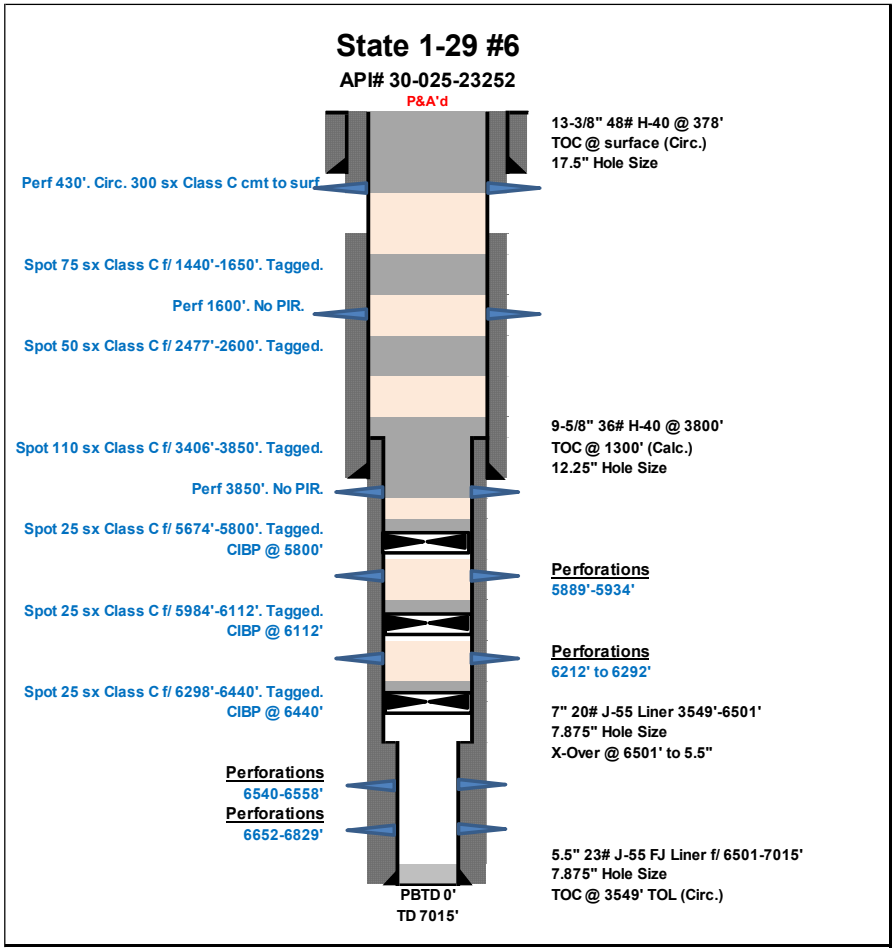

API NUMBER	OPERATOR	LEASE NAME	WELL NO.	WELL TYPE	STATUS	FTG. N/S	N/S	FTG. E/W	E/W	UNIT	SEC.	TSHP.	RNG.	DATE DRILLED	TVD (ft)	HOLE SIZE (in)	CSG. SIZE (in)	SET AT (ft)	SX. CMT.	CMT. TOP (ft)	MTD.	COMPLETION	REMARKS
30-025-41578	OCCIDENTAL PERMIAN LTD	NORTH HOBBS G/SA	948	Oil	Active	2094	N	1963	W	F	33	18S	38E	3/2/2014	4592	12.250 8.75	9.625 7.000	1638 4859	650 1010	Surf Surf	Circ Circ	4308'-4568' GRAYBURG-SAN ANDRES	DV Tool at 3,779'

Wellbore Diagram : NHSAU 948-33

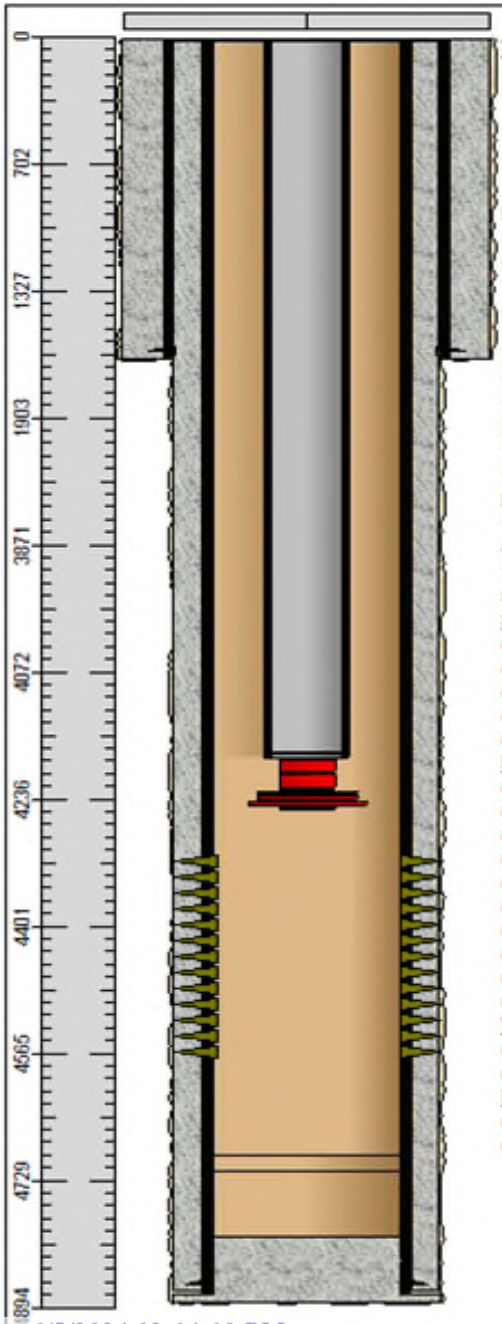

Tubing String Quantity (Top-Bottom Depth) Desc
1 @(11-17) J-55 2.875 OD/ 6.50# T&C External Upset 2.441 ID 2.347 Drift- -
1 @(0-4166) ESP Cable (CENTRILIFT-PART C76643, AWG 4, TYPE LD-CPL)- - N/A
128 @(17-4176) J-55 2.875 OD/ 6.50# T&C External Upset 2.441 ID 2.347 Drift- -
1 @(4176-4177) Seat Nipple - Standard (2.875") Cup Type- - N/A
1 @(4177-4183) J-55 2.875 OD/ 6.50# T&C External Upset 2.441 ID 2.347 Drift- -
1 @(4183-4184) ESP Bolt on Discharge (CENTRILIFT-PART C63029, MODEL 400, TYPE BOLT ON PUMP)- - N/A
1 @(4184-4200) ESP Pump (CENTRILIFT-PART C1030YCUS, STAGES 89, TYPE P18, MODEL 400PMSSD)- - N/A
1 @(4200-4220) ESP Pump (CENTRILIFT-PART C023063506, STAGES 116, TYPE P18, MODEL, 400PMSSD)- - N/A
1 @(4220-4223) ESP Gas Separator (CENTRILIFT-PART C308803, TYPE GASSEP, MODEL 400GSHVV)- - N/A
1 @(4223-4229) ESP Seal (CENTRILIFT-PART C314031063, MODEL 513 LABYRINTH)- - N/A
1 @(4166-4236) ESP-Motor Flat Cable (CENTRILIFT-PART C78715-110, AWG 5, TYPE 562NEXGEN)- - N/A
1 @(4236-4236) ESP Motor Pothead- - N/A
1 @(4229-4236) ESP Seal (CENTRILIFT-PART C314031519, MODEL GSB3DB FER HL SSCV H6 SB/SB PFSA)- - N/A
1 @(4236-4246) ESP Motor (CENTRILIFT-PART C312222, MODEL 562MSP, HP 105, VOLT 1310, AMP 48)- - N/A
1 @(4246-4250) ESP Downhole Sensor (CENTRILIFT-PART C902634, TYPE CENTINEL 3, MODEL ASM 5000)- - N/A

Surface Casing (Top-Bottom Depth) Desc
@(17-1593) J-55 9.625 OD/ 36.00# Round Long 8.921 ID 8.764 Drift- - N/A
@(1593-1594) Float Collar Nominal - 9.625" OD-10.630" Drillout ID- 8.885"- - N/A
@(1594-1637) J-55 9.625 OD/ 36.00# Round Long 8.921 ID 8.764 Drift- - N/A
@(11-1638) Cement (behind Casing)- - N/A
@(1637-1638) Float Shoe/Guide Shoe Nominal - 9.625" OD-10.630" Drillout ID- 8.885"- - N/A

Production Casing (Top-Bottom Depth) Desc
@(4308-4568) Producing Interval (Completion)- - N/A
@(4308-4568) Perforations-Open - N/A
@(17-4697) J-55 7.000 OD/ 26.00# Round Long 6.276 ID 6.151 Drift- - N/A
@(4697-4716) J-55 7.000 OD/ 26.00# Round Long 6.276 ID 6.151 Drift- - N/A
@(4716-4831) J-55 7.000 OD/ 26.00# Round Long 6.276 ID 6.151 Drift- - N/A
@(4831-4832) Float Collar Nominal - 7.000" OD- 7.650" Drillout ID- 6.351"- - N/A
@(4832-4873) J-55 7.000 OD/ 26.00# Round Long 6.276 ID 6.151 Drift- - N/A
@(17-4874) Cement (behind Casing)- - N/A
@(4873-4874) Casing Shoe (7.000 OD Casing)- - N/A
@(4801-4889) Plug Back (unknown type)- - N/A

Wellbore Notes (Top-Bottom Depth) Desc
@(4889-4889) Total Depth- - N/A
@(4801-4889) Plug Back Total Depth- - N/A

Borehole (Top-Bottom Depth) Desc
@(11-1638) Wellbore Hole OD-12.2500- - N/A
@(1638-4889) Wellbore Hole OD- 8.7500- - N/A

API NUMBER	OPERATOR	LEASE NAME	WELL NO.	WELL TYPE	STATUS	FTG. N/S	N/S	FTG. E/W	E/W	UNIT	SEC.	TSHP.	RNG.	DATE DRILLED	TVD (ft)	HOLE SIZE (in)	CSG. SIZE (in)	SET AT (ft)	SX. CMT.	CMT. TOP (ft)	MTD.	COMPLETION	REMARKS
30-025-44719	OCCIDENTAL PERMIAN LTD	NORTH HOBBS G/SA	695	Oil	Active	950	N	2188	W	C	33	18S	38E	12/30/2018	4446	13.500 8.750	9.625 7.000	1637 5224	885 885	Surf 0	Circ Calc	4789'-5074' GRAYBURG-SAN ANDRES	DV tool at 3,735'

Wellbore Diagram : NHSAU 695-33

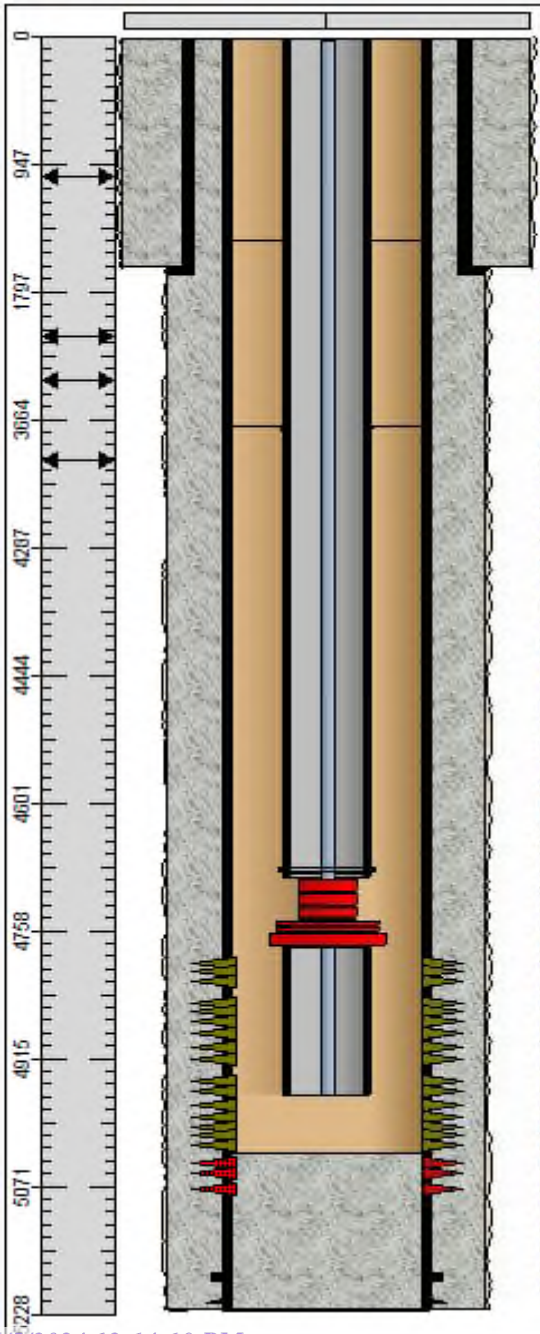

Tubing String Quantity (Top-Bottom Depth) Desc
1 @(15-21) J-55 2.875 OD/ 6.50# T&C External Upset 2.441 ID 2.347 Drift- - Rerun
1 @(15-4660) ESP Cable (Borets-Part#592966, Model CPNF, AWG 4)- - Used & Inspected
144 @(21-4680) J-55 2.875 OD/ 6.50# T&C External Upset 2.441 ID 2.347 Drift - Bare- - Rerun
1 @(4680-4681) 2.31" F Nipple- - New
1 @(4681-4685) J-55 2.875 OD/ 6.50# T&C External Upset 2.441 ID 2.347 Drift- - Rerun
1 @(4685-4686) 2.25" Nipple - R- - New
1 @(4686-4692) J-55 2.875 OD/ 6.50# T&C External Upset 2.441 ID 2.347 Drift- - Rerun
1 @(4692-4693) ESP Bolt on Discharge (Borets-Part#10006707, Type ESP B 400 2.875 EVE SS, CS Monel)- - New
1 @(4693-4710) ESP Pump (Borets-Part#10050814, Model 400-3000, 76 STG, Type CW HSS MTSCA HT, CS MONEL)- - New
1 @(4710-4727) ESP Pump (Borets-Part#10050814, Model 400-3000, 76 STG, Type CW HSS MTSCA HT, CS MONEL)- - New
1 @(4727-4741) ESP Pump (Borets-Part#10034028, Model 400-5300, Type HSS TA MTSCA HT, CS Monel)- - New
1 @(4741-4744) ESP Gas Separator (Borets-Part#10027875, Type ESP B 400 VGS CW 3000 HSS SS HT, Vortex Type, CS Monel- - New
1 @(4744-4751) ESP Seal (Borets-Part#10050256, Type BPBSL HL HSS MTC HT, PB102, CS MONEL)- - New
1 @(4660-4758) ESP-Motor Flat Cable (Borets-Model MLE, ESP FLAT B 456/562 UB-13 ELB MPSS 4KV 30M)- - New
1 @(4758-4758) ESP Motor Pothead- - New
1 @(4751-4758) ESP Seal (Borets-Part#10035135, Type BPBSL HL HSS MTC HT, 1PB102, CS MONEL)- - New
1 @(4758-4776) ESP Motor (Borets-Part#2031446, Type 456 PL200P, HP 240, Volts 2424, AMPS 57, CS MONEL)- - New
1 @(4776-4779) ESP Downhole Sensor (Borets-Part#2030707, Model ESP B Viewpoint, CS MONEL)- - New
6 @(4779-4959) FG 2.875 OD/ 6.50# T&C External Upset 2.441 ID 2.347 Drift- - New

Capillary String (Inside Tubing) (Top-Bottom Depth) Desc
@(18-4959) Capillary Tubing - 0.375" Stainless Steel- - N/A

Surface Casing (Top-Bottom Depth) Desc
@(18-35) J-55 9.625 OD/ 36.00# Round Long 8.921 ID 8.764 Drift - N/A- - N/A
@(35-1593) J-55 9.625 OD/ 36.00# Round Long 8.921 ID 8.764 Drift - N/A- - N/A
@(1593-1594) Float Collar Nominal - 9.625" OD-10.630" Drillout ID- 8.865" - N/A- - N/A
@(1594-1636) J-55 9.625 OD/ 36.00# Round Long 8.921 ID 8.764 Drift - N/A- - N/A
@(18-1637) Cement (behind Casing) - N/A- - N/A
@(1636-1637) Float Collar Nominal - 9.625" OD-10.630" Drillout ID- 8.865" - N/A- - N/A

Production Casing (Top-Bottom Depth) Desc
@(18-1461) L-80 7.000 OD/ 26.00# Round Long 6.276 ID 6.151 Drift - N/A- - N/A
@(1461-3732) L-80 7.000 OD/ 26.00# Round Long 6.276 ID 6.151 Drift - N/A- - N/A
@(3732-3734) DV Tool (Diverter Tool)- - N/A
@(4789-4795) Perforations - Open-Open - N/A
@(4801-4805) Perforations - Open-Open - N/A
@(4811-4815) Perforations - Open-Open - N/A
@(4840-4844) Perforations - Open-Open - N/A
@(4850-4854) Perforations - Open-Open - N/A
@(4860-4868) Perforations - Open-Open - N/A
@(4875-4885) Perforations - Open-Open - N/A
@(4893-4901) Perforations - Open-Open - N/A
@(4907-4928) Perforations - Open-Open - N/A
@(4935-4941) Perforations - Open-Open - N/A
@(4948-4956) Perforations - Open-Open - N/A
@(4963-4971) Perforations - Open-Open - N/A
@(4978-4984) Perforations - Open-Open - N/A
@(4990-4994) Perforations - Open-Open - N/A
@(5000-5008) Perforations - Open-Open - N/A
@(5014-5020) Perforations - Open-Open - N/A
@(5036-5040) Perforations-Closed-Squeezed - N/A
@(5048-5052) Perforations-Closed-Squeezed - N/A
@(5066-5074) Perforations-Closed-Squeezed - N/A
@(4789-5074) Producing Interval (Completion)- - N/A
@(3734-5181) L-80 7.000 OD/ 26.00# Round Long 6.276 ID 6.151 Drift - N/A- - N/A
@(5181-5182) Float Collar Nominal - 7.000" OD- 7.650" Drillout ID- 6.351" - N/A- - N/A
@(5182-5223) L-80 7.000 OD/ 26.00# Round Long 6.276 ID 6.151 Drift - N/A- - N/A
@(18-5224) Cement (behind Casing) - N/A- - N/A
@(5030-5224) Plug Back- - N/A
@(5223-5224) Casing Shoe (7.000 OD Casing) - N/A- - N/A

Wellbore Notes (Top-Bottom Depth) Desc
@(5224-5224) Total Depth- - N/A
@(5030-5224) Plug Back Total Depth- - N/A

Borehole (Top-Bottom Depth) Desc
@(18-1637) Wellbore Hole OD-20.0000 - N/A- - N/A
@(1637-5224) Wellbore Hole OD-8.5000 - N/A- - N/A

API NUMBER	OPERATOR	LEASE NAME	WELL NO.	WELL TYPE	STATUS	FTG. N/S	N/S	FTG. E/W	E/W	UNIT	SEC.	TSHP.	RNG.	DATE DRILLED	TVD (ft)	HOLE SIZE (in)	CSG. SIZE (in)	SET AT (ft)	SX. CMT.	CMT. TOP (ft)	MTD.	COMPLETION	REMARKS
30-025-44718	OCCIDENTAL PERMIAN LTD	NORTH HOBBS G/SA UNIT	694	Oil	Active	1000	N	2188	W	C	33	18S	38E	12/22/2018	4541	13.500 8.750	9.625 7.000	1655 5207	820 1110	Surf 0	Circ Calc	4661'-4930' GRAYBURG-SAN ANDRES	DV tool at 3,717'

Wellbore Diagram : NHSAU 694-33

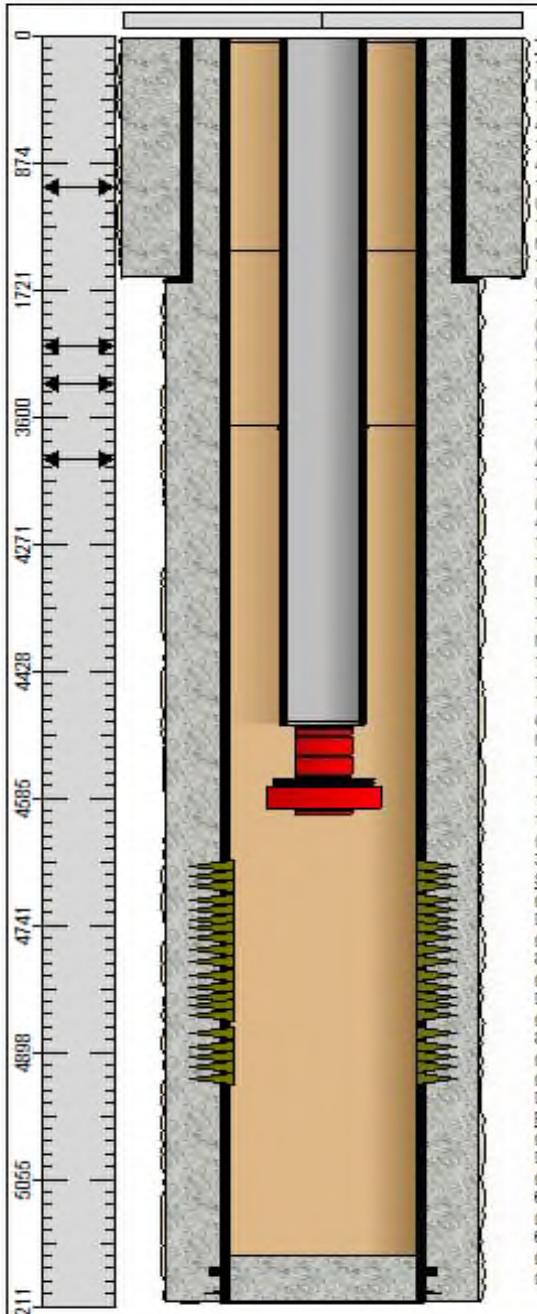

Tubing String Quantity (Top-Bottom Depth) Desc
1 @(11-17) J-55 2.875 OD/ 6.50# T&C External Upset 2.441 ID 2.347 Drift- - New
1 @(11-4209) ESP Cable (CENTRILIFT) -61292237AA C76643 4 AWG CPLF Galv- - Used & Inspected
1 @(4209-4459) ESP Cable -LT8517057 SLB CONSIGNMENT 4 AWG CPLF Galv- - Used & Inspected
138 @(17-4488) J-55 2.875 OD/ 6.50# T&C External Upset 2.441 ID 2.347 Drift- - New
1 @(4488-4489) Seat Nipple - Heavy Duty (2.875") Cup Type- - New
1 @(4489-4495) J-55 2.875 OD/ 6.50# T&C External Upset 2.441 ID 2.347 Drift- - New
1 @(4495-4496) ESP Bolt on Discharge (Non-Serialized/Centrilift)-C45895 400 B/O CS 2 7/8 12 MIL (SS)- - New
1 @(4496-4507) ESP Pump (Non-Serialized/Centrilift)-14750387 C023044530 36 P35 400PMHVSND 12 MIL (SS)- - New
1 @(4507-4531) ESP Pump (Non-Serialized/Centrilift)-14685928 C023044571 78 P35 400PMHVSND 12 MIL (SS)- - New
1 @(4531-4554) ESP Pump (Non-Serialized/Centrilift)-14643210 C023044571 78 P35 400PMHVSND 12 MIL (SS)- - New
1 @(4554-4557) ESP Gas Separator (Non-Serialized/Centrilift)-14765436 C425001260 Gas Master 400GSHV 12 MIL (SS)- - New
1 @(4557-4563) ESP Seal (Non-Serialized/Centrilift)-14793504 10492077 FSC3U PFSA CL5 FER HL PFSA 12 MIL (SS)- - New
1 @(4459-4569) ESP-Motor Flat Cable (CENTRILIFT) 14611778 C78450M-110 5 AWG NEXT GEN MONEL- - New
1 @(4563-4569) ESP Seal (Non-Serialized/Centrilift)-14750410 C313017048 FSB3DB H6 FER SSCV SB/SB 12 MIL (SS)- - New
1 @(4569-4569) ESP Motor Pothead- - New
1 @(4569-4596) ESP Motor (Non-Serialized/Centrilift)14512246 105106631 450SP 220HP 2395V 59A 12 MIL (SS)- - New
1 @(4596-4604) ESP Downhole Sensor (Non-Serialized/Centrilift)-G1406354 C1030YCUS CENTINEL 3 ASM 5000 C 450 12 MIL- - New

Surface Casing (Top-Bottom Depth) Desc
@(18-35) J-55 9.625 OD/ 36.00# Round Long 8.921 ID 8.764 Drift - N/A- - N/A
@(35-1593) J-55 9.625 OD/ 36.00# Round Long 8.921 ID 8.764 Drift - N/A- - N/A
@(1593-1594) Float Collar Nominal - 9.625" OD-10.630" Drillout ID- 8.865" - N/A- - N/A
@(1594-1636) J-55 9.625 OD/ 36.00# Round Long 8.921 ID 8.764 Drift - N/A- - N/A
@(18-1637) Cement (behind Casing) - N/A- - N/A
@(1636-1637) Float Collar Nominal - 9.625" OD-10.630" Drillout ID- 8.865" - N/A- - N/A

Production Casing (Top-Bottom Depth) Desc
@(18-34) L-80 7.000 OD/ 26.00# Round Long 6.276 ID 6.151 Drift - N/A- - N/A
@(34-1453) L-80 7.000 OD/ 26.00# Round Long 6.276 ID 6.151 Drift - N/A- - N/A
@(1453-3715) L-80 7.000 OD/ 26.00# Round Long 6.276 ID 6.151 Drift - N/A- - N/A
@(3715-3717) DV Tool (Diverter Tool)- - N/A
@(4661-4667) Perforations - Open-Open - N/A
@(4673-4679) Perforations - Open-Open - N/A
@(4685-4689) Perforations - Open-Open - N/A
@(4703-4707) Perforations - Open-Open - N/A
@(4714-4720) Perforations - Open-Open - N/A
@(4726-4730) Perforations - Open-Open - N/A
@(4736-4742) Perforations - Open-Open - N/A
@(4749-4757) Perforations - Open-Open - N/A
@(4763-4769) Perforations - Open-Open - N/A
@(4778-4786) Perforations - Open-Open - N/A
@(4795-4803) Perforations - Open-Open - N/A
@(4811-4817) Perforations - Open-Open - N/A
@(4823-4827) Perforations - Open-Open - N/A
@(4833-4837) Perforations - Open-Open - N/A
@(4845-4855) Perforations - Open-Open - N/A
@(4867-4877) Perforations - Open-Open - N/A
@(4883-4891) Perforations - Open-Open - N/A
@(4897-4901) Perforations - Open-Open - N/A
@(4908-4916) Perforations - Open-Open - N/A
@(4661-4930) Producing Interval (Completion)- - N/A
@(4922-4930) Perforations - Open-Open - N/A
@(3717-5166) L-80 7.000 OD/ 26.00# Round Long 6.276 ID 6.151 Drift - N/A- - N/A
@(5166-5167) Float Collar Nominal - 7.000" OD- 7.650" Drillout ID- 6.351" - N/A- - N/A
@(5167-5206) L-80 7.000 OD/ 26.00# Round Long 6.276 ID 6.151 Drift - N/A- - N/A
@(5148-5207) Plug Back (unknown type)- - N/A
@(18-5207) Cement (behind Casing) - N/A- - N/A
@(5206-5207) Casing Shoe (7.000 OD Casing) - N/A- - N/A

Wellbore Notes (Top-Bottom Depth) Desc
@(5207-5207) Total Depth- - N/A
@(5148-5207) Plug Back Total Depth- - N/A

Borehole (Top-Bottom Depth) Desc
@(18-1637) Wellbore Hole OD-13.5000 - N/A- - N/A
@(1637-5207) Wellbore Hole OD-8.7500 - N/A- - N/A

API NUMBER	OPERATOR	LEASE NAME	WELL NO.	WELL TYPE	STATUS	FTG. N/S	N/S	FTG. E/W	E/W	UNIT	SEC.	TSHP.	RNG.	DATE DRILLED	TVD (ft)	HOLE SIZE (in)	CSG. SIZE (in)	SET AT (ft)	SX. CMT.	CMT. TOP (ft)	MTD.	COMPLETION	REMARKS
30-025-49739	OCCIDENTAL PERMIAN LTD	NORTH HOBBS G/SA UNIT	965	Injection	New	1488	N	2027	W	F	33	18S	38E	8/4/2022	4324	13.5 8.75	9.625 7	1625 4937	977 1335	0 0	Circ. CBL	4604'-4800' GRAYBURG-SAN ANDRES	

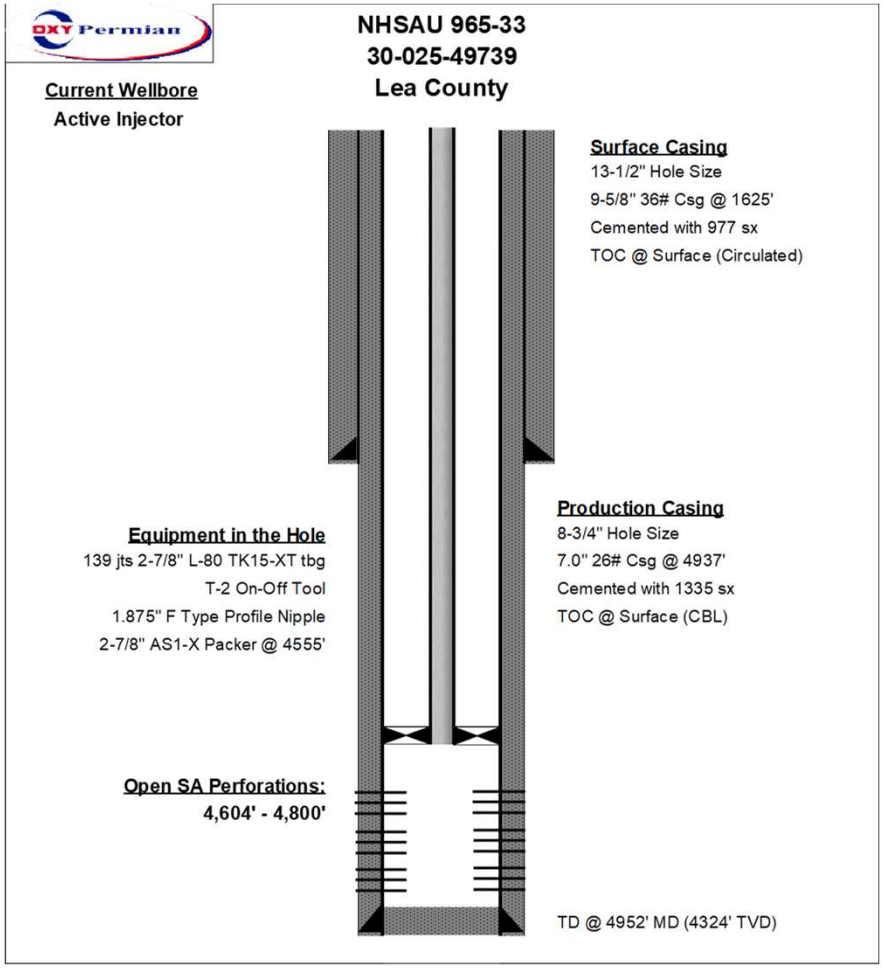

API NUMBER	OPERATOR	LEASE NAME	WELL NO.	WELL TYPE	STATUS	FTG. N/S	N/S	FTG. E/W	E/W	UNIT	SEC.	TSHP.	RNG.	DATE DRILLED	TVD (ft)	HOLE SIZE (in)	CSG. SIZE (in)	SET AT (ft)	SX. CMT.	CMT. TOP (ft)	MTD.	COMPLETION	REMARKS
30-025-49476	OCCIDENTAL PERMIAN LTD	NORTH HOBBS G/SA UNIT	963	Oil	Active	262	N	1989	W	C	33	18S	38E	8/24/2022	4417	13.5 8.75	9.625 7	1655 5313	985 1845	0 0	Circ. CBL	5018'-5192' GRAYBURG-SAN ANDRES	

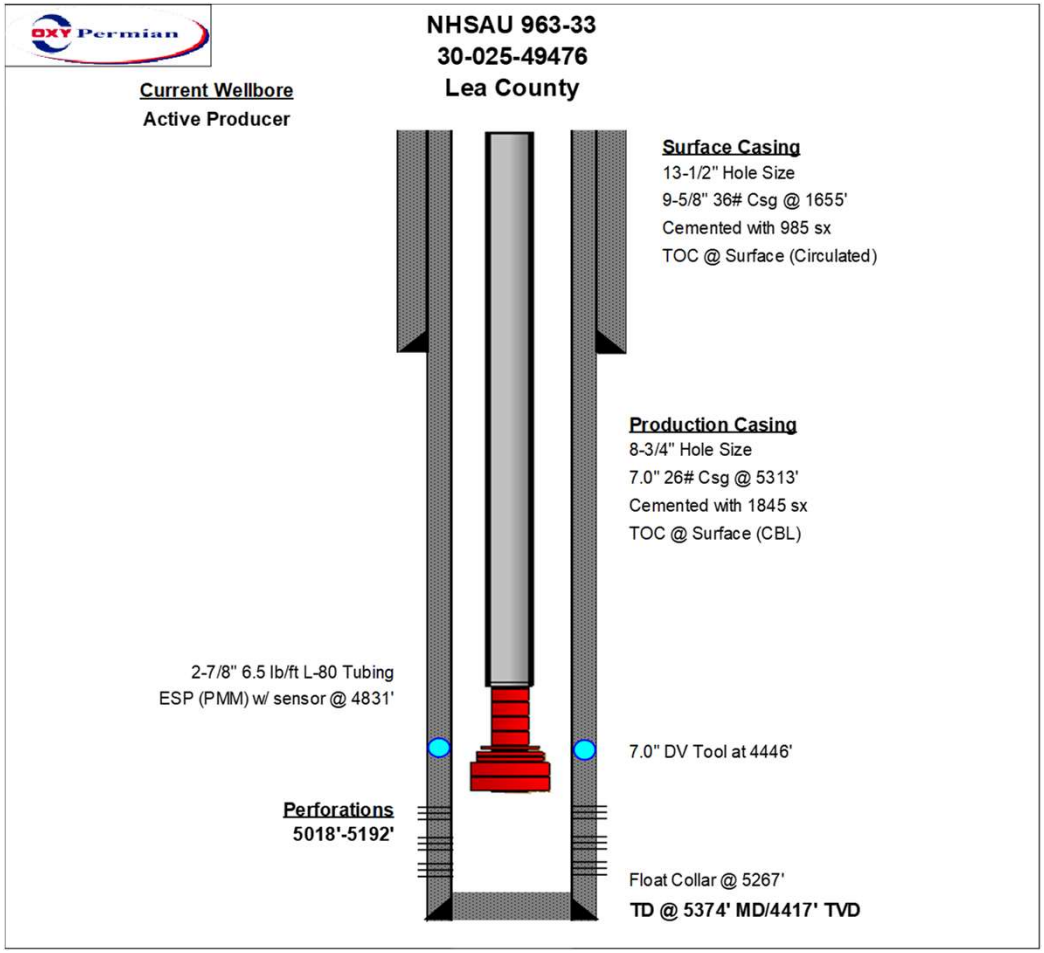

API NUMBER	OPERATOR	LEASE NAME	WELL NO.	WELL TYPE	STATUS	FTG. N/S	N/S	FTG. E/W	E/W	UNIT	SEC.	TSHP.	RNG.	DATE DRILLED	TVD (ft)	HOLE SIZE (in)	CSG. SIZE (in)	SET AT (ft)	SX. CMT.	CMT. TOP (ft)	MTD.	COMPLETION	REMARKS
30-025-49477	OCCIDENTAL PERMIAN LTD	NORTH HOBBS G/SA UNIT	964	Oil	Active	292	N	1989	W	C	33	18S	38E	8/30/2022	4341	13.5 8.75	9.625 7	1670 4520	965 973	0 0	Circ. CBL	4246'-4403' GRAYBURG-SAN ANDRES	

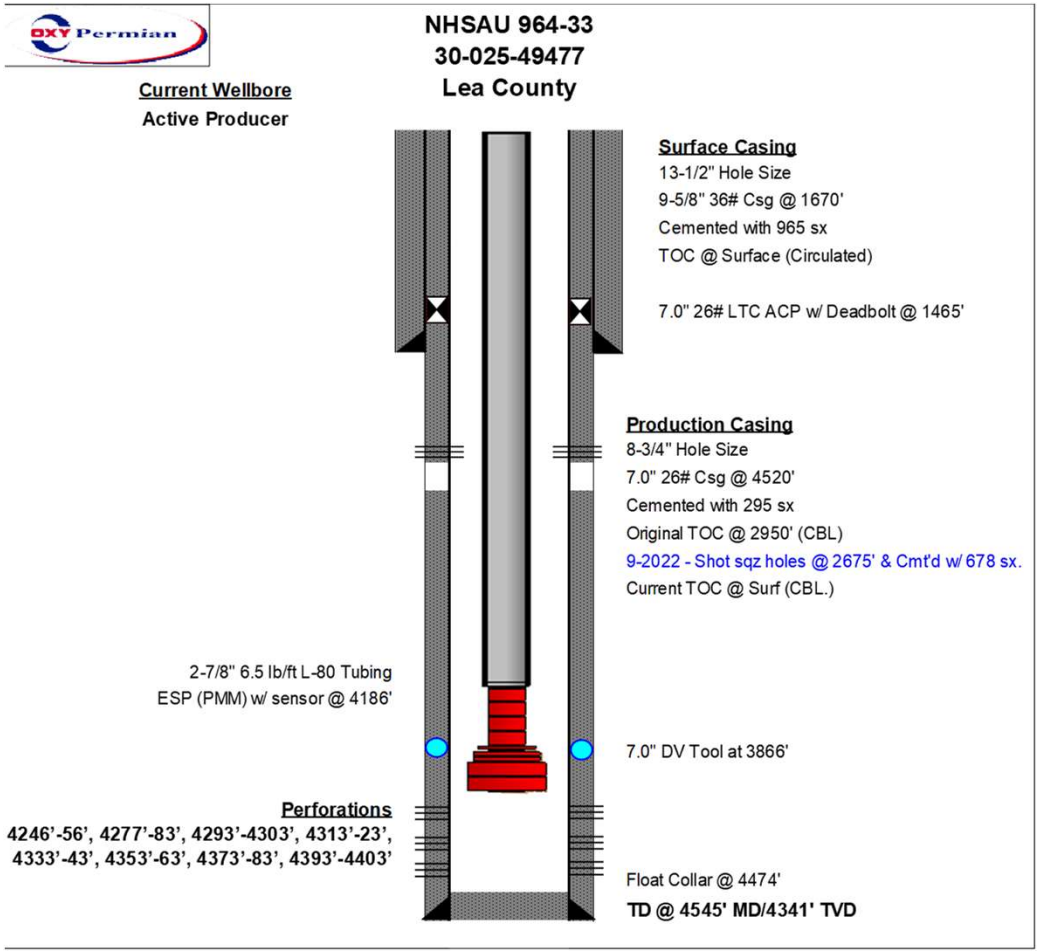

API NUMBER	OPERATOR	LEASE NAME	WELL NO.	WELL TYPE	STATUS	FTG. N/S	N/S	FTG. E/W	E/W	UNIT	SEC.	TSHP.	RNG.	DATE DRILLED	TVD (ft)	HOLE SIZE (in)	CSG. SIZE (in)	SET AT (ft)	SX. CMT.	CMT. TOP (ft)	MTD.	COMPLETION	REMARKS
30-025-49475	OCCIDENTAL PERMIAN LTD	NORTH HOBBS G/SA UNIT	962	Oil	Active	232	N	1989	W	C	33	18S	38E	8/14/2022	4417	13.5 8.75	9.625 7	1652 4804	960 1295	0 0	Circ. CBL	4450'-4644' GRAYBURG-SAN ANDRES	

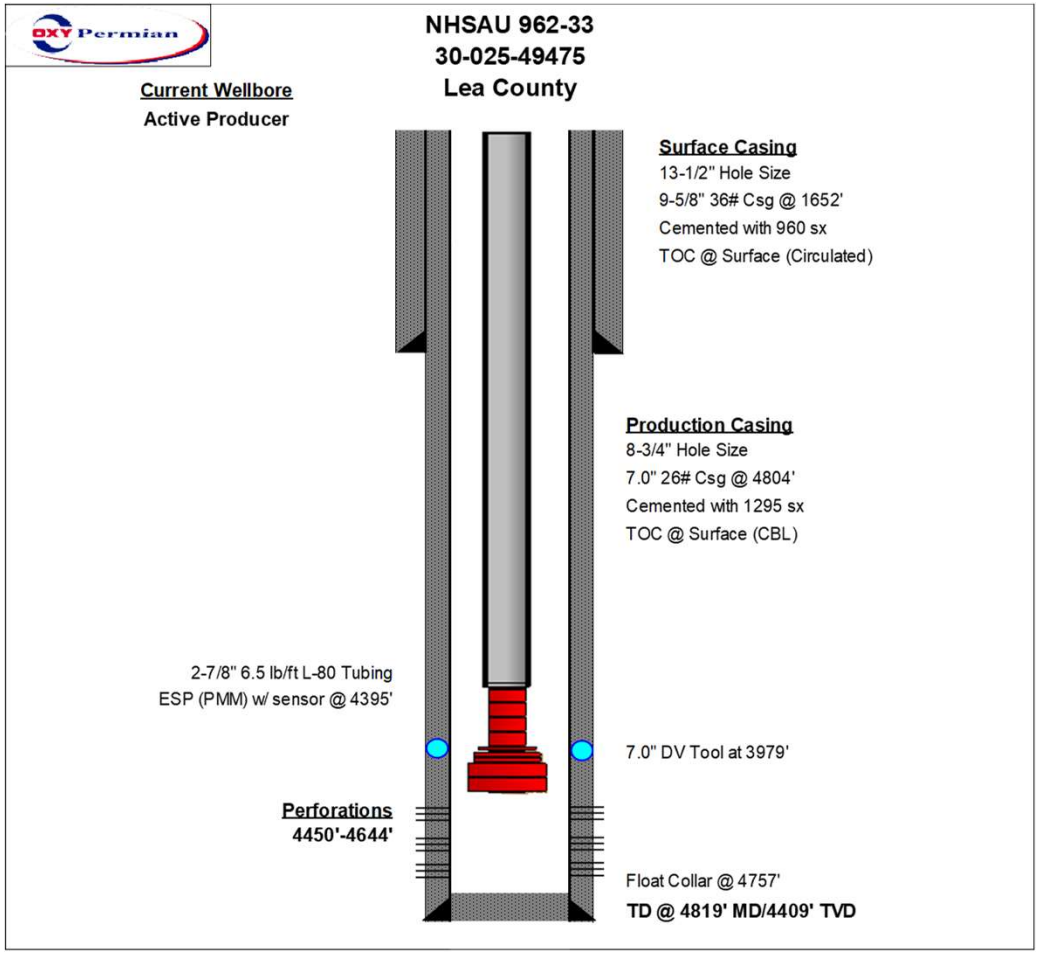

Current WBD

NHSAU 985-28
30-025-51410
Lea County

Current Wellbore
Active Producer

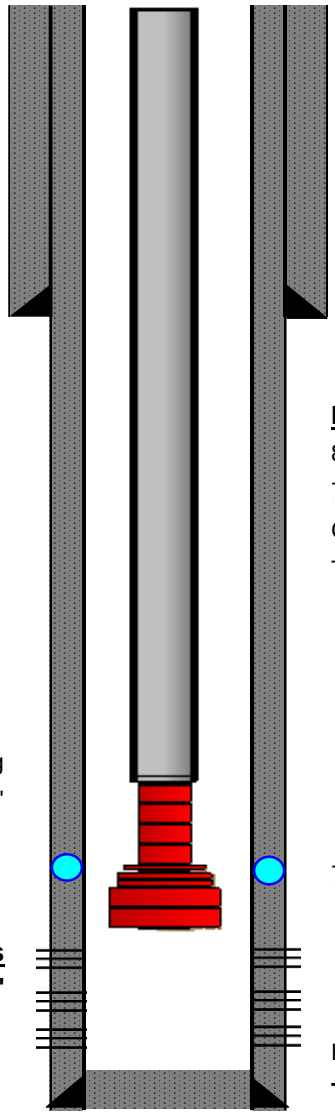

Surface Casing
13-1/2" Hole Size
9-5/8" 36# Csg @ 1652'
Cemented with 1015 sx
TOC @ Surface (Circulated 207 sx)

Production Casing
8-3/4" Hole Size
7.0" 26# Csg @ 5162'
Cemented with 1235 sx
TOC @ Surface (CBL)

2-7/8" 6.5 lb/ft L-80 Tubing
ESP (PMM) w/ sensor @ 4646'

7.0" DV Tool at 4197'

Perforations
4730'-4980'

PBTD (FC) @ 5119'
TD @ 5188' MD/4379' TVD

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 350689

CONDITIONS

Operator: OCCIDENTAL PERMIAN LTD P.O. Box 4294 Houston, TX 772104294	OGRID: 157984
	Action Number: 350689
	Action Type: [C-108] Fluid Injection Well (C-108)

CONDITIONS

Created By	Condition	Condition Date
mgebremichael	None	6/5/2024