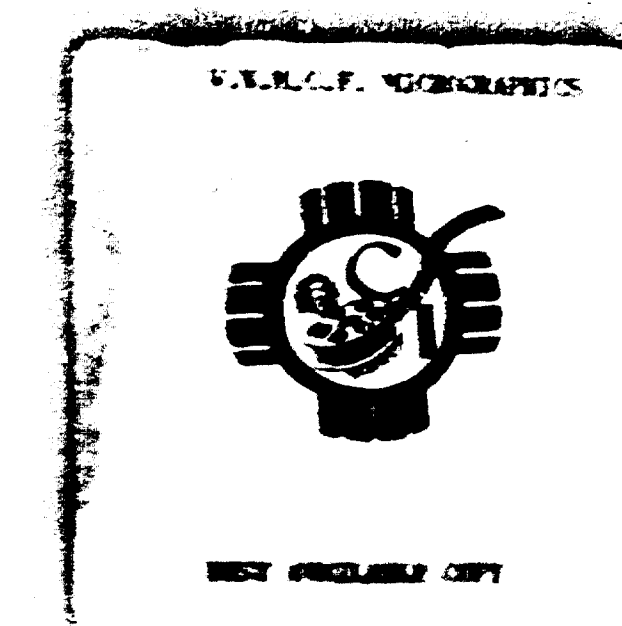


Case No.
4406

Large Exhibits



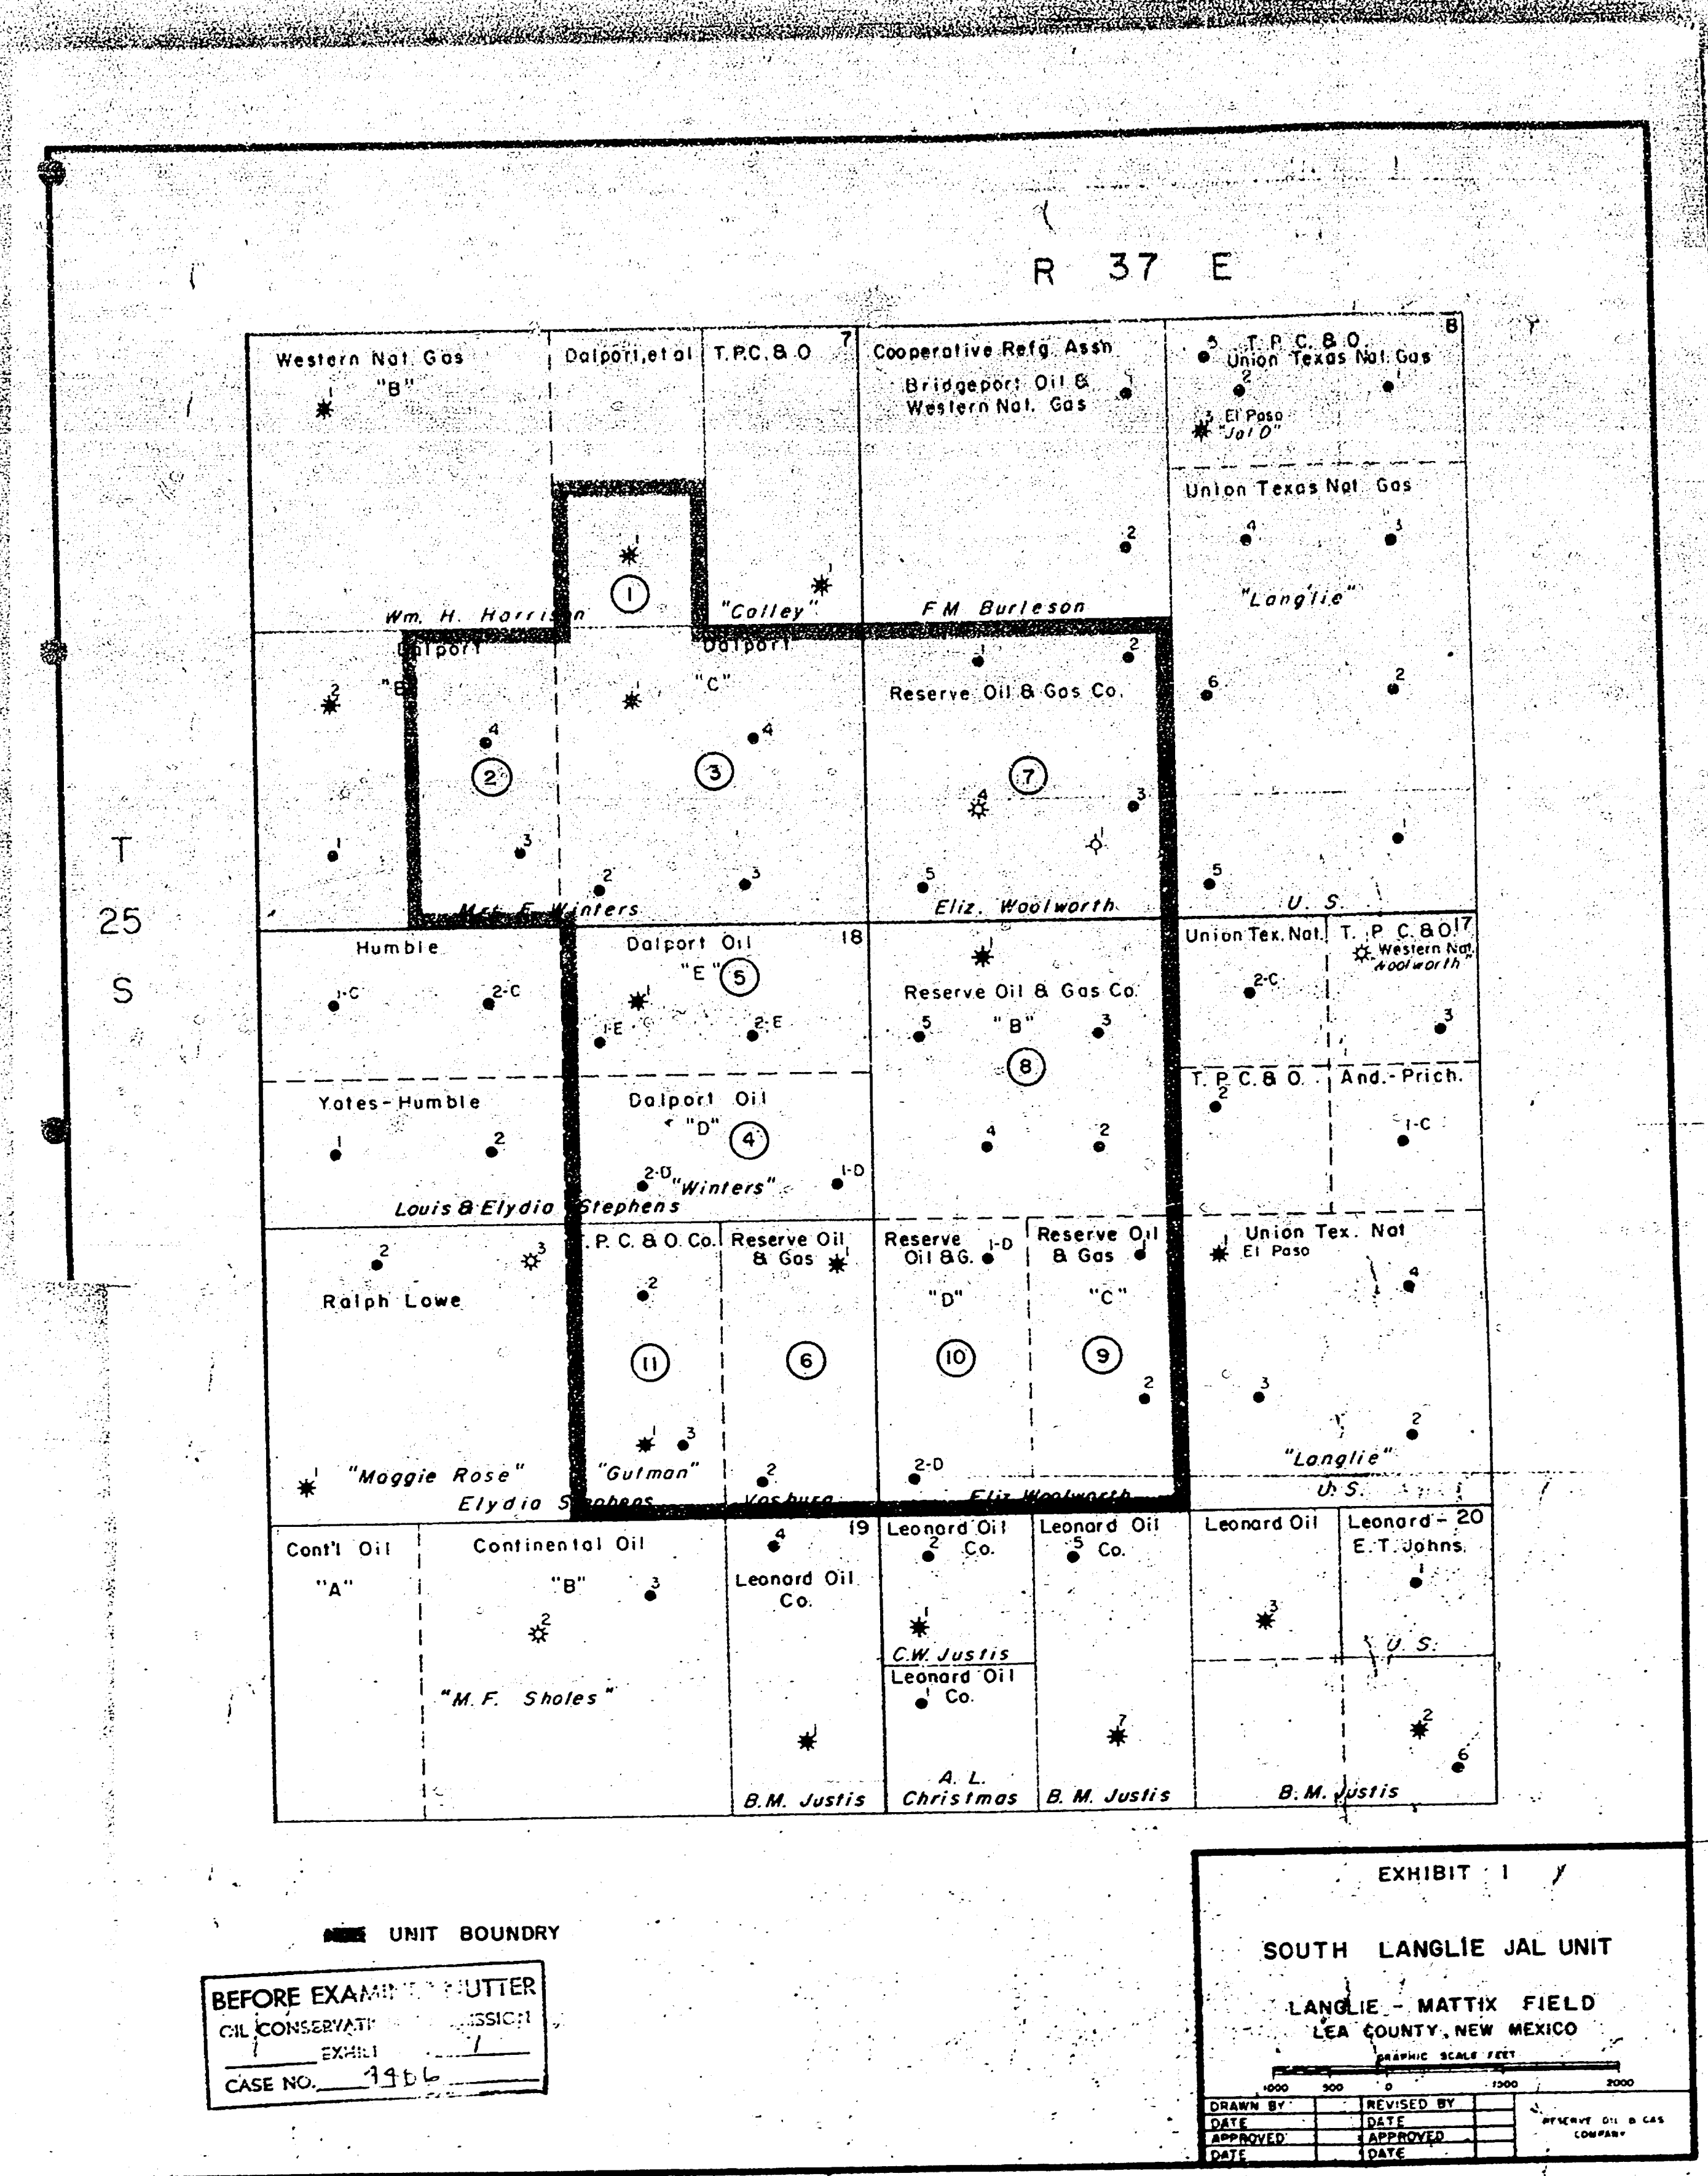


TABLE NO. 6
INJECTION WELL DETAIL
FOUR LAMBLE GAS UNIT
LEA COUNTY, NEW MEXICO

Operator	Well No.	Distance	LOCATION	Yards	Bore	CASING			Perforations	Open Hole	Total Depth	Plugged Back Total Depth	Injection Interval Perforations or Open Hole	Tubing-Packer Set At
						Size	Depth	Amount						
Diquest	1	1980 FNL & 1980 FSL	G	7	250	37C	9-5/8"	310'	5-1/2"	3224'	400 (1)	2474C	2820-2970' (1)	3214-3355'
Winters "B"	4	1555 FNL & 1650 FSL	K	7	250	37C	8-5/8"	1082'	5-1/2"	3268'	200	2508C	3168-3358'	3254-3358'
Winters "C"	2	300 FNL & 3100 FSL	O	7	250	37C	9-5/8"	315'	5-1/2"	3255'	200 Shoe	2115C	3155-3338'	3255-3338'
Winters "C"	4	960 FNL & 1650 FSL	I	7	250	37C	9-5/8"	300'	1"	3255'	200 Shoe	2555C	3225-3345'	3225-3345'
Winters "D"	2	1980 FNL & 2310 FNL	G	18	250	37C	8-5/8"	230'	5-1/2"	3237'	200 Shoe	2477C	3237-3350'	3237-3350'
Winters "E"	2	990 FNL & 990 FSL	A	18	250	37C	8-5/8"	301'	5-1/2"	3230'	200 Shoe	2470C	3230-3320'	3230-3320'
Revere Oil and Gas Company	5	330 FNL & 900 FSL	M	8	250	37C	8-5/8"	184'	5-1/2"	3268'	200 Shoe	2508C	3268-3385'	3268-3385'
Woodward "B"	3	990 FNL & 3100 FSL	C	17	250	37C	10-3/4"	156'	7"	2810'	200 Shoe	2130C	3217-3380'	3217-3380'
Woodward "B"	4	1980 FNL & 990 FSL	E	17	250	37C	10-3/4"	157'	7"	2814'	200 Shoe	2214C	3200-3397'	3200-3397'
Vesberg (Dall)	1	330 FNL & 2275 FSL	I	18	250	37C	10-3/4"	159'	7"	3168'	200 Shoe	2568C	3168-3336'	3168-3336'

* - Wells

NOTES:
(1) Cemented in two stages; location of stage not available.
(2) A liner will be set and cemented from 2750' to 3397' & liner perforated 3200-3380'.
(3) Taper Gas Zone.
C

PKC 3180

It's arrived
it's purchased from
ready with good
with no problem

BEFORE EXAMINER NUTT
OIL CONSERVATION COMMISSION
EXHIBIT NO. 6
CASE NO. 4506

