

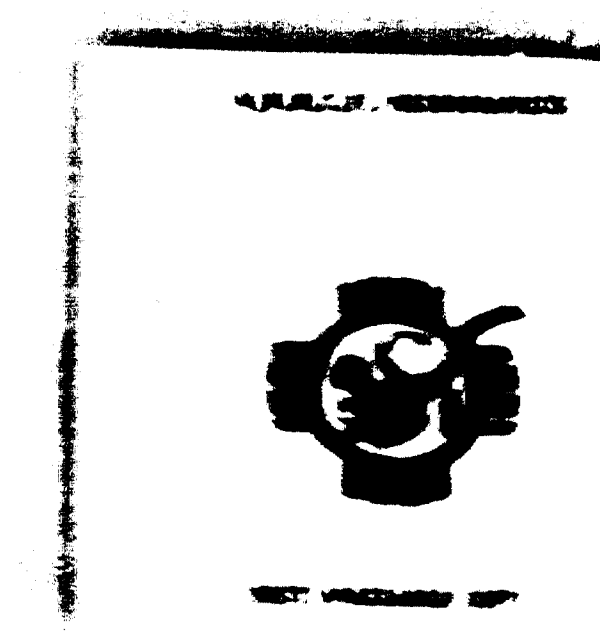
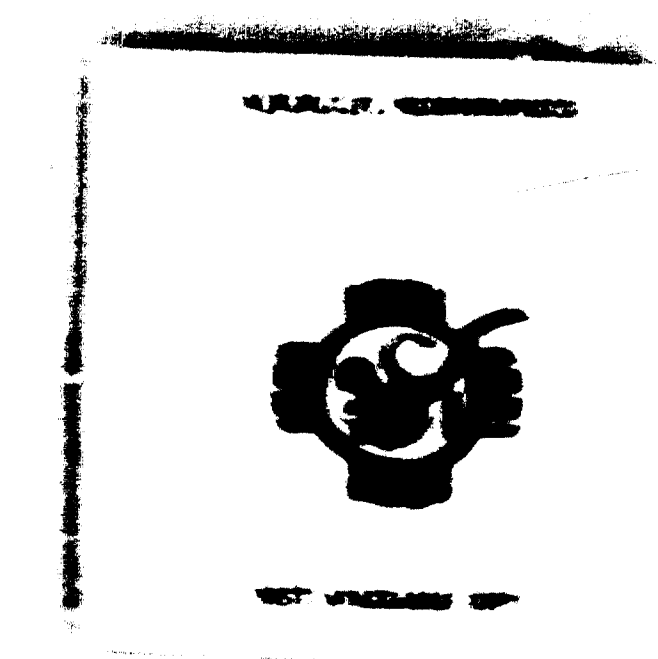
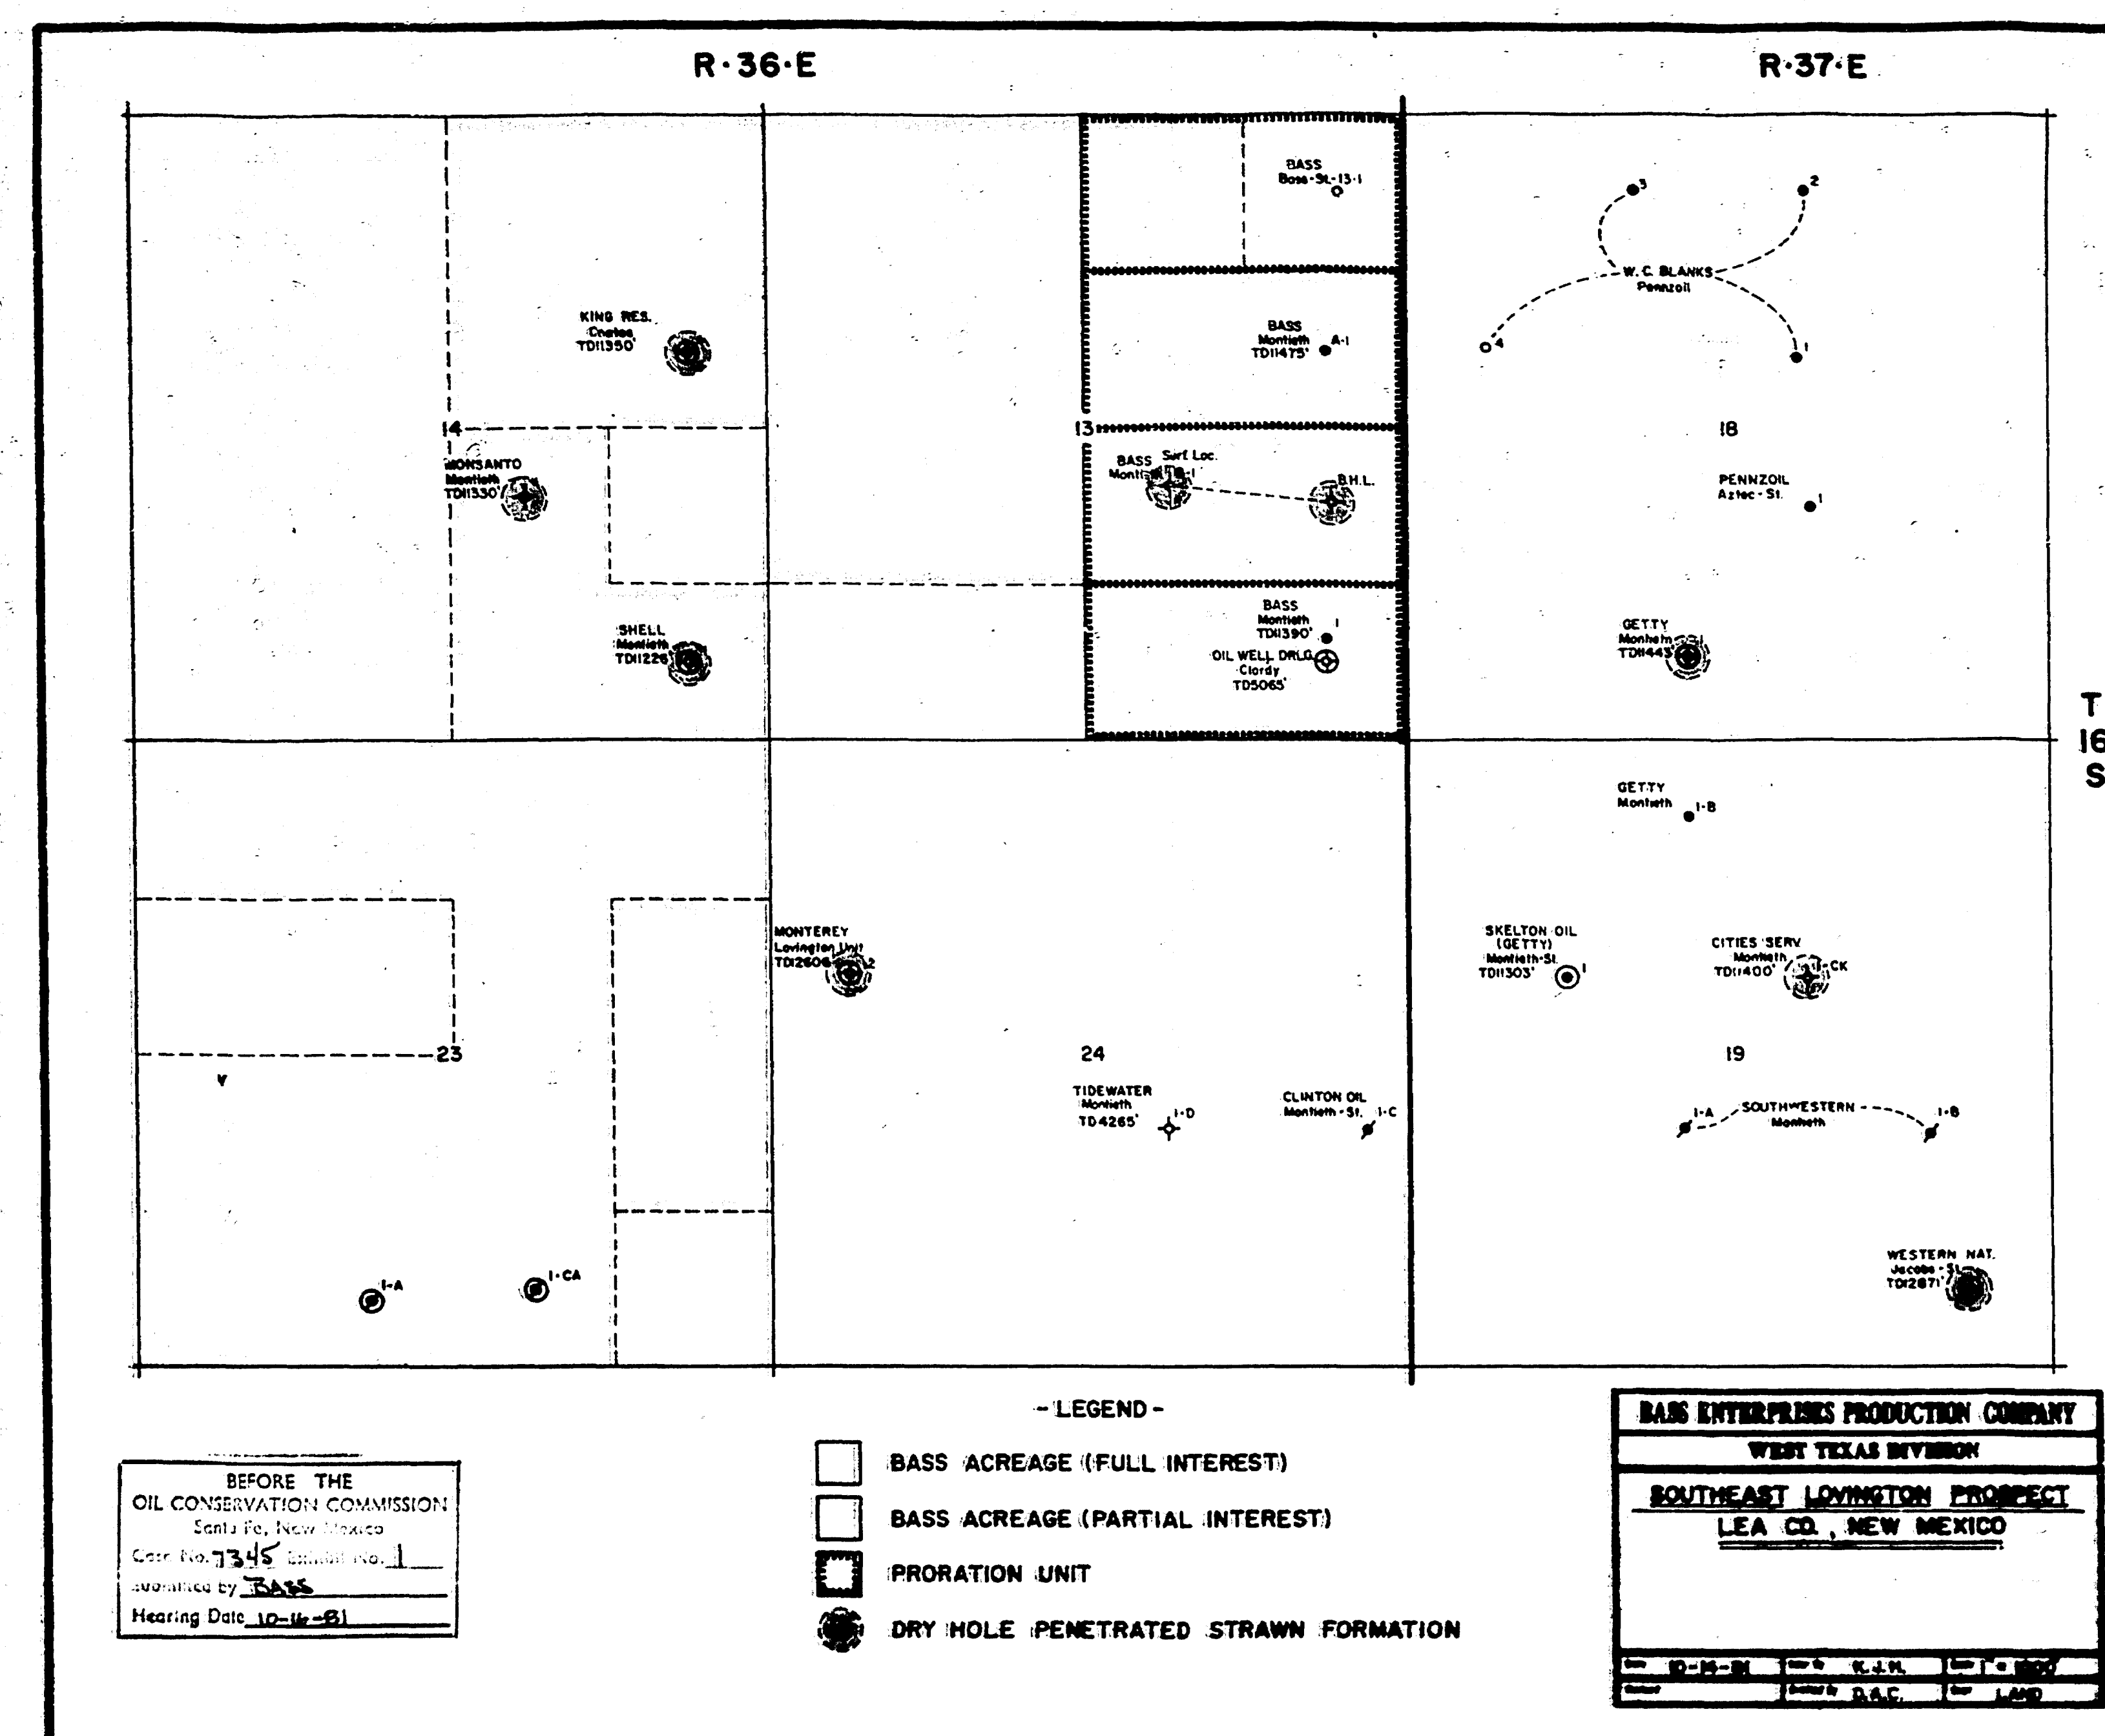
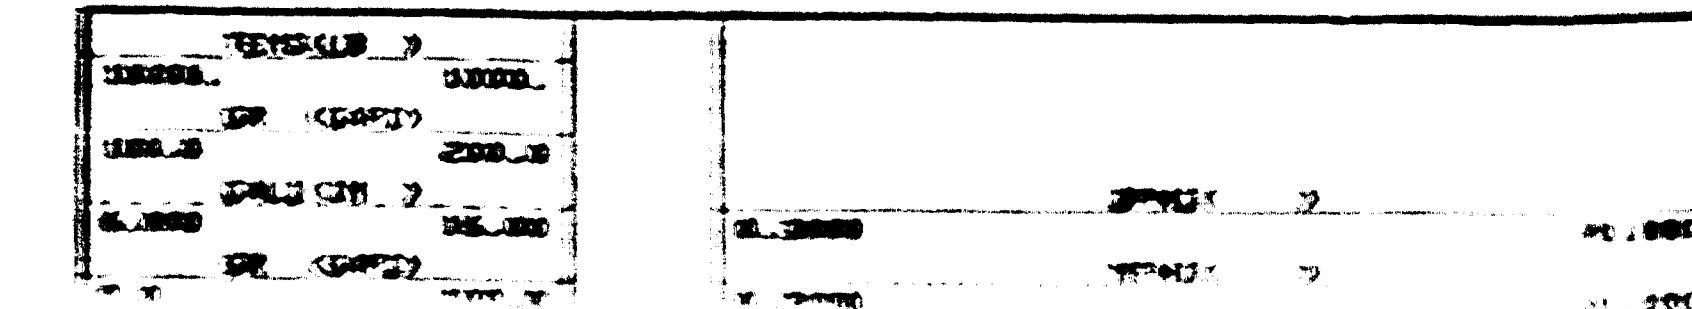
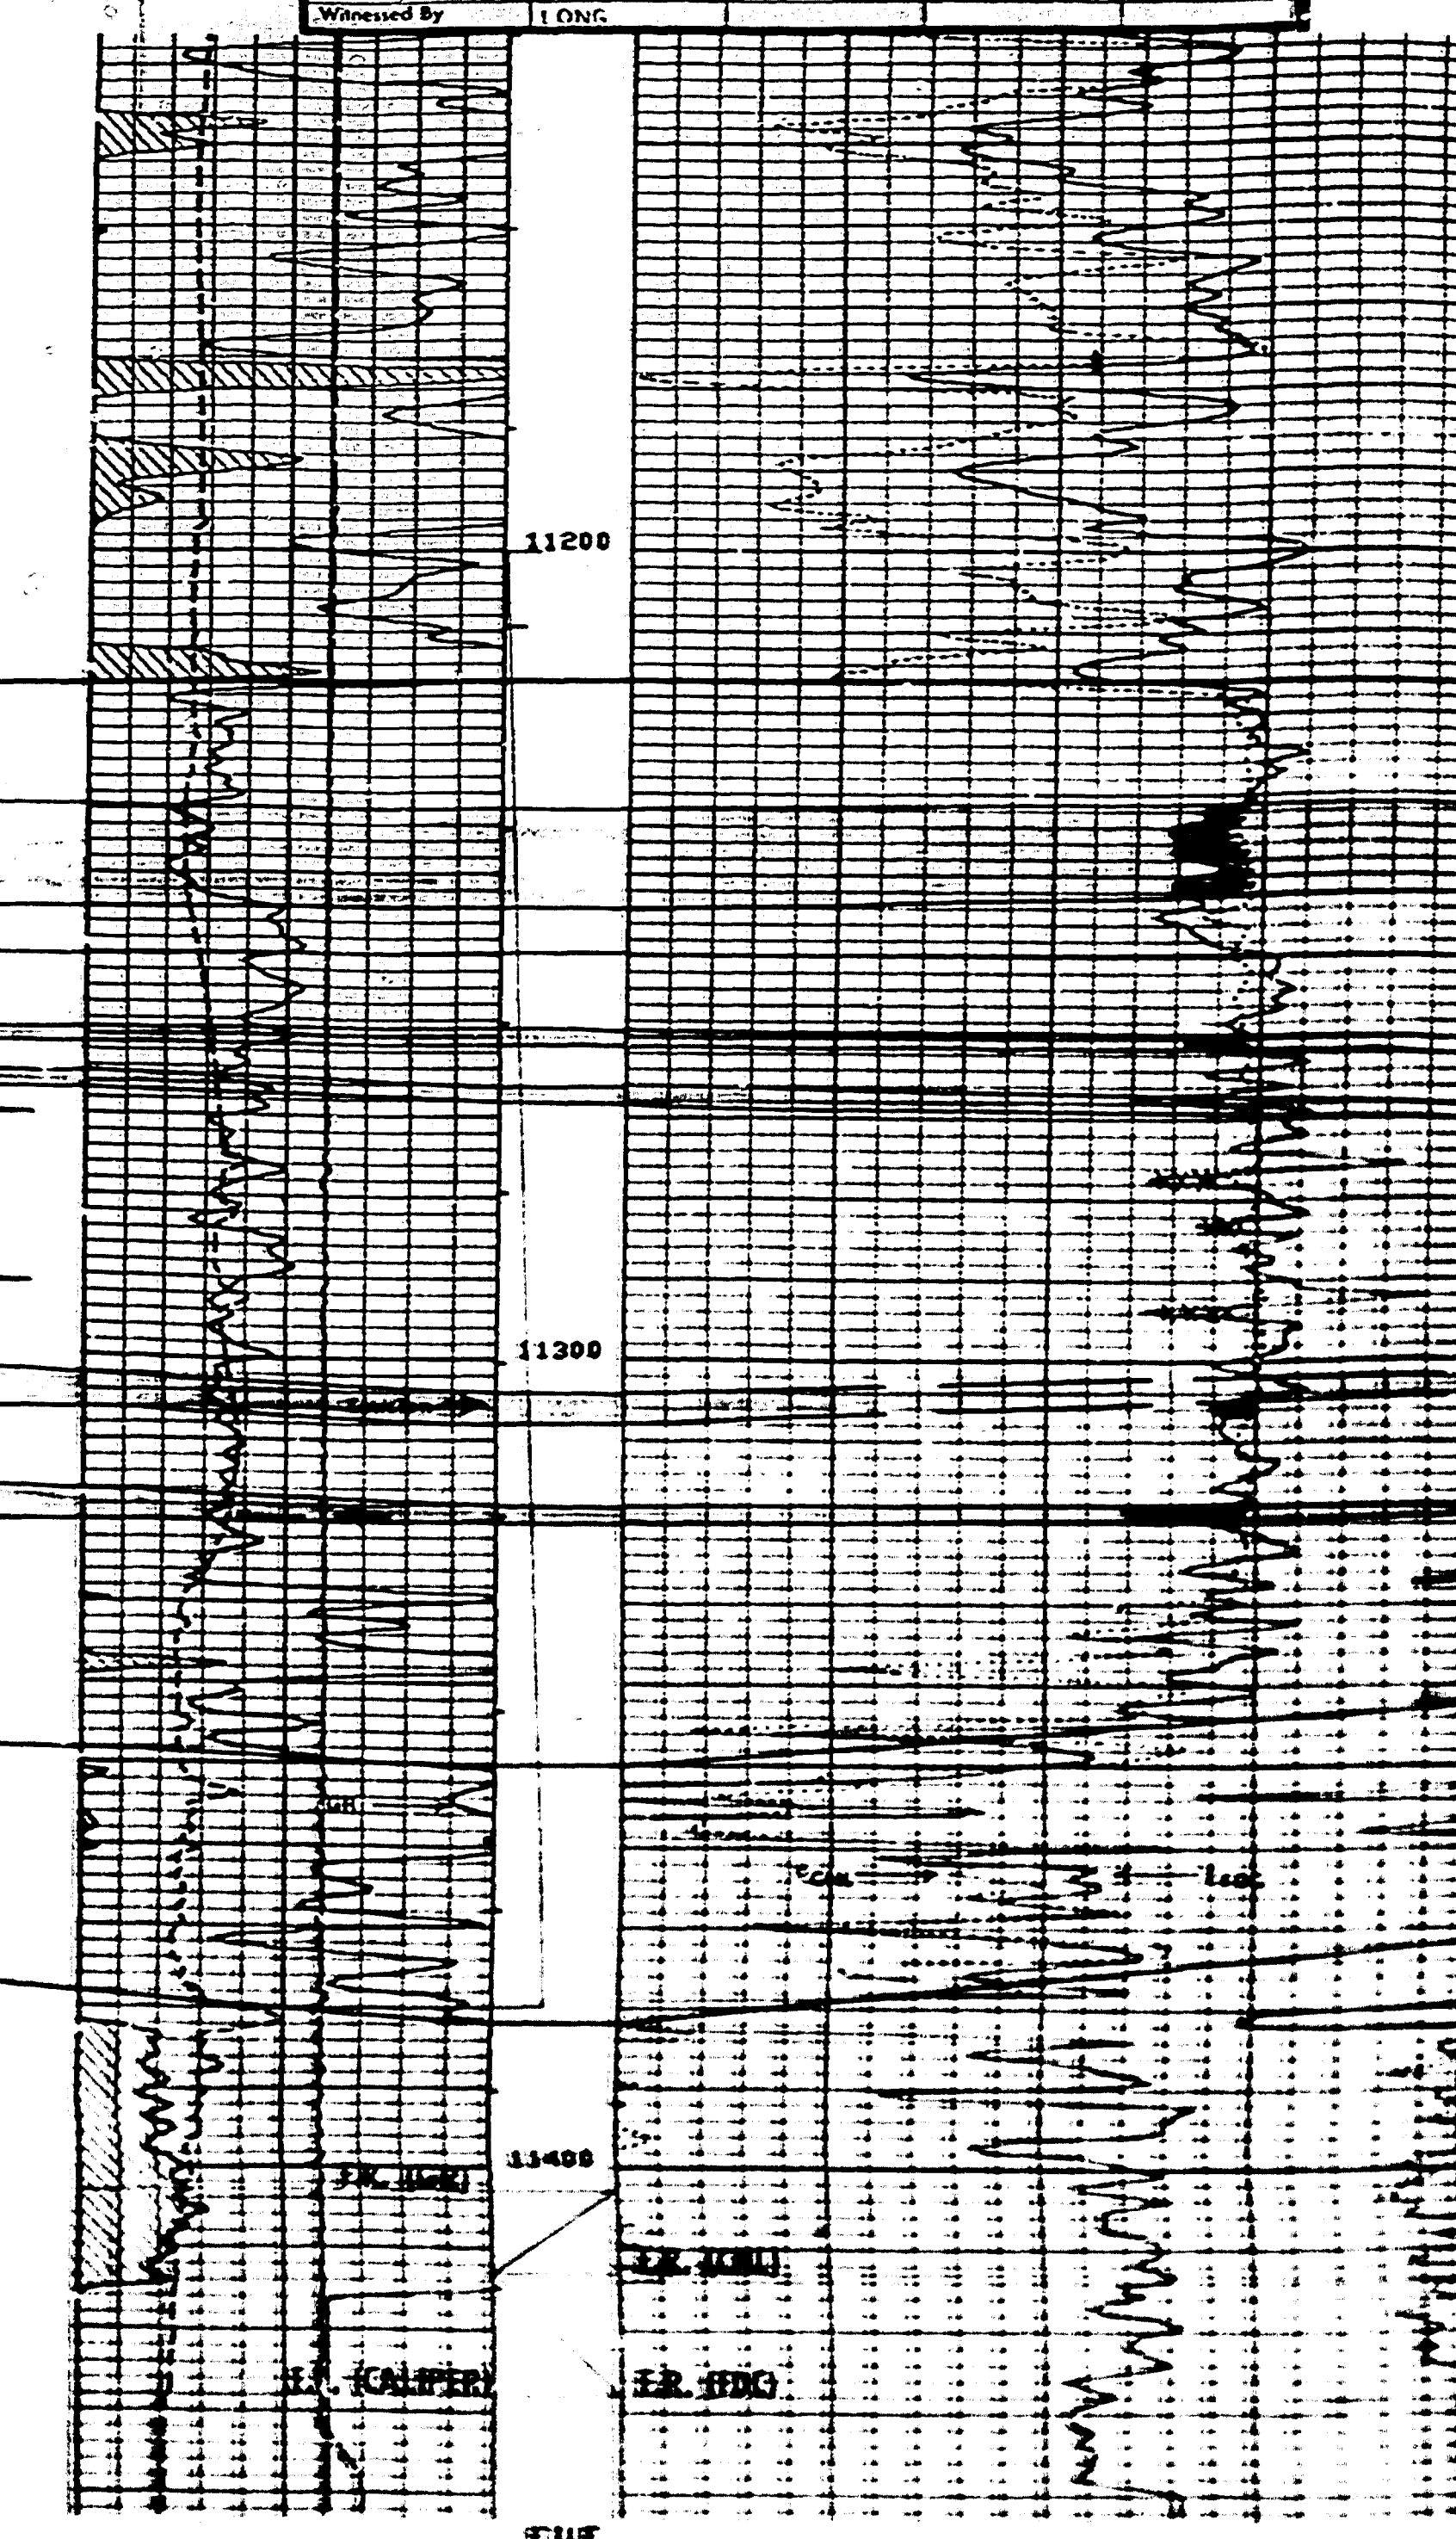


Case No.
7345

Large Exhibits

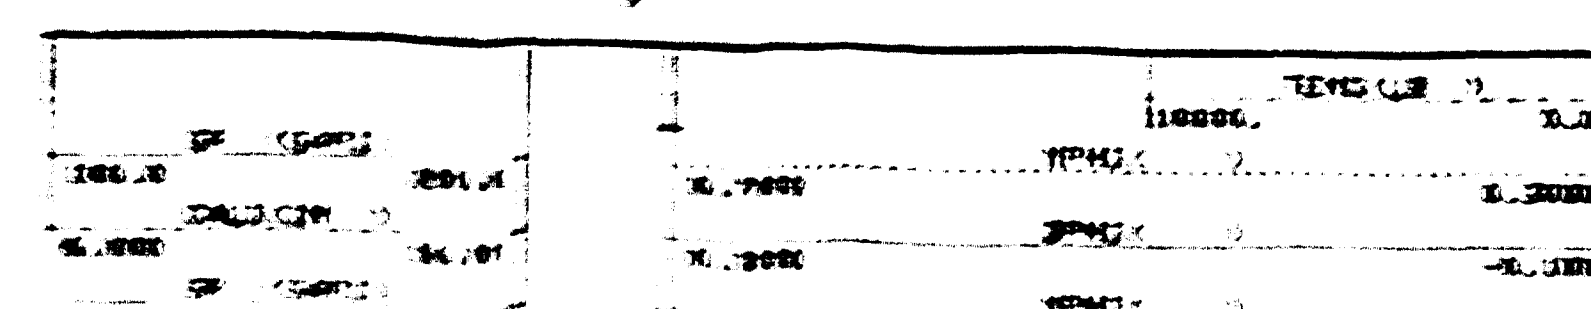

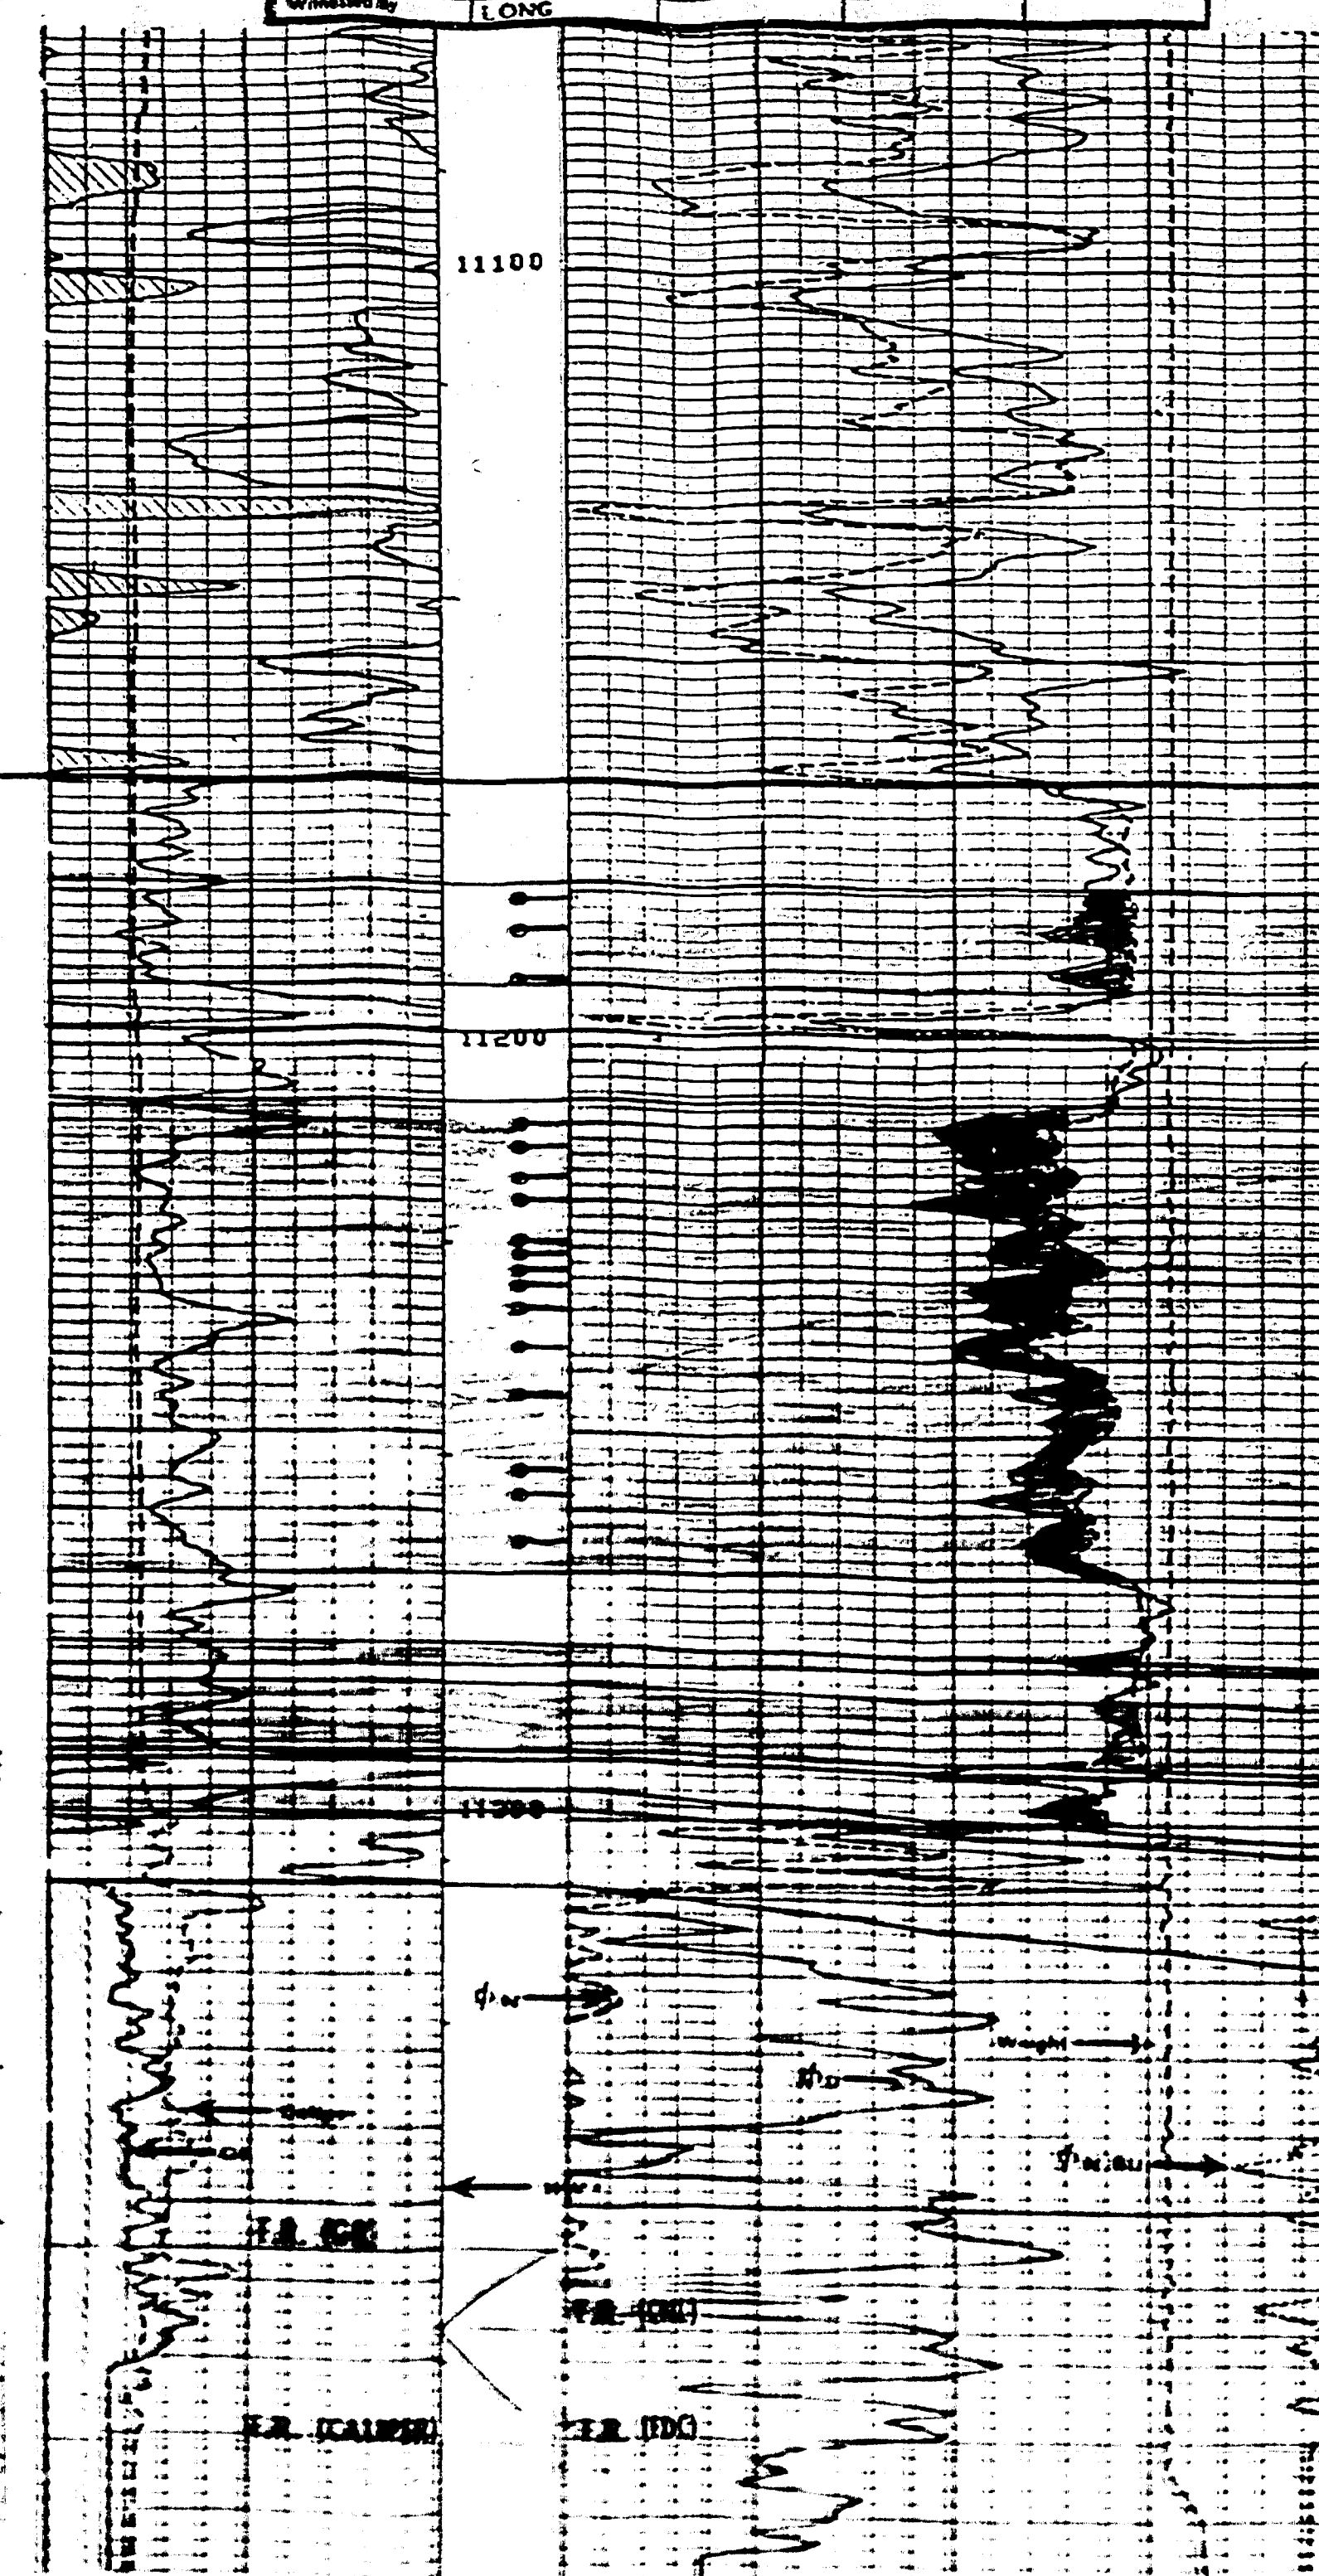



[illegible]

SIMULTANEOUS		SCHEMATICALLY CORRELATED NEUTRON FORMATION DENSITY	
Schlumberger			
COMPANY - DAVIDSON PUMP WELL - MOBILE 13 FIELD - MOBILE 13 COUNTY - MOBILE STATE - ALABAMA	COMPANY - BASS ENTERPRISES WELL - "B" No. 1 - SEKAISITE Hole FIELD - (MOBILE #1 - FORMALLY) COUNTY - ALA. STATE - NEW MEXICO		
	1980 FEB 6 2130 PSL		
	Other Service OIL		
	Casing Depth - 13 16.5 36.6 Log Interval - 13 16.5 36.6		
	Log Interval - 13 16.5 36.6		
Pumping Duration - 18 18 18 18 Log Measured From - K.B. Drilling Measured From - K.B.			
Date - 4-1-81 Run No. - 11578 Depth - 11578 Casing - 11578 Log Interval - 11578 Top Log Interval - SURF Casing - 2,588 - 5810 Casing - 5810 Bit Size - 7 7/8 Type Fluid in Hole - DRILLING FLUID pH - 9.2 pH - 10 Source of Sample - 11578 At (Mean Temp.) - 62 F At (Mean Temp.) - 62 F At (Mean Temp.) - 62 F Source of Sample - 11578 Correlation Shipped - 2.00 Correlation on Bottom - 2.00 Max. Rec. Temp. - 152 F Rec. Location - 11578 Recorded by - MARLEY			


Schlumberger SIMULTANEOUS COMPENSATED NEUTRON FORMATION DENSITY

COMPANY: BASS ENTERPRISES
 WELL: MONTIETH "D" No. 1 - Straight Hole
 FIELD: N.E. LOVINGTON PENN.
 COUNTY: LEA STATE: NEW MEXICO
 1980' FNL 6 2130' FEL
 Permanent Datum: G.L. Elev. 3858
 Log Measured From: K.B. 18' Above Perm. Datum
 Drilling Measured From: K.B.
 Other Services: DIL

DATE	5-1-81	TIME	10-5	LOGGERS	56-E
Run No.	ONE				
Depth-Driller	11528				
Depth-Logger	11429				
Run Log Interval	11428				
Top Log Interval	5189				
Casing-Driller	8 5/8 4810				
Casing-Logger	5819				
Bit Size	7 7/8				
Type Fluid in Hole	FRESH GEL				
Flow Rate	3.2				
Flow Unit	gal				
Source of Sample	SHAKER				
Run to Meas. Temp.	13 05.2 62°				
Run to Meas. Temp.	20 00 62°				
Run to Meas. Temp.	27 00 62°				
Source Well Log	44 00 62°				
Run to Meas. Temp.	56 00 62°				
Run to Meas. Temp.	66 00 62°				
Run to Meas. Temp.	77 00 62°				
Run to Meas. Temp.	88 00 62°				
Run to Meas. Temp.	99 00 62°				
Run to Meas. Temp.	110 00 62°				
Run to Meas. Temp.	121 00 62°				
Run to Meas. Temp.	132 00 62°				
Run to Meas. Temp.	143 00 62°				
Run to Meas. Temp.	154 00 62°				
Run to Meas. Temp.	165 00 62°				
Run to Meas. Temp.	176 00 62°				
Run to Meas. Temp.	187 00 62°				
Run to Meas. Temp.	198 00 62°				
Run to Meas. Temp.	209 00 62°				
Run to Meas. Temp.	220 00 62°				
Run to Meas. Temp.	231 00 62°				
Run to Meas. Temp.	242 00 62°				
Run to Meas. Temp.	253 00 62°				
Run to Meas. Temp.	264 00 62°				
Run to Meas. Temp.	275 00 62°				
Run to Meas. Temp.	286 00 62°				
Run to Meas. Temp.	297 00 62°				
Run to Meas. Temp.	308 00 62°				
Run to Meas. Temp.	319 00 62°				
Run to Meas. Temp.	330 00 62°				
Run to Meas. Temp.	341 00 62°				
Run to Meas. Temp.	352 00 62°				
Run to Meas. Temp.	363 00 62°				
Run to Meas. Temp.	374 00 62°				
Run to Meas. Temp.	385 00 62°				
Run to Meas. Temp.	396 00 62°				
Run to Meas. Temp.	407 00 62°				
Run to Meas. Temp.	418 00 62°				
Run to Meas. Temp.	429 00 62°				
Run to Meas. Temp.	440 00 62°				
Run to Meas. Temp.	451 00 62°				
Run to Meas. Temp.	462 00 62°				
Run to Meas. Temp.	473 00 62°				
Run to Meas. Temp.	484 00 62°				
Run to Meas. Temp.	495 00 62°				
Run to Meas. Temp.	506 00 62°				
Run to Meas. Temp.	517 00 62°				
Run to Meas. Temp.	528 00 62°				
Run to Meas. Temp.	539 00 62°				
Run to Meas. Temp.	550 00 62°				
Run to Meas. Temp.	561 00 62°				
Run to Meas. Temp.	572 00 62°				
Run to Meas. Temp.	583 00 62°				
Run to Meas. Temp.	594 00 62°				
Run to Meas. Temp.	605 00 62°				
Run to Meas. Temp.	616 00 62°				
Run to Meas. Temp.	627 00 62°				
Run to Meas. Temp.	638 00 62°				
Run to Meas. Temp.	649 00 62°				
Run to Meas. Temp.	660 00 62°				
Run to Meas. Temp.	671 00 62°				
Run to Meas. Temp.	682 00 62°				
Run to Meas. Temp.	693 00 62°				
Run to Meas. Temp.	704 00 62°				
Run to Meas. Temp.	715 00 62°				
Run to Meas. Temp.	726 00 62°				
Run to Meas. Temp.	737 00 62°				
Run to Meas. Temp.	748 00 62°				
Run to Meas. Temp.	759 00 62°				
Run to Meas. Temp.	770 00 62°				
Run to Meas. Temp.	781 00 62°				
Run to Meas. Temp.	792 00 62°				
Run to Meas. Temp.	803 00 62°				
Run to Meas. Temp.	814 00 62°				
Run to Meas. Temp.	825 00 62°				
Run to Meas. Temp.	836 00 62°				
Run to Meas. Temp.	847 00 62°				
Run to Meas. Temp.	858 00 62°				
Run to Meas. Temp.	869 00 62°				
Run to Meas. Temp.	880 00 62°				
Run to Meas. Temp.	891 00 62°				
Run to Meas. Temp.	902 00 62°				
Run to Meas. Temp.	913 00 62°				
Run to Meas. Temp.	924 00 62°				
Run to Meas. Temp.	935 00 62°				
Run to Meas. Temp.	946 00 62°				
Run to Meas. Temp.	957 00 62°				
Run to Meas. Temp.	968 00 62°				
Run to Meas. Temp.	979 00 62°				
Run to Meas. Temp.	990 00 62°				
Run to Meas. Temp.	1001 00 62°				
Run to Meas. Temp.	1012 00 62°				
Run to Meas. Temp.	1023 00 62°				
Run to Meas. Temp.	1034 00 62°				
Run to Meas. Temp.	1045 00 62°				
Run to Meas. Temp.	1056 00 62°				
Run to Meas. Temp.	1067 00 62°				
Run to Meas. Temp.	1078 00 62°				
Run to Meas. Temp.	1089 00 62°				
Run to Meas. Temp.	1100 00 62°				
Run to Meas. Temp.	1111 00 62°				
Run to Meas. Temp.	1122 00 62°				
Run to Meas. Temp.	1133 00 62°				
Run to Meas. Temp.	1144 00 62°				
Run to Meas. Temp.	1155 00 62°				
Run to Meas. Temp.	1166 00 62°				
Run to Meas. Temp.	1177 00 62°				
Run to Meas. Temp.	1188 00 62°				
Run to Meas. Temp.	1199 00 62°				
Run to Meas. Temp.	1210 00 62°				
Run to Meas. Temp.	1221 00 62°				
Run to Meas. Temp.	1232 00 62°				
Run to Meas. Temp.	1243 00 62°				
Run to Meas. Temp.	1254 00 62°				
Run to Meas. Temp.	1265 00 62°				
Run to Meas. Temp.	1276 00 62°				
Run to Meas. Temp.	1287 00 62°				
Run to Meas. Temp.	1298 00 62°				
Run to Meas. Temp.	1309 00 62°				
Run to Meas. Temp.	1320 00 62°				
Run to Meas. Temp.	1331 00 62°				
Run to Meas. Temp.	1342 00 62°				
Run to Meas. Temp.	1353 00 62°				
Run to Meas. Temp.	1364 00 62°				
Run to Meas. Temp.	1375 00 62°				
Run to Meas. Temp.	1386 00 62°				
Run to Meas. Temp.	1397 00 62°				
Run to Meas. Temp.	1408 00 62°				
Run to Meas. Temp.	1419 00 62°				
Run to Meas. Temp.	1430 00 62°				
Run to Meas. Temp.	1441 00 62°				
Run to Meas. Temp.	1452 00 62°				
Run to Meas. Temp.	1463 00 62°				
Run to Meas. Temp.	1474 00 62°				
Run to Meas. Temp.	1485 00 62°				
Run to Meas. Temp.	1496 00 62°				
Run to Meas. Temp.	1507 00 62°				
Run to Meas. Temp.	1518 00 62°				
Run to Meas. Temp.	1529 00 62°				
Run to Meas. Temp.	1540 00 62°				
Run to Meas. Temp.	1551 00 62°				
Run to Meas. Temp.	1562 00 62°				
Run to Meas. Temp.	1573 00 62°				
Run to Meas. Temp.	1584 00 62°				
Run to Meas. Temp.	1595 00 62°				
Run to Meas. Temp.	1606 00 62°				
Run to Meas. Temp.	1617 00 62°				
Run to Meas. Temp.	1628 00 62°				
Run to Meas. Temp.	1639 00 62°				
Run to Meas. Temp.	1650 00 62°				
Run to Meas. Temp.	1661 00 62°				
Run to Meas. Temp.	1672 00 62°				
Run to Meas. Temp.	1683 00 62°				
Run to Meas. Temp.	1694 00 62°				
Run to Meas. Temp.	1705 00 62°				
Run to Meas. Temp.	1716 00 62°				
Run to Meas. Temp.	1727 00 62°				
Run to Meas. Temp.	1738 00 62°				
Run to Meas. Temp.	1749 00 62°				
Run to Meas. Temp.	1760 00 62°				
Run to Meas. Temp.	1771 00 62°				
Run to Meas. Temp.	1782 00 62°				
Run to Meas. Temp.	1793 00 62°				
Run to Meas. Temp.	1804 00 62°				
Run to Meas. Temp.	1815 00 62°				
Run to Meas. Temp.	1826 00 62°				
Run to Meas. Temp.	1837 00 62°				
Run to Meas. Temp.	1848 00 62°				
Run to Meas. Temp.	1859 00 62°				
Run to Meas. Temp.	1870 00 62°				
Run to Meas. Temp.	1881 00 62°				
Run to Meas. Temp.	1892 00 62°				
Run to Meas. Temp.	1903 00 62°				
Run to Meas. Temp.	1914 00 62°				
Run to Meas. Temp.	1925 00 62°				
Run to Meas. Temp.	1936 00 62°				
Run to Meas. Temp.	1947 00 62°				
Run to Meas. Temp.	1958 00 62°				
Run to Meas. Temp.	1969 00 62°				
Run to Meas. Temp.	1980 00 62°				
Run to Meas. Temp.	1991 00 62°				
Run to Meas. Temp.	2002 00 62°				
Run to Meas. Temp.	2013 00 62°				
Run to Meas. Temp.	2024 00 62°				
Run to Meas. Temp.	2035 00 62°				
Run to Meas. Temp.	2046 00 62°				
Run to Meas. Temp.	2057 00 62°				
Run to Meas. Temp.	2068 00 62°				
Run to Meas. Temp.	2079 00 62°				
Run to Meas. Temp.	2090 00 62°				
Run to Meas. Temp.	2101 00 62°				
Run to Meas. Temp.	2112 00 62°				
Run to Meas. Temp.	2123 00 62°				
Run to Meas. Temp.	2134 00 62°				
Run to Meas. Temp.	2145 00 62°				
Run to Meas. Temp.	2156 00 62°				
Run to Meas. Temp.	2167 00 62°				
Run to Meas. Temp.	2178 00 62°				
Run to Meas. Temp.	2189 00 62°				
Run to Meas. Temp.	2200 00 62°				
Run to Meas. Temp.	2211 00 62°				
Run to Meas. Temp.	2222 00 62°				
Run to Meas. Temp.	2233 00 62°				
Run to Meas. Temp.	2244 00 62°				
Run to Meas. Temp.	2255 00 62°				
Run to Meas. Temp.	2266 00 62°				
Run to Meas. Temp.	2277 00 62°				
Run to Meas. Temp.	2288 00 62°				
Run to Meas. Temp.	229				

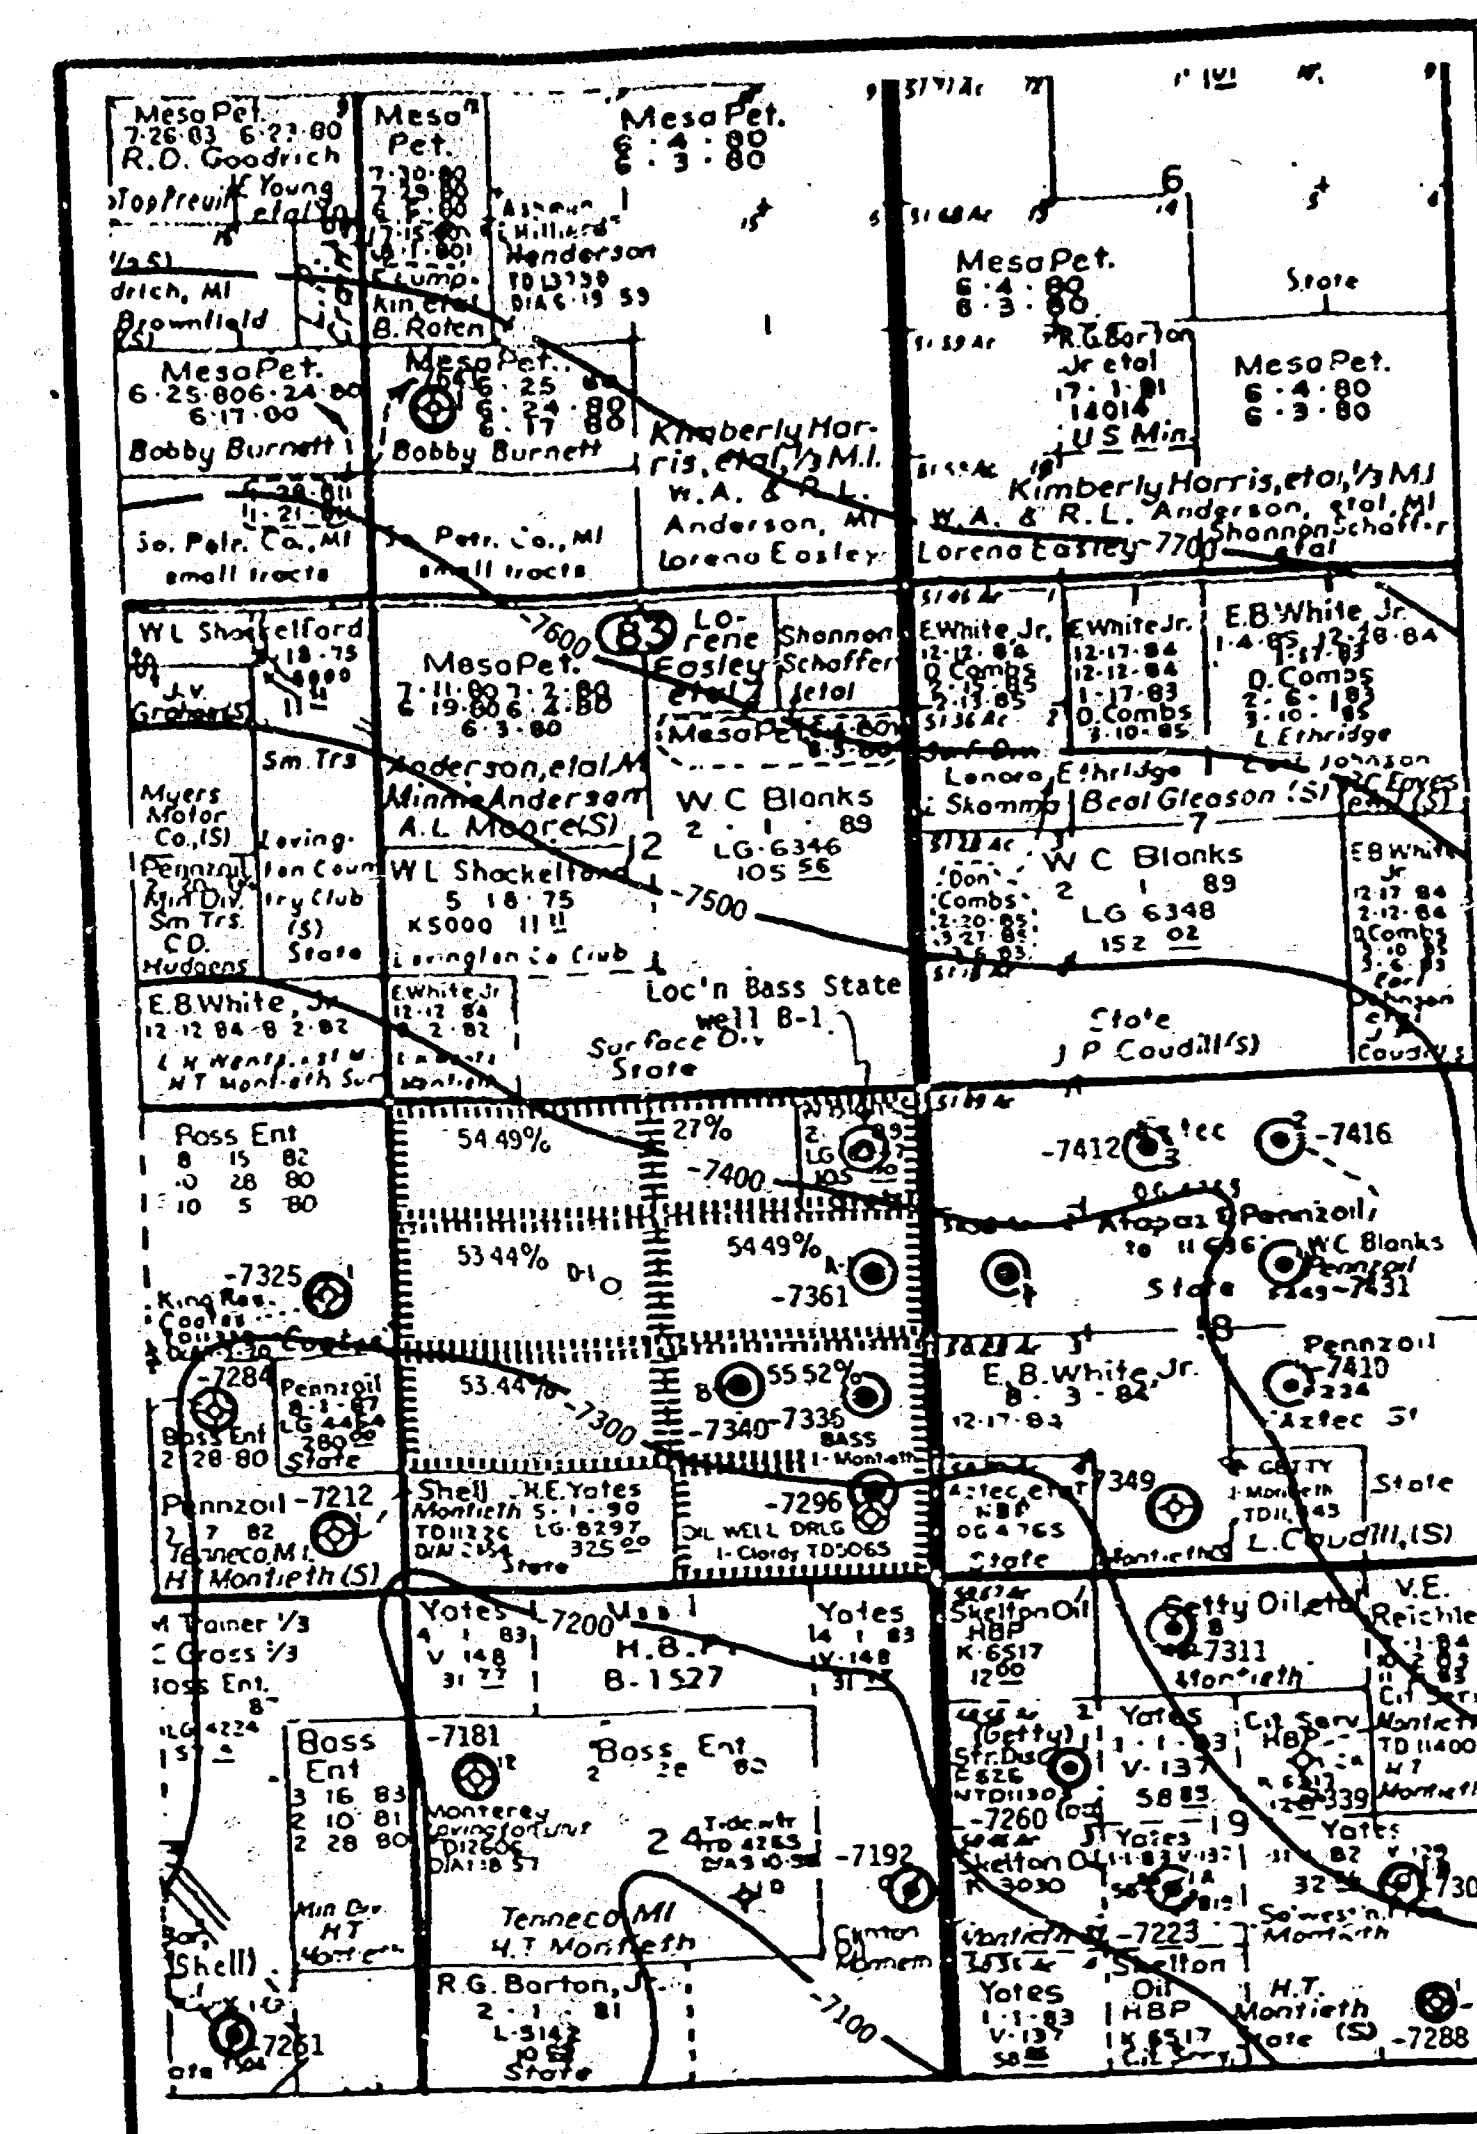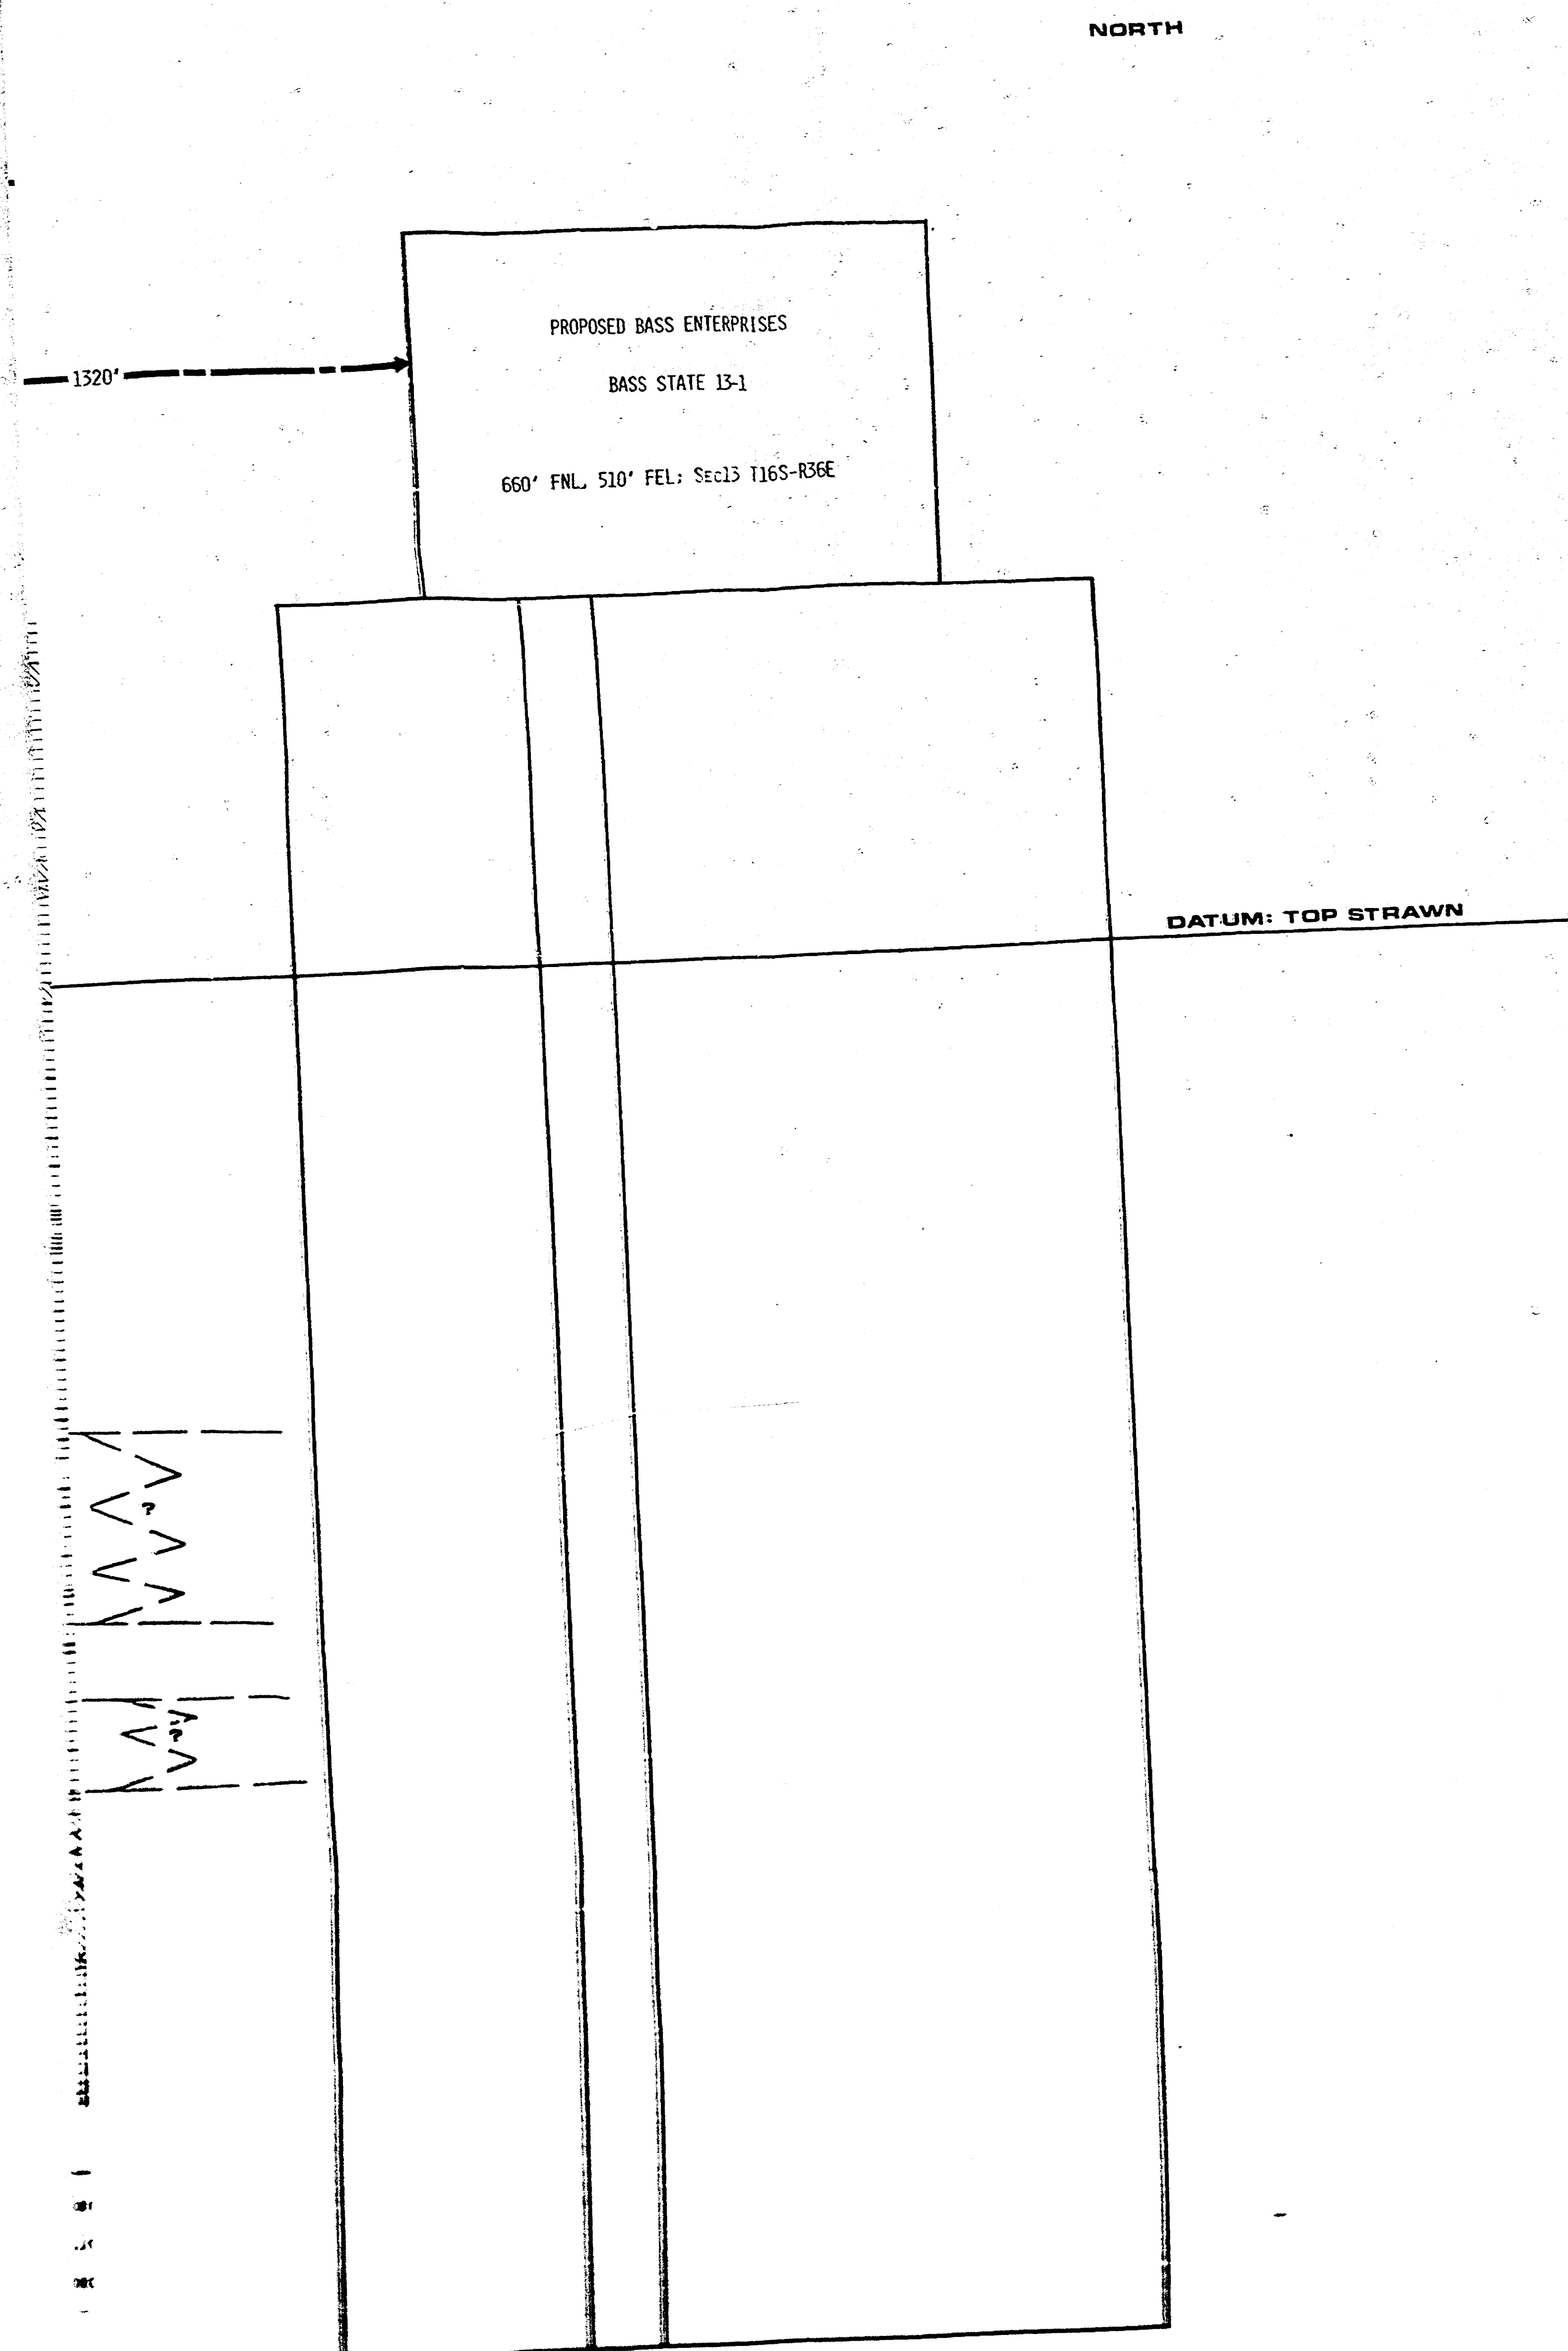



HYDROCARBON EFFECT ON CNL-FDC LOG WHERE SEPARATION EXCEED 2pu


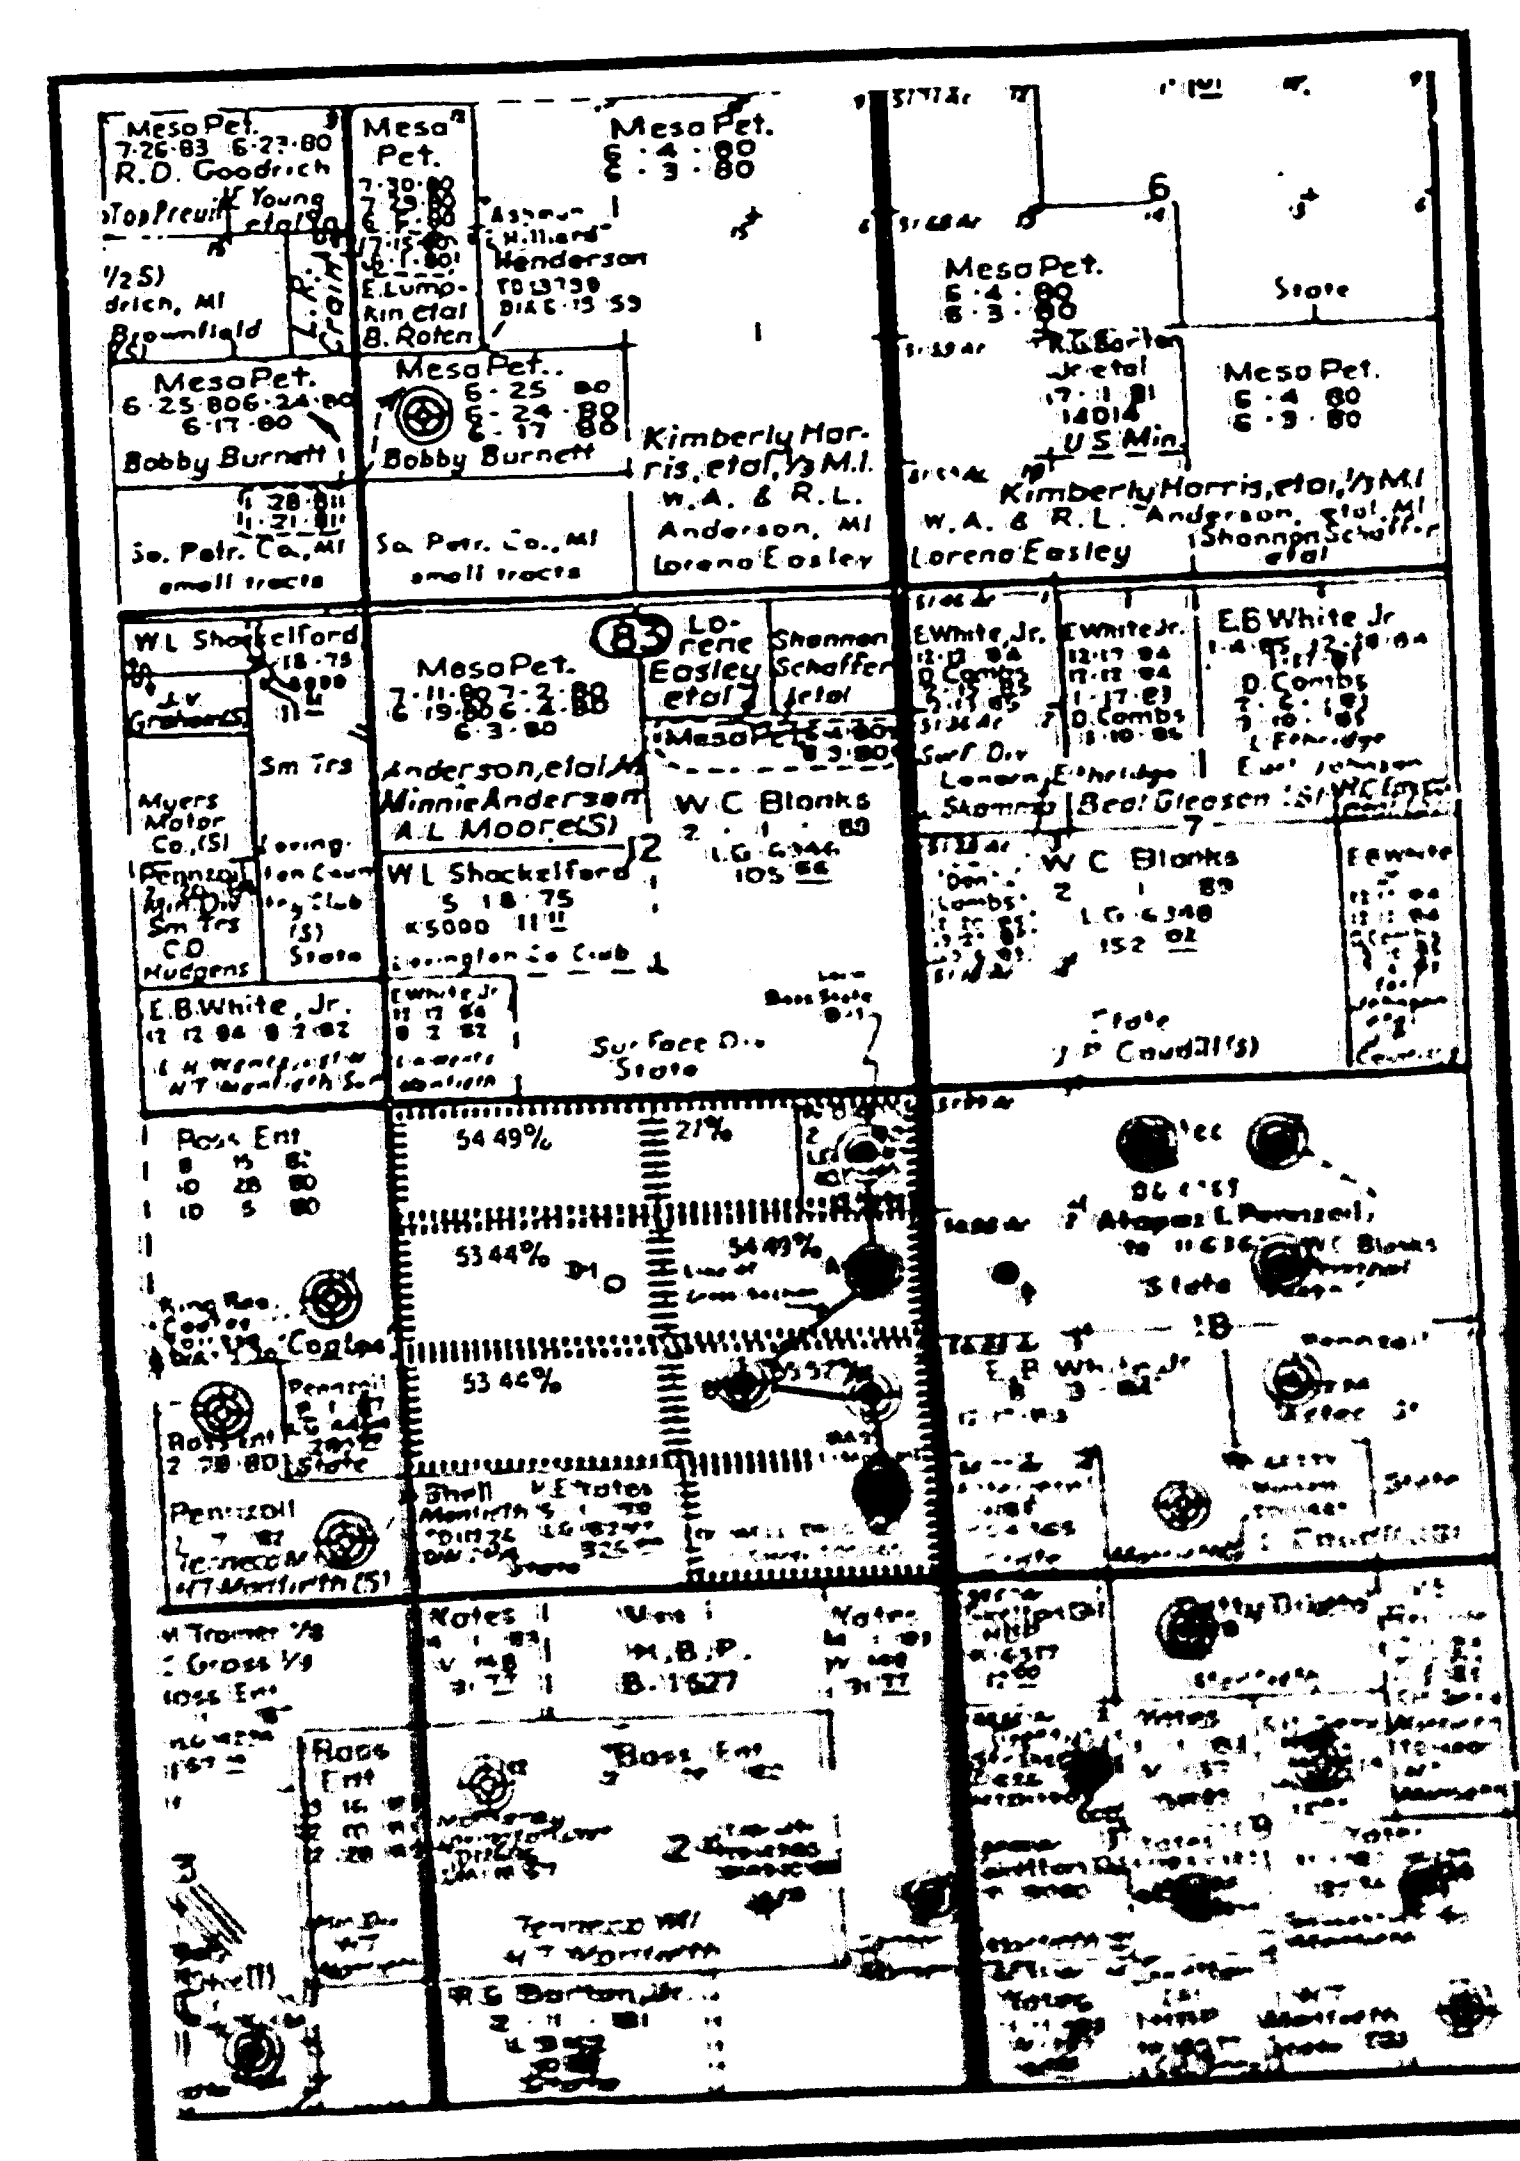


STRAWN NON-PRODUCITIVE

STRAWN PRODUCITIVE

CLIP: PRODUCTION LESS THAN 20,000 BBL

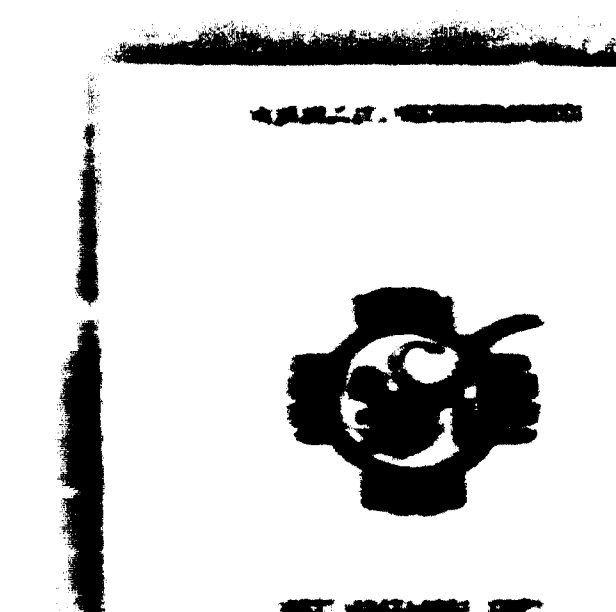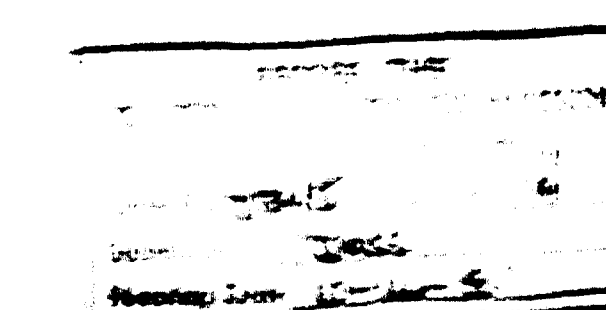


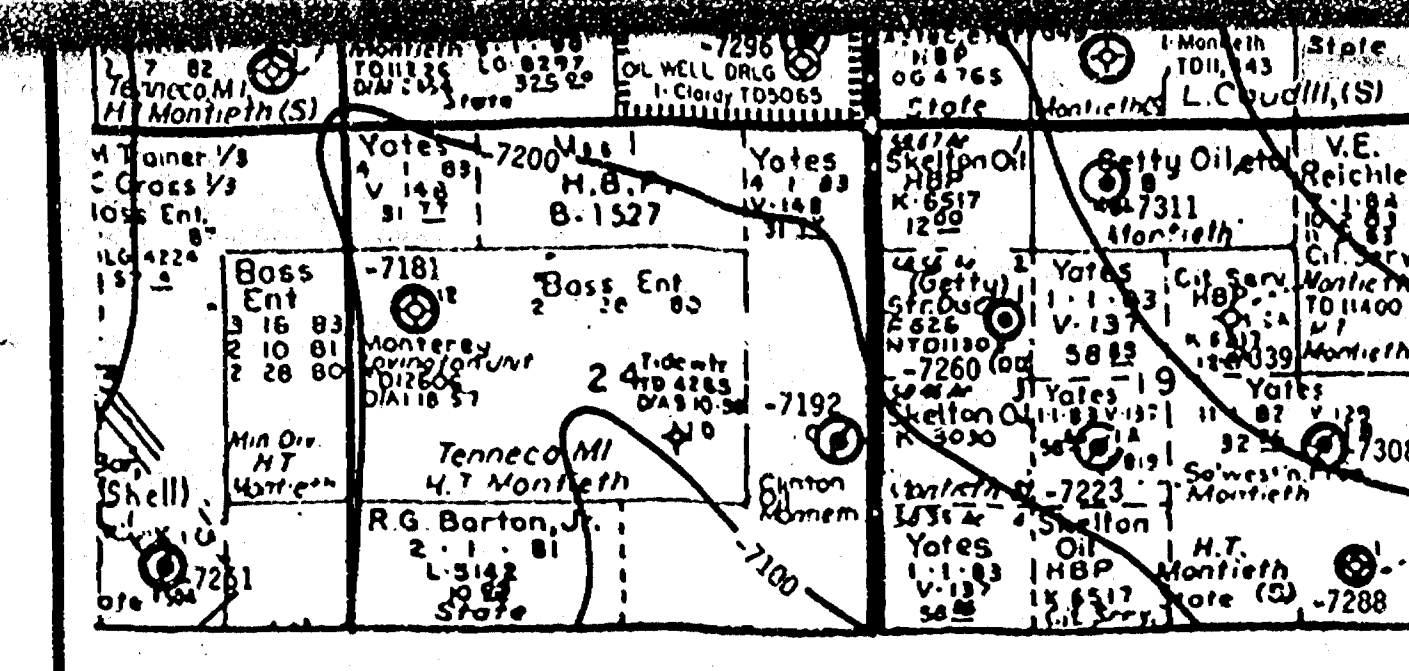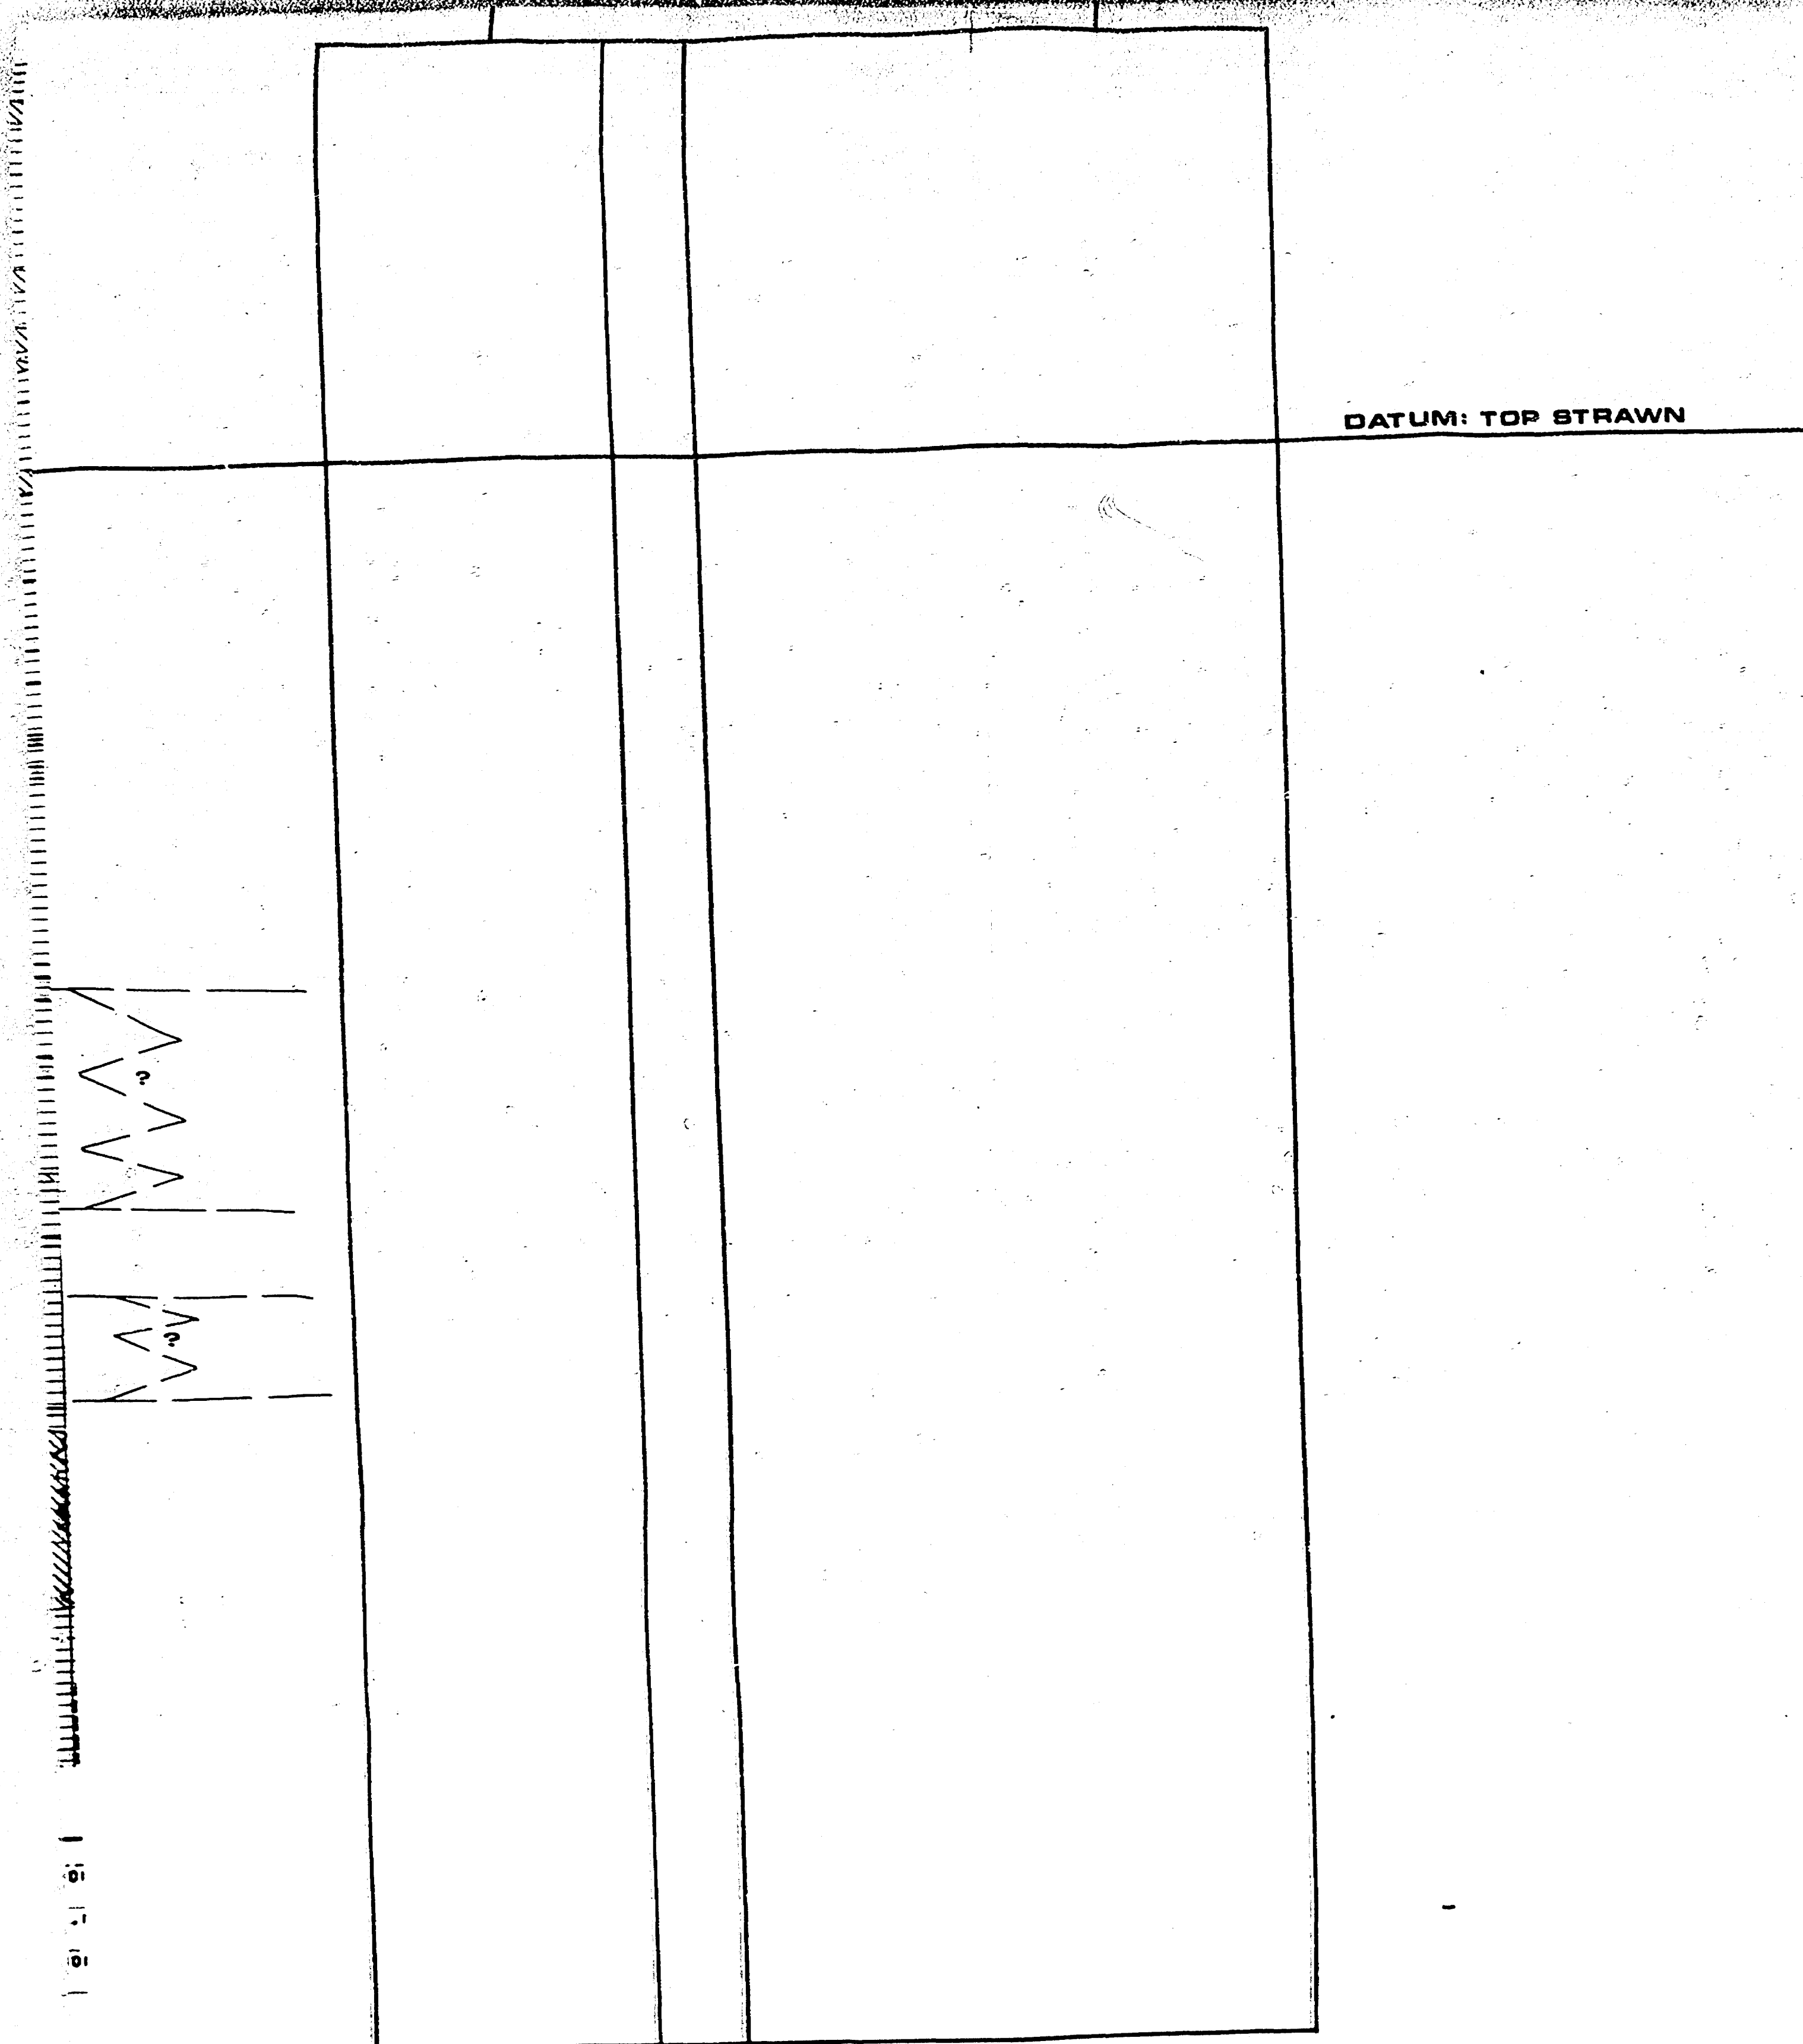

CONTOURED ON TOP STRAWN C.I.=100'



HYDROCARBON EFFECT ON CNL-FDC LOG WHERE SEPARATION EXCEED 2pu

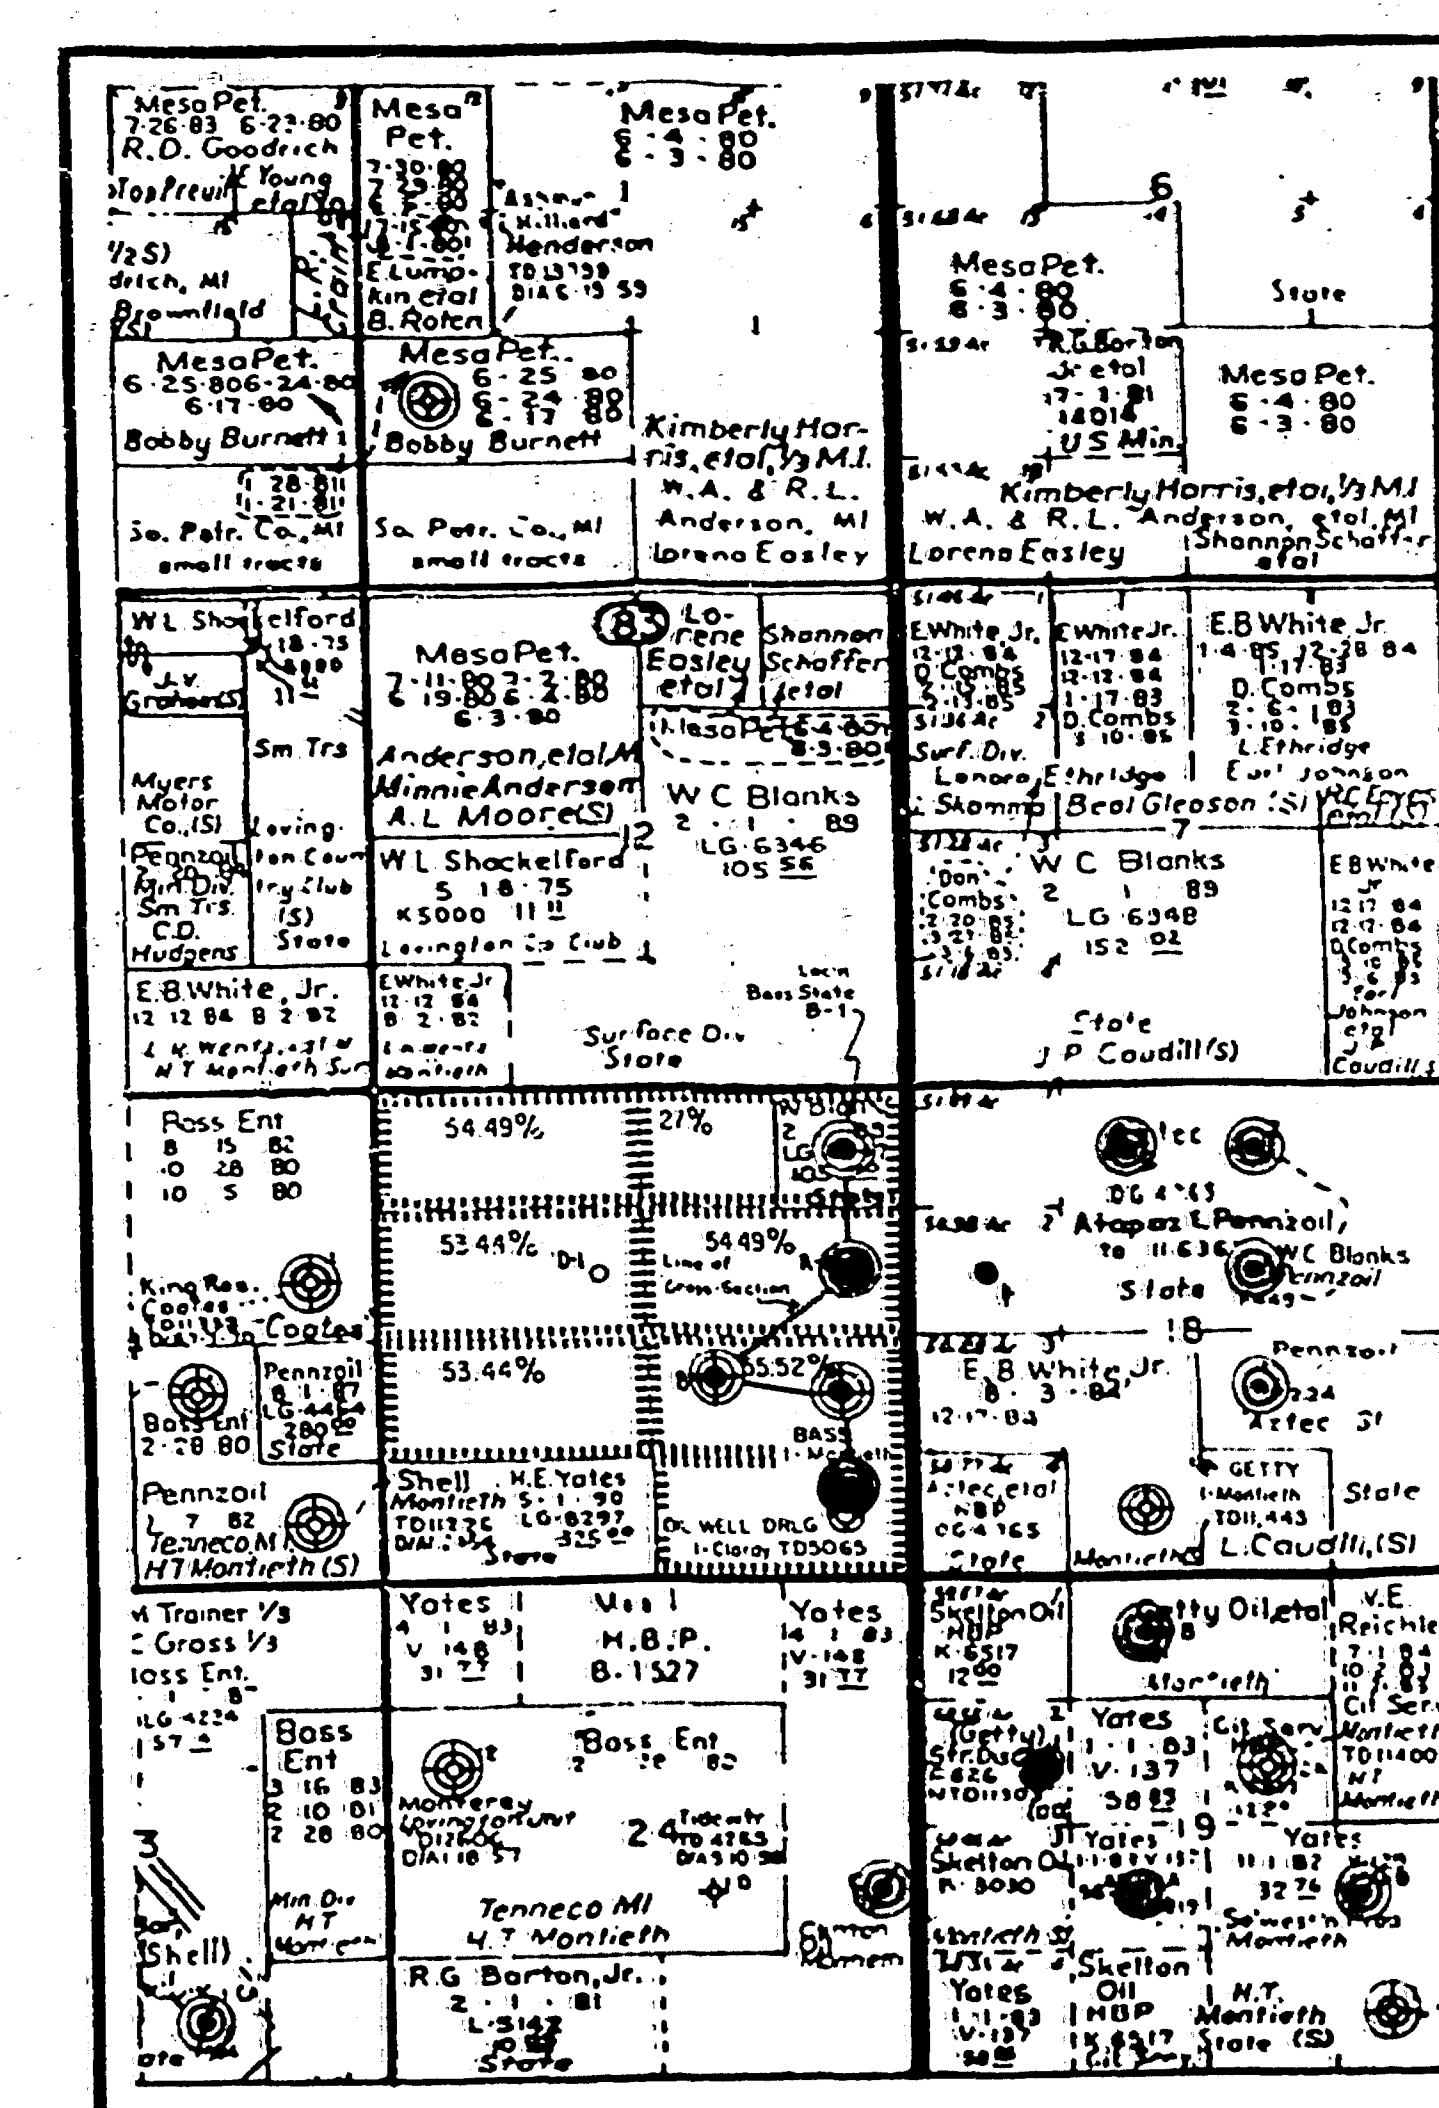

STRAWN NON-PRODUCTIVE

STRAWN PRODUCTIVE

CUM. PRODUCTION LESS THAN 20,000 BO

0 1/2 1
MILES


BEFORE THE
COMMISSION
ON CONSERVATION
No. 345
Issued by 3455
Hearing Date 10-16-61

BASS ENTERPRISES PRODUCTION CO.

MONTIETH AREA
T165-R36E LEA COUNTY, N.M.

STRATIGRAPHIC CROSS-SECTION (DATUM: TOP STRAWN)
TOP STRAWN STRUCTURE
CONTOURED MAP ILLUSTRATING RESULTS OF STRAWN TESTS.

DATE: 10-16-61
BY: [Signature]
CHECKED BY: [Signature]
REVIEWED BY: [Signature]

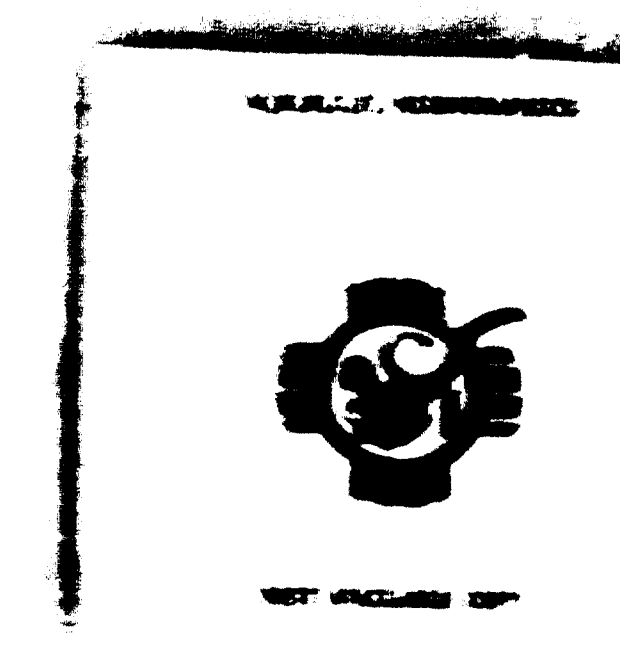

Schlumberger MULTI-TUBE
COMPENSATED NEUTRON
FORMATION DENSITY

COMPANY BASS ENTERPRISES
WELL MONTIETH #1
FIELD MILDCAT
COUNTY LEA STATE NEW MEXICO
810' FSL & 560' FSL
DIL

Permanent Datum G.L. Elev. 3850.2
Log Measured From K.B. 18' Above Perm. Datum
Drilling Measured From K.B. Elev. 3850.2

Date	Run No.	Depth - Driller	Depth - Logger	Run Log Interval	Top Log Interval	Coring Depth	Coring Logger	Log Size	Type Fluid in Hole	Dens. @ 1000' FSL	Dens. @ 200' FSL	Dens. @ 100' FSL	Dens. @ 50' FSL	Dens. @ 25' FSL	Dens. @ 10' FSL	Dens. @ 5' FSL	Dens. @ 2' FSL	Dens. @ 1' FSL	Dens. @ 0' FSL
10-2-80	ONE	11350	11352	11351	8.5/88.5	8.5/88.5	8.5/88.5	8.5/88.5	8.5/88.5	8.5/88.5	8.5/88.5	8.5/88.5	8.5/88.5	8.5/88.5	8.5/88.5	8.5/88.5	8.5/88.5	8.5/88.5	8.5/88.5

Source of Sample 10-2-80
Run @ 1000' FSL 8.5/88.5
Run @ 200' FSL 8.5/88.5
Run @ 100' FSL 8.5/88.5
Run @ 50' FSL 8.5/88.5
Run @ 25' FSL 8.5/88.5
Run @ 10' FSL 8.5/88.5
Run @ 5' FSL 8.5/88.5
Run @ 2' FSL 8.5/88.5
Run @ 1' FSL 8.5/88.5
Run @ 0' FSL 8.5/88.5

Log Measured By SCHLUMBERGER
Checked By ONE

Schlumberger SIMULTANEOUS
COMPENSATED NEUTRON
FORMATION DENSITY


COMPANY BASS ENTERPRISES
WELL MONTIETH #1 - Straight Hole
FIELD [MONTIETH #1 - formally]
COUNTY LEA STATE NEW MEXICO
3580' FSL & 2130' FSL
DIL

Permanent Datum G.L. Elev. 3858
Log Measured From K.B. 18' Above Perm. Datum
Drilling Measured From K.B. Elev. 3858

Date	Run No.	Depth - Driller	Depth - Logger	Run Log Interval	Top Log Interval	Coring Depth	Coring Logger	Log Size	Type Fluid in Hole	Dens. @ 1000' FSL	Dens. @ 200' FSL	Dens. @ 100' FSL	Dens. @ 50' FSL	Dens. @ 25' FSL	Dens. @ 10' FSL	Dens. @ 5' FSL	Dens. @ 2' FSL	Dens. @ 1' FSL	Dens. @ 0' FSL
10-2-80	ONE	11428	11428	11428	8.5/88.5	8.5/88.5	8.5/88.5	8.5/88.5	8.5/88.5	8.5/88.5	8.5/88.5	8.5/88.5	8.5/88.5	8.5/88.5	8.5/88.5	8.5/88.5	8.5/88.5	8.5/88.5	8.5/88.5

Source of Sample 10-2-80
Run @ 1000' FSL 8.5/88.5
Run @ 200' FSL 8.5/88.5
Run @ 100' FSL 8.5/88.5
Run @ 50' FSL 8.5/88.5
Run @ 25' FSL 8.5/88.5
Run @ 10' FSL 8.5/88.5
Run @ 5' FSL 8.5/88.5
Run @ 2' FSL 8.5/88.5
Run @ 1' FSL 8.5/88.5
Run @ 0' FSL 8.5/88.5

Log Measured By SCHLUMBERGER
Checked By ONE

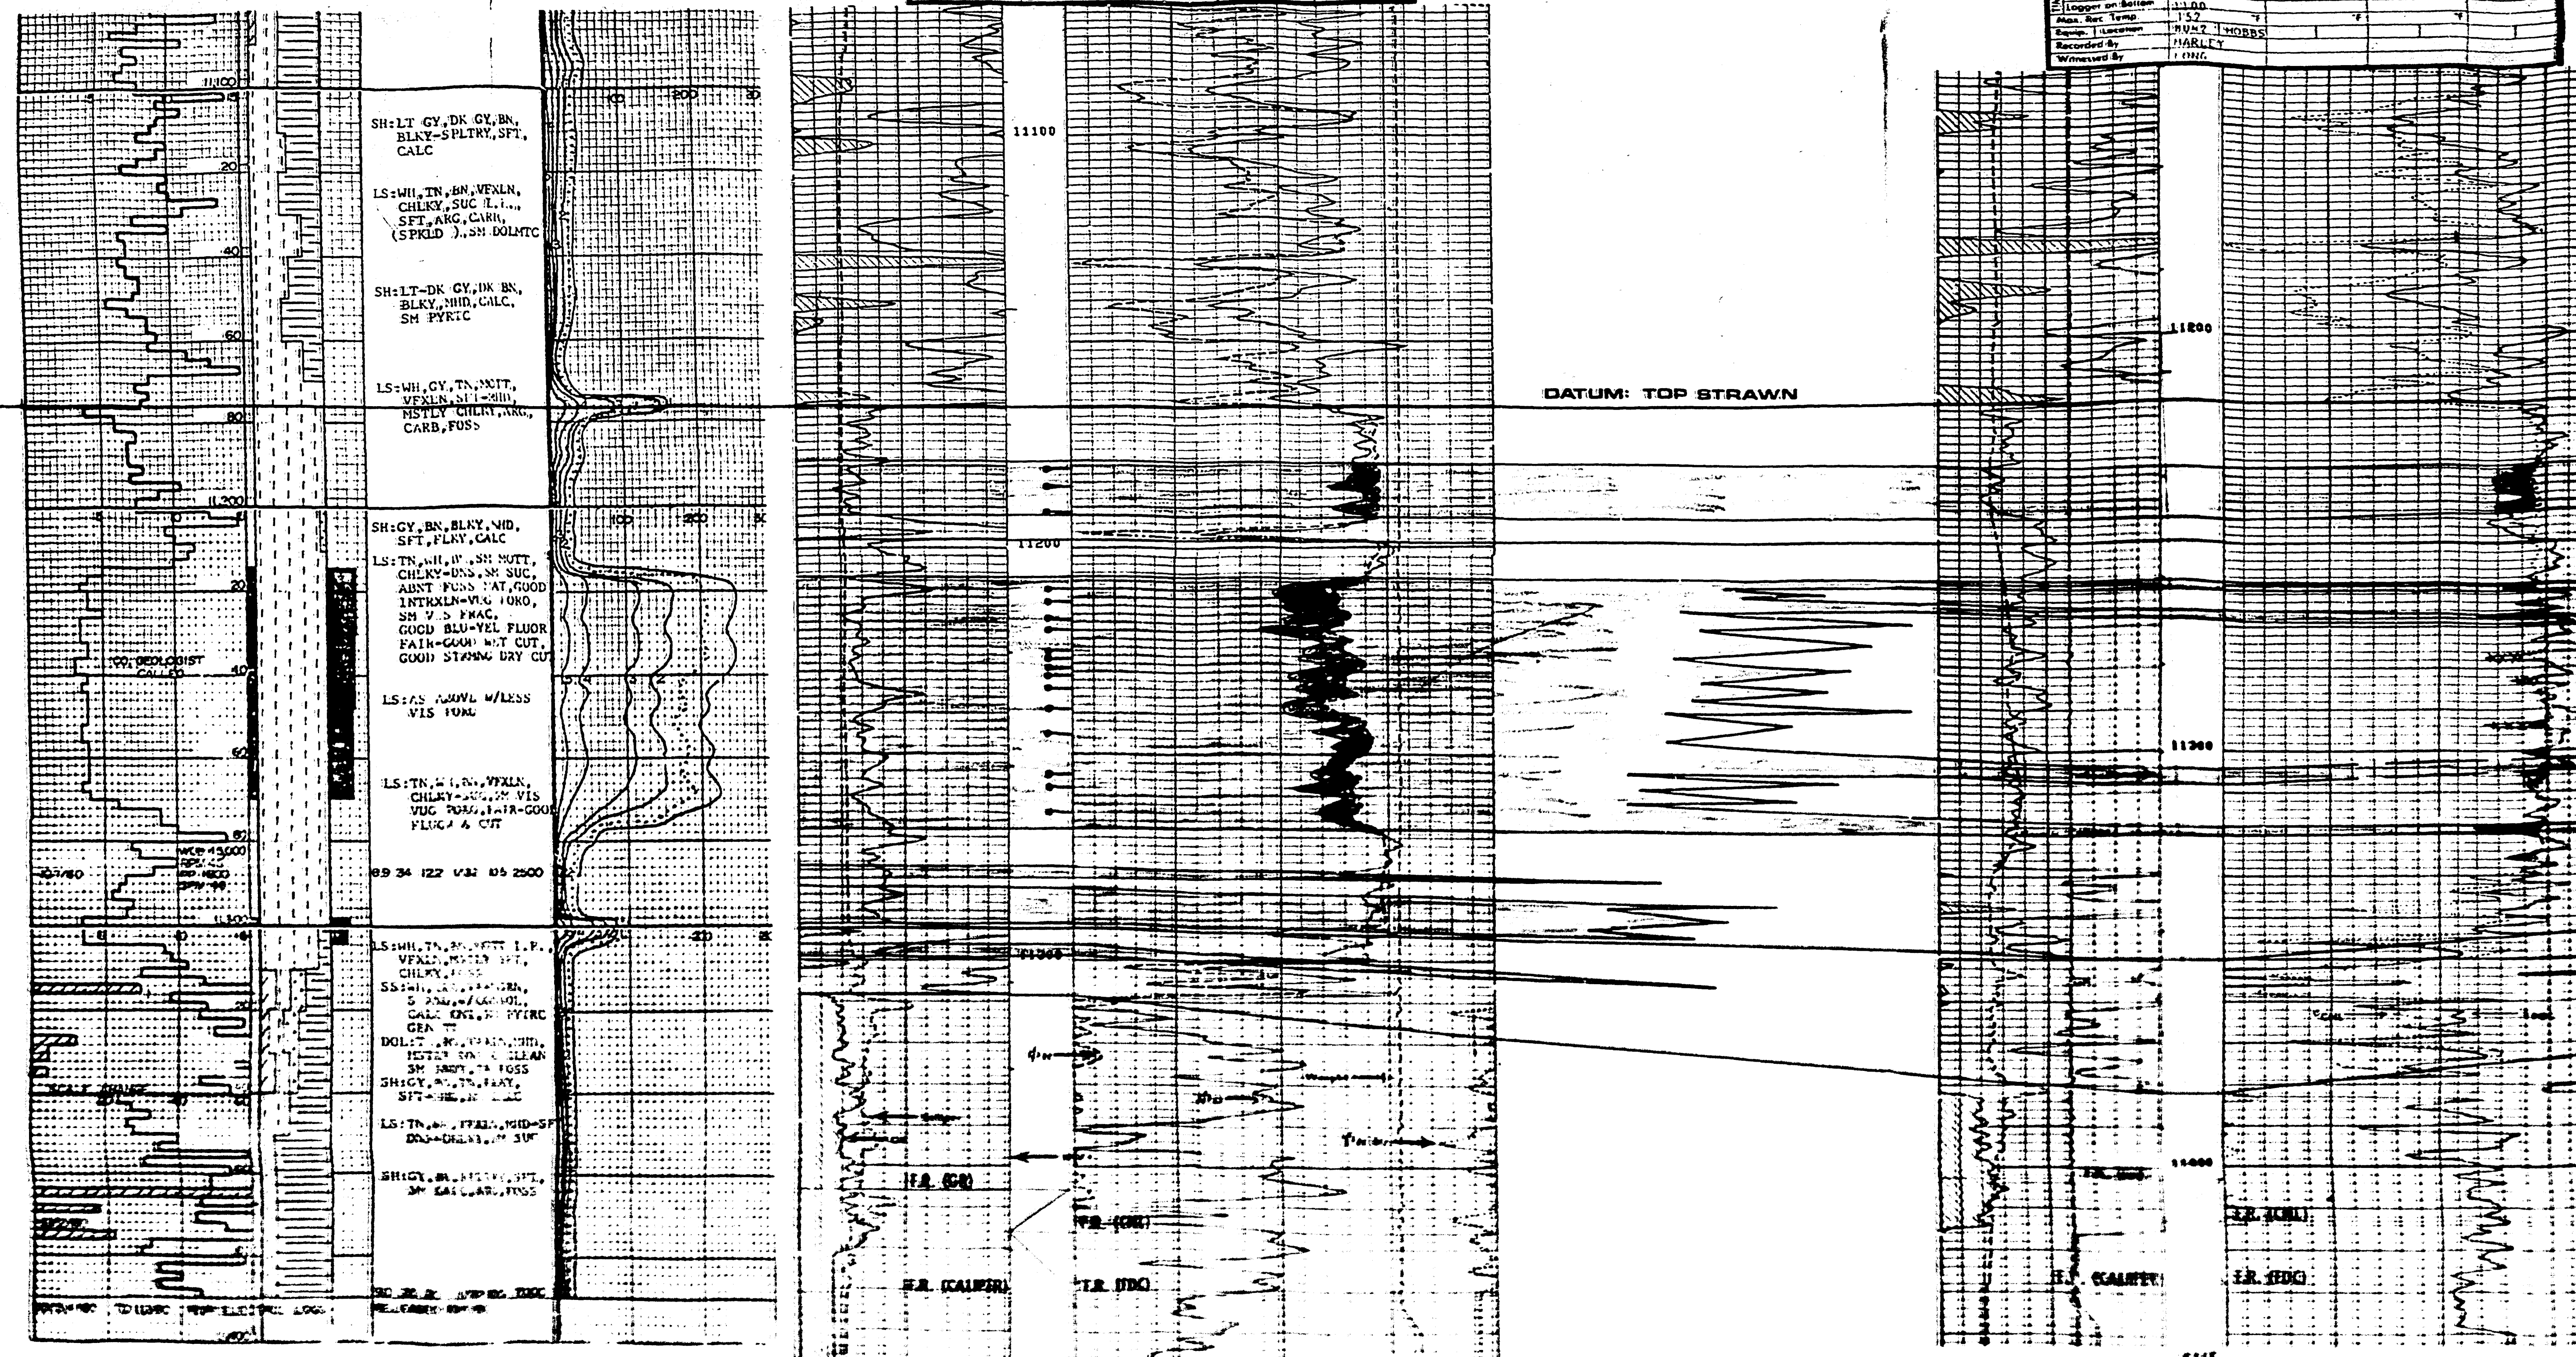

Schlumberger SIMULTANEOUS COMPENSATED NEUTRON FORMATION DENSITY

COMPANY: BASS ENTERPRISES
 WELL: MONTIETH "B" No. 1 - Straight Hole
 FIELD: N.E. LOVINGTON PENN.
 COUNTY: LEA STATE: NEW MEXICO

1280' FEL & 2130' FSL

Permanent Datum: G.L. Elev. 3876
 Log Measured From: K.B. 78 ft. Above Perm. Datum
 Drilling Measured From: K.B. G.L. 3858

Other Services: DIL

Date: 4-1-81
 Run No.: ONE
 Depth-Driller: 11528
 Depth-Logger: 11528
 Blue Log Interval: 11528
 Top Log Interval: SURF
 Casing-Driller: 8.5/88 5610
 Casing-Logger: 5810
 Bit Size: 7.75
 Type Fluid in Hole: FRESH GEL
 Chem. Anal. 10.11 ml
 pH: 10.11 ml
 Sp. Gr. 1.06 @ 62°F
 Ref. @ Meas. Temp.: 7.2 @ 62°F
 Ref. @ Meas. Temp.: 7.2 @ 62°F
 Sp. Gr. 1.06 @ 62°F
 Ref. @ Meas. Temp.: 7.2 @ 62°F
 Sp. Gr. 1.06 @ 62°F
 Ref. @ Meas. Temp.: 7.2 @ 62°F

Log Measured From: K.B. 78 ft. Above Perm. Datum
 Drilling Measured From: K.B. G.L. 3858

Schlumberger SIMULTANEOUS COMPENSATED NEUTRON FORMATION DENSITY

COMPANY: BASS ENTERPRISES
 WELL: MONTIETH "B" No. 1 - Sidetrack
 FIELD: N.E. LOVINGTON PENN.
 COUNTY: LEA STATE: NEW MEXICO

1111' S. & 1301' E. of Straight Hole

Permanent Datum: G.L. Elev. 3876
 Log Measured From: K.B. 78 ft. Above Perm. Datum
 Drilling Measured From: K.B. G.L. 3858

Other Services: DIL

Date: 5-10-81
 Run No.: ONE
 Depth-Driller: 11528
 Depth-Logger: 11528
 Blue Log Interval: 11528
 Top Log Interval: SURF
 Casing-Driller: 8.5/88 5810
 Casing-Logger: 5810
 Bit Size: 7.75
 Type Fluid in Hole: FRESH GEL
 Chem. Anal. 10.11 ml
 pH: 10.11 ml
 Sp. Gr. 1.06 @ 62°F
 Ref. @ Meas. Temp.: 7.2 @ 62°F
 Ref. @ Meas. Temp.: 7.2 @ 62°F
 Sp. Gr. 1.06 @ 62°F
 Ref. @ Meas. Temp.: 7.2 @ 62°F

Log Measured From: K.B. 78 ft. Above Perm. Datum
 Drilling Measured From: K.B. G.L. 3858

Schlumberger SIMULTANEOUS COMPENSATED NEUTRON FORMATION DENSITY

COMPANY: BASS ENTERPRISES
 WELL: MONTIETH "A" No. 1
 FIELD: N.E. LOVINGTON PENN.
 COUNTY: LEA STATE: NEW MEXICO

1280' FEL & 2130' FSL

Permanent Datum: G.L. Elev. 3876
 Log Measured From: K.B. 78 ft. Above Perm. Datum
 Drilling Measured From: K.B. G.L. 3858



Other Services: DIL

Date: 11-23-80
 Run No.: ONE
 Depth-Driller: 11528
 Depth-Logger: 11528
 Blue Log Interval: 11528
 Top Log Interval: SURF
 Casing-Driller: 8.5/88 5810
 Casing-Logger: 5810
 Bit Size: 7.75
 Type Fluid in Hole: FRESH GEL
 Chem. Anal. 10.11 ml
 pH: 10.11 ml
 Sp. Gr. 1.06 @ 62°F
 Ref. @ Meas. Temp.: 7.2 @ 62°F
 Ref. @ Meas. Temp.: 7.2 @ 62°F
 Sp. Gr. 1.06 @ 62°F
 Ref. @ Meas. Temp.: 7.2 @ 62°F

Log Measured From: K.B. 78 ft. Above Perm. Datum
 Drilling Measured From: K.B. G.L. 3858


PROPOSED BASS ENTERPRISES
 BASS STATE 13-1

660' FNL, 510' FEL, Sec13 T10

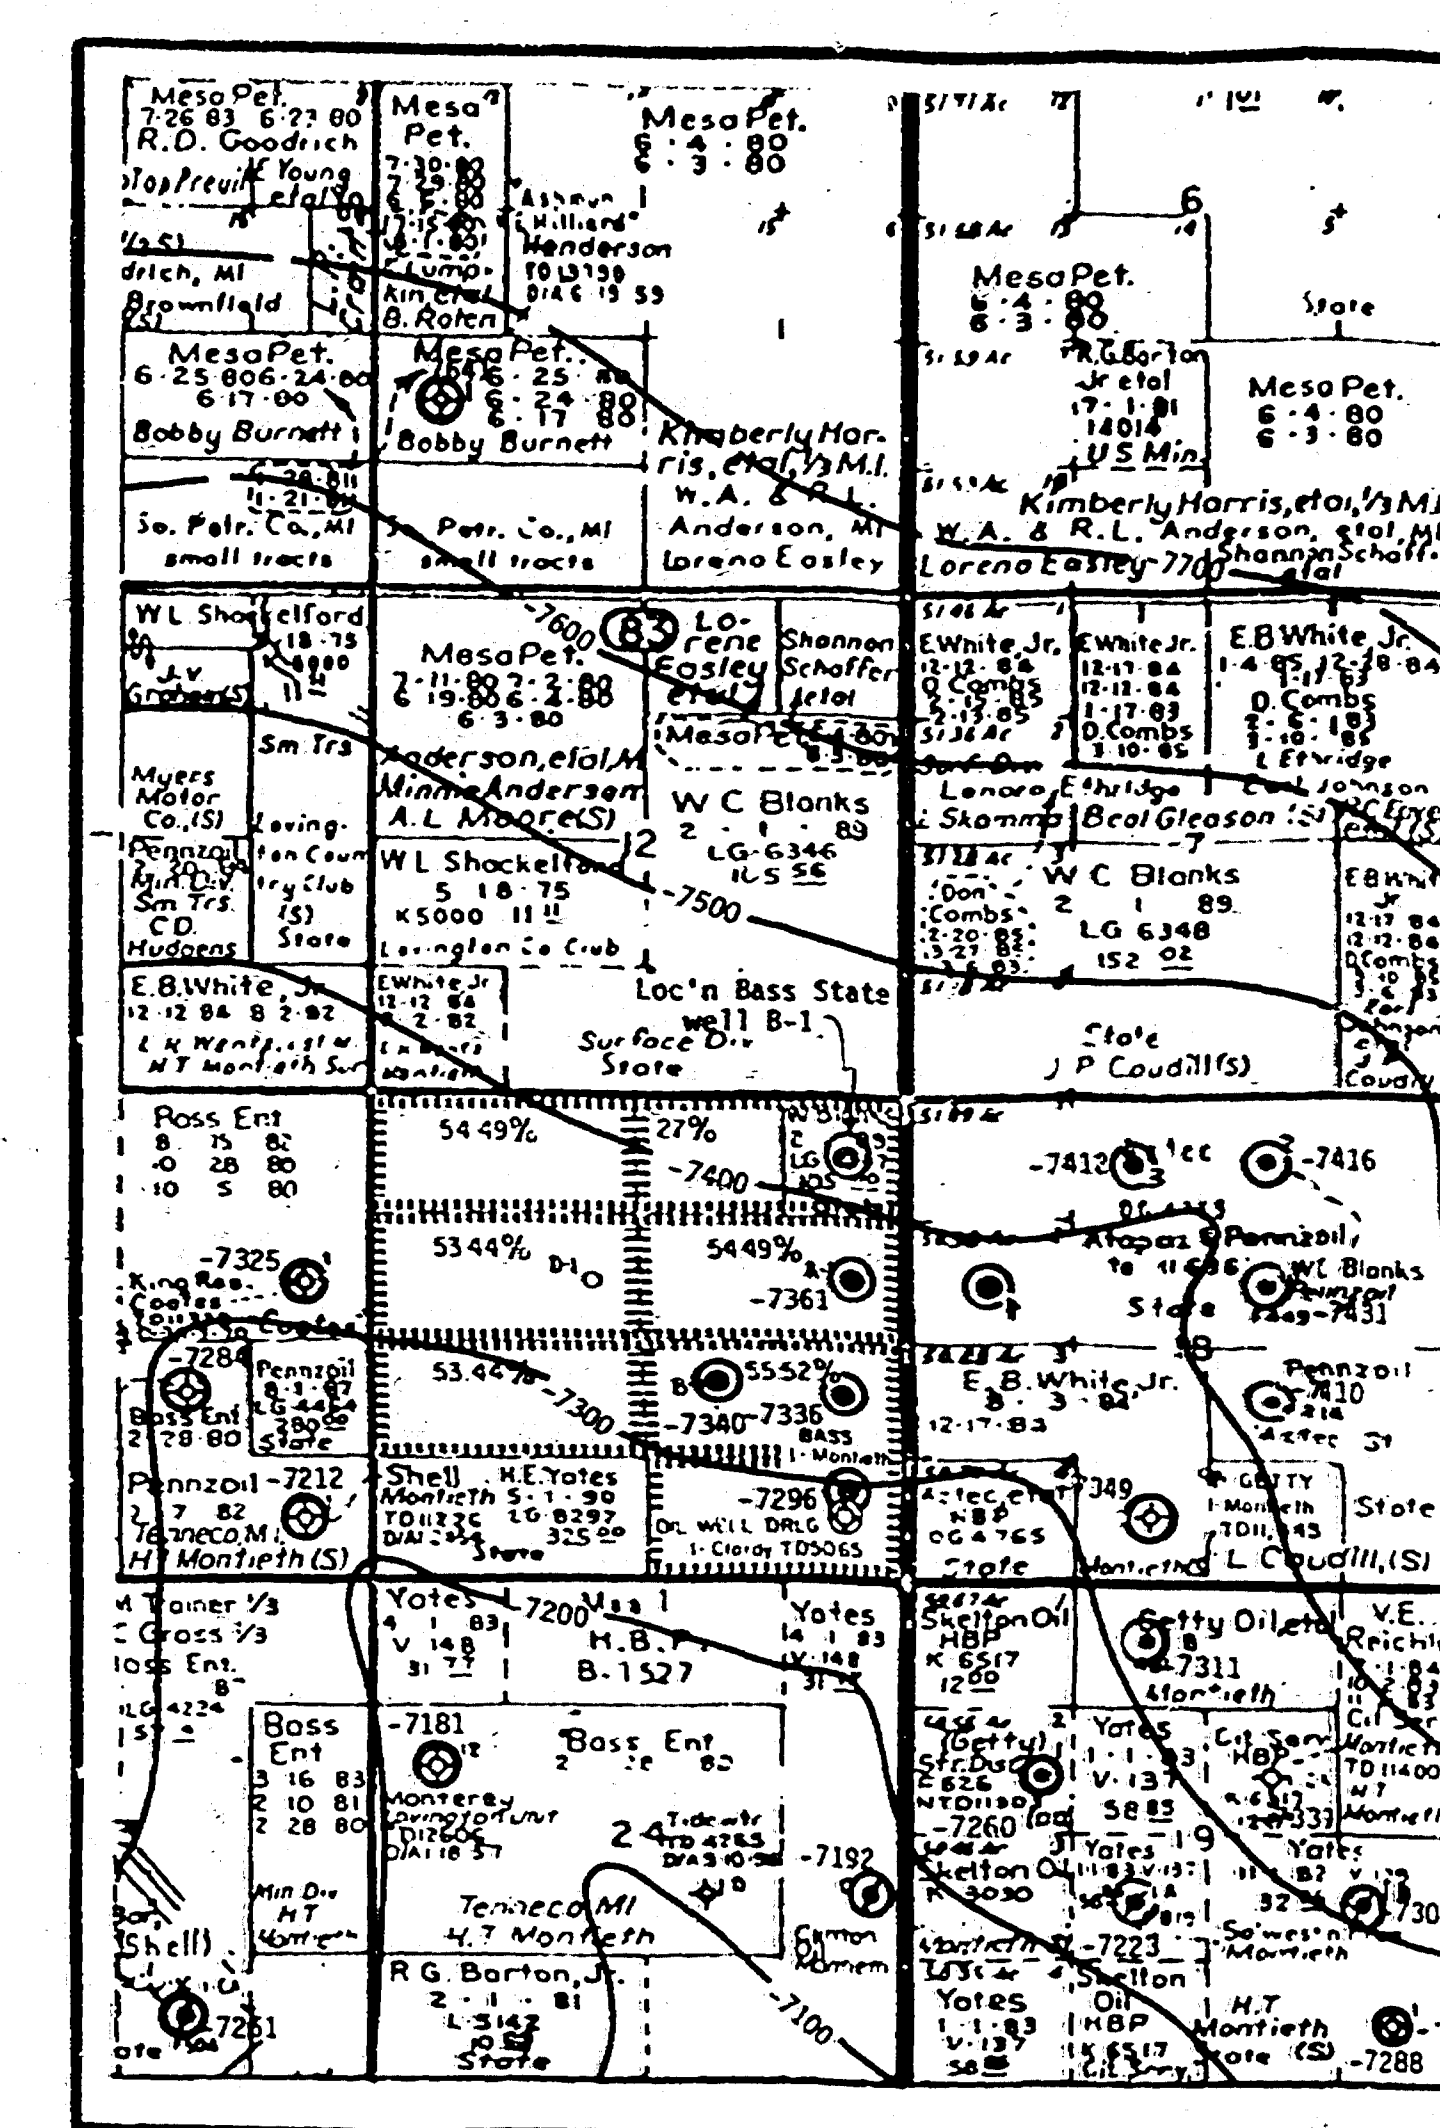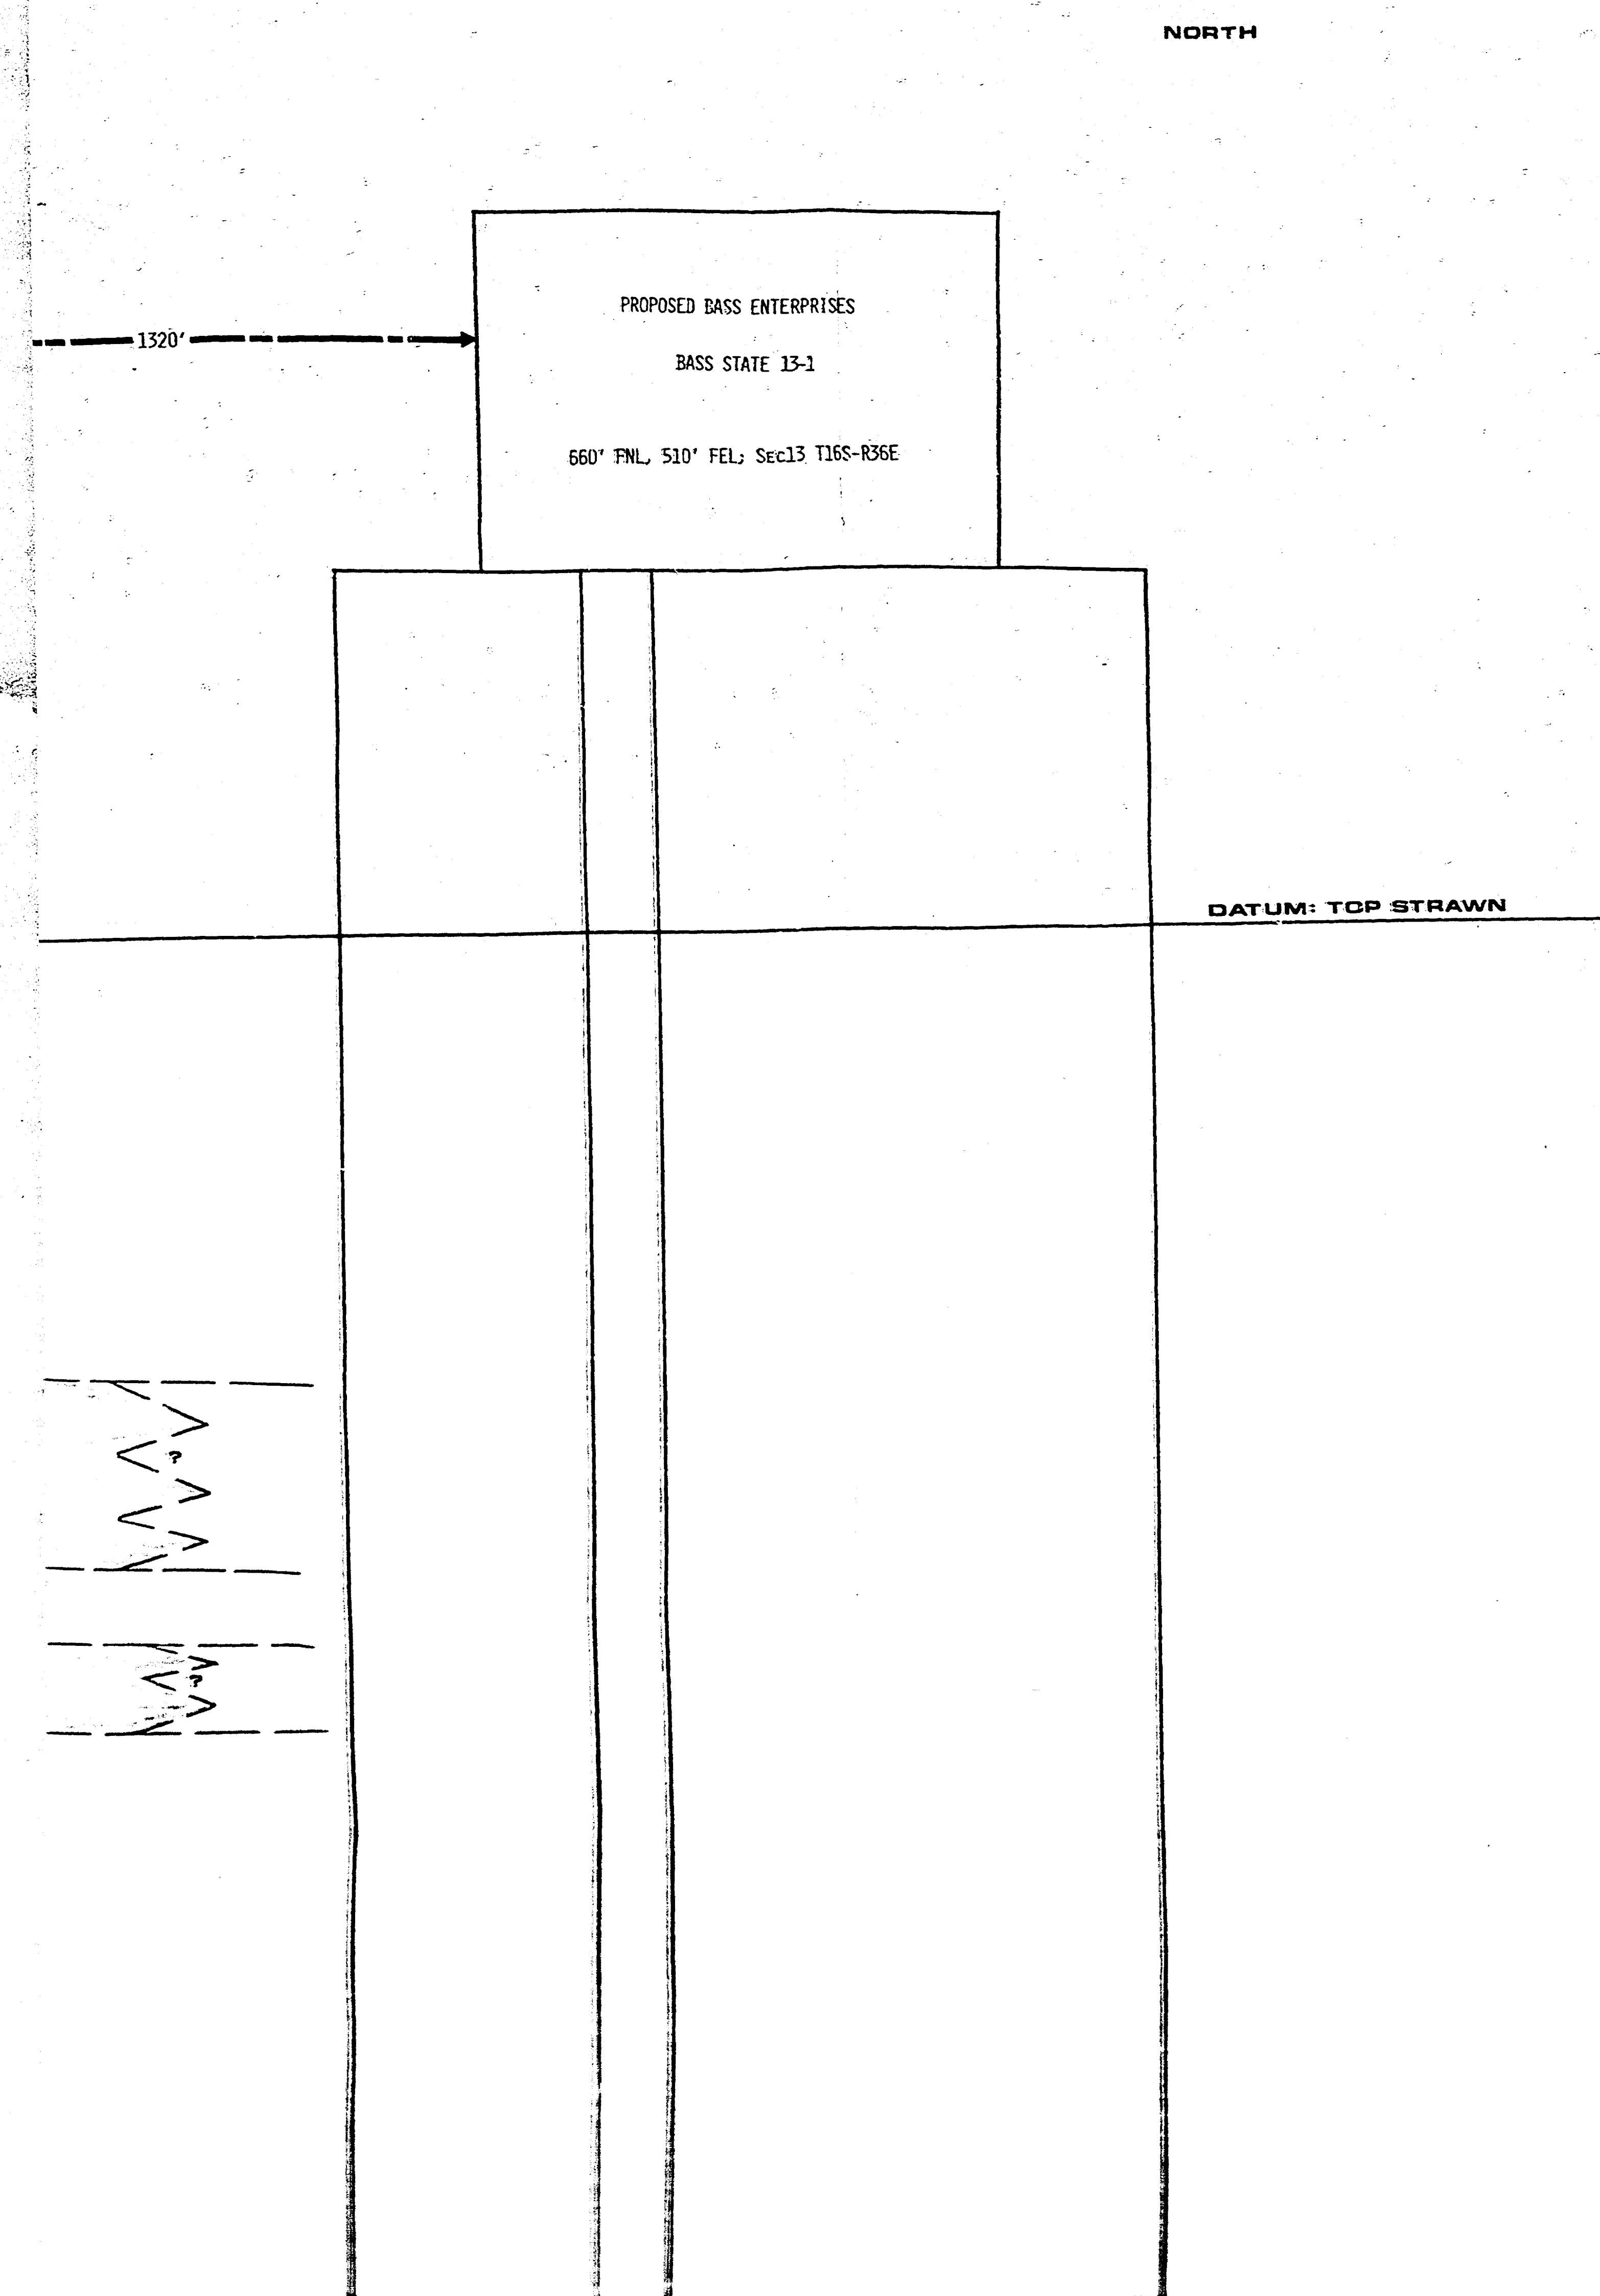


CONTOURED ON TOP STRAWN C.T.=100'



HYDROCARBON EFFECT ON CNL-FDC LOG WHERE SEPARATION EXCEED 2Psi

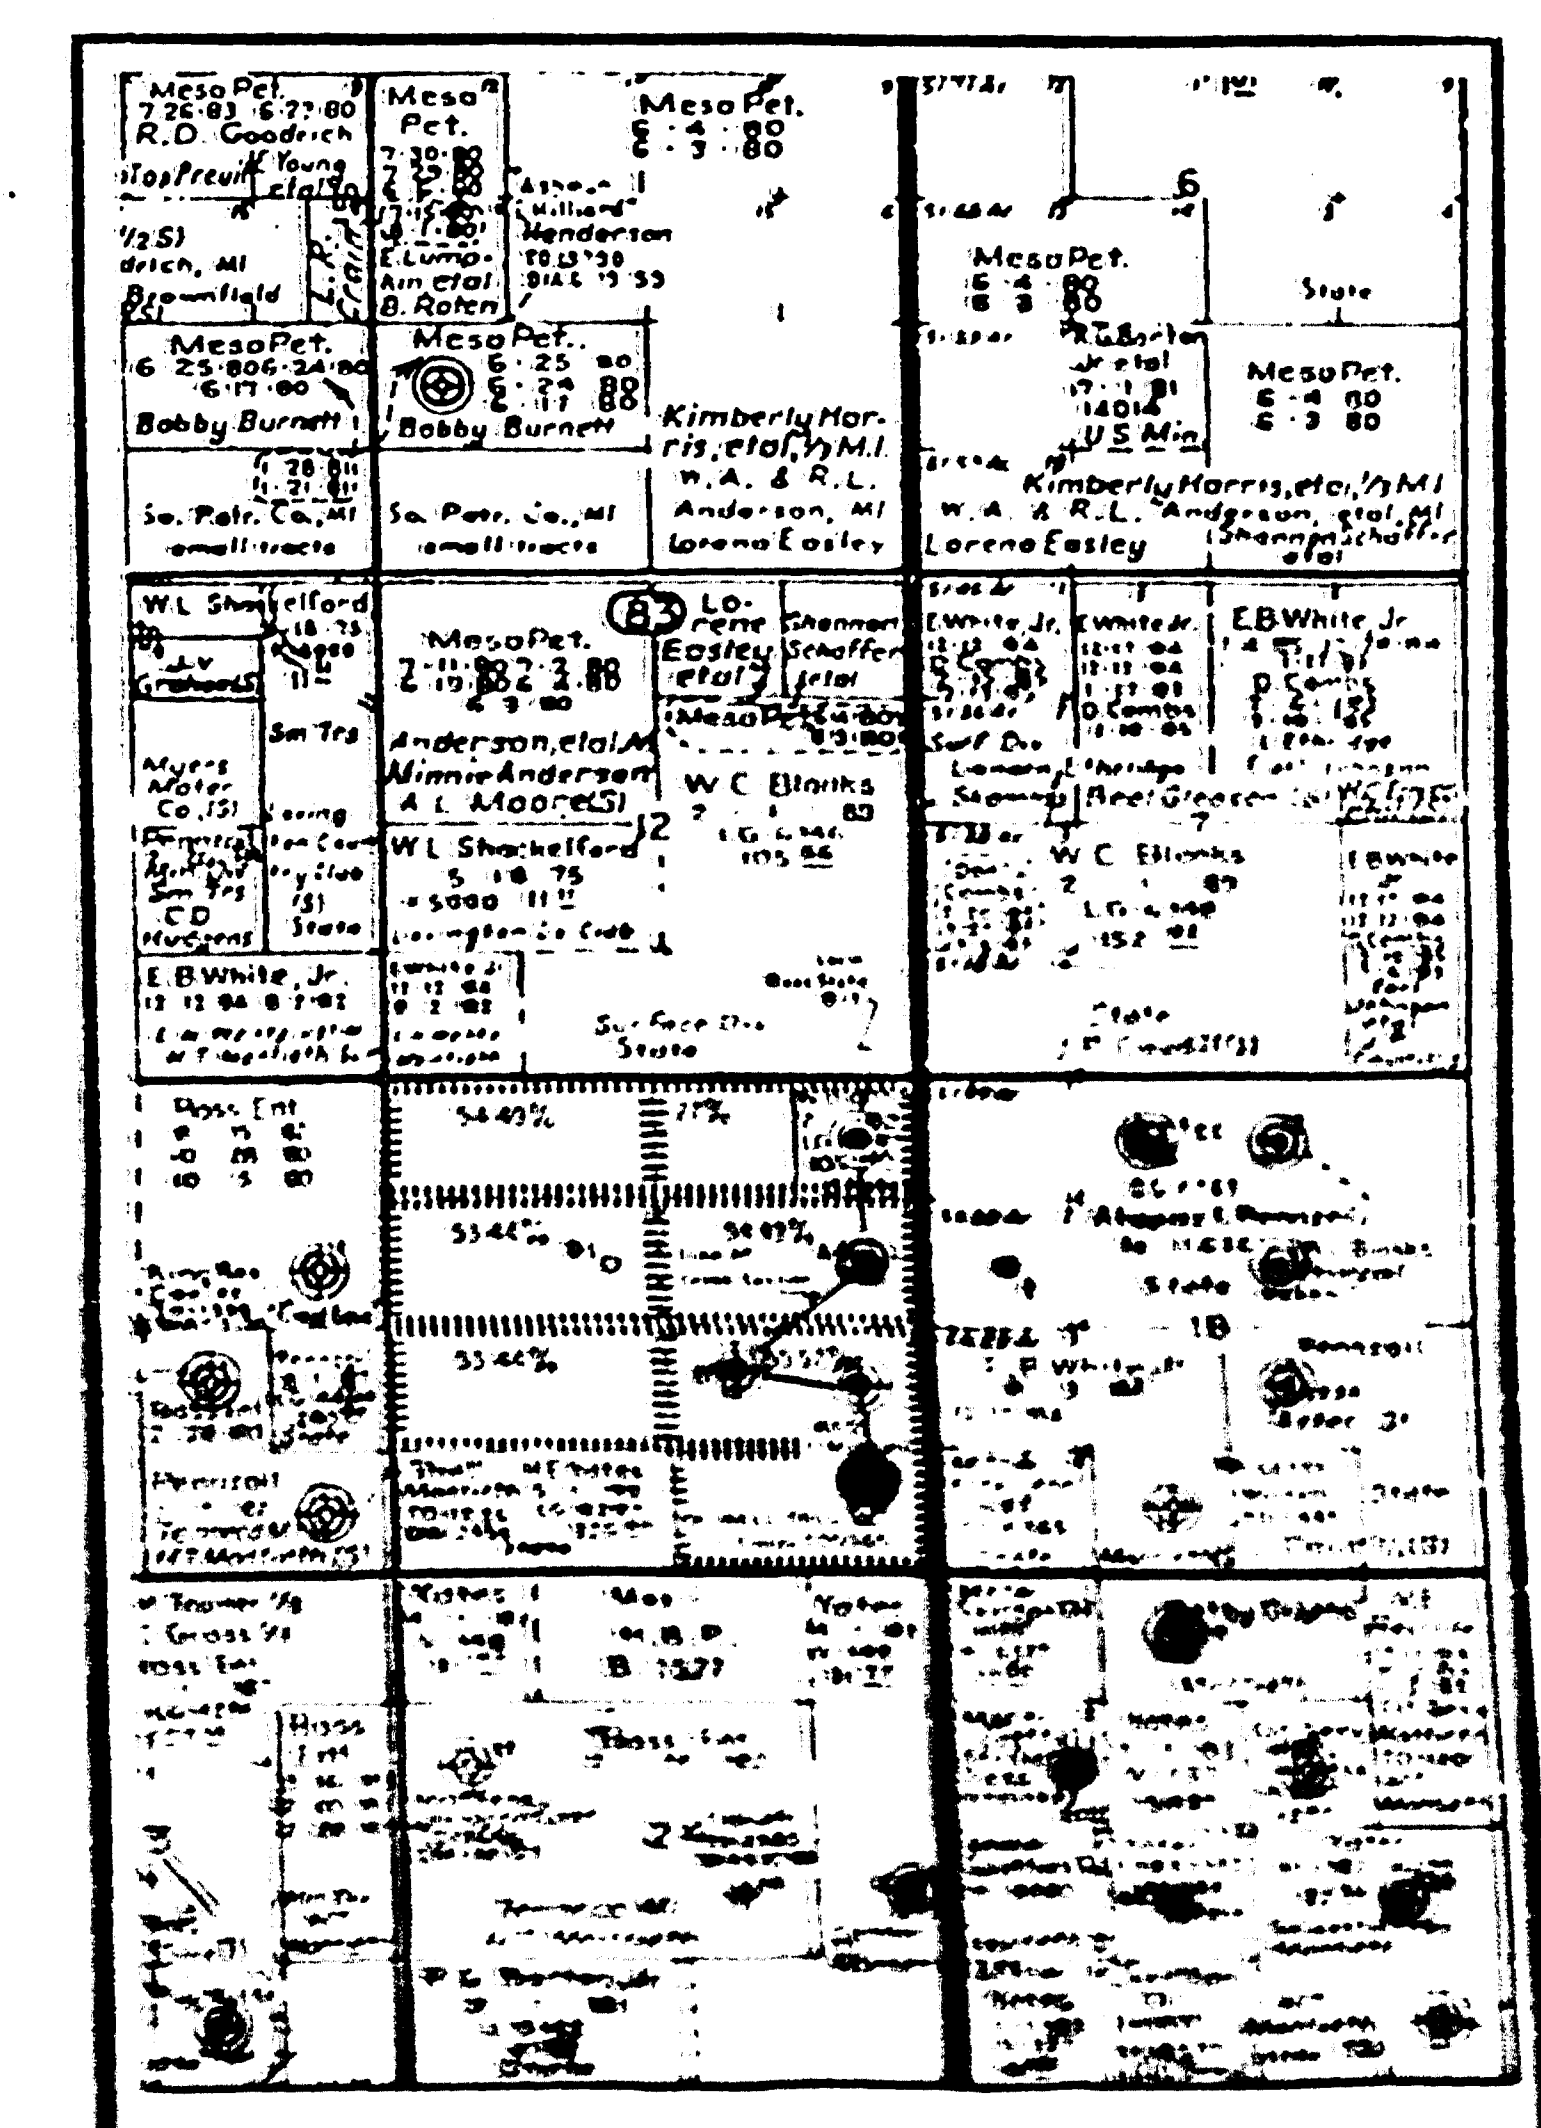

STRAWN WITH PRODUCTION TIME
STRAWN PRODUCTION TIME
STRAWN PRODUCTION TIME

STRAWN WITH PRODUCTION TIME
STRAWN PRODUCTION TIME
STRAWN PRODUCTION TIME

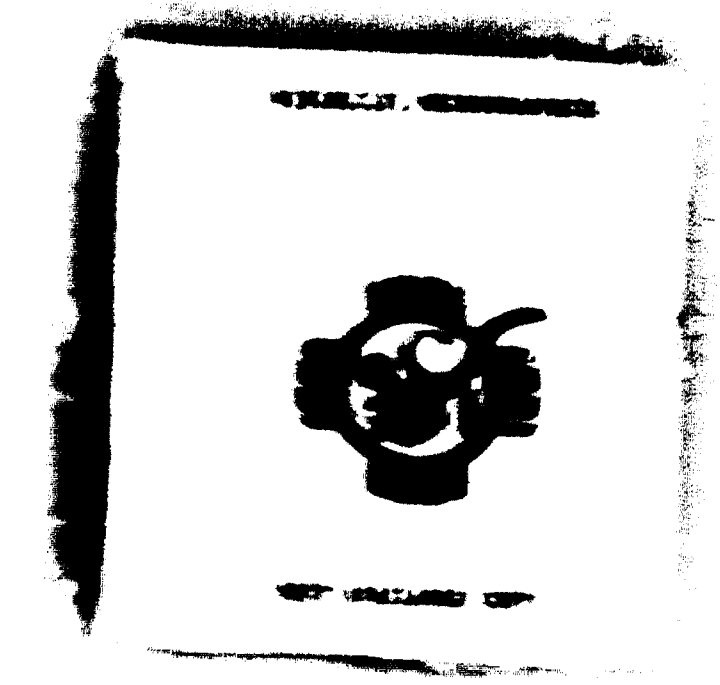


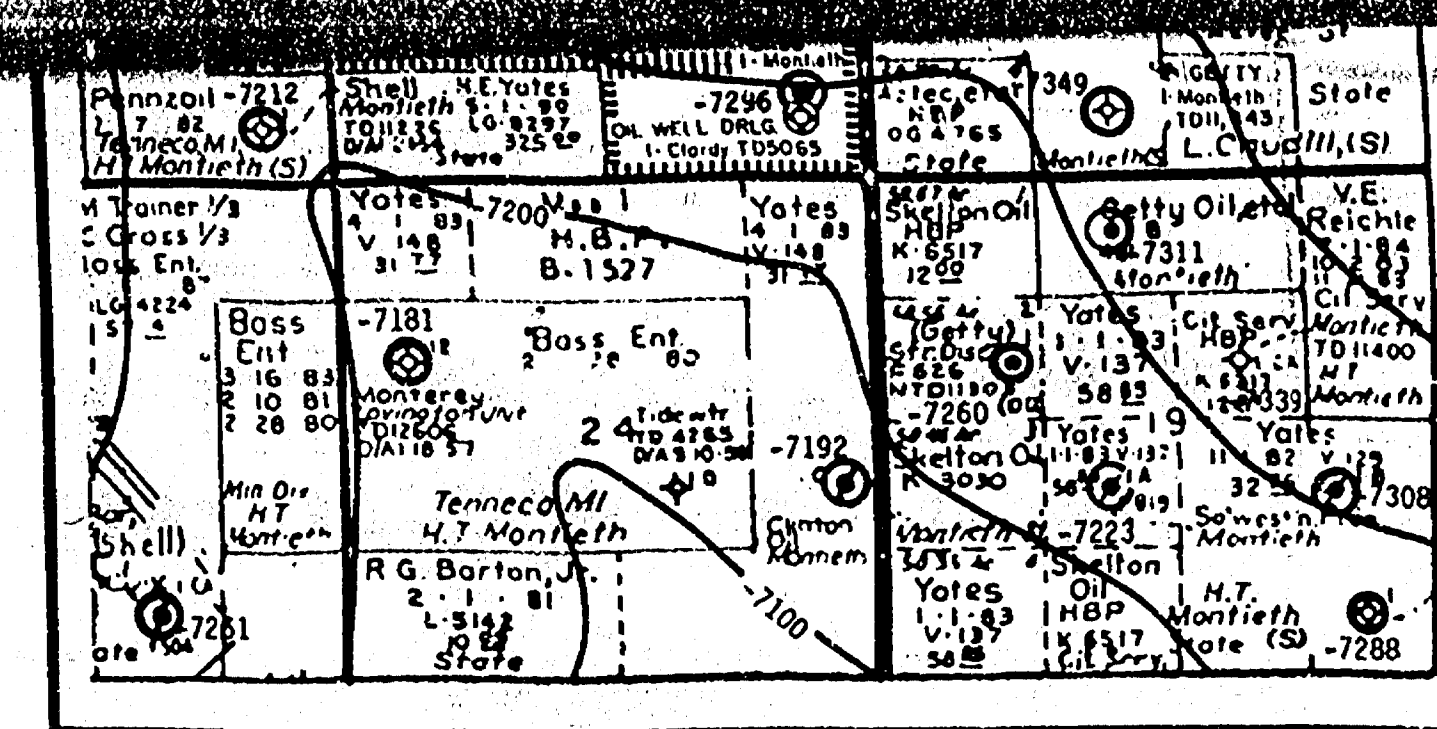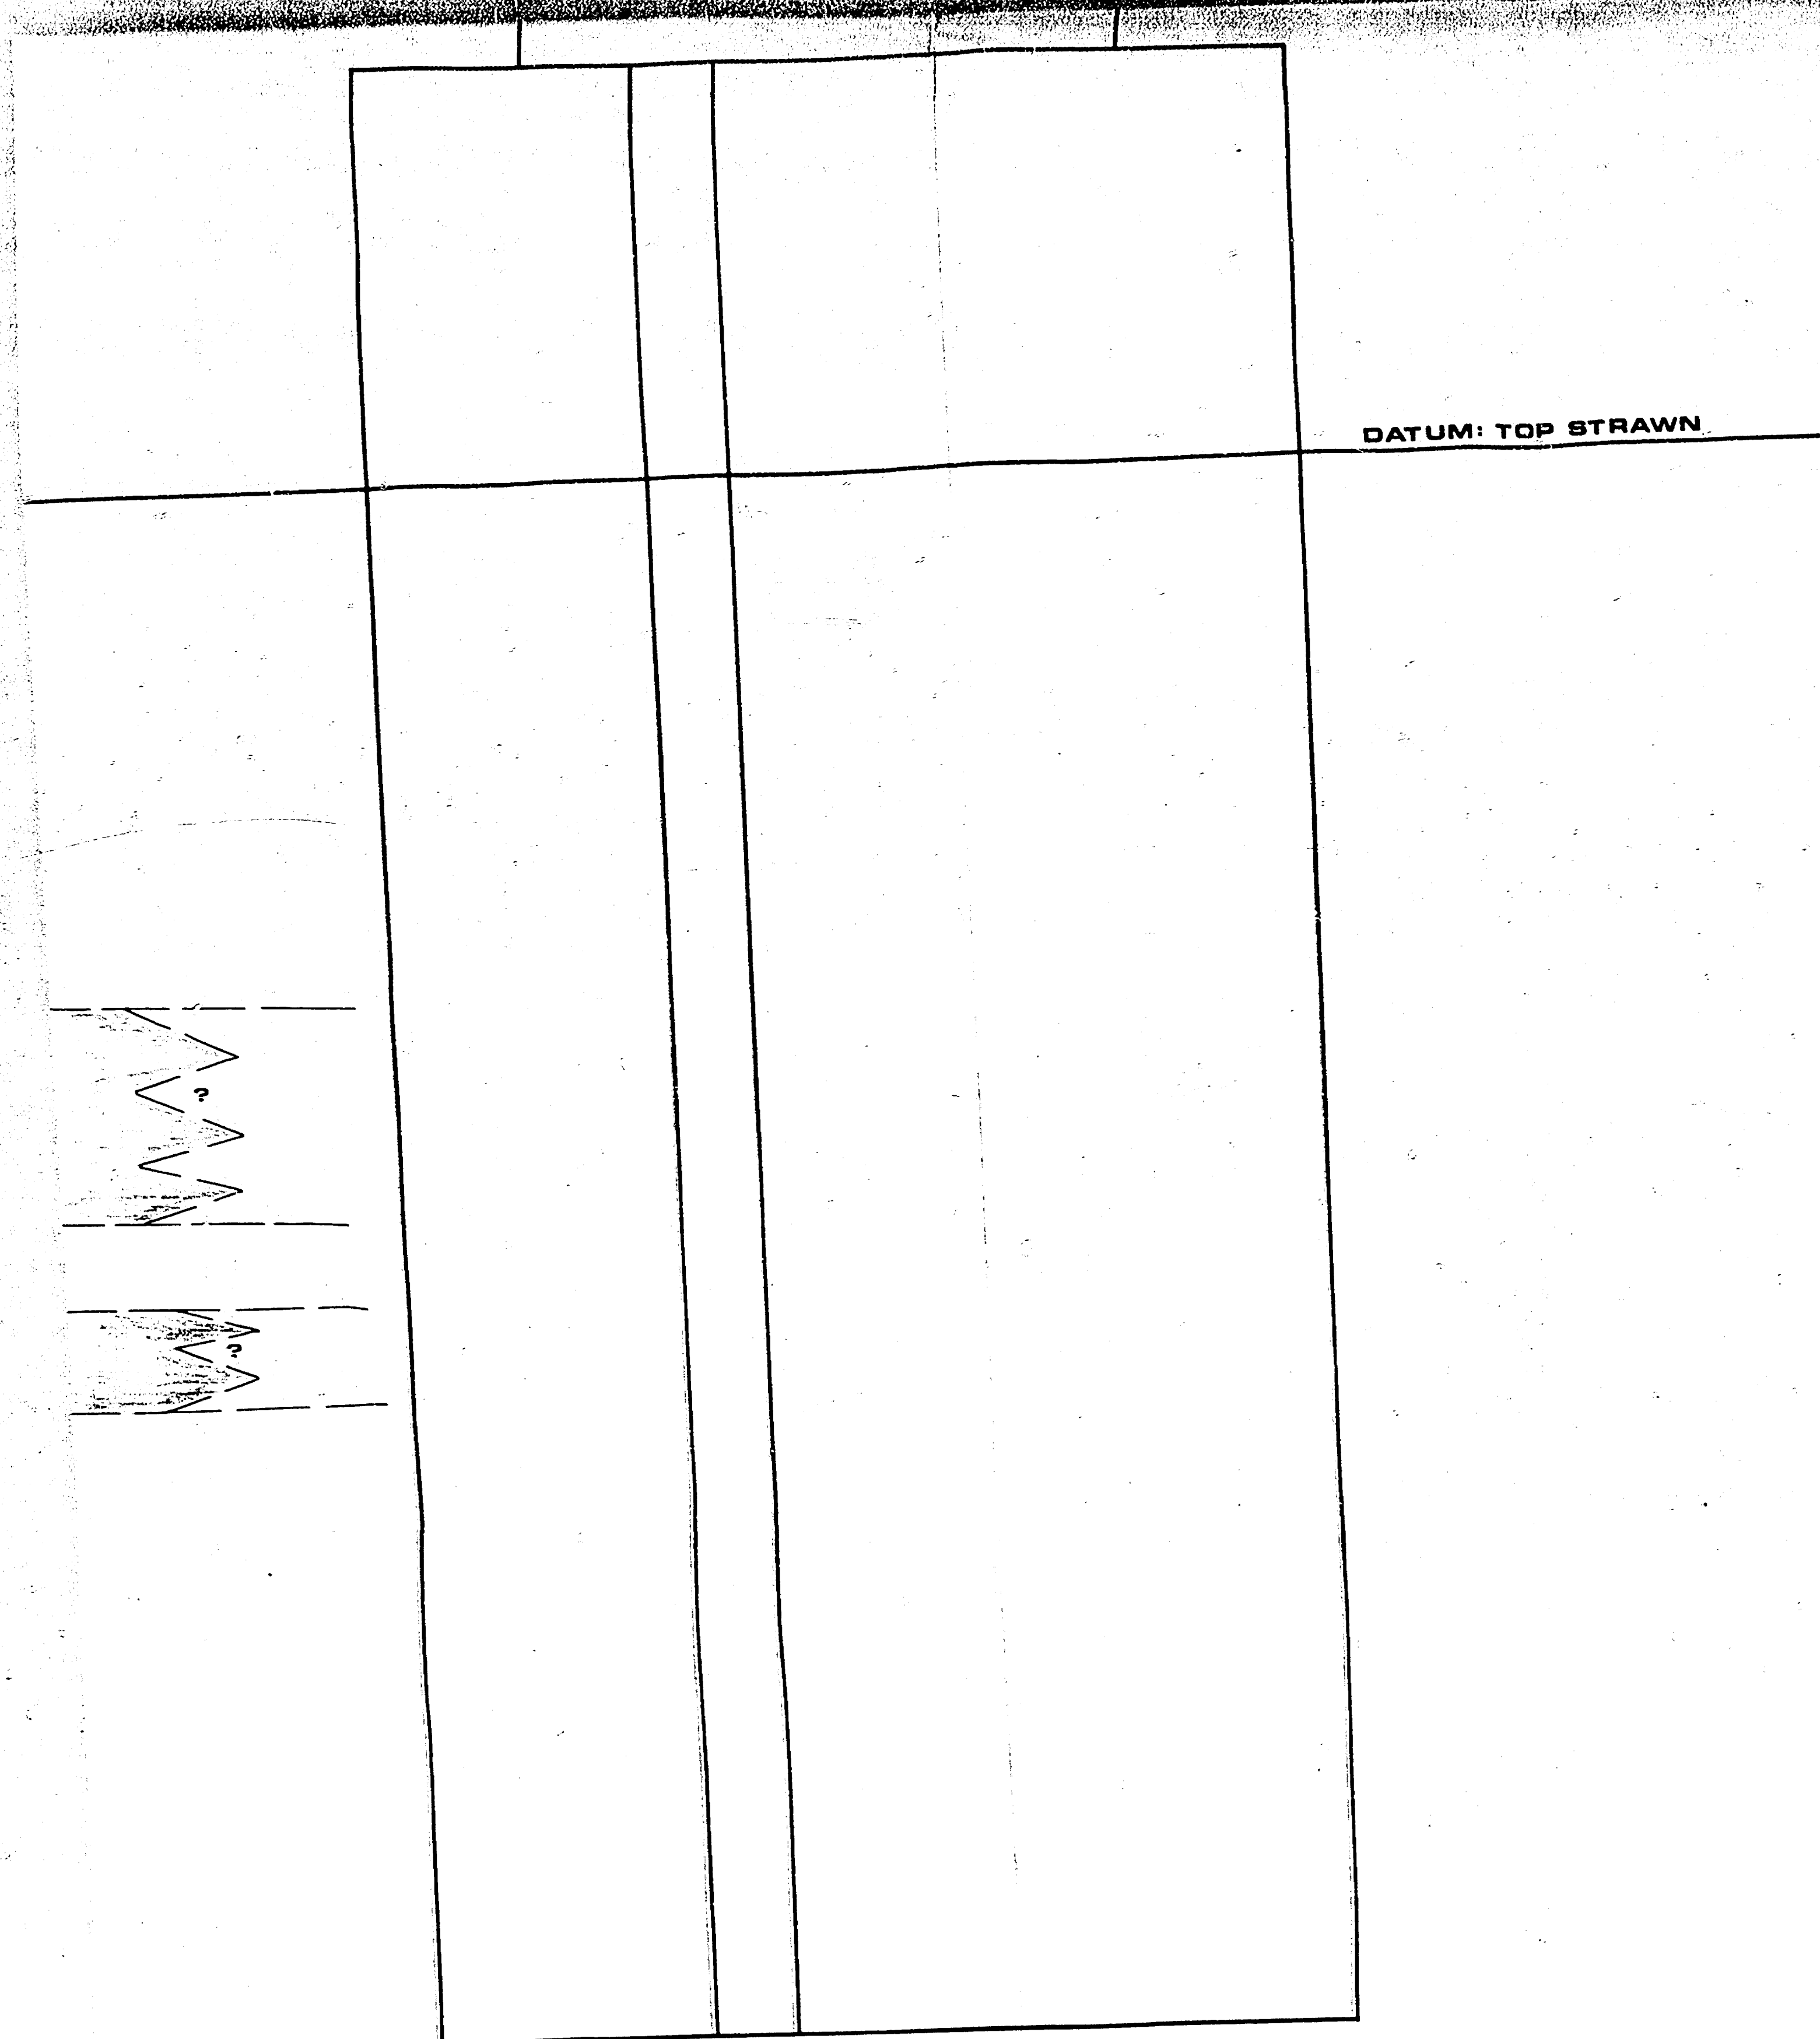

CONTOURED ON TOP STRAWN C.I.=100'



HYDROCARBON EFFECT ON CNL-FDC LOG WHERE SEPARATION EXCEED 2p.u

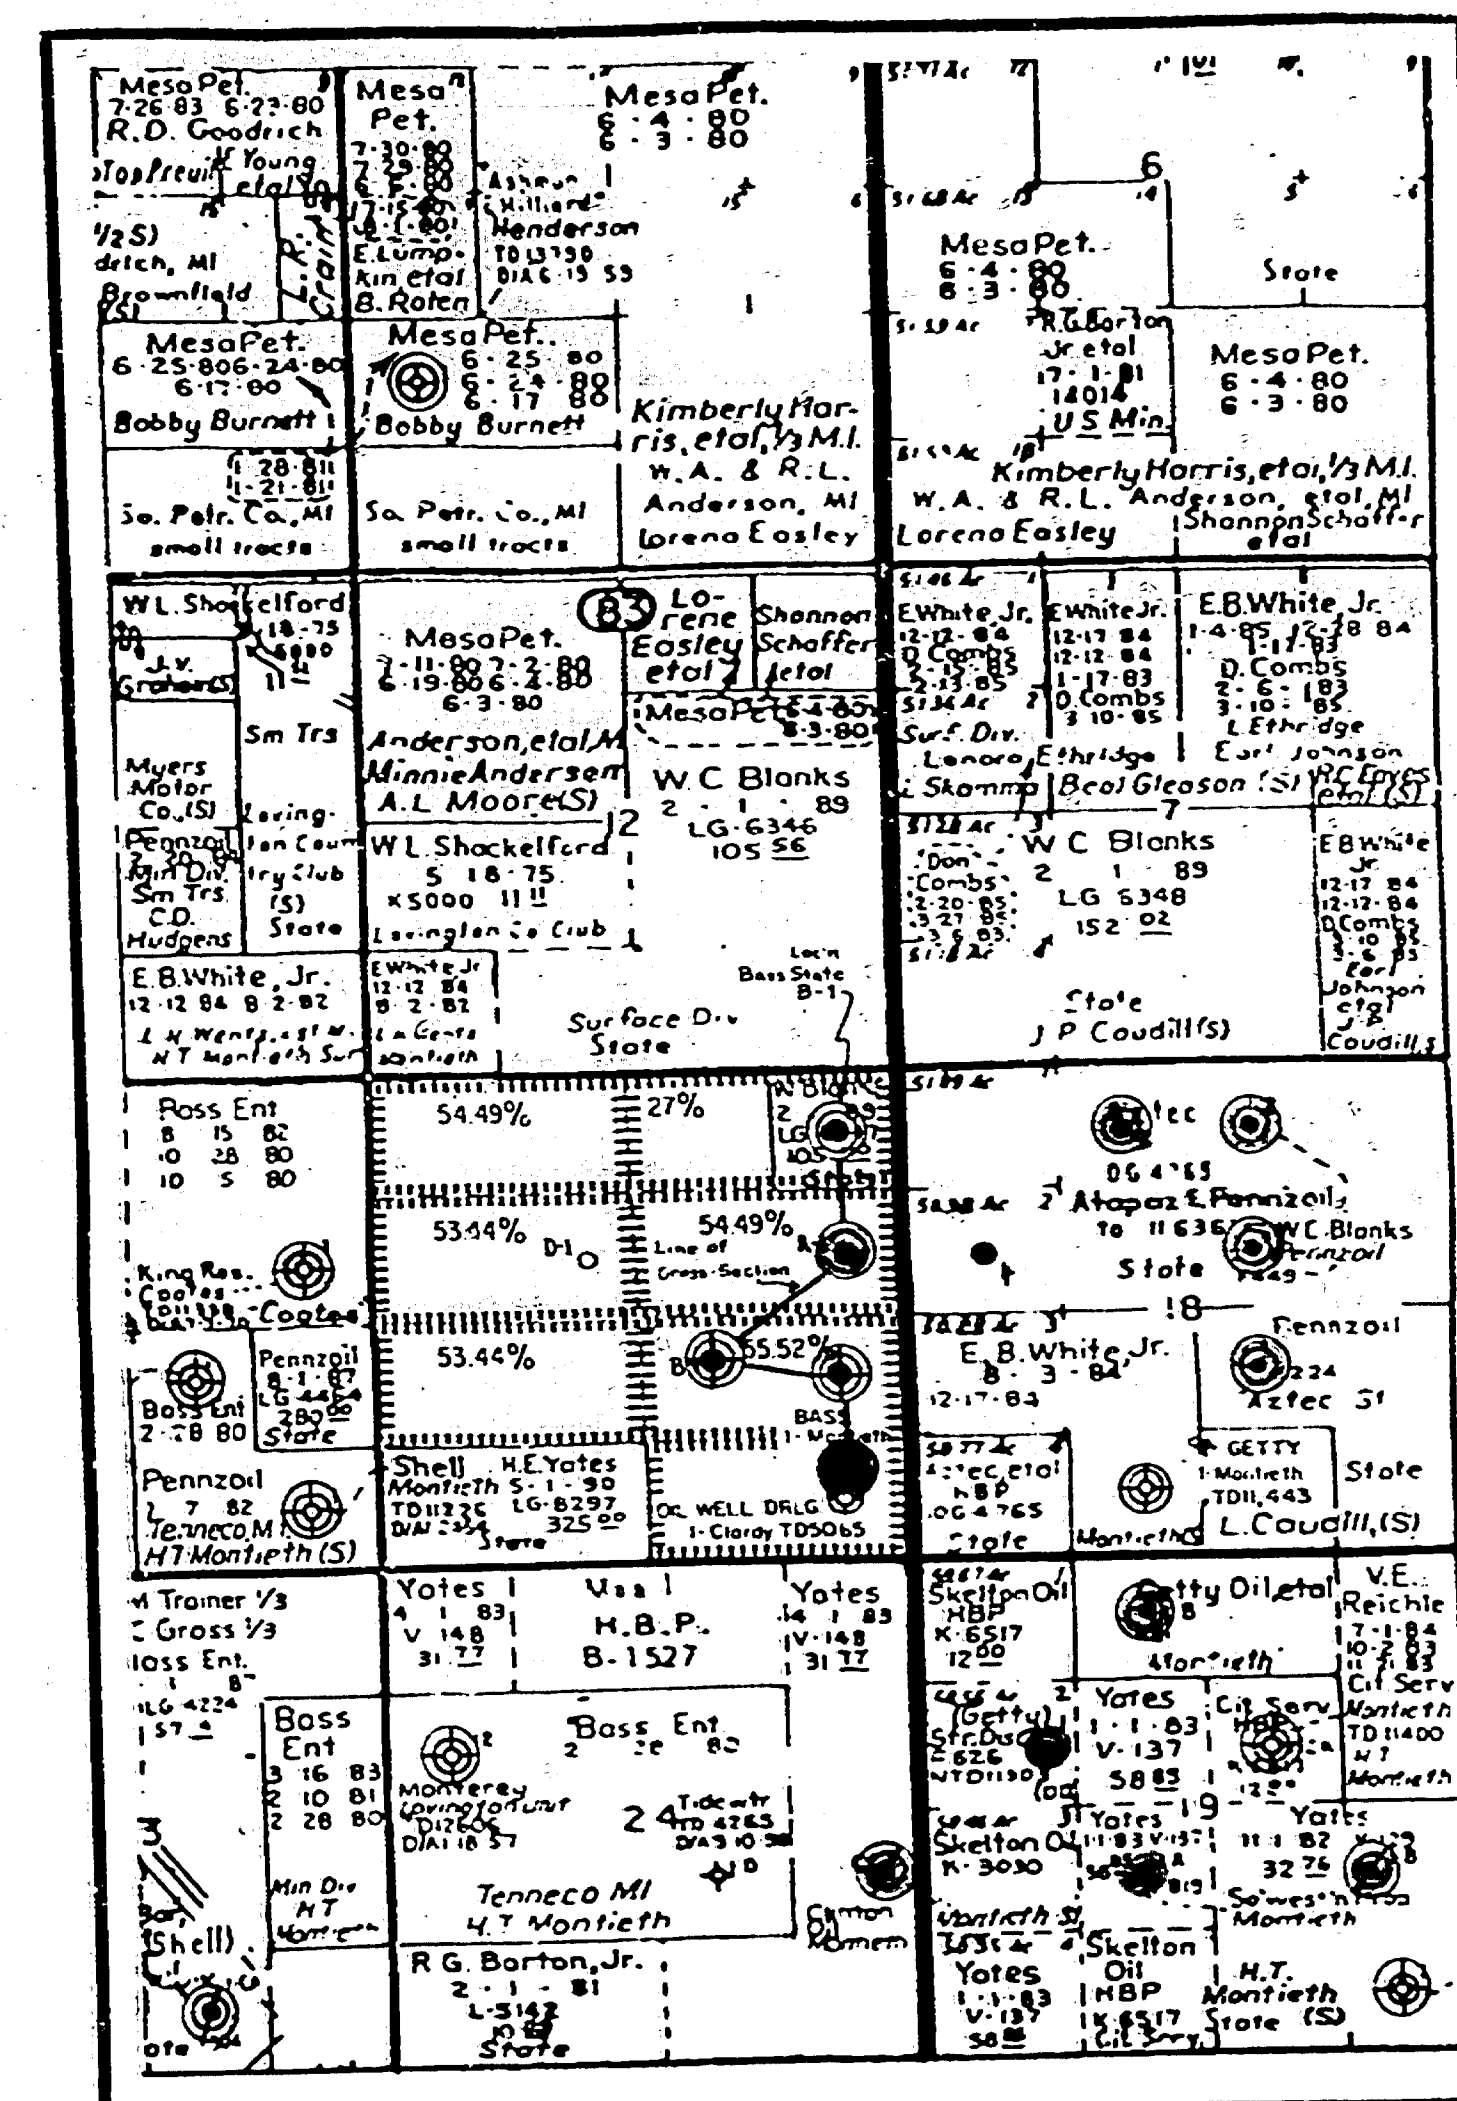

STRAWN NON-PRODUCTIVE

STRAWN PRODUCTIVE

CUM. PRODUCTION LESS THAN 20,000 BO



BEFORE THE
OIL CONSERVATION COMMISSION
Case No. 7545
Submitted by: [Signature]
Hearing Date: 10-11-60


BASS ENTERPRISES PRODUCTION CO.




MONTIEITH AREA

T16S-R36E LIA COUNTY, N.M.

STRATIGRAPHIC CROSS-SECTION (DATUM=TOP STRAWN)
TOP STRAWN STRUCTURE
DISTRIBUTION MAP ILLUSTRATING RESULTS OF STRAWN TESTS.

DATE: OCT. 17, 1960
DRAWN BY: G. HILLIS
SCALE: 1"=100'

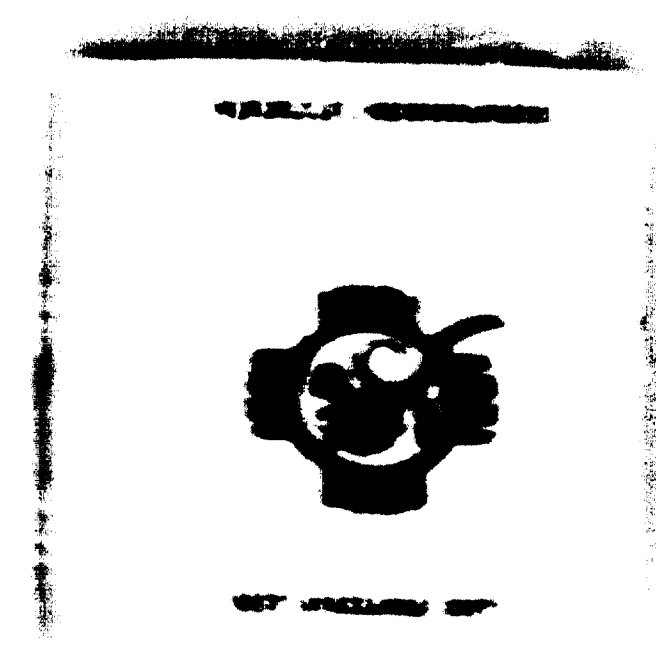

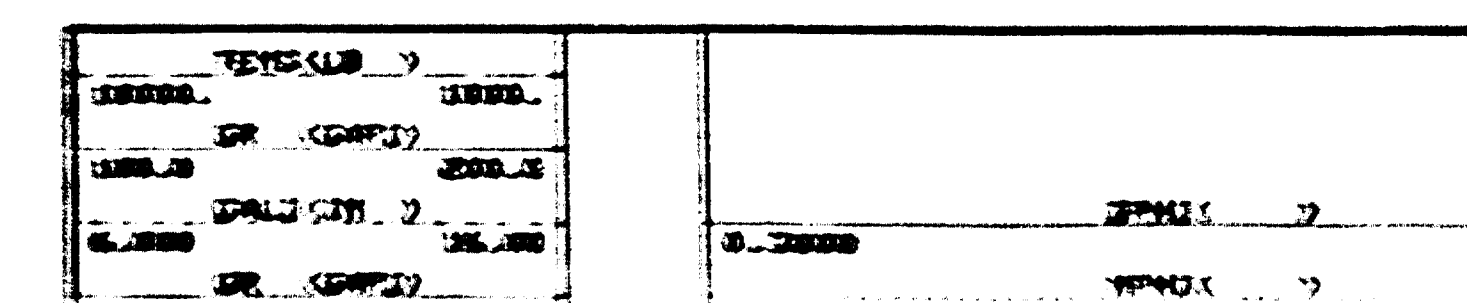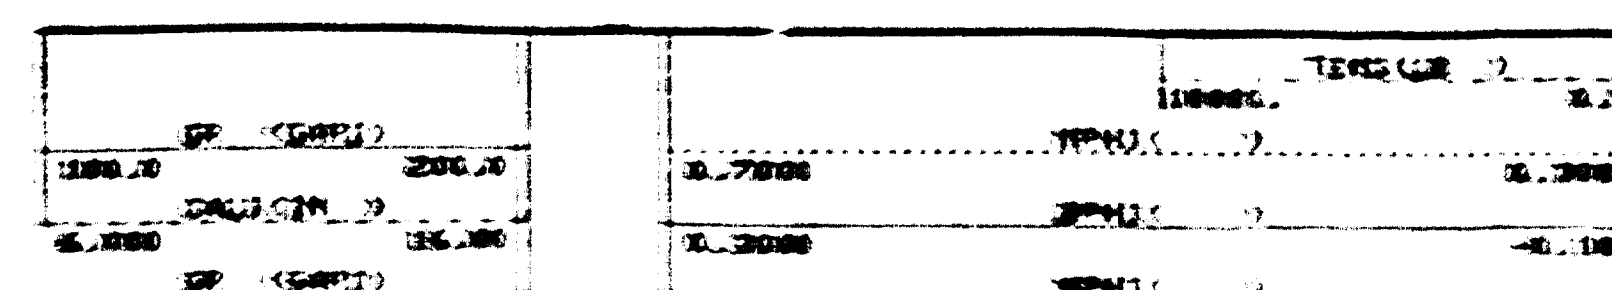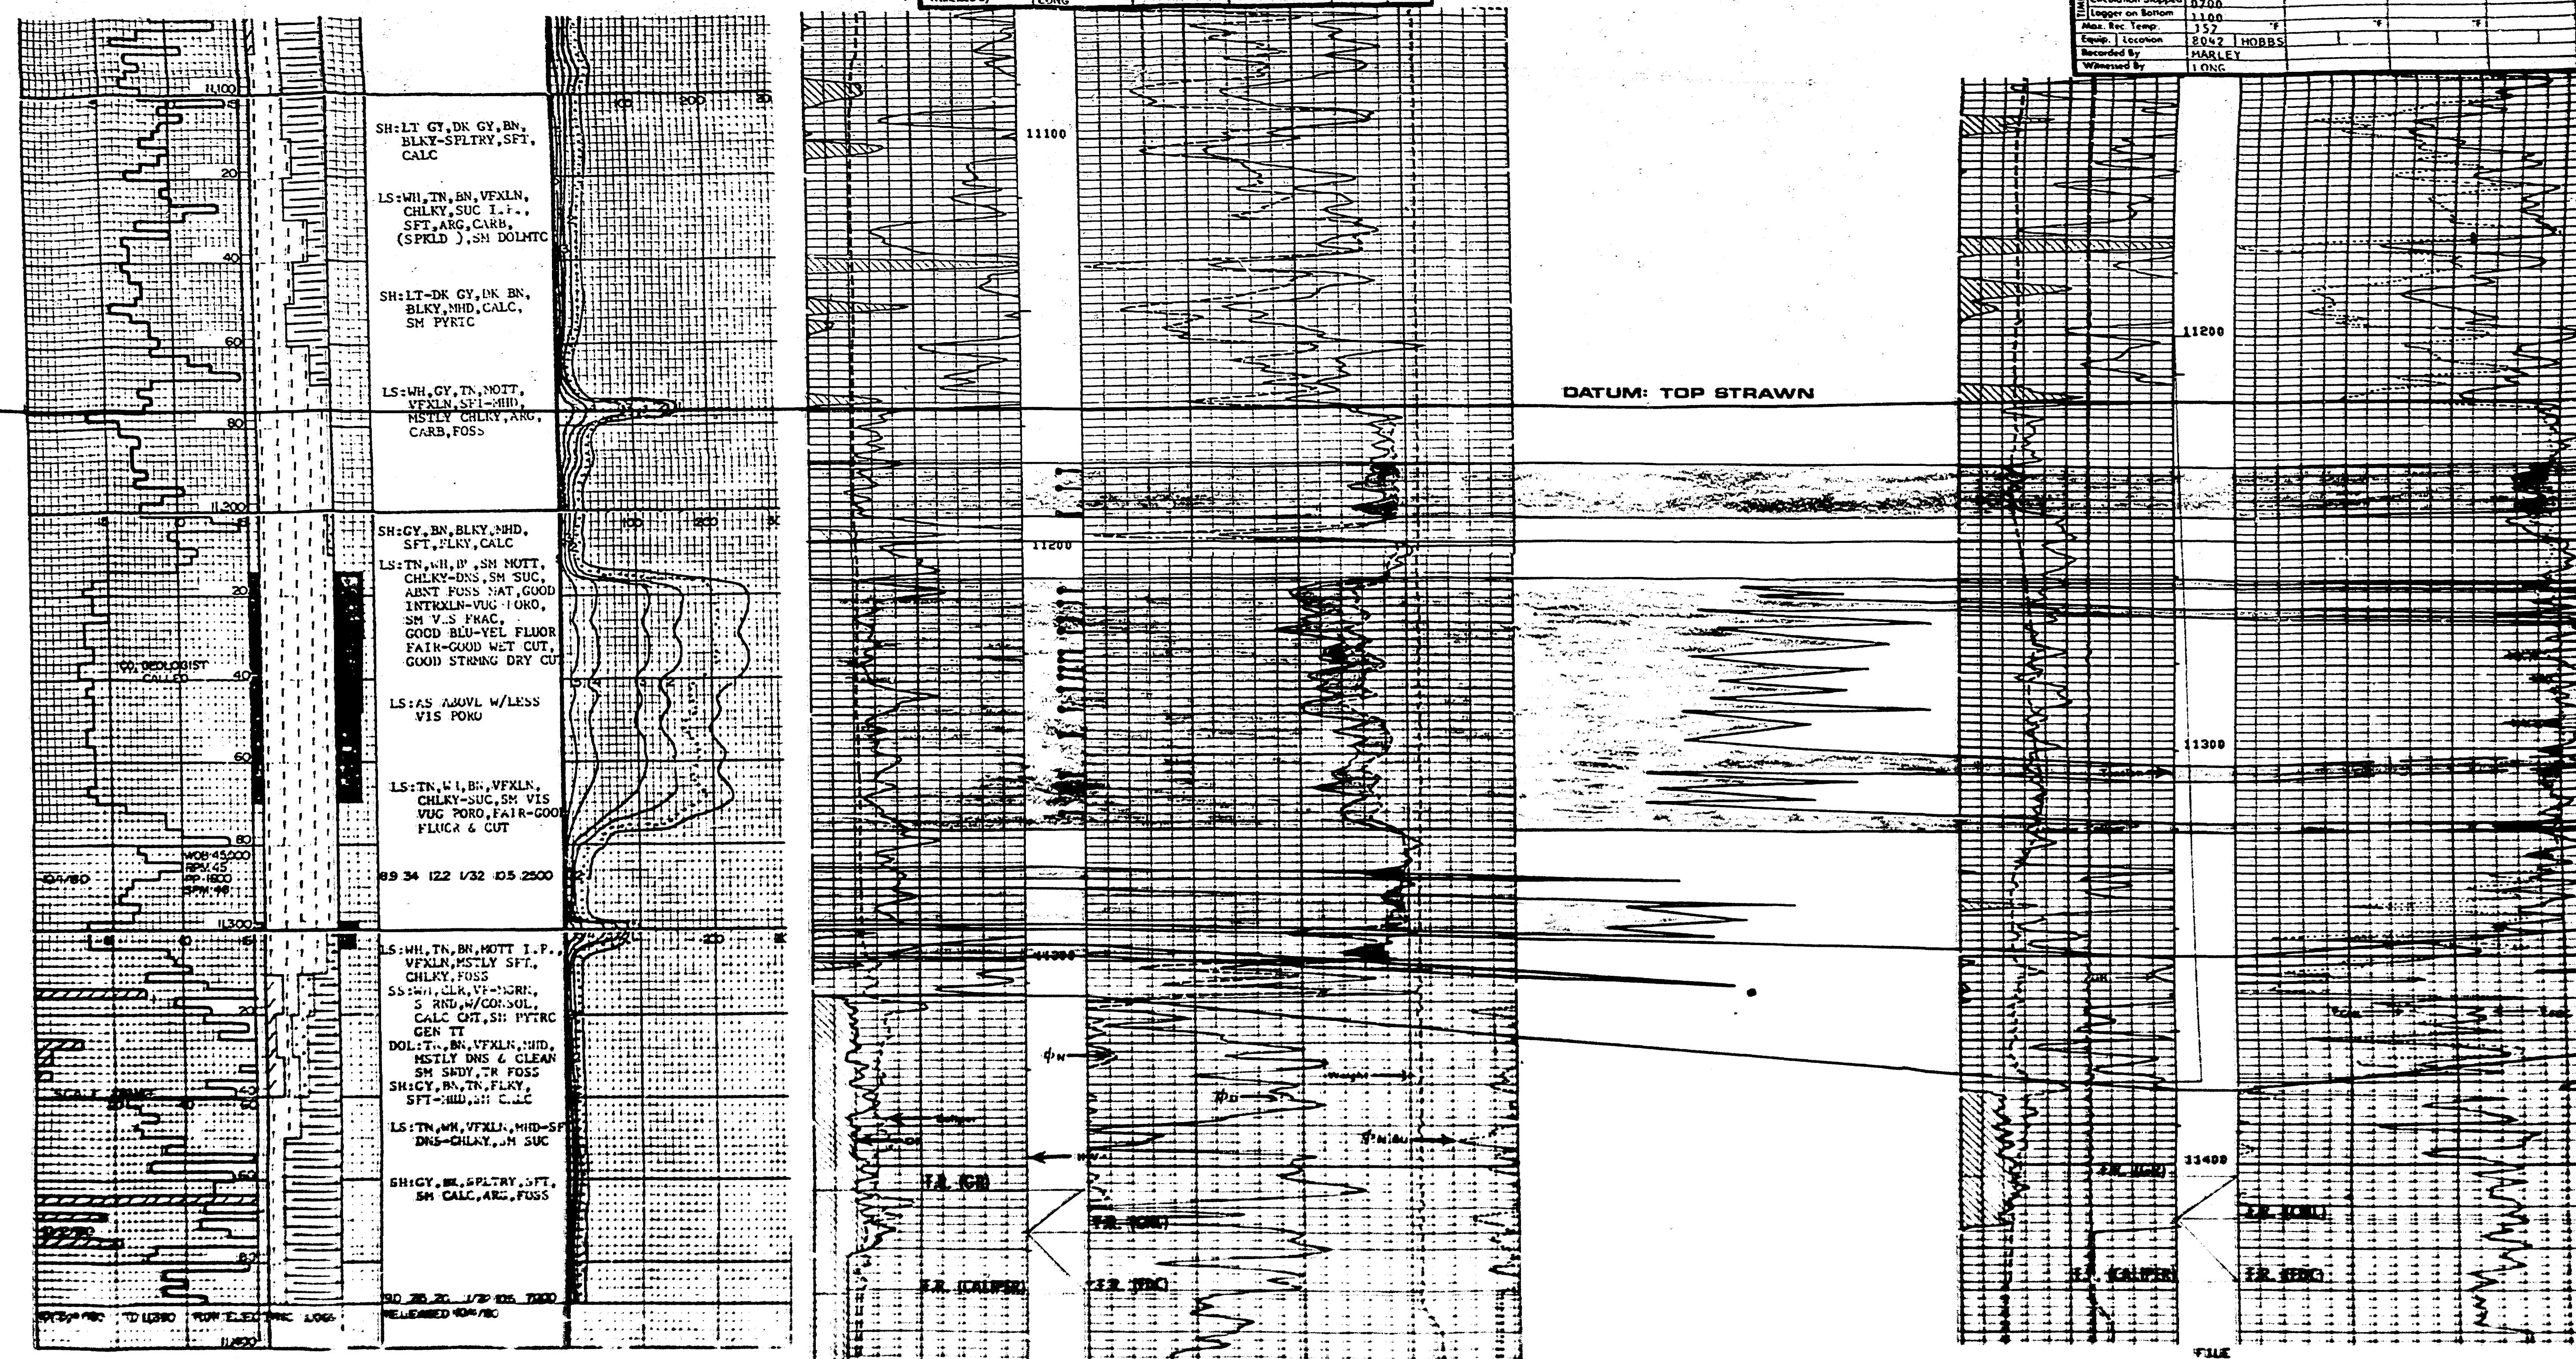[illegible]

Schlumberger **COMPENSATED NEUTRON FORMATION DENSITY**

COMPANY: BASS ENTERPRISES
 WELL: MONTIETH "B" No. 1 - Sidetrack
 FIELD: N.E. LOVINGTON PENN
 COUNTY: LEA STATE: NEW MEXICO

1380' FNL 5. 2130' FSL
 13 16-S 16-E

Permanent Datum: G.L. Elev. 3858
 Log Measured From: C.B. 18 ft. Above Perm. Datum
 Drilling Measured From: C.B. D.F. G.L. 3858

Date	5-10-81
Run No.	ONE
Depth-Driller	11428
Depth-Logger	11428
Run Log Interval	11428
Top Log Interval	5800
Counting-Driller	8.5/85 4810
Counting-Logger	4810
Run Size	7.75
Type Fluid in Hole	FRESH GEL
Dens. @ 100'	1.0
pH @ 100'	11
Source of Sample	SWAB
Run @ Mean Temp.	1.46 @ 62.7
Run @ Mean Temp.	2.2 @ 62.7
Run @ Mean Temp.	7 @ 71
Run @ Mean Temp.	7 @ 71
Source Mud 1 Run	1.46 @ 62.7
Source Mud 2 Run	1.46 @ 62.7
Completion Stopped	1150
Log Measured From	1150
Log Measured To	1150
Log Measured By	MANLEY
Log Measured By	LONG

Schlumberger **COMPENSATED NEUTRON FORMATION DENSITY**

COMPANY: BASS ENTERPRISES
 WELL: MONTIETH "B" No. 1 - Sidetrack
 FIELD: N.E. LOVINGTON PENN
 COUNTY: LEA STATE: NEW MEXICO

1311' S. & 1301' E. of Straight SEC 13
 16-S 16-E

Permanent Datum: G.L. Elev. 3858
 Log Measured From: C.B. 18 ft. Above Perm. Datum
 Drilling Measured From: C.B. D.F. G.L. 3858

Date	5-10-81
Run No.	ONE
Depth-Driller	11543
Depth-Logger	11398 TMD
Run Log Interval	11398 TMD
Top Log Interval	5800
Counting-Driller	8.5/85 4810
Counting-Logger	4810
Run Size	7.75
Type Fluid in Hole	FRESH GEL
Dens. @ 100'	1.0
pH @ 100'	11
Source of Sample	SWAB
Run @ Mean Temp.	1.47 @ 75.4
Run @ Mean Temp.	1.1 @ 72.7
Run @ Mean Temp.	7 @ 71
Run @ Mean Temp.	7 @ 71
Source Mud 1 Run	1.47 @ 75.4
Source Mud 2 Run	1.47 @ 75.4
Completion Stopped	1150
Log Measured From	1150
Log Measured To	1150
Log Measured By	MANLEY
Log Measured By	LONG


Schlumberger **COMPENSATED NEUTRON FORMATION DENSITY**

COMPANY: BASS ENTERPRISES
 WELL: MONTIETH "A" No. 1
 FIELD: N.E. LOVINGTON PENN
 COUNTY: LEA STATE: NEW MEXICO


1380' FNL 5. 510' FSL
 13 16-S 16-E

Permanent Datum: G.L. Elev. 3853
 Log Measured From: C.B. 18 ft. Above Perm. Datum
 Drilling Measured From: C.B. D.F. G.L. 3853


Date	11-23-80
Run No.	ONE
Depth-Driller	11577
Depth-Logger	11558
Run Log Interval	11558
Top Log Interval	0
Counting-Driller	8.5/85 4810
Counting-Logger	4810
Run Size	7.75
Type Fluid in Hole	GEL/DRI SPAG
Dens. @ 100'	1.0
pH @ 100'	11
Source of Sample	PIT
Run @ Mean Temp.	1.34 @ 62.7
Run @ Mean Temp.	1.33 @ 62.7
Run @ Mean Temp.	7 @ 71
Run @ Mean Temp.	7 @ 71
Source Mud 1 Run	1.34 @ 62.7
Source Mud 2 Run	1.34 @ 62.7
Completion Stopped	1150
Log Measured From	1150
Log Measured To	1150
Log Measured By	MANLEY
Log Measured By	LONG

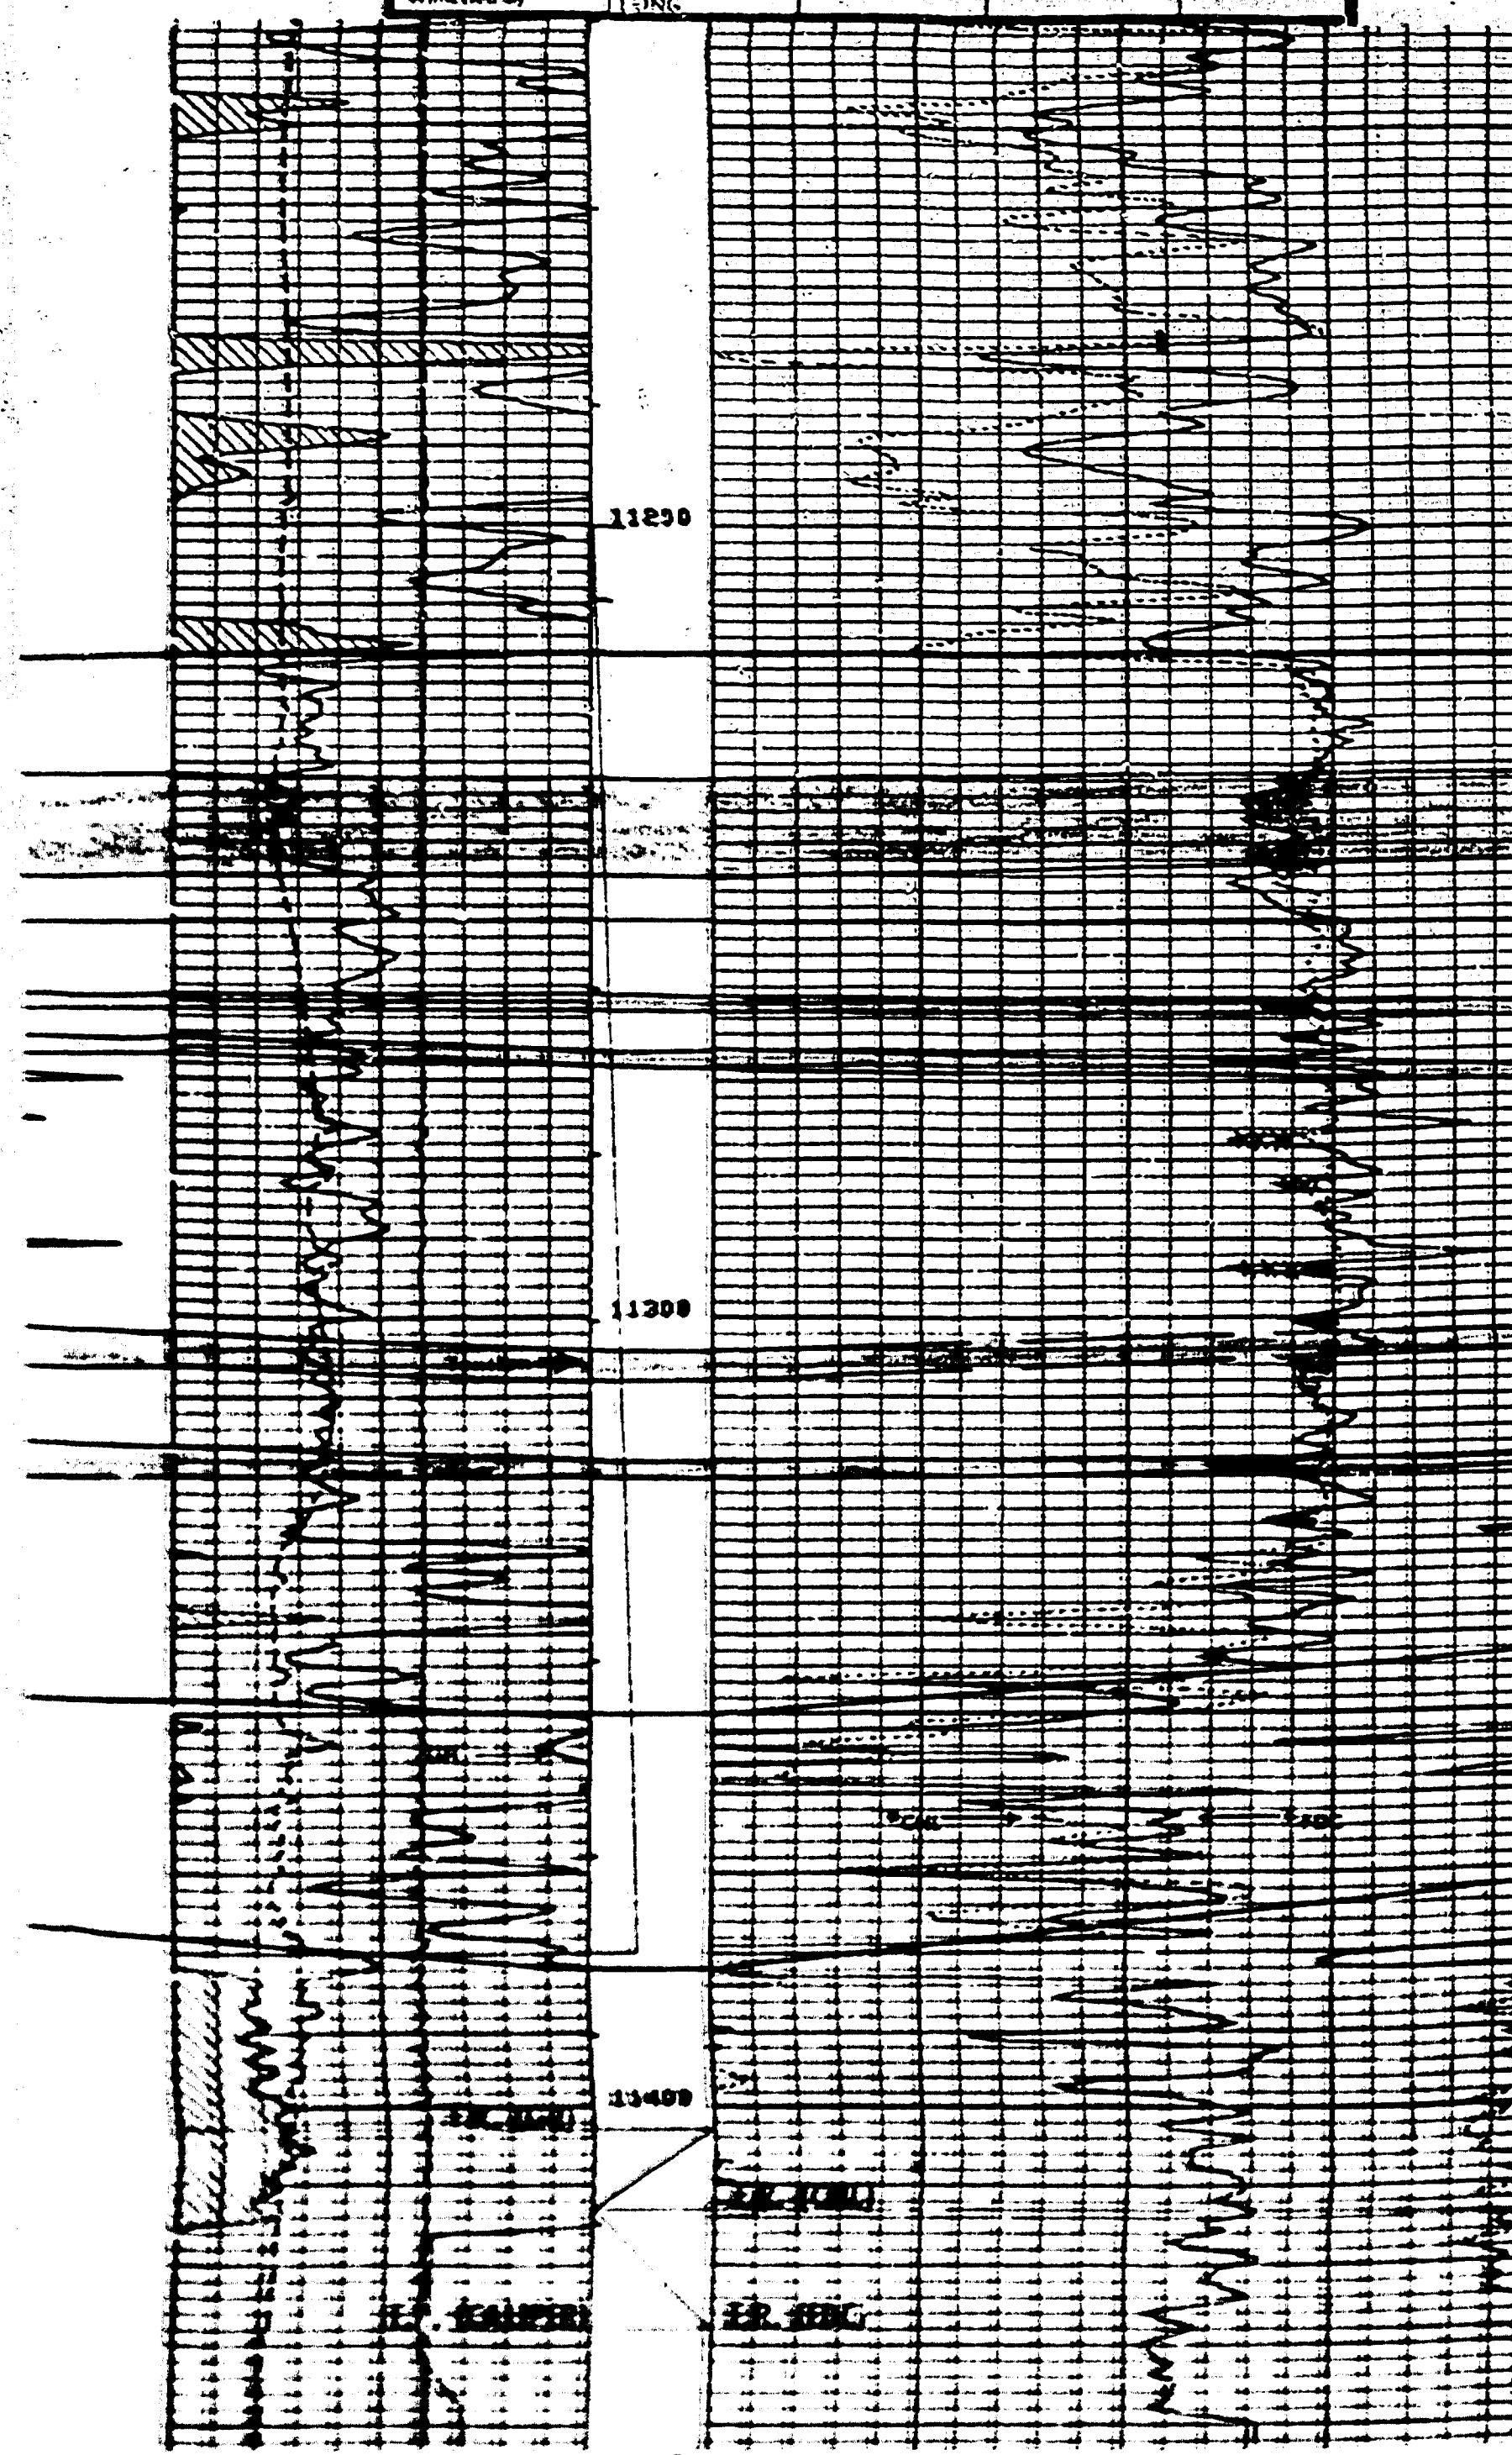


DEPTH	DENSITY
11200	1.00
11250	1.00
11300	1.00
11350	0.80
11400	0.80

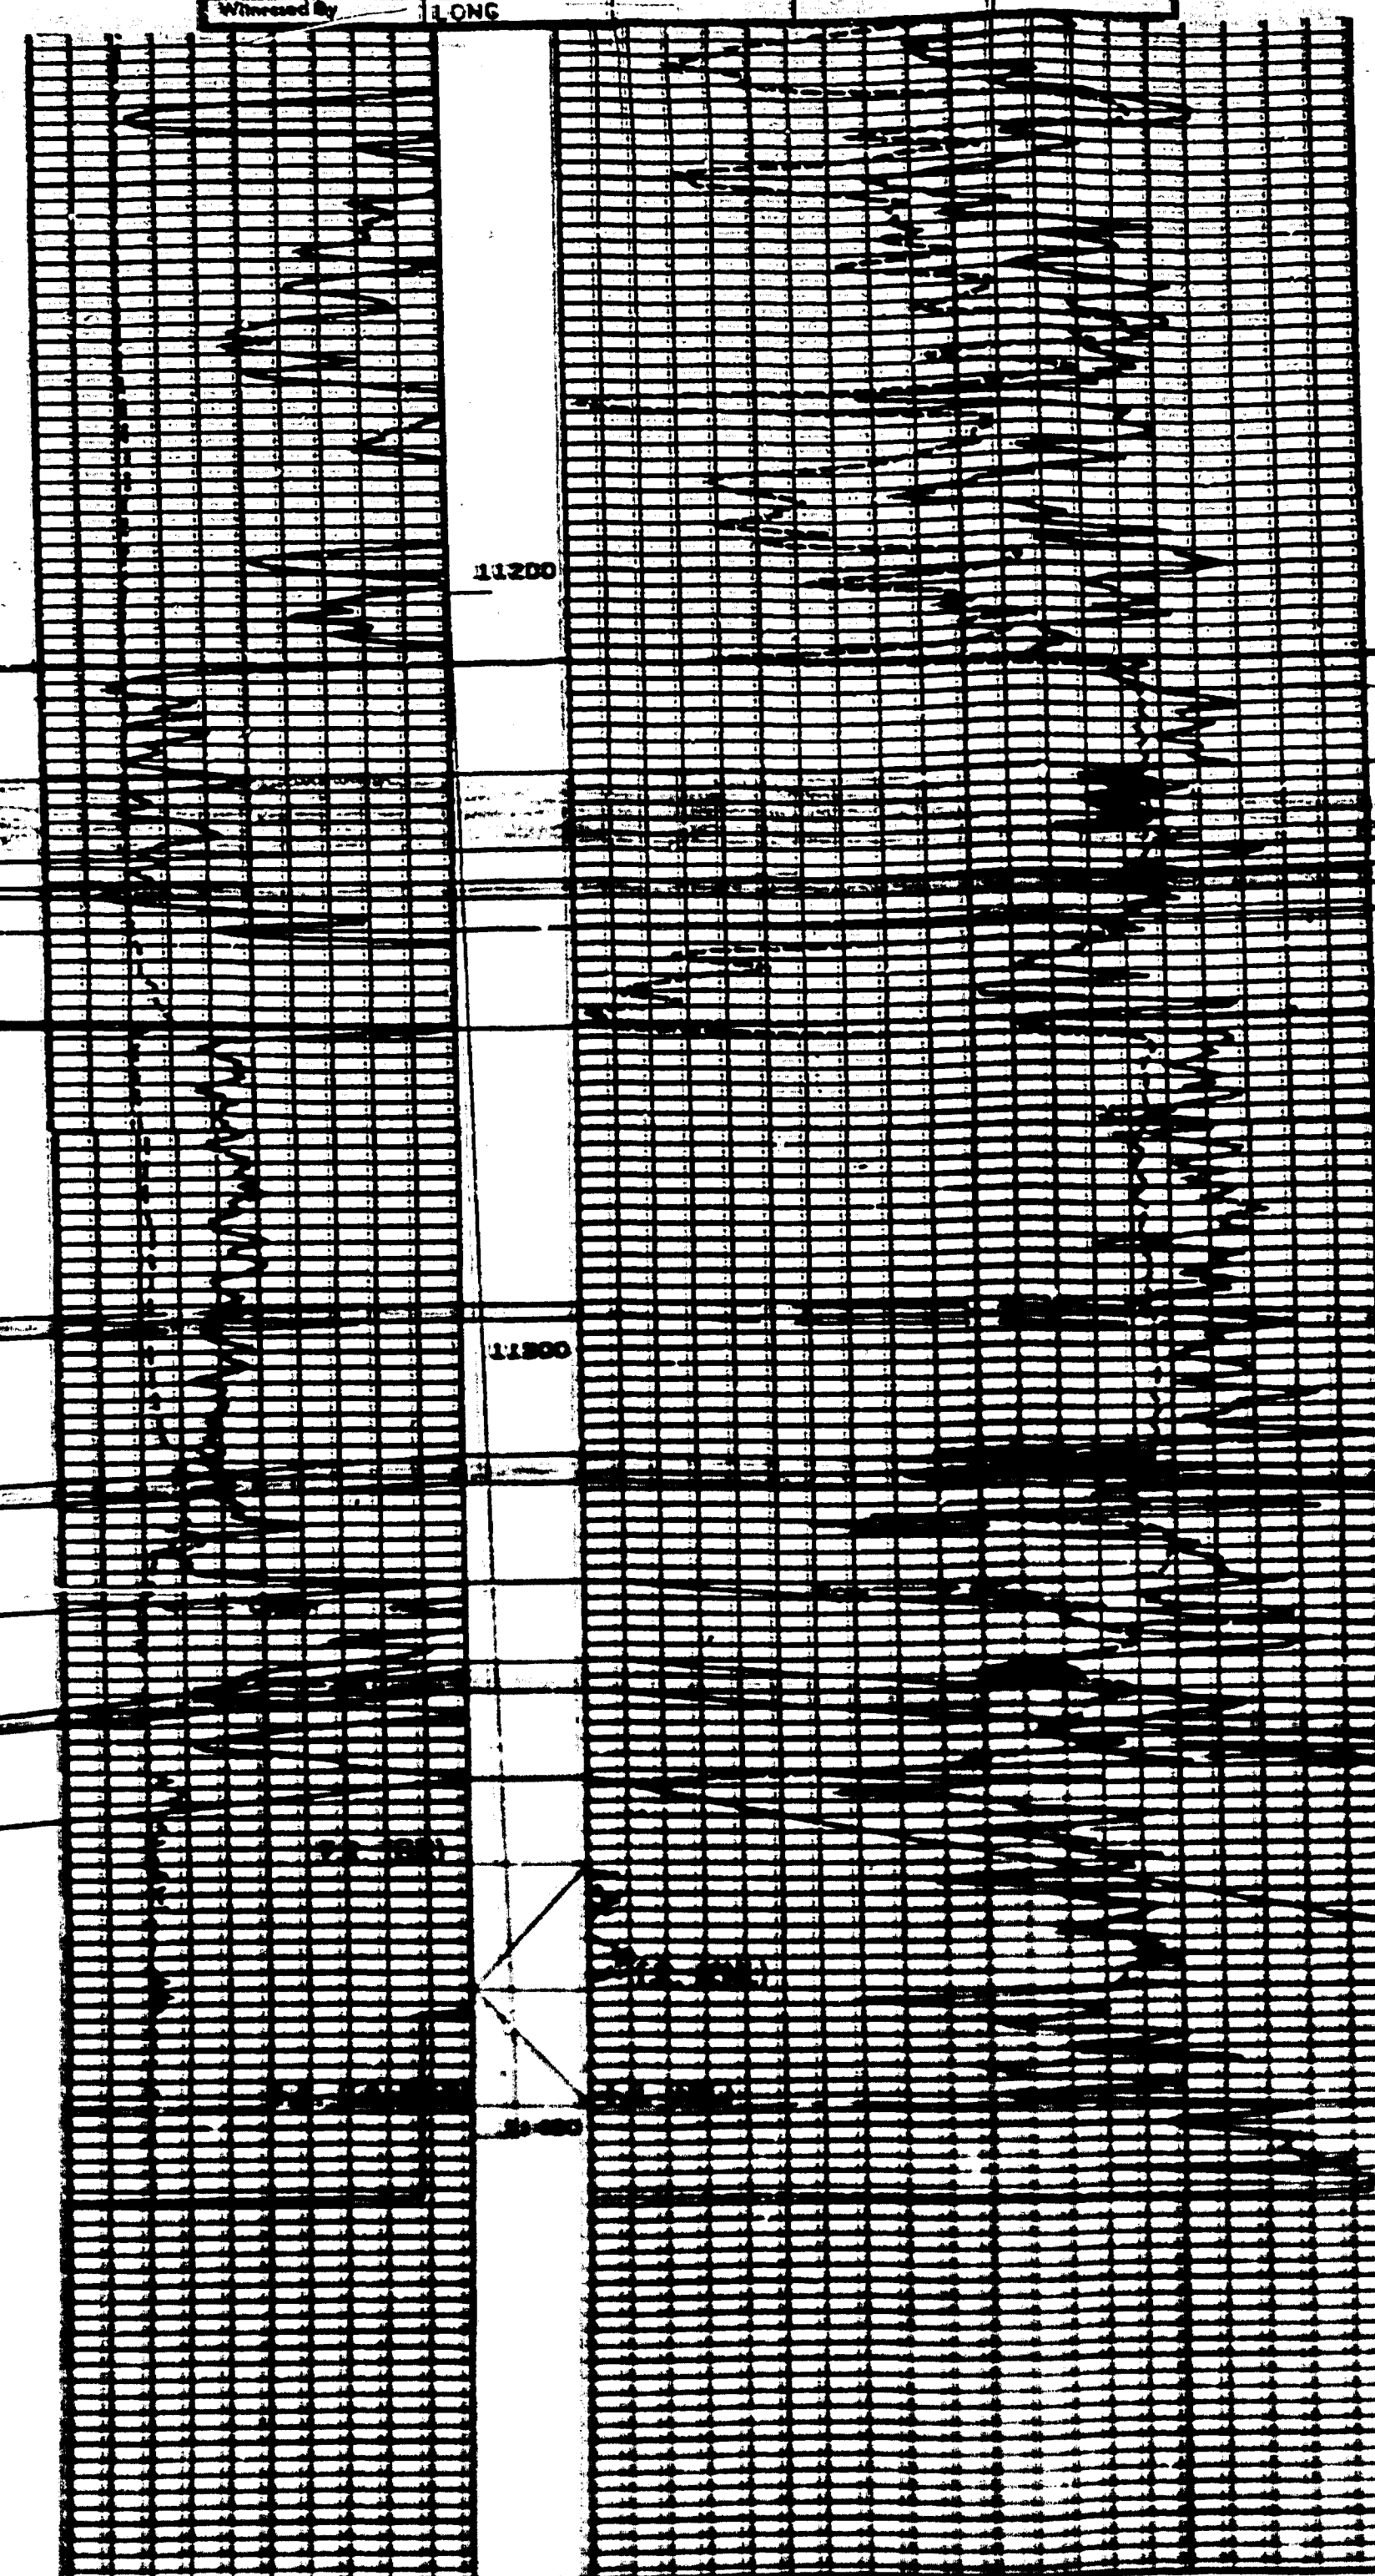



DEPTH	DENSITY
11200	1.00
11250	1.00
11300	1.00
11350	0.80
11400	0.80

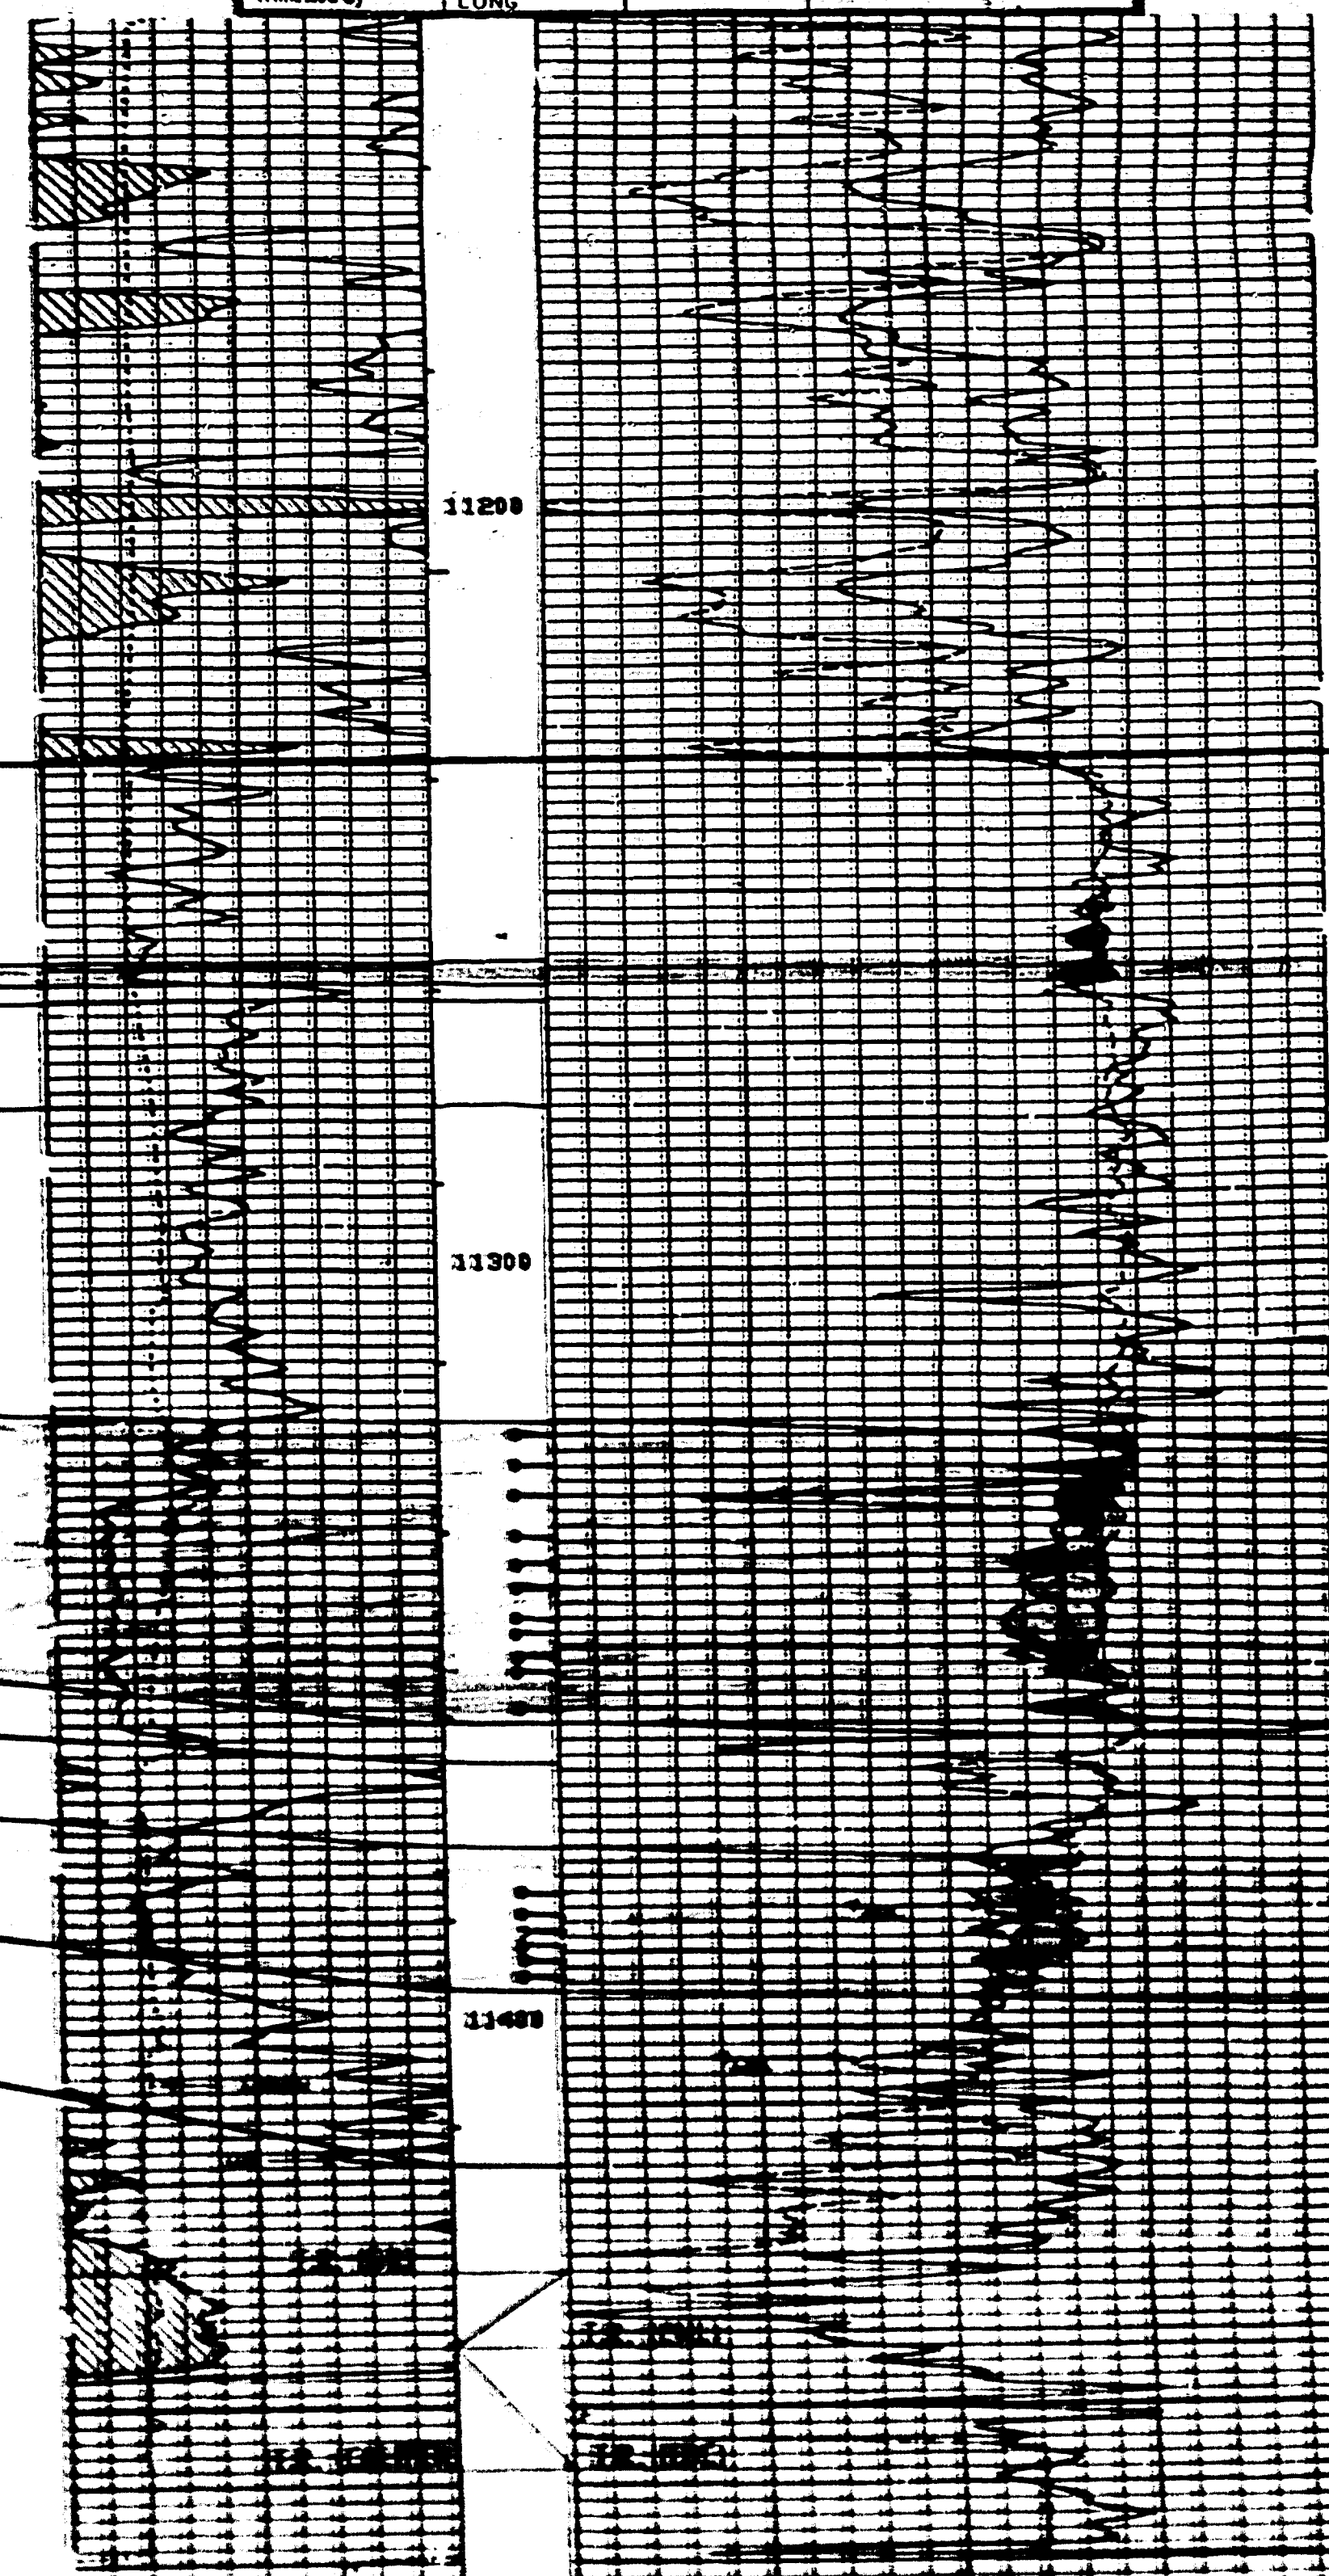


DEPTH	DENSITY
11200	1.00
11250	1.00
11300	1.00
11350	0.80
11400	0.80

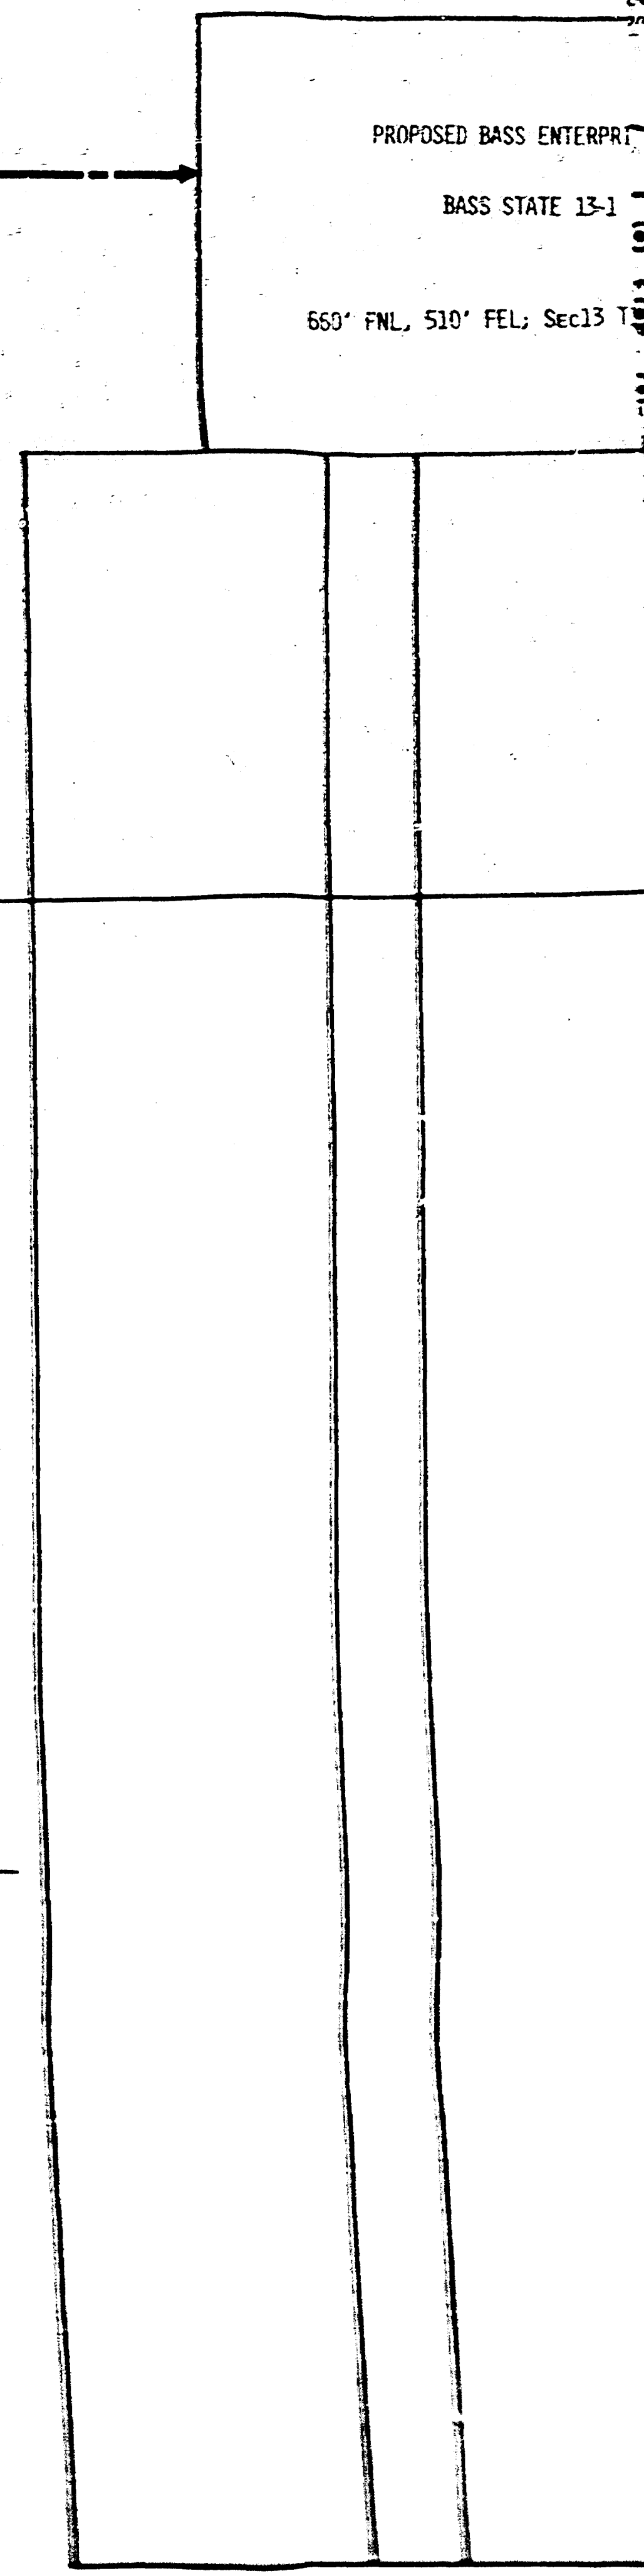

PROPOSED BASS ENTERPRISE
 BASS STATE 13-1
 550' FNL, 510' FSL; Sec 13 T

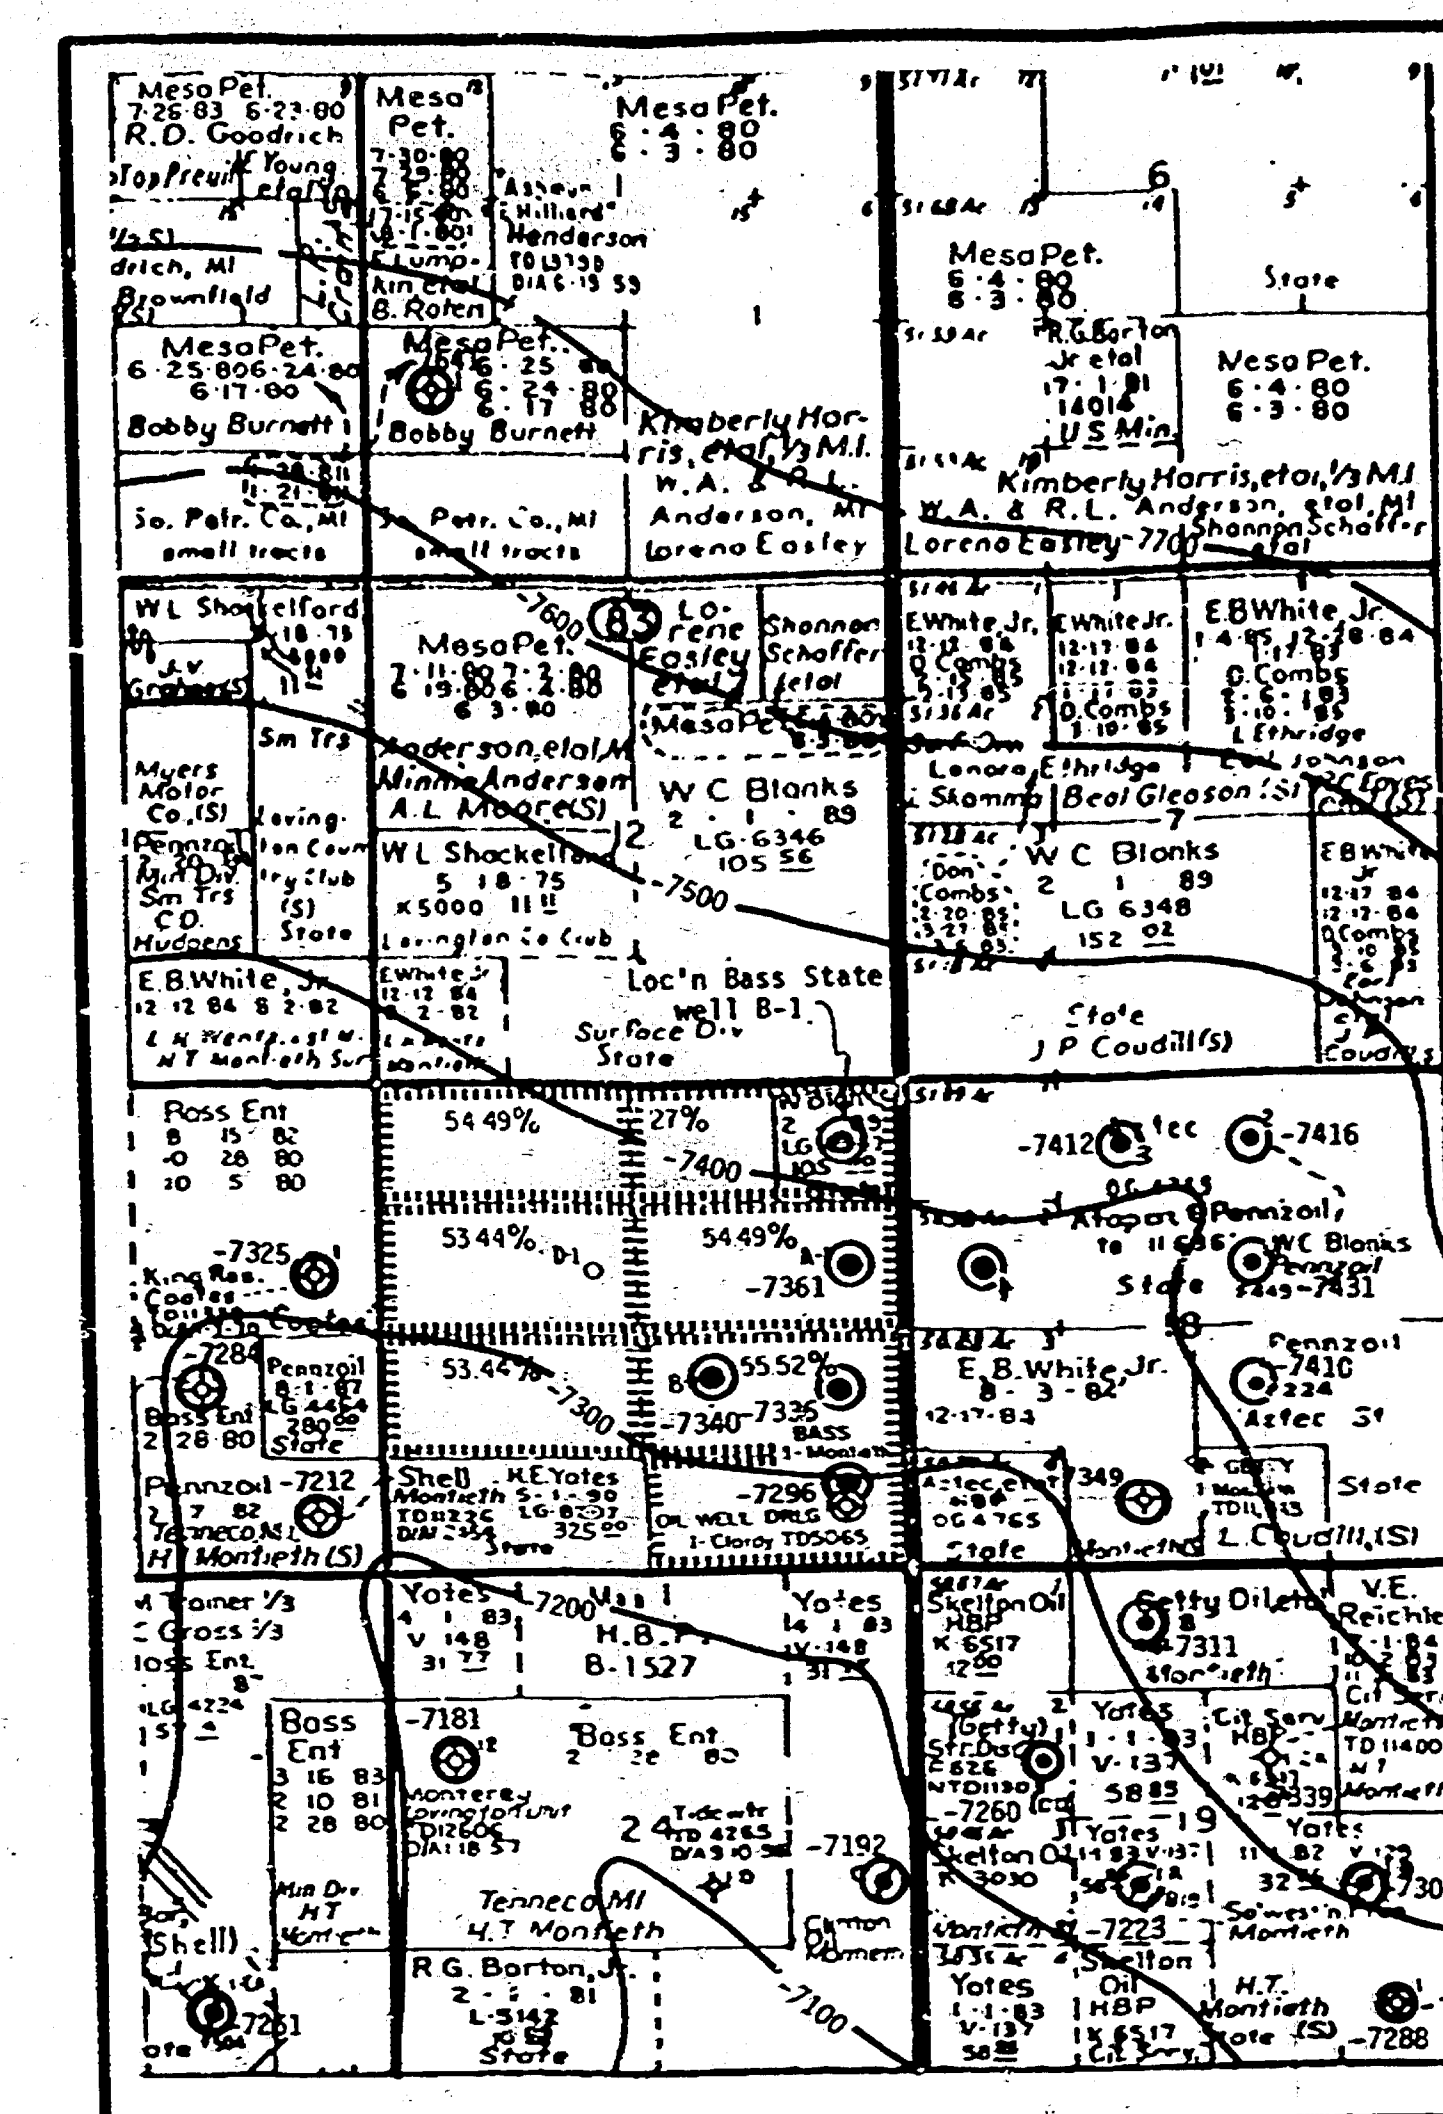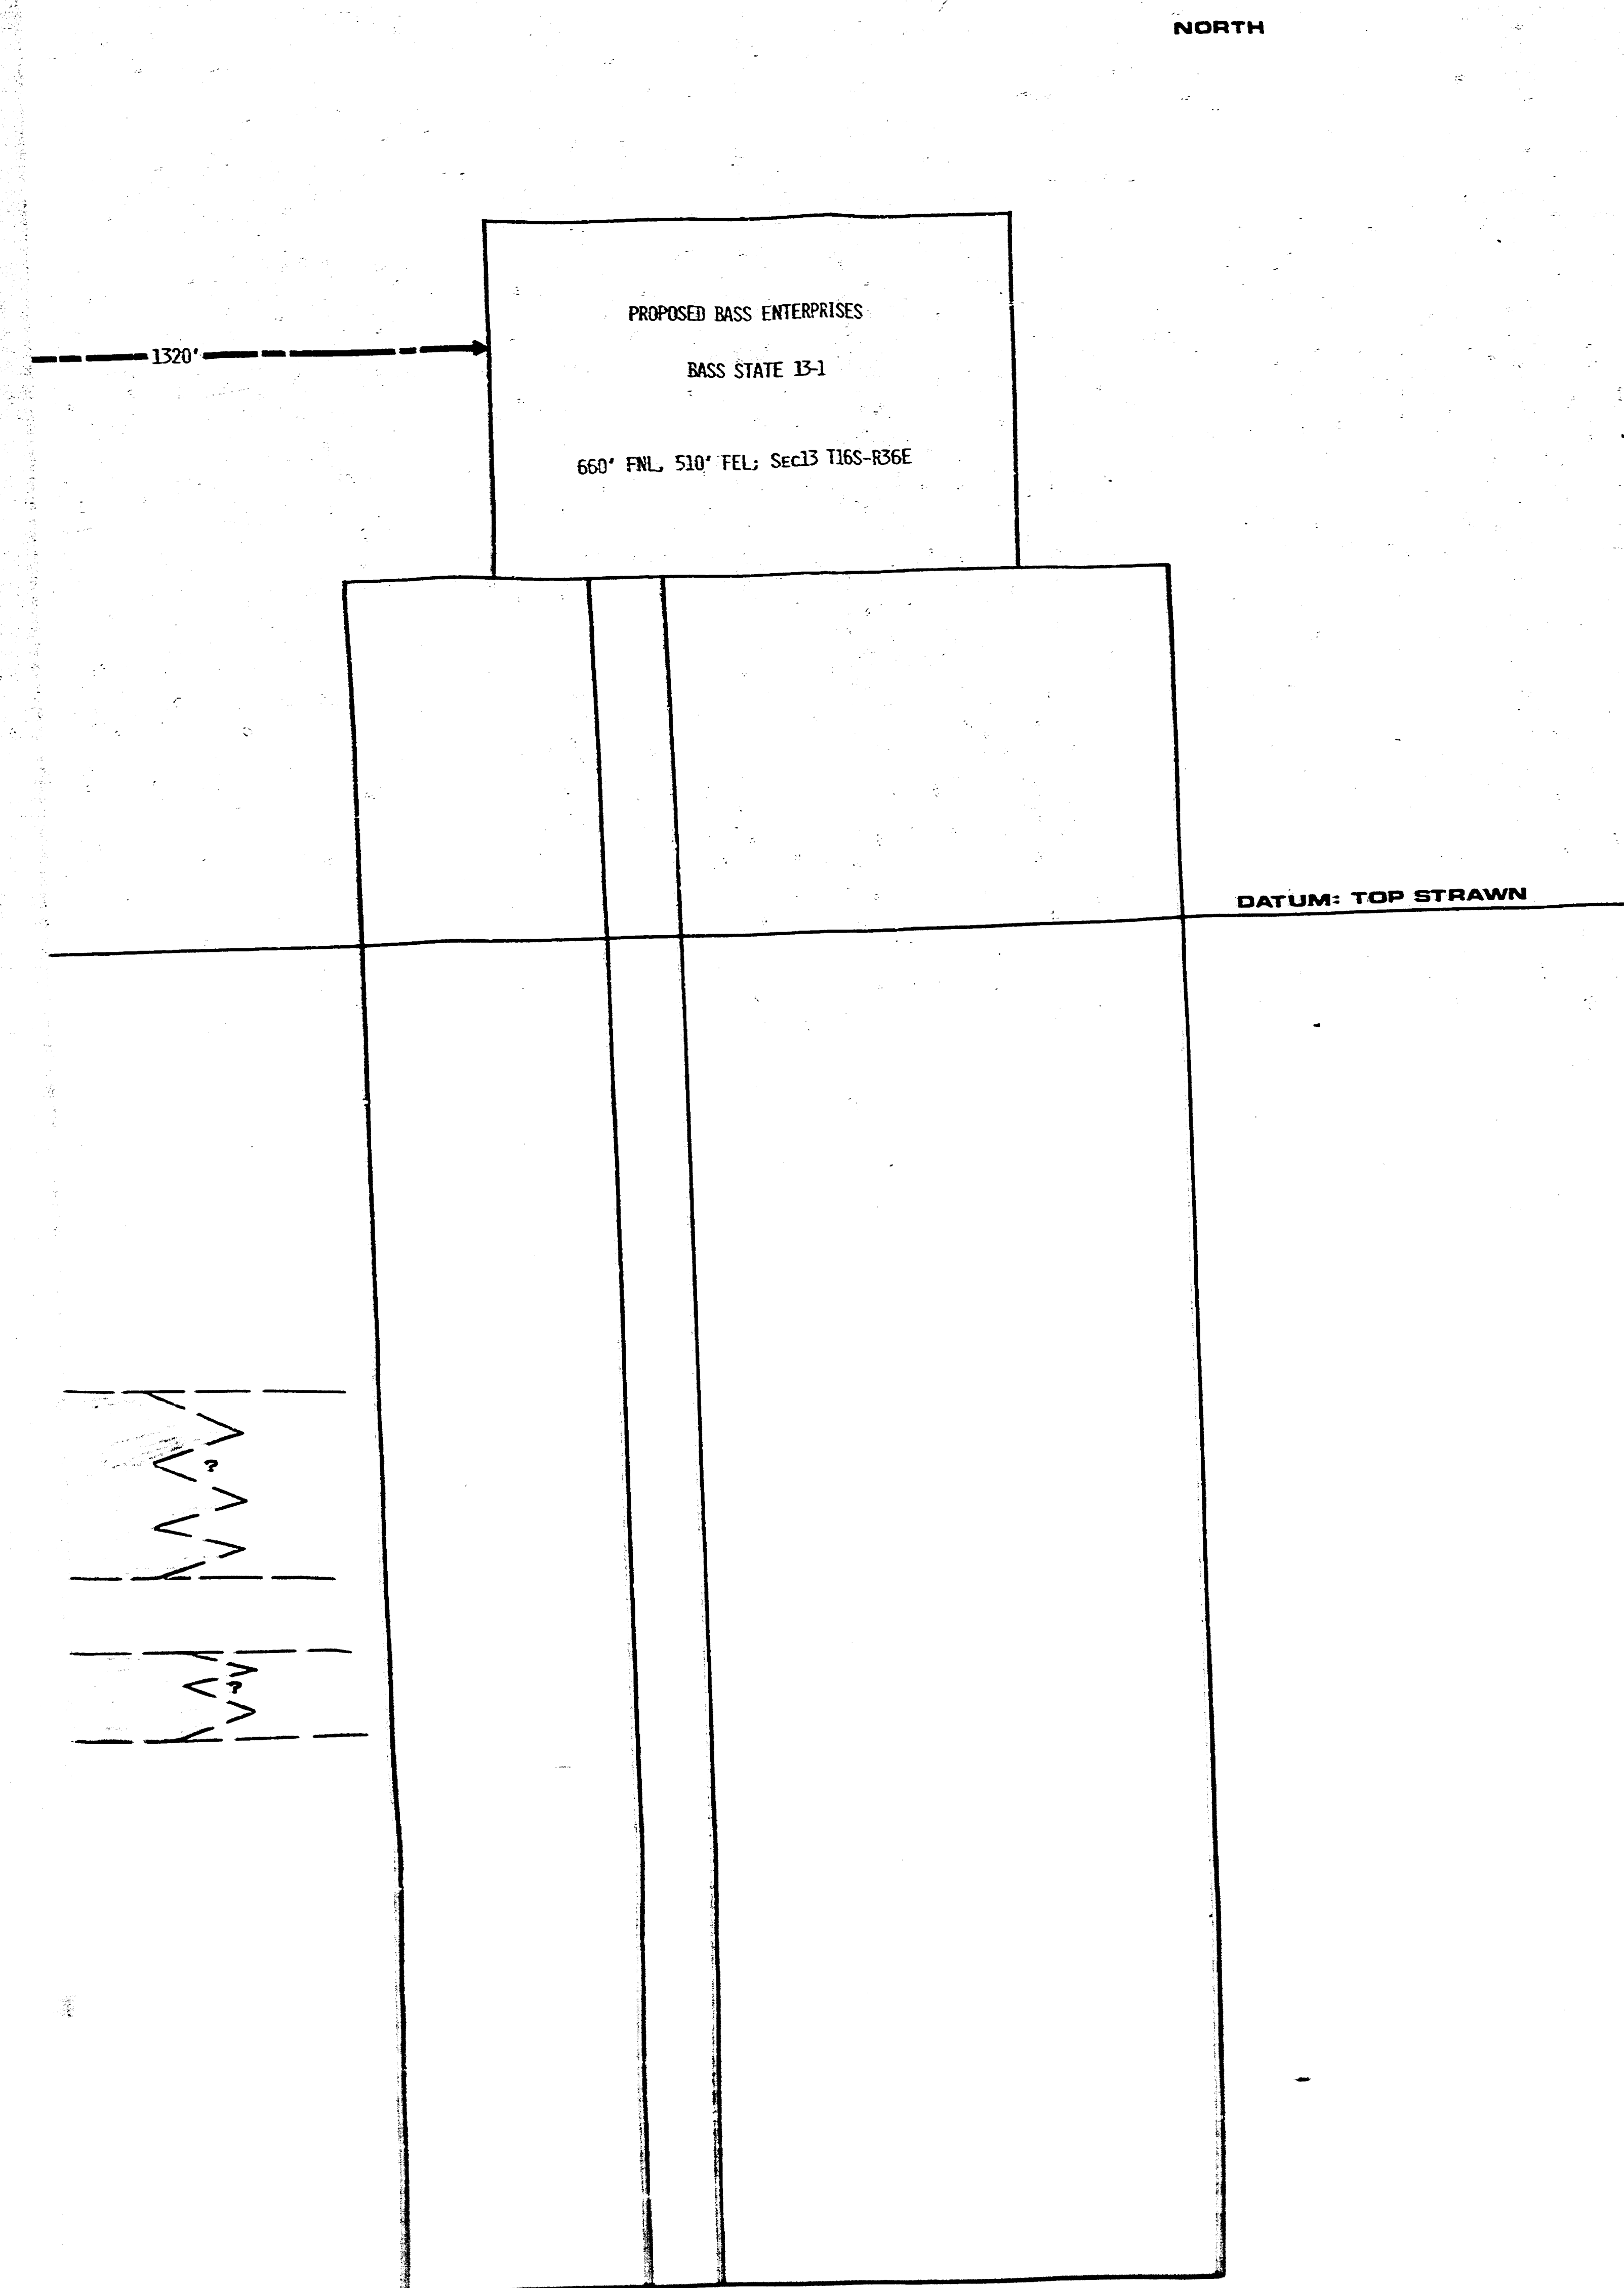




HYDROCARBON EFFECT ON CNL-FDC LOG WHERE SEPARATION EXCEED 2pu

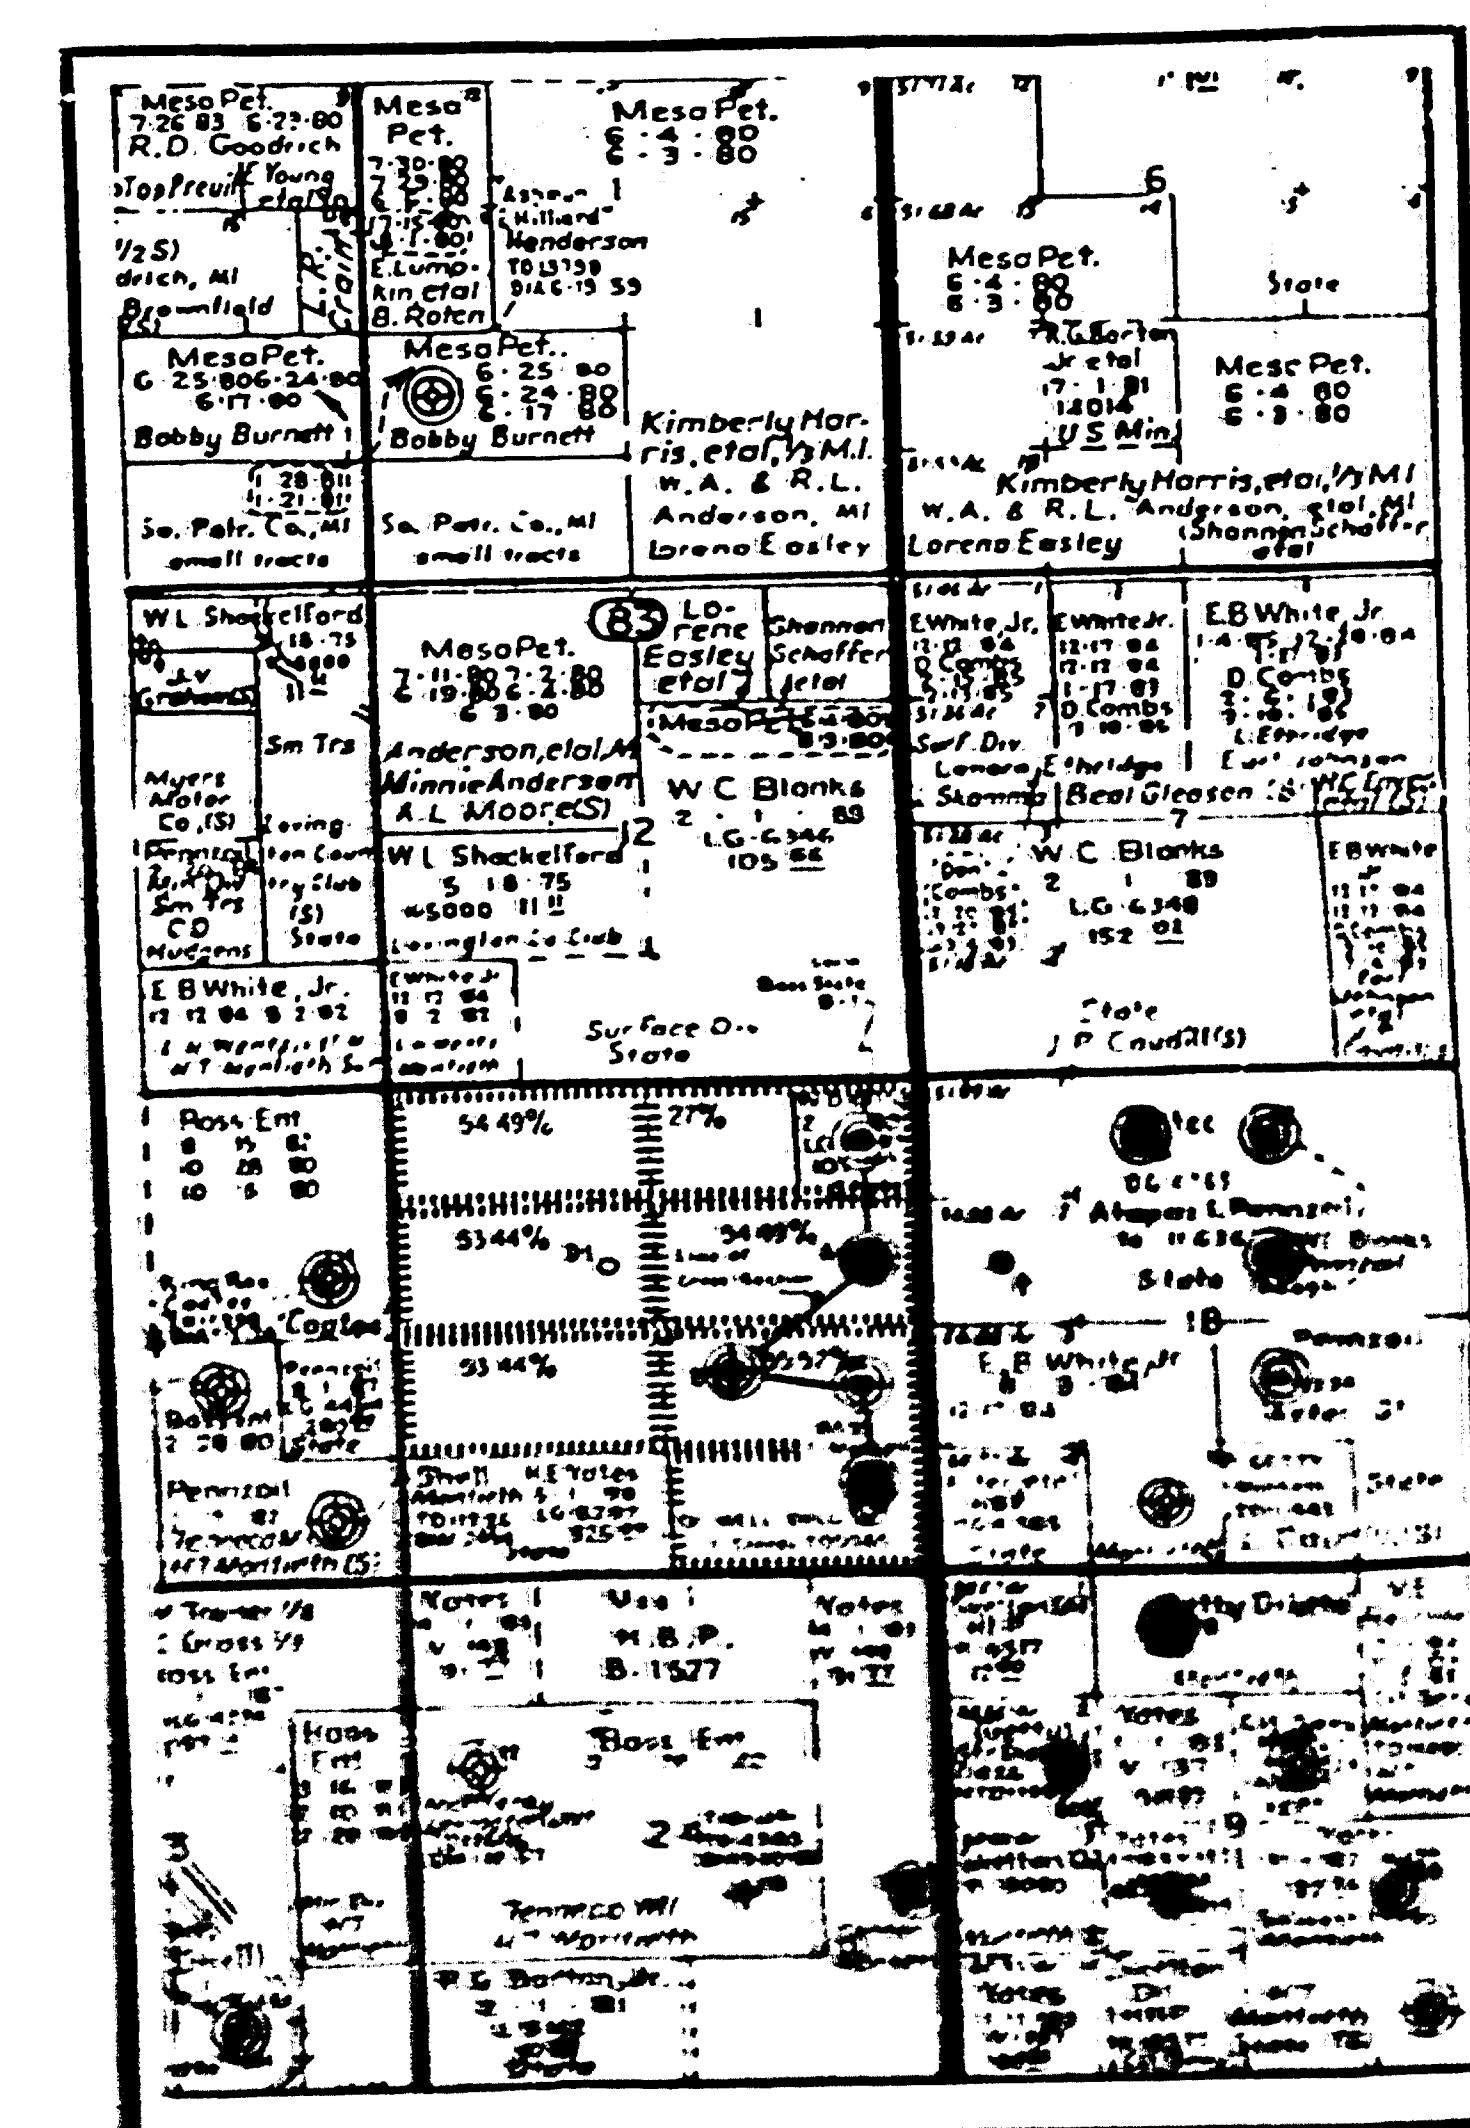


STRAWN NON-PRODUCING
STRAWN PRODUCING
CIP. PRODUCTION LESS THAN 20.000 BBL

BASS ENTERPRISES PRODUCTION CO.

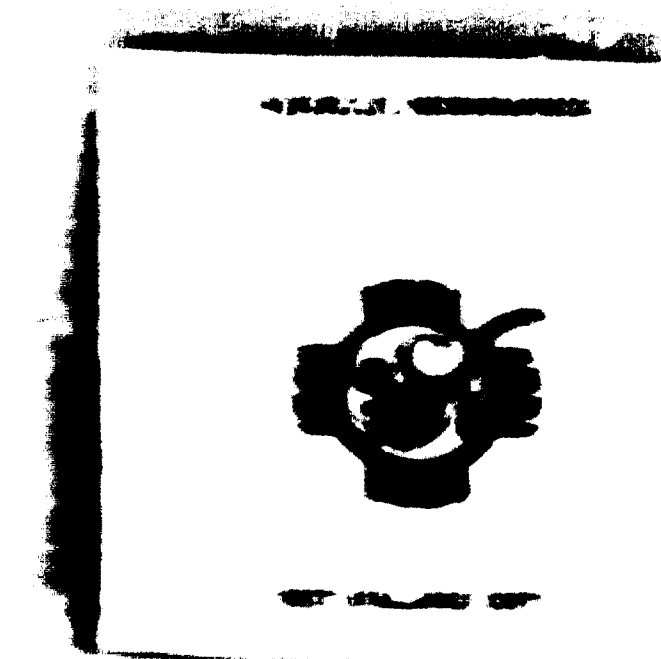


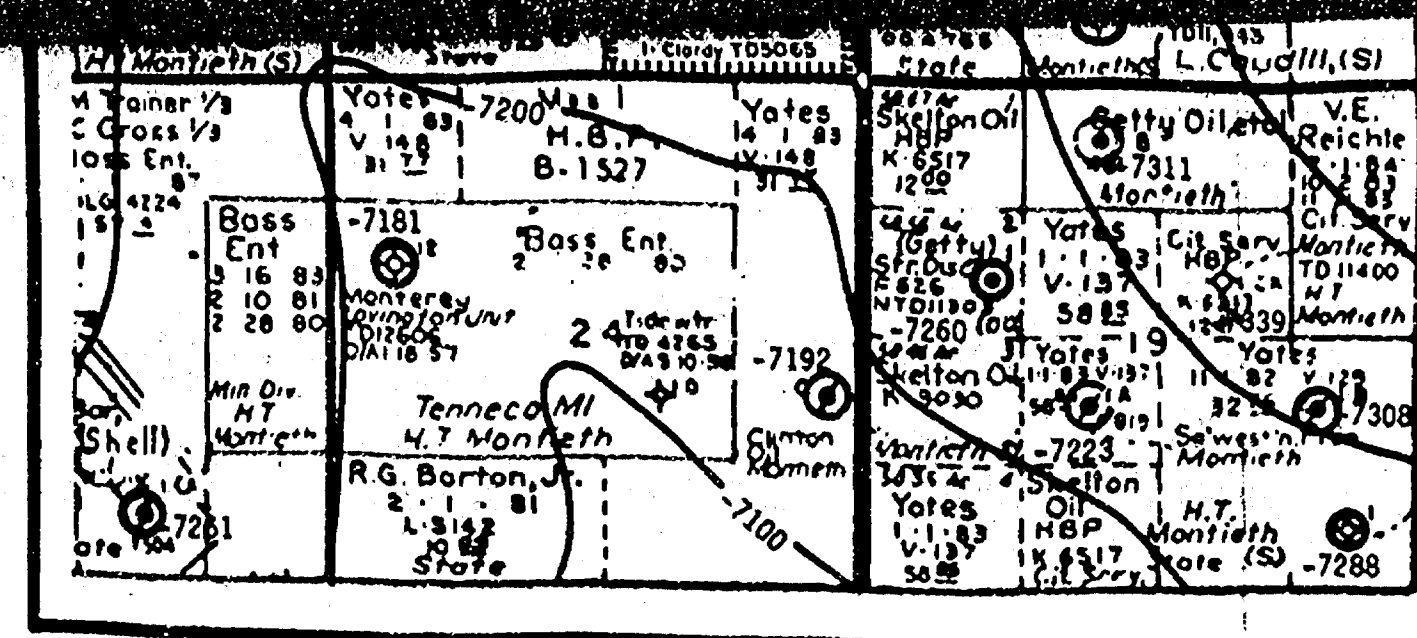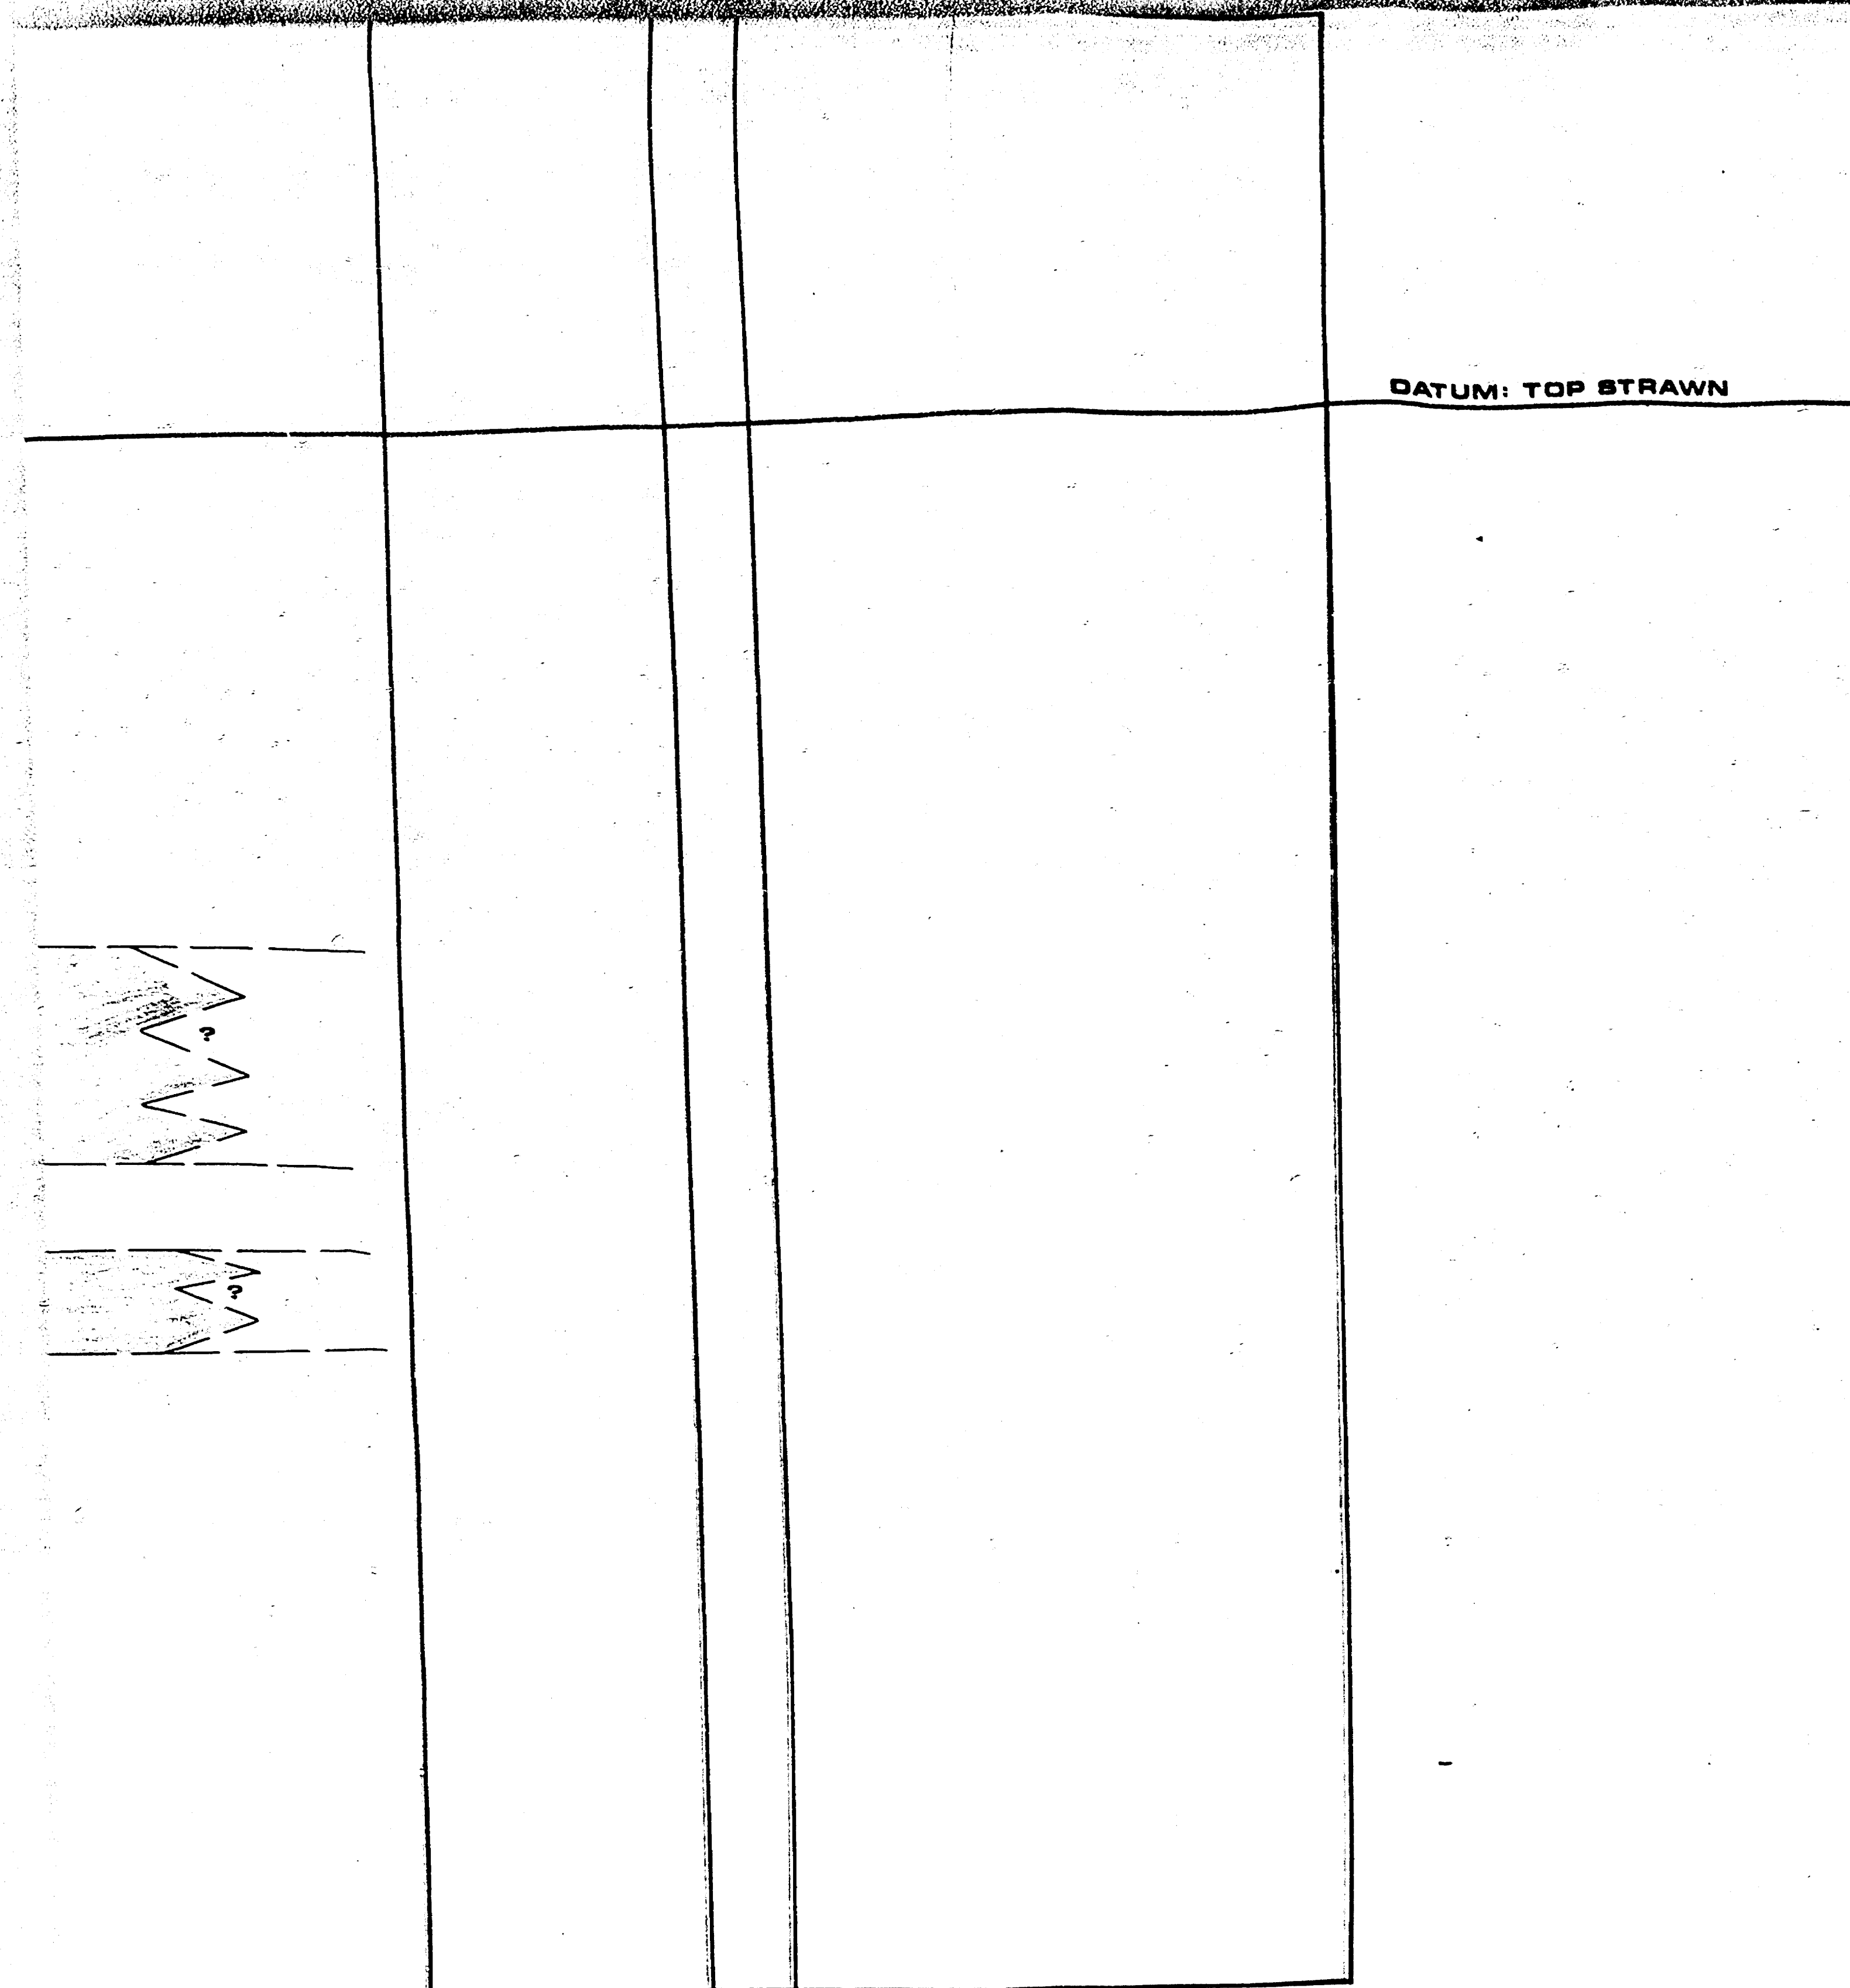

CONTOURED ON TOP STRAWN C.I.=100'



HYDROCARBON EFFECT ON CNL-FDC LOG WHERE SEPARATION EXCEED 2pu

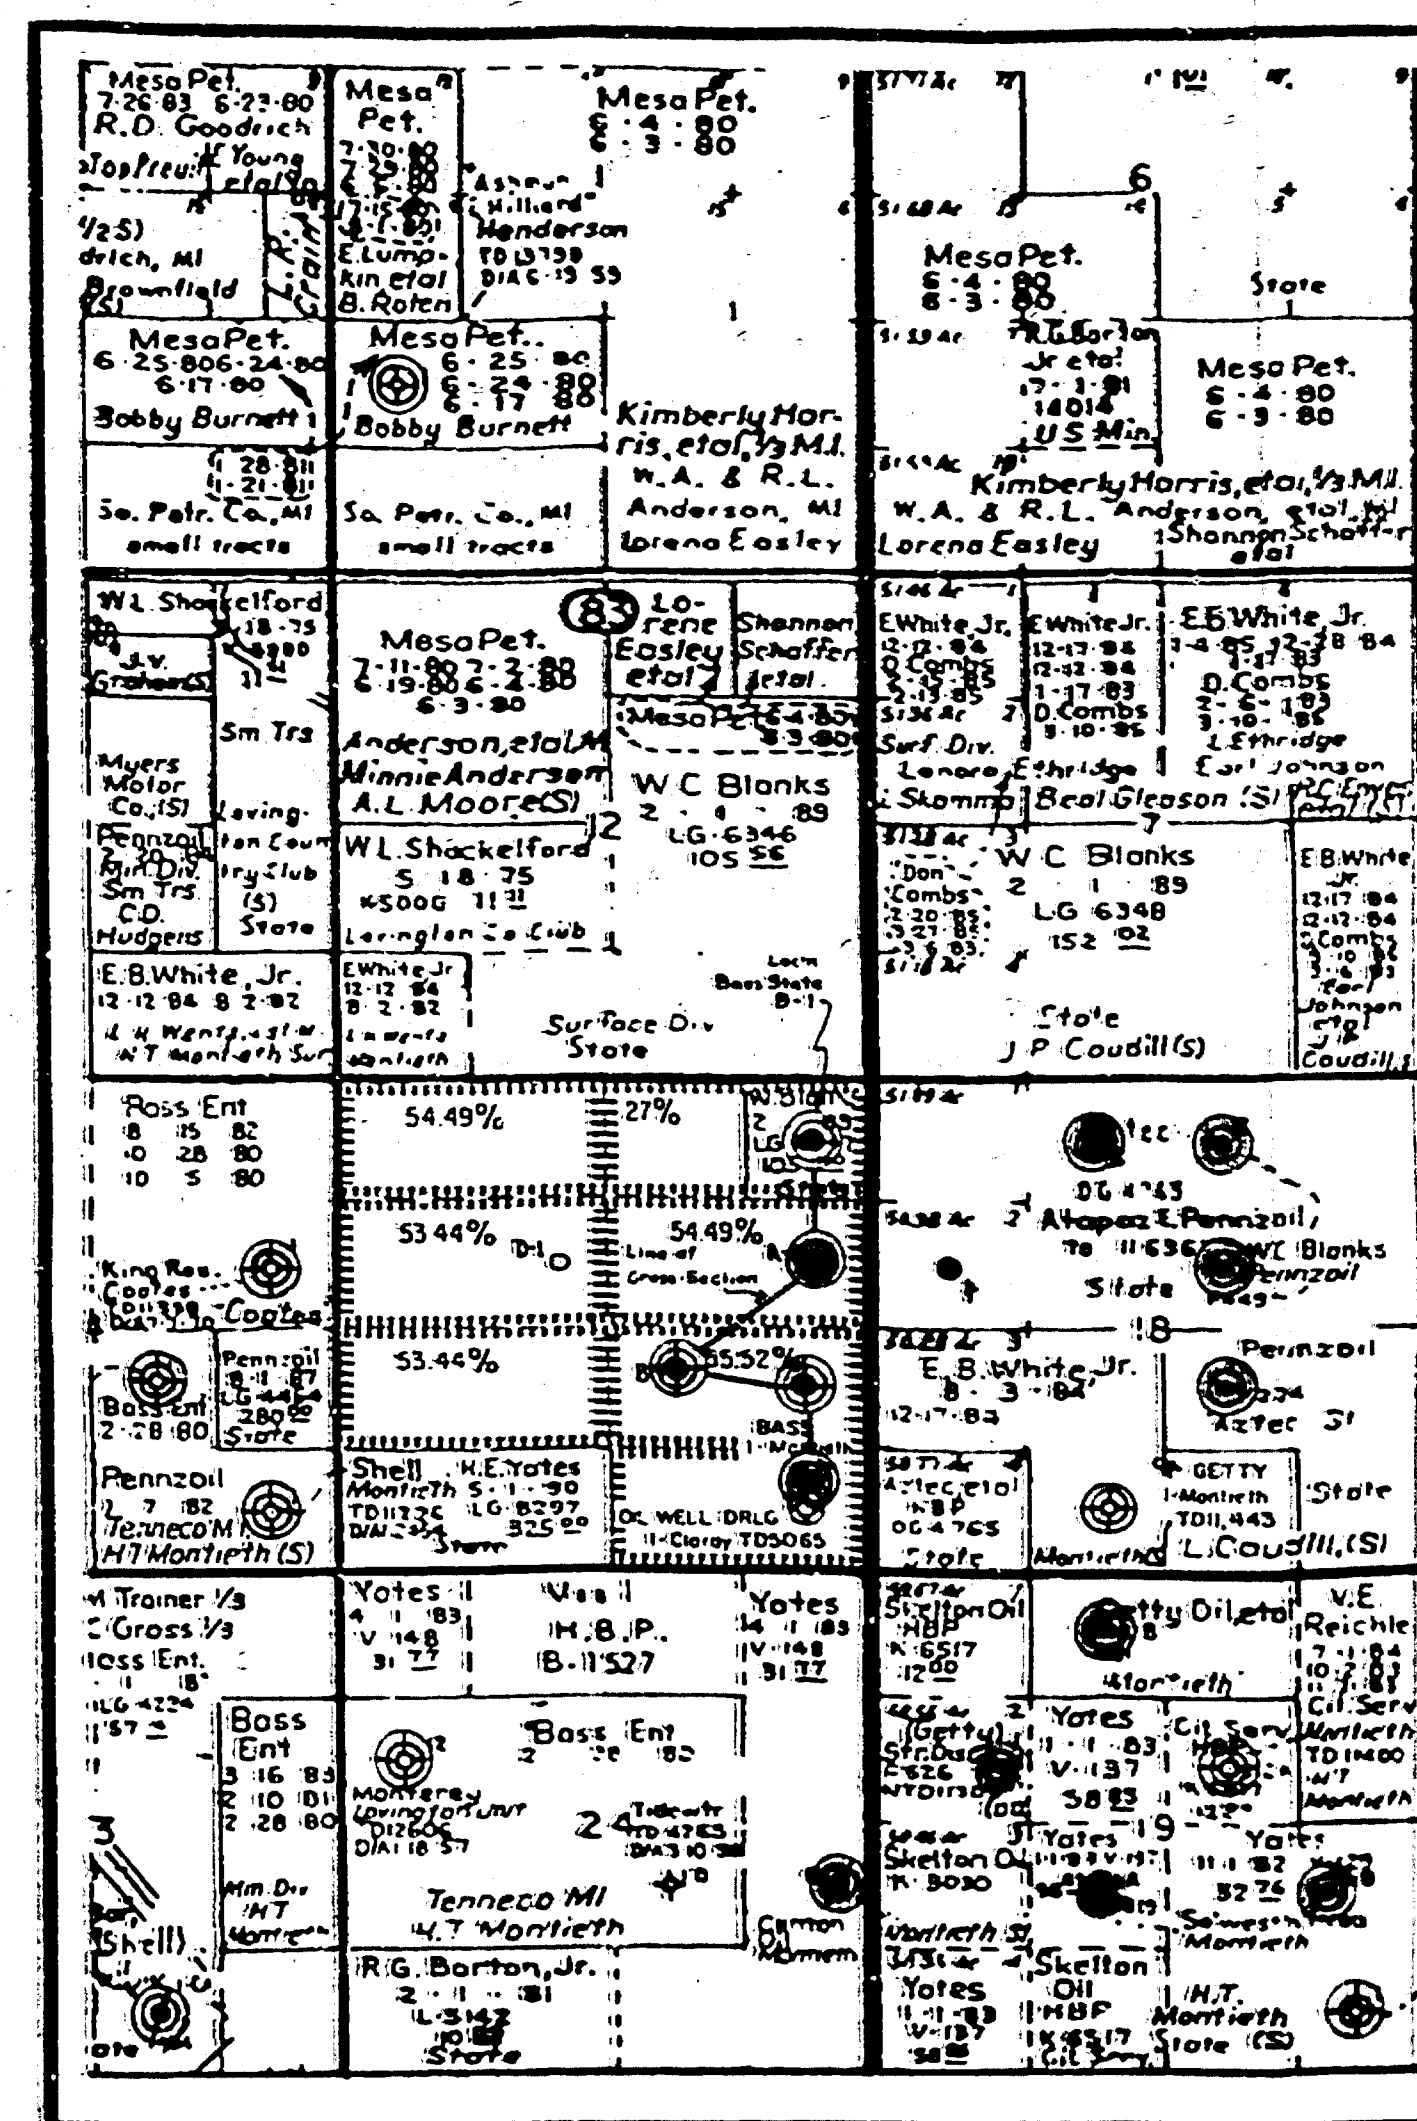

STRAWN NON-PRODUCTIVE

STRAWN PRODUCTIVE

CUM. PRODUCTION LESS THAN 20,000 BO

0 1 MILES

BEFORE THE
OIL CONSERVATION COMMISSION
Case No. 7345, State No. 4
Submitted by: Bass
Hearing Date: 12-16-61

BASS ENTERPRISES PRODUCTION CO.

MONTIETH AREA

T16S-R36E LEA COUNTY, N.M.

STRATIGRAPHIC CROSS-SECTION (DOWN TOP STRAWN)
TOP STRAWN STRUCTURE
DISTRIBUTION MAP ILLUSTRATING RESULTS OF STRAWN TESTS.

DOCKET: _____

Date: OCT 27 1961 By: ENGINEERING Prepared by: J.E.
Drawn by: G. HILLIS

