

I hereby certify that the information given above is true and complete to the best of my knowledge and belief. I further certify that the drilling pit will be constructed according to NMOCD guidelines ☐ , a general permit ☐ , or an (attached) alternative OCD-approved plan ☐ .		OIL CONSERVATION DIVISION	
		Approved By: Randy Dade	
Printed Name: Electronically filed by Randy Bolles		Title: District Supervisor	
Title:		Approved Date: 12/29/2010	Expiration Date: 12/29/2012
Email Address: randy.bolles@dvn.com			
Date: 12/27/2010	Phone: 405-228-8588	Conditions of Approval Attached	

District I
 1625 N. French Dr., Hobbs, NM 88240
 Phone:(505) 393-6161 Fax:(505) 393-0720

District II
 1301 W. Grand Ave., Artesia, NM 88210
 Phone:(505) 748-1283 Fax:(505) 748-9720

District III
 1000 Rio Brazos Rd., Aztec, NM 87410
 Phone:(505) 334-6178 Fax:(505) 334-6170

District IV
 1220 S. St Francis Dr., Santa Fe, NM 87505
 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form C-102
 Permit 124960

WELL LOCATION AND ACREAGE DEDICATION PLAT

1. API Number 30-015-38335	2. Pool Code 55510	3. Pool Name SCANLON DRAW;BONE SPRING
4. Property Code 38432	5. Property Name AGATE PWU 21	6. Well No. 001H
7. OGRID No. 6137	8. Operator Name DEVON ENERGY PRODUCTION COMPANY, LP	9. Elevation 3322


10. Surface Location

UL - Lot D	Section 21	Township 19S	Range 29E	Lot Idn	Feet From 575	N/S Line N	Feet From 330	E/W Line W	County EDDY
---------------	---------------	-----------------	--------------	---------	------------------	---------------	------------------	---------------	----------------

11. Bottom Hole Location If Different From Surface

UL - Lot A	Section 21	Township 19S	Range 29E	Lot Idn A	Feet From 400	N/S Line N	Feet From 330	E/W Line E	County EDDY
12. Dedicated Acres 160.00		13. Joint or Infill		14. Consolidation Code		15. Order No.			

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

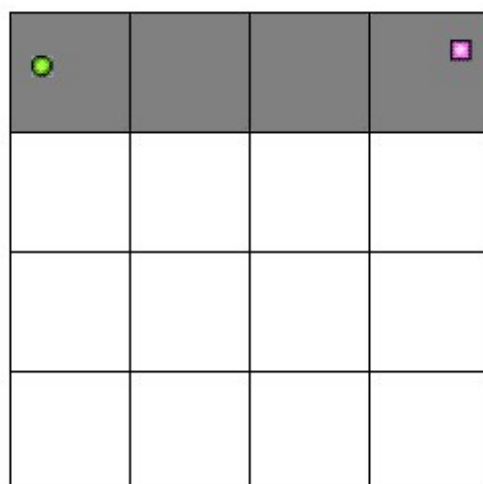

OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location(s) or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

E-Signed By: Randy Bolles

Title:

Date: 12/27/2010

SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

Surveyed By: Filmone Jaramillo

Date of Survey: 12/14/2010

Certificate Number: 12797

Permit Comments

Operator: DEVON ENERGY PRODUCTION COMPANY, LP , 6137

Well: AGATE PWU 21 #001H

API: 30-015-38335

Created By	Comment	Comment Date
YSASAS	The BOP system used to drill the intermediate hole will consist of a 13-5/8" 3M Triple Ram and Annular preventer. The BOP system will be tested as per BLM Onshore Oil and Gas Order No. 2 as a 3M system prior to drilling out the surface casing shoe. The BOP system used to drill the production hole will consist of a 13-5/8" 3M Triple Ram and Annular preventer. The BOP system will be tested as per BLM Onshore Oil and Gas Order No. 2 as a 3M system prior to drilling out the intermediate casing shoe. The pipe rams will be operated and checked each 24 hour period and each time the drill pipe	12/27/2010
YSASAS	BOP CONTINUED: is out of the hole. These tests will be logged in the daily driller's log. A 2" kill line and 3" choke line will be incorporated into the drilling spool below the ram BOP. In addition to the rams and annular preventer, additional BOP accessories include a kelly cock, floor safety valve, choke lines, and choke manifold rated at 3,000 psi WP.	12/27/2010
YSASAS	Depth to groundwater is 50' or more, but less than 100', distance to surface water is approximately 1000', well is not in a wellhead protection area.	12/27/2010
YSASAS	No H2S is expected to be encountered.	12/27/2010
YSASAS	C-102 to be mailed next day via Fed-Ex.	12/27/2010
Artesia	Land S/S	12/28/2010

Permit Conditions of Approval

Operator: DEVON ENERGY PRODUCTION COMPANY, LP , 6137

Well: AGATE PWU 21 #001H

API: 30-015-38335

OCD Reviewer	Condition
Artesia	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string