

**District I**  
1625 N. French Dr., Hobbs, NM 88240  
Phone:(575) 393-6161 Fax:(575) 393-0720  
**District II**  
811 S. First St., Artesia, NM 88210  
Phone:(575) 748-1283 Fax:(575) 748-9720  
**District III**  
1000 Rio Brazos Rd., Aztec, NM 87410  
Phone:(505) 334-6178 Fax:(505) 334-6170  
**District IV**  
1220 S. St Francis Dr., Santa Fe, NM 87505  
Phone:(505) 476-3470 Fax:(505) 476-3462

**State of New Mexico**  
**Energy, Minerals and Natural Resources**  
**Oil Conservation Division**  
**1220 S. St Francis Dr.**  
**Santa Fe, NM 87505**

Form C-101  
August 1, 2011  
Permit 152267

**APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE**

1. Operator Name and Address DEVON ENERGY PRODUCTION COMPANY, LP 333 W. Sheridan Avenue Oklahoma City, OK 73102		2. OGRID Number 6137
4. Property Code 38434		3. API Number 30-015-40506
5. Property Name TURQUOISE PWU 27		6. Well No. 002H

**7. Surface Location**

UL - Lot	Section	Township	Range	Lot Idn	Feet From	N/S Line	Feet From	E/W Line	County
H	27	19S	29E	H	1980	N	50	E	EDDY

**8. Pool Information**

PARKWAY;BONE SPRING	49622
---------------------	-------

**Additional Well Information**

9. Work Type New Well	10. Well Type OIL	11. Cable/Rotary	12. Lease Type State	13. Ground Level Elevation 3332
14. Multiple N	15. Proposed Depth 12839	16. Formation 2nd Bone Spring Sand	17. Contractor	18. Spud Date
Depth to Ground water		Distance from nearest fresh water well		Distance to nearest surface water

**19. Proposed Casing and Cement Program**

Type	Hole Size	Casing Type	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC
Surf	17.5	13.375	48	300	340	0
Int1	12.25	9.625	40	3400	1075	0
Prod	8.75	5.5	17	12839	1410	0
Prod	8.75	5.5	17	7400	875	2900

**Casing/Cement Program: Additional Comments**

13-3/8 Lead: w/340sx HalCem-C + 2% CaCl-Flake + 0.125#/sx Poly-EF Yld.1.35 cf/sx, FW 14.8 ppg. 9-5/8 Lead: w/780sx EconoCem-HLC + 5% Salt + 0.125#/sx Poly-EF Yld. 1.85 cf/sx, Brine 12.9 ppg. Tail: w/295sx HalCem-C + 0.125#/sx Poly-EF. Yld. 1.33 cf/sx, FW 14.8 ppg. 5-1/2 Lead: w/875sx EconoCem-HLH 0.125#/sx Poly-EF + 0.10% HR-601 Yd. 1.95f/sx, FW 125 ppg. Tail: w/1410 sx VersaCem-H 0.125#/sx Poly-EF + 0.10% HR-601 + 1#/sx Salt. Yld. 1.22 cf/sk, FW 14.5 ppg. TVD 8020

**Proposed Blowout Prevention Program**

Type	Working Pressure	Test Pressure	Manufacturer
Annular	3000	3000	
DoubleRam	3000	3000	

I hereby certify that the information given above is true and complete to the best of my knowledge and belief. I further certify that the drilling pit will be constructed according to NMOC guidelines <input type="checkbox"/> , a general permit <input type="checkbox"/> , or an (attached) alternative OCD-approved plan <input type="checkbox"/> .	<b>OIL CONSERVATION DIVISION</b>	
Printed Name: Electronically filed by Randy Bolles Title: Manager, Regulatory Affairs Email Address: randy.bolles@dmn.com Date: 7/19/2012	Approved By: Randy Dade Title: District Supervisor Approved Date: 7/23/2012    Expiration Date: 7/23/2014 Conditions of Approval Attached	

**District I**  
1625 N. French Dr., Hobbs, NM 88240  
Phone:(575) 393-6161 Fax:(575) 393-0720  
**District II**  
811 S. First St., Artesia, NM 88210  
Phone:(575) 748-1283 Fax:(575) 748-9720  
**District III**  
1000 Rio Brazos Rd., Aztec, NM 87410  
Phone:(505) 334-6178 Fax:(505) 334-6170  
**District IV**  
1220 S. St Francis Dr., Santa Fe, NM 87505  
Phone:(505) 476-3470 Fax:(505) 476-3462

**State of New Mexico**  
**Energy, Minerals and Natural Resources**  
**Oil Conservation Division**  
**1220 S. St Francis Dr.**  
**Santa Fe, NM 87505**

Form C-102  
August 1, 2011  
Permit 152267

**WELL LOCATION AND ACREAGE DEDICATION PLAT**

1. API Number 30-015-40506	2. Pool Code 49622	3. Pool Name PARKWAY;BONE SPRING
4. Property Code 38434	5. Property Name TURQUOISE PWU 27	6. Well No. 002H
7. OGRID No. 6137	8. Operator Name DEVON ENERGY PRODUCTION COMPANY, LP	9. Elevation 3332


**10. Surface Location**

UL - Lot H	Section 27	Township 19S	Range 29E	Lot Idn	Feet From 1980	N/S Line N	Feet From 50	E/W Line E	County EDDY
---------------	---------------	-----------------	--------------	---------	-------------------	---------------	-----------------	---------------	----------------

**11. Bottom Hole Location If Different From Surface**

11. Bottom Hole Location If Different From Surface									
UL - Lot E	Section 27	Township 19S	Range 29E	Lot Idn E	Feet From 2310	N/S Line N	Feet From 330	E/W Line W	County EDDY
12. Dedicated Acres 160.00		13. Joint or Infill		14. Consolidation Code			15. Order No.		

**NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION**

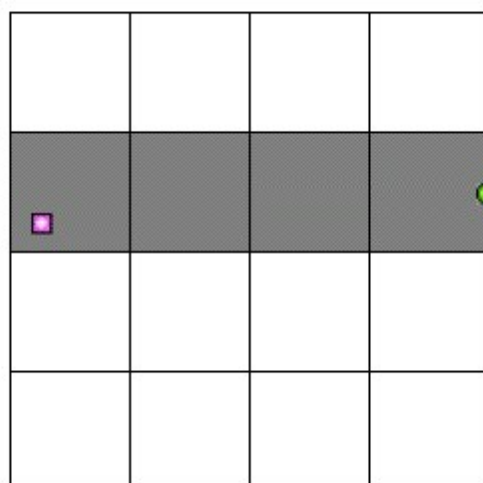

**OPERATOR CERTIFICATION**

*I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location(s) or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.*

E-Signed By: Randy Bolles  
Title: Manager, Regulatory Affairs  
Date: 7/19/2012

**SURVEYOR CERTIFICATION**

*I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.*

Surveyed By: Filimon Jaramillo  
Date of Survey: 5/4/2012  
Certificate Number: 12797



## Permit Comments

**Operator:** DEVON ENERGY PRODUCTION COMPANY, LP , 6137

**Well:** TURQUOISE PWU 27 #002H

**API:** 30-015-40506

Created By	Comment	Comment Date
morawford	The BOP system used to drill the intermediate and production holes will consist of a 13-5/8" 3M Triple Ram and Annular preventer. The BOP system will be tested as per BLM Onshore Oil and Gas Order No. 2 as a 3M system prior to drilling out the prior casing shoe.	7/19/2012
morawford	The pipe rams will be operated and checked each 24 hour period and each time the drill pipe is out of the hole. These tests will be logged in the daily driller's log. A 2" kill line and 3" choke line will be incorporated into the drilling spool below the ram BOP. In addition to the rams and annular preventer, additional BOP accessories include a kelly cock, floor safety valve, choke lines, and choke manifold rated at 3,000 psi WP.	7/19/2012
morawford	Devon requests a variance to use a flexible line with flanged ends between the BOP and the choke manifold (choke line). The line will be kept as straight as possible with minimal turns.	7/19/2012
morawford	No H2S is anticipated to be encountered.	7/19/2012
barnettj	Mud: 0-300' fresh, 8.4-9.0, 28-34, N/C water loss. 300-3,400' brine, 9.8-10.2, 28-32, N/C water loss, 3,400-12,839' fresh, 8.6-9.0, 28-32, N/C-12 water loss.	7/19/2012
CSHAPARD	Land s/S	7/23/2012

## Permit Conditions of Approval

**Operator:** DEVON ENERGY PRODUCTION COMPANY, LP , 6137

**Well:** TURQUOISE PWU 27 #002H

**API:** 30-015-40506

OCD Reviewer	Condition
CSHAPARD	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string