

Form 3160-3
(June 2015)

FORM APPROVED
OMB No. 1004-0137
Expires: January 31, 2018

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. NMNM0001244A
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other		6. If Indian, Allottee or Tribe Name
1c. Type of Completion: <input type="checkbox"/> Hydraulic Fracturing <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		7. If Unit or CA Agreement, Name and No. BELL LAKE / NMNM068292X
2. Name of Operator KAISER FRANCIS OIL COMPANY [12361]		8. Lease Name and Well No. BELL LAKE UNIT NORTH 331H
3a. Address 6733 S. Yale Ave. Tulsa OK 74121	3b. Phone No. (include area code) (918)491-0000	9. API Well No. 30-025-48866
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface NWSW / 1991 FSL / 404 FWL / LAT 32.3318542 / LONG -103.499404 At proposed prod. zone NWNW / 330 FNL / 350 FWL / LAT 32.3545135 / LONG -103.4995516		10. Field and Pool, or Exploratory [98259] OJO CHISO / WOLFCAMP, SOUTHWES
14. Distance in miles and direction from nearest town or post office* 20 miles		11. Sec., T. R. M. or Blk. and Survey or Area SEC 5 / T23S / R34E / NMP
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 404 feet		12. County or Parish LEA
16. No of acres in lease 480		13. State NM
17. Spacing Unit dedicated to this well 480		
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 30 feet		20. BLM/BIA Bond No. in file FED: WYB000055
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 3443 feet		22. Approximate date work will start* 09/01/2019
		23. Estimated duration 40 days
24. Attachments		

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

- | | |
|--|---|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification. |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be requested by the BLM. |

25. Signature (Electronic Submission)	Name (Printed/Typed)	Date
Title		06/17/2019
Approved by (Signature) (Electronic Submission)	Name (Printed/Typed)	Date
Title	Cody Layton / Ph: (575)234-5959	04/16/2021
Assistant Field Manager Lands & Minerals	Office	
	CARLSBAD	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

GCP Rec 04/22/2021

SL

(Continued on page 2)



KZ
05/13/2021

*(Instructions on page 2)

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME:	KAISER FRANCIS OIL COMPANY
LEASE NO.:	NMNM 0001244A
WELL NAME & NO.:	BELL LAKE UNIT NORTH 331H
SURFACE HOLE FOOTAGE:	1991'S & 404'/W
BOTTOM HOLE FOOTAGE:	330'/N & 350'/W
LOCATION:	Section 5, T.23 S., R.34 E., NMPM
COUNTY:	Lea County, New Mexico

COA

H2S	<input type="radio"/> Yes	<input checked="" type="radio"/> No	
Potash	<input checked="" type="radio"/> None	<input type="radio"/> Secretary	<input type="radio"/> R-111-P
Cave/Karst Potential	<input checked="" type="radio"/> Low	<input type="radio"/> Medium	<input type="radio"/> High
Cave/Karst Potential	<input type="radio"/> Critical		
Variance	<input type="radio"/> None	<input checked="" type="radio"/> Flex Hose	<input type="radio"/> Other
Wellhead	<input type="radio"/> Conventional	<input checked="" type="radio"/> Multibowl	<input type="radio"/> Both
Other	<input type="checkbox"/> 4 String Area	<input type="checkbox"/> Capitan Reef	<input type="checkbox"/> WIPP
Other	<input type="checkbox"/> Fluid Filled	<input type="checkbox"/> Cement Squeeze	<input type="checkbox"/> Pilot Hole
Special Requirements	<input type="checkbox"/> Water Disposal	<input type="checkbox"/> COM	<input checked="" type="checkbox"/> Unit

A. HYDROGEN SULFIDE

Hydrogen Sulfide (H2S) monitors shall be installed prior to drilling out the surface shoe. If H2S is detected in concentrations greater than 100 ppm, the Hydrogen Sulfide area shall meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, provide measured values and formations to the BLM.

B. CASING

1. The **10-3/4** inch surface casing shall be set at approximately **1515 feet** (a minimum of 25 feet (Lea County) into the Rustler Anhydrite and above the salt) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8**

hours or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)

- c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.
 - e. Excess cement calculates to less than 25% ; More cement may be needed.
2. The **7-5/8** inch intermediate casing shall be set at **10550 feet**. The minimum required fill of cement behind the **7-5/8** inch intermediate casing is:

Option 1 (Single Stage):

- Cement to surface. If cement does not circulate see B.1.a, c-d above. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.**
- Excess cement calculates to less than 25% ; More cement may be needed.

3. The minimum required fill of cement behind the **5-1/2** inch production casing is:

Option 1 (Single Stage):

- Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.

C. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).

2. BOP Requirements

Option 1

- a. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **3000 (3M)** psi.

- b. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the intermediate casing shoe shall be **5000 (5M)** psi.

Option 2

Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **10,000 (10M)** psi. . **Variance is approved to use a 5000 (5M) Annular which shall be tested to 5000 (5M) psi.**

- a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
- b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
- c. Manufacturer representative shall install the test plug for the initial BOP test.
- d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
- e. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.

D. SPECIAL REQUIREMENT (S)

Unit Wells

The well sign for a unit well shall include the unit number in addition to the surface and bottom hole lease numbers. This also applies to participating area numbers. If a participating area has not been established, the operator can use the general unit designation, but will replace the unit number with the participating area number when the sign is replaced.

Commercial Well Determination

A commercial well determination shall be submitted after production has been established for at least six months. (This is not necessary for secondary recovery unit wells)

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

Eddy County

Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,
(575) 361-2822

Lea County

Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (575)
393-3612

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per Onshore Oil and Gas Order No. 2 as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on

which the draw works are located, this does not include the dog house or stairway area.

3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.

7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.

5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
 - b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the plug. However, **no tests** shall commence until the cement has had a minimum of 24 hours setup time, except the casing pressure test can be initiated immediately after bumping the plug (only applies to single stage cement jobs).
 - c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
 - d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
 - e. The results of the test shall be reported to the appropriate BLM office.
 - f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
 - g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to

the test at full stack pressure.

- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

RI01192021



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Application Data Report

04/19/2021

APD ID: 10400042505

Submission Date: 06/17/2019

Highlighted data
reflects the most
recent changes

Operator Name: KAISER FRANCIS OIL COMPANY

Well Name: BELL LAKE UNIT NORTH

Well Number: 331H

[Show Final Text](#)

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - General

APD ID: 10400042505

Tie to previous NOS?

Submission Date: 06/17/2019

BLM Office: CARLSBAD

User: Stormi Davis

Title: Regulatory Analyst

Federal/Indian APD: FED

Is the first lease penetrated for production Federal or Indian? FED

Lease number: NMNM0001244A

Lease Acres:

Surface access agreement in place?

Allotted?

Reservation:

Agreement in place? YES

Federal or Indian agreement: FEDERAL

Agreement number: NMNM068292X

Agreement name: BELL LAKE

Keep application confidential? YES

Permitting Agent? NO

APD Operator: KAISER FRANCIS OIL COMPANY

Operator letter of designation:

Operator Info

Operator Organization Name: KAISER FRANCIS OIL COMPANY

Operator Address: 6733 S. Yale Ave.

Zip: 74121

Operator PO Box: PO Box 21468

Operator City: Tulsa

State: OK

Operator Phone: (918)491-0000

Operator Internet Address:

Section 2 - Well Information

Well in Master Development Plan? NO

Master Development Plan name:

Well in Master SUPO? NO

Master SUPO name:

Well in Master Drilling Plan? NO

Master Drilling Plan name:

Well Name: BELL LAKE UNIT NORTH

Well Number: 331H

Well API Number:

Field/Pool or Exploratory? Field and Pool

Field Name: OJO CHISO

Pool Name: WOLFCAMP,
SOUTHWEST

Is the proposed well in an area containing other mineral resources? NATURAL GAS,OIL

Operator Name: KAISER FRANCIS OIL COMPANY

Well Name: BELL LAKE UNIT NORTH

Well Number: 331H

Is the proposed well in an area containing other mineral resources? NATURAL GAS,OIL

Is the proposed well in a Helium production area? N **Use Existing Well Pad?** NO **New surface disturbance?**

Type of Well Pad: MULTIPLE WELL

Multiple Well Pad Name:
NORTH BELL LAKE UNIT

Number: 13

Well Class: HORIZONTAL

Number of Legs: 1

Well Work Type: Drill

Well Type: OIL WELL

Describe Well Type:

Well sub-Type: EXPLORATORY (WILDCAT)

Describe sub-type:

Distance to town: 20 Miles

Distance to nearest well: 30 FT

Distance to lease line: 404 FT

Reservoir well spacing assigned acres Measurement: 480 Acres

Well plat: BLUN_331H_C102_20190604144454.pdf

Pay.gov_20190617084931.pdf

Well work start Date: 09/01/2019

Duration: 40 DAYS

Section 3 - Well Location Table

Survey Type: RECTANGULAR

Describe Survey Type:

Datum: NAD83

Vertical Datum: NAVD88

Survey number: 6991

Reference Datum:

Wellbore	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD	Will this well produce from this lease?
SHL Leg #1	199	FSL	404	FW L	23S	34E	5	Aliquot NWS W	32.3318542	-103.499404	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 0587	3443	0	0	
KOP Leg #1	199	FSL	404	FW L	23S	34E	5	Aliquot NWS W	32.3318542	-103.499404	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 0587	-7151	10594	10594	

Operator Name: KAISER FRANCIS OIL COMPANY

Well Name: BELL LAKE UNIT NORTH

Well Number: 331H

Wellbore	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD	Will this well produce from this lease?
PPP Leg #1-1	260	FNL	470	FWL	23S	34E	5	Aliquot SWNW	32.333759	-103.4991902	LEA	NEW MEXICO	NEW MEXICO	F	NMNM 01244A	-774.8	116.49	111.91	
PPP Leg #1-2	0	FSL	400	FWL	22S	34E	32	Aliquot SWSW	32.340797	-103.4993348	LEA	NEW MEXICO	NEW MEXICO	S	STATE	-774.8	142.49	111.91	
EXIT Leg #1	330	FNL	350	FWL	22S	34E	32	Aliquot NWNW	32.3545135	-103.4995516	LEA	NEW MEXICO	NEW MEXICO	S	STATE	-774.8	191.93	111.91	
BHL Leg #1	330	FNL	350	FWL	22S	34E	32	Aliquot NWNW	32.3545135	-103.4995516	LEA	NEW MEXICO	NEW MEXICO	S	STATE	-774.8	191.93	111.91	



Melanie Wilson <nmogrservices@gmail.com>

Pay.gov Payment Confirmation: BLM Oil and Gas Online Payment

1 message

notification@pay.gov <notification@pay.gov>
To: nmogrservices@gmail.com

Mon, Jun 17, 2019 at 8:47 AM



An official email of the United States government



Your payment has been submitted to Pay.gov and the details are below. If you have any questions regarding this payment, please contact BLM OC CBS Customer Service at (303) 236-6795 or BLM_OC_CBS_Customer_Service@blm.gov.

Application Name: BLM Oil and Gas Online Payment
Pay.gov Tracking ID: 2616NAEJ
Agency Tracking ID: 75773030146
Transaction Type: Sale
Transaction Date: 06/17/2019 10:47:22 AM EDT
Account Holder Name: George B Kaiser
Transaction Amount: \$10,050.00
Card Type: Visa
Card Number: *****0061

Company: Kaiser-Francis Oil Company
APD IDs: 10400042505
Lease Numbers: NMNM0000587
Well Numbers: 331H

Note: You will need your Pay.gov Tracking ID to complete your APD transaction in AFMSS II. Please ensure you write this number down upon completion of payment.

THIS IS AN AUTOMATED MESSAGE. PLEASE DO NOT REPLY.



Pay.gov is a program of the U.S. Department of the Treasury, Bureau of the Fiscal Service



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Drilling Plan Data Report

04/19/2021

APD ID: 10400042505

Submission Date: 06/17/2019

Highlighted data
reflects the most
recent changes

Operator Name: KAISER FRANCIS OIL COMPANY

Well Name: BELL LAKE UNIT NORTH

Well Number: 331H

[Show Final Text](#)

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - Geologic Formations

Formation ID	Formation Name	Elevation	True Vertical Depth	Measured Depth	Lithologies	Mineral Resources	Producing Formation
470992	---	3443	0	0		NONE	N
470993	RUSTLER	2261	1182	1182		NONE	N
470994	SALADO	1871	1572	1572		NONE	N
470995	TOP SALT	1671	1772	1772		NONE	N
470996	BASE OF SALT	-1279	4722	4722		NONE	N
470997	LAMAR	-1479	4922	4922		NATURAL GAS, OIL	N
470998	BELL CANYON	-1729	5172	5172		NATURAL GAS, OIL	N
470999	CHERRY CANYON	-2629	6072	6072		NATURAL GAS, OIL	N
471000	BRUSHY CANYON	-4029	7472	7472		NATURAL GAS, OIL	N
471001	BONE SPRING	-5129	8572	8572		NATURAL GAS, OIL	N
471002	AVALON SAND	-5174	8617	8617		NATURAL GAS, OIL	N
471003	BONE SPRING 1ST	-6079	9522	9522		NATURAL GAS, OIL	N
471004	BONE SPRING 2ND	-6589	10032	10032		NATURAL GAS, OIL	N
471034	BONE SPRING LIME	-7079	10522	10522		NATURAL GAS, OIL	N
471035	BONE SPRING 3RD	-7527	10970	10970		NATURAL GAS, OIL	Y

Section 2 - Blowout Prevention

Operator Name: KAISER FRANCIS OIL COMPANY**Well Name:** BELL LAKE UNIT NORTH**Well Number:** 331H**Pressure Rating (PSI):** 10M**Rating Depth:** 18000

Equipment: A 10M system will be installed according to Onshore Order #2 consisting of an Annular Preventer, BOP with two rams and a blind ram. BOP will be equipped with 2 side outlets (choke side shall be a minimum 3" line, and kill side will be a minimum 2" line). Kill line will be installed with (2) valves and a check valve (2" min) of proper pressure rating for the system. Remote kill line (2' min) will be installed and ran to the outer edge of the substructure and be unobstructed. A manual and hydraulic valve (3" min) will be installed on the choke line, 3 chokes will be used with one being remotely controlled. Fill up line will be installed above the uppermost preventer. Pressure gauge of proper pressure rating will be installed on choke manifold. Upper and lower kelly cocks will be utilized with handles readily available in plain sight. A float sub will be available at all times. All connections subject to well pressure will be flanged, welded, or clamped.

Requesting Variance? YES**Variance request:** Flex Hose Variance

Testing Procedure: BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all of the components installed will be functional and tested.

Choke Diagram Attachment:

BLUN_331H_Choke_Manifold_20190604135618.pdf

BOP Diagram Attachment:

BLUN_331H_Multi_Bowl_Wellhead_20191112122518.pdf

BLUN_331H_FlexHose_20191112122554.pdf

BLUN_331H_BOP_20191112123630.pdf

Section 3 - Casing

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	14.75	10.75	NEW	API	N	0	910	0	910			910	J-55	40.5	ST&C	3.7	7.3	DRY	11.4	DRY	17.1
2	INTERMEDIATE	9.875	7.625	NEW	API	N	0	10550	0	10550			10550	HCP-110	29.7	LT&C	1.4	1.9	DRY	2.5	DRY	3
3	PRODUCTION	6.75	5.5	NEW	API	N	0	19190	0	11191			19190	P-110	20	OTHER - Eagle SF	1.9	2.1	DRY	2.8	DRY	3.3

Casing Attachments

Operator Name: KAISER FRANCIS OIL COMPANY

Well Name: BELL LAKE UNIT NORTH

Well Number: 331H

Casing Attachments

Casing ID: 1 **String Type:** SURFACE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

BLUN_331H_Casing_Assumptions_20190604140130.pdf

Casing ID: 2 **String Type:** INTERMEDIATE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

BLUN_331H_Casing_Assumptions_20190604140402.pdf

Casing ID: 3 **String Type:** PRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

BLUN_331H_Casing_Assumptions_20190604140535.pdf

5.5_x_20_P110_HP_USS_EAGLE_SFH_Performance_Sheet_20190604140620.pdf

Section 4 - Cement

Operator Name: KAISER FRANCIS OIL COMPANY

Well Name: BELL LAKE UNIT NORTH

Well Number: 331H

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead		0	910	577	1.74	13.5	1006	50	Halcem	Cemex Premium Plus C

INTERMEDIATE	Lead		0	1055 0	821	2.77	11	2277	15	Premium C	Extender
INTERMEDIATE	Tail		0	1055 0	437	1.23	15.6	537	15	Halcem	Cemex Premium H
PRODUCTION	Lead		1000 0	1919 0	769	1.22	14.5	940	15	Econocem	5% Salt

Section 5 - Circulating Medium

Mud System Type: Closed

Will an air or gas system be Used? NO

Description of the equipment for the circulating system in accordance with Onshore Order #2:

Diagram of the equipment for the circulating system in accordance with Onshore Order #2:

Describe what will be on location to control well or mitigate other conditions: Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times

Describe the mud monitoring system utilized: PVT/Pason/Visual Monitoring

Circulating Medium Table

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	PH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
1055 0	1119 1	OIL-BASED MUD	10	12							
910	1055 0	OTHER : Diesel- Brine Emulsion	8.8	9.2							
0	910	OTHER : Fresh Water	8.4	9							

Operator Name: KAISER FRANCIS OIL COMPANY

Well Name: BELL LAKE UNIT NORTH

Well Number: 331H

Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

Top of cement on production casing will be determined by calculation.

List of open and cased hole logs run in the well:

DS,GR,MUDLOG

Coring operation description for the well:

None planned

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 6983

Anticipated Surface Pressure: 4520.97

Anticipated Bottom Hole Temperature(F): 199

Anticipated abnormal pressures, temperatures, or potential geologic hazards? NO

Describe:

Contingency Plans geohazards description:

Contingency Plans geohazards attachment:

Hydrogen Sulfide drilling operations plan required? YES

Hydrogen sulfide drilling operations plan:

BLUN_Pad_13_H2S_Contingency_Plan_20190531110528.pdf

Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:

BLUN_331H___Directional_Plan_20190604142147.pdf

Other proposed operations facets description:

Gas Capture Plan attached


Other proposed operations facets attachment:

BLUN_Pad_13_GCP_20190531110715.pdf

Other Variance attachment:


BLUN_331H_FlexHose_Data_20190604142216.pdf

CONFIDENTIAL

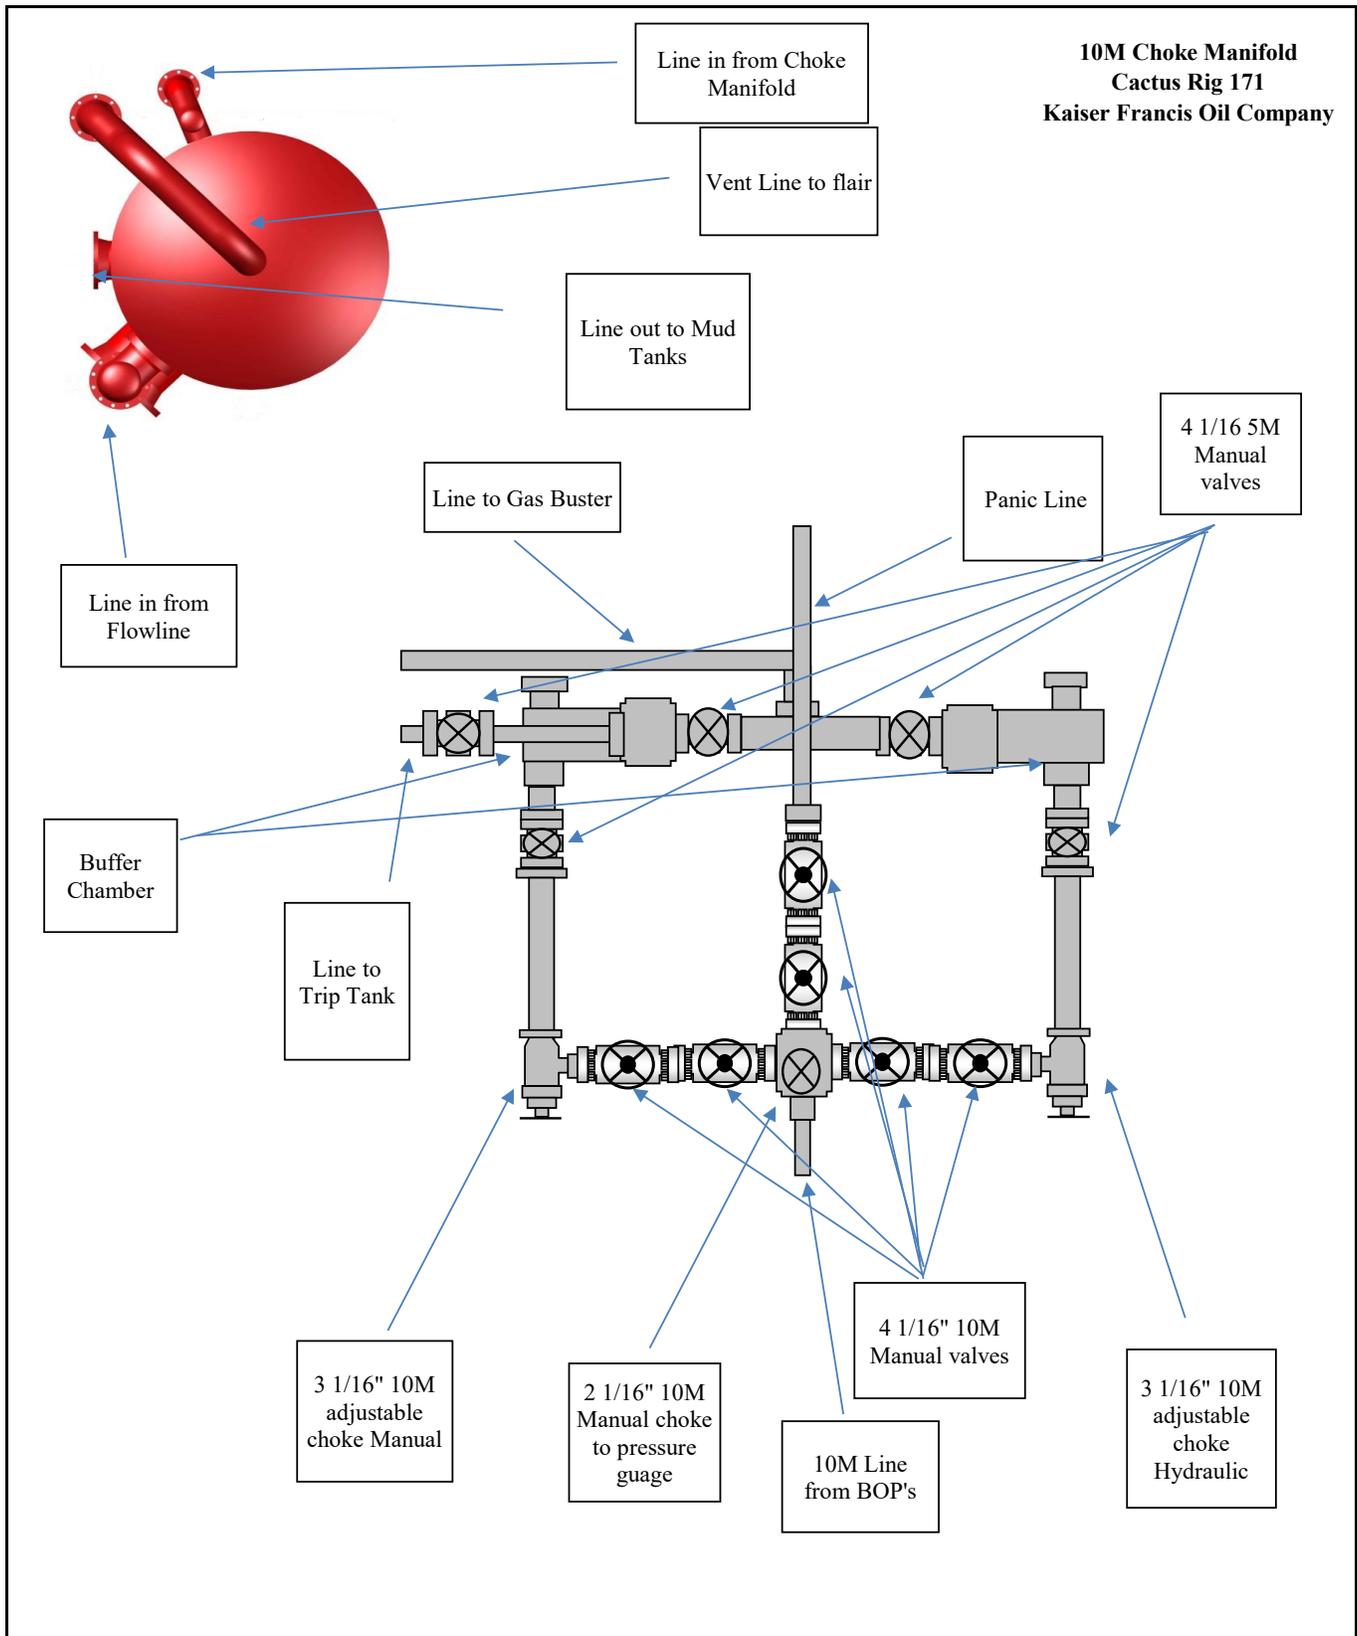



13-5/8" 10K MN-DS Wellhead

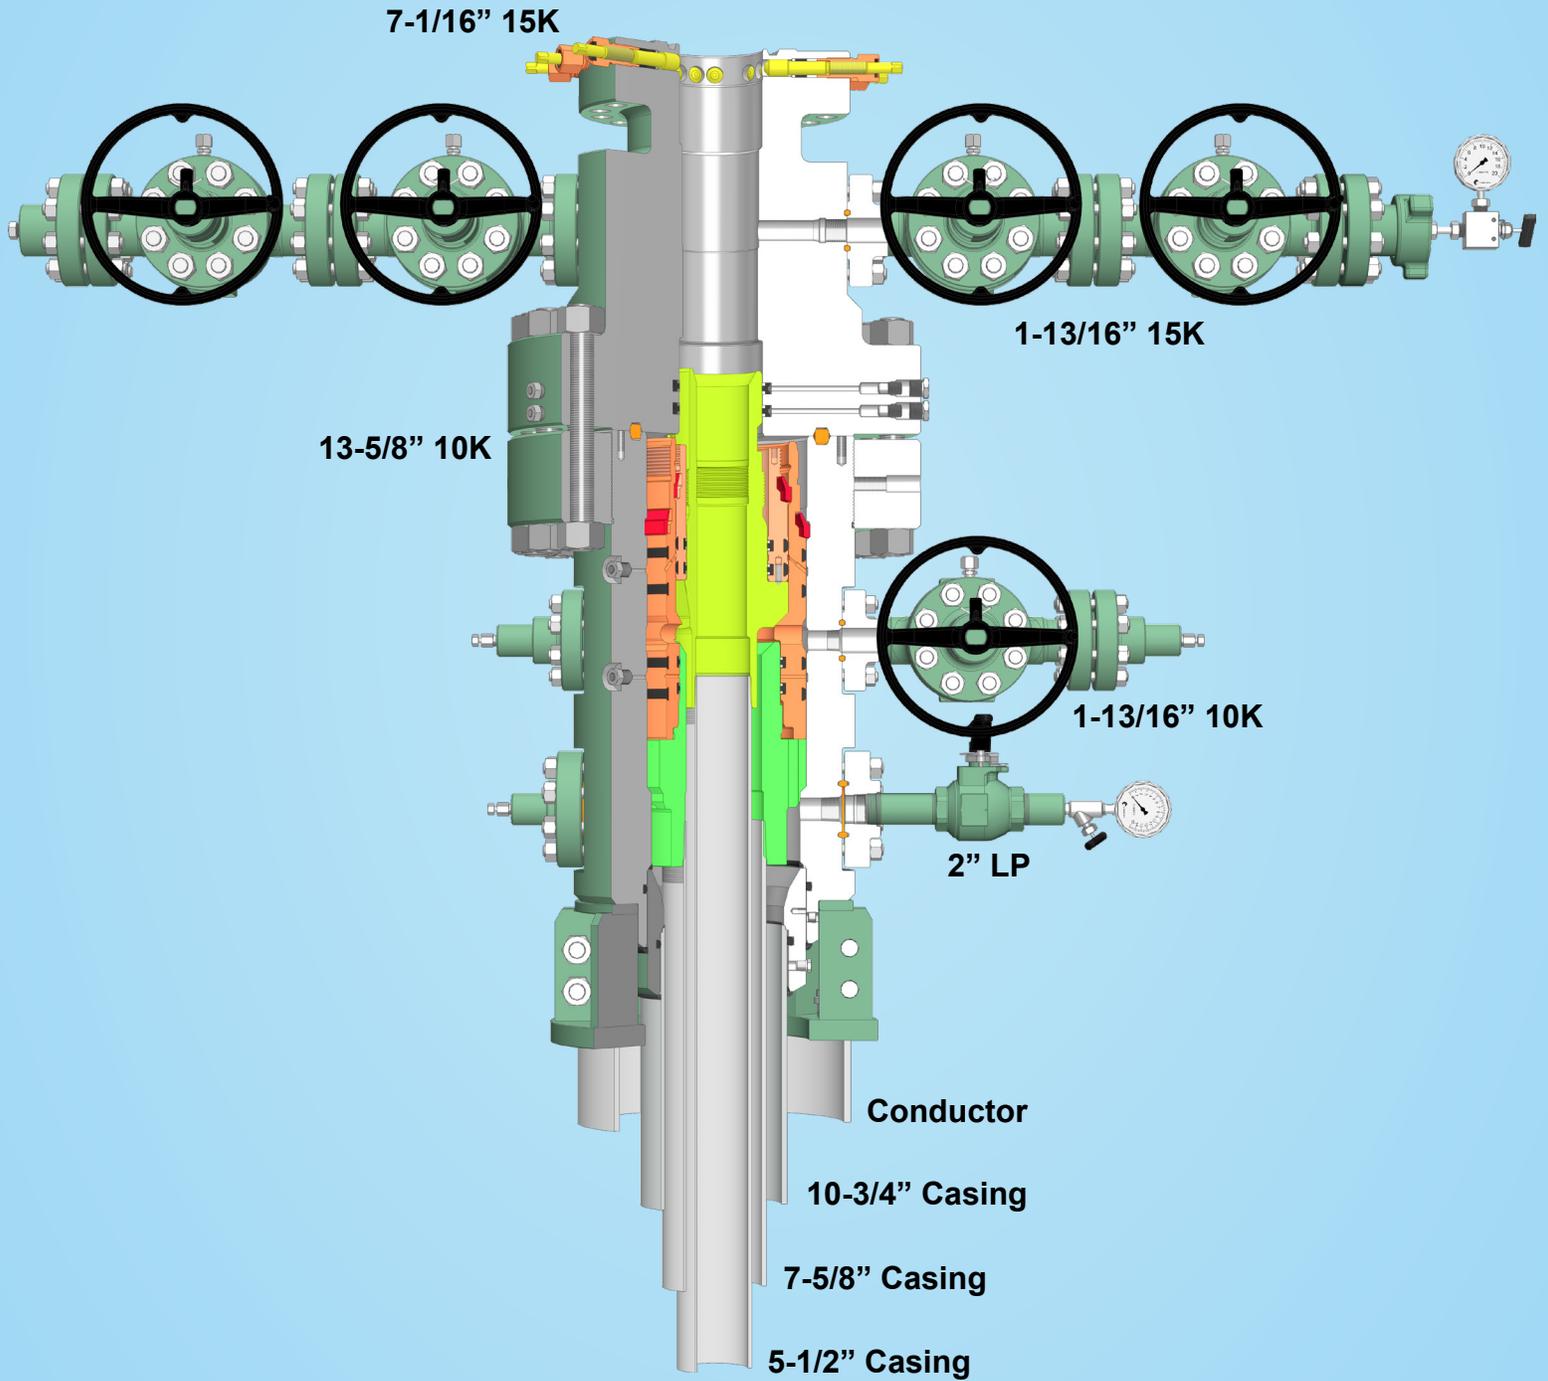

Kaiser-Francis Oil Company

1678248

NOTE: All dimensions on this drawing are estimated measurements and should be evaluated by engineering.



Certificate of Registration

**APIQR® REGISTRATION NUMBER
3042**

This certifies that the quality management system of

**COPPER STATE RUBBER, INC.
10485 W. Roosevelt Street
Avondale, AZ**

has been assessed by the American Petroleum Institute Quality Registrar (APIQR®) and found it to be in conformance with the following standard:

ISO 9001:2015

The scope of this registration and the approved quality management system applies to the
Design and Manufacture of Oilfield, Marine and Other Industrial Hoses

APIQR® approves the organization's justification for excluding:

No Exclusions Identified as Applicable

Effective Date: APRIL 21, 2019
Expiration Date: APRIL 21, 2022
Registered Since: APRIL 21, 2016

*Vice President of Global
Industry Services*

Accredited by Member of
the International
Accreditation Forum
Multilateral Recognition
Arrangement for Quality
Management Systems



This certificate is valid for the period specified herein. The registered organization must continually meet all requirements of APIQR's Registration Program and the requirements of the Registration Agreement. Registration is maintained and regularly monitored through annual full system audits. Further clarifications regarding the scope of this certificate and the applicability of ISO 9001 standard requirements may be obtained by consulting the registered organization. This certificate has been issued from APIQR offices located at 200 Massachusetts Avenue, NW Suite 1100, Washington, DC 20001-5571, U.S.A., it is the property of APIQR, and must be returned upon request. To verify the authenticity of this certificate, go to www.api.org/compositelist.



2018-152 | 02.19
Digital



REGISTRATION NO. Q1-3217

Certificate of Registration

The American Petroleum Institute certifies that the quality management system of

COPPER STATE RUBBER, INC.
10485 W. Roosevelt Street
Avondale, AZ

has been assessed by the American Petroleum Institute and found to be in conformance with the following:


API Specification Q1

The scope of this registration and the approved quality management system applies to the:

Design and Manufacture of Oilfield, Marine and Other Industrial Hoses

API approves the organization's justification for excluding:

No Exclusions Identified as Applicable

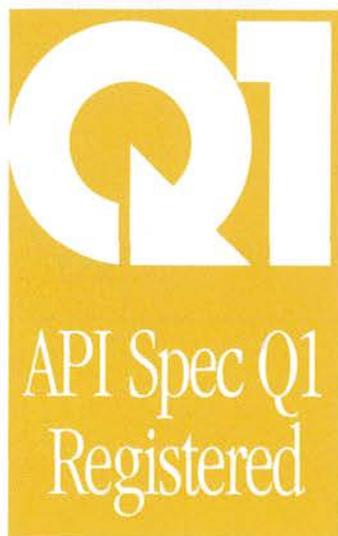

Effective Date: APRIL 21, 2019
Expiration Date: APRIL 21, 2022
Registered Since: MAY 4, 2016

Vice President of Global Industry Services

This certificate is valid for the period specified herein. The registered organization must continually meet all requirements of API Spec Q1, *Specification for Quality Programs for the Petroleum, Petrochemical and Natural Gas Industry*, and the requirements of the Registration Agreement. Registration is maintained and regularly monitored through annual full system audits. This certificate has been issued from API offices located at 200 Massachusetts Avenue, NW Suite 1100, Washington, DC 20001-5571, U.S.A. It is the property of API, and must be returned upon request. **To verify the authenticity of this certificate, go to www.api.org/compositelist.**

2018-154 | 02.19 | Digital

Certificate of Authority to use the Official API Monogram

License Number: 16C-0383

ORIGINAL

The American Petroleum Institute hereby grants to

**COPPER STATE RUBBER, INC.
10485 W. Roosevelt Street
Avondale, AZ**

the right to use the Official API Monogram® on manufactured products under the conditions in the official publications of the American Petroleum Institute entitled API Spec Q1® and **API-16C** and in accordance with the provisions of the License Agreement.

In all cases where the Official API Monogram is applied, the API Monogram shall be used in conjunction with this certificate number: **16C-0383**

The American Petroleum Institute reserves the right to revoke this authorization to use the Official API Monogram for any reason satisfactory to the Board of Directors of the American Petroleum Institute.

The scope of this license includes the following: Flexible Choke and Kill Lines at FSL 0, FSL 1, FSL 2, FSL 3

QMS Exclusions: No Exclusions Identified as Applicable

Effective Date: APRIL 21, 2019
Expiration Date: APRIL 21, 2022

To verify the authenticity of this license, go to www.api.org/compositelist.

Vice President of Global Industry Services



**American
Petroleum
Institute**



2018-151 | Digital



14141 S. Wayside Drive
Houston, Texas 77048

Phone 713-644-1491
Fax 713-644-9830
www.copperstaterubber.com
sales@copperstaterubber.com

October 7, 2019

Cactus Drilling LTR Fastener
11722 W. Hwy 80 E.
Odessa, TX 79765

Subject: Date: October 7, 2019
Specialties Company File No.: CSR-32367 / SPECO-83336


Equipment: Inspect, Borescope, and Recertify Customer's Choke & Kill Hose, API 16C Monogrammed, Fire Resistant, 10,000 PSI MAWP x 15,000 PSI Test, Complete With 4-1/16" 10,000 PSI API Flanged Ends (Swivel x Fixed).
1EA: 3" ID X 35 Ft. (S/N-33974A)

CERTIFICATE OF COMPLIANCE

This is to certify the above referenced equipment meets or exceeds the following requirements and were manufactured from same material specification and manufacturing methods as prototype assemblies for referenced specifications.

- I. COMPLETE HOSE ASSEMBLY
 - A. API Certificate of Accreditation for Spec: Q1 (Quality Programs) and Spec.: 16C
 - 1. Copper State Rubber, Inc. Certificate No.: 16C-0383
 - B. CSR Specification No.: 090-1915C-48

- II. PHYSICAL/CHEMICAL PROPERTIES OF METAL COMPONENTS
 - A. API Spec. 6A, latest edition
 - B. API Spec. 16A, latest edition
 - C. NACE Standard MR0175, latest edition

Sincerely,

Wyatt D. Love,
Technical Department

Marine, Industrial, and Oilfield Hose
Made in the U.S.A.



Visual Inspection / Hydrostatic Test Report

Manufacturer	Copper State Rubber Inc.
Hose Type	Rotary Hose Re-Test
Pressure Rating	10,000 PSI MAWP X 15,000 PSI T/P
Spec Number	090-1915C - 48

Serial Number	33974A
Size ID	3"
Length	35'
Date	October 3, 2019
Shop Order Number	32367

Connections Description: 4 1/16" 10,000 PSI API SWIVEL FLANGE
4 1/16" 10,000 PSI API FIXED FLANGE

Traceability of Terminating Connectors

	Insert	Male	Nut	Female	Flanges	Hubs	Other
Connector 1	14B2				V4760		81401-1
Connector 2	14C1				V5468		H1264

Comments _____

Calibrated Devices

Pressure Recorder	CAL242	Calibration Date	8/8/2019
-------------------	--------	------------------	----------

*This report signifies that the product has been visually inspected for defects in the interior tube, recess, gasket, cover and branding and all have been found to be conforming.

Comments Hose recess was repaired and then tested to factory test pressure as new.

Hydrostatic Testing Requirements

Length after test

15 Min @ 15,000 psi (-0/+500 psi)

_____ 35' _____ OAL

Witness By: 
 Kyle Winters, Supervisor

Final OK: 
 Robert Snider, Quality Manager



Borescope / Visual Inspection

Manufacturer	Copper State Rubber Inc.
Hose Type	Vibrator / Rotary Hose
Pressure Rating	10,000 PSI MAWP X 15,000 PSI T/P
Spec Number	090-1915C - 48

Serial Number	33974A
Size ID	3"
Length	35'
Date	October 3, 2019

	Remarks
Gasket Faces	Pass
Recesses	Pass
Hose Bore	Pass
Bubbles or Bulges	None Noted
Visual Inspection	Pass

Comments: Hose is confirmed to be in factory new condition.

Witness By: 


 Robert Snider, Quality Manager

Date 10/03/19

C&K (15,000 psi)



Working Pressure	10000 psi
Test Pressure	15000 psi
Final Pressure	15229 psi
Pressure Recorder ID	CAL242
Calibration Date	08/08/19

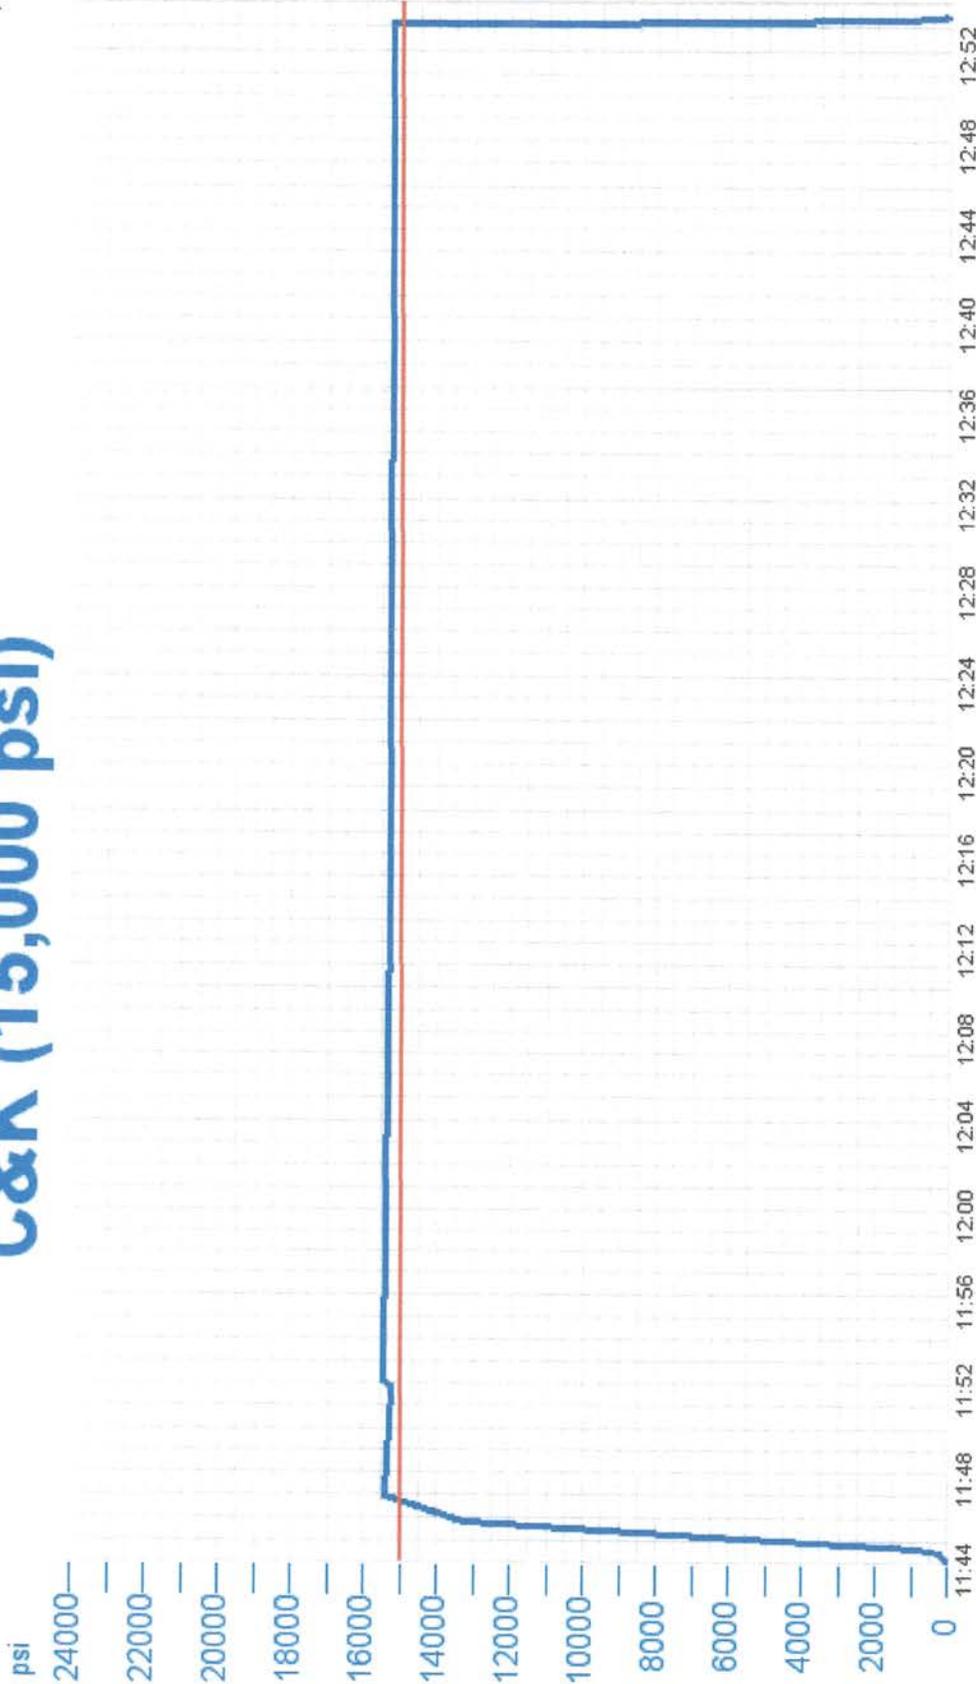

Serial	Work Order	Hose I.D.	Length	End Fitting A	End Fitting B
33974A	32367	3"	35 ft 0.00 in	4-1/16" 10,000# API SWIVEL FLANG	4-1/16" 10,000# API FLANGE

Operator	Reviewer	3rd Party Witness
Ruben Martinez	Kyle Winters	Robert Snyder II

[Signature]
Signature/Date

[Signature]
Signature/Date

[Signature]
Signature/Date

Casing Assumptions

Interval	Length	Casing Size	Weight (#/ft)	Grade	Thread	Condition	Hole Size	TVD (ft)	Mud Type	Mud Weight Hole Control	Depth	Viscosity	Fluid Loss	Anticipated Mud Weight (ppg)	Max Pore Pressure (psi)	Collapse (psi)	Burst (psi)	Body Tensile Strength	Joint Tensile Strength	Collapse Safety Factor (Min 1.1)	Burst Safety Factor (Min 1.0)	Body Tensile Safety Factor (Min 1.8)	Joint Tensile Safety Factor (Min 1.8)
Conductor	120	20"				New		120															
Surface	910	10-3/4"	40.5	J-55	STC	New	14-3/4"	910	FW	8.4 - 9.0	1350'	32 - 34	NC	9	426	1580	3130	629000	420000	3.7	7.3	17.1	11.4
Intermediate	10550	7-5/8"	29.7	HCP110	LTC	New	9-7/8"	10550	Brine	8.7 - 9.0	11426'	28 - 29	NC	9	4937	6700	9460	940000	769000	1.4	1.9	3.0	2.5
Production	19190	5-1/2"	20	P110 HP	USS Eagle SFH	New	6-3/4"	11191	OBM	10.0 - 12.0	19882'	55 - 70		12	6983	13150	14360	729000	629000	1.9	2.1	3.3	2.8

Casing Assumptions

Interval	Length	Casing Size	Weight (#/ft)	Grade	Thread	Condition	Hole Size	TVD (ft)	Mud Type	Mud Weight Hole Control	Depth	Viscosity	Fluid Loss	Anticipated Mud Weight (ppg)	Max Pore Pressure (psi)	Collapse (psi)	Burst (psi)	Body Tensile Strength	Joint Tensile Strength	Collapse Safety Factor (Min 1.1)	Burst Safety Factor (Min 1.0)	Body Tensile Safety Factor (Min 1.8)	Joint Tensile Safety Factor (Min 1.8)
Conductor	120	20"				New		120															
Surface	910	10-3/4"	40.5	J-55	STC	New	14-3/4"	910	FW	8.4 - 9.0	1350'	32 - 34	NC	9	426	1580	3130	629000	420000	3.7	7.3	17.1	11.4
Intermediate	10550	7-5/8"	29.7	HCP110	LTC	New	9-7/8"	10550	Brine	8.7 - 9.0	11426'	28 - 29	NC	9	4937	6700	9460	940000	769000	1.4	1.9	3.0	2.5
Production	19190	5-1/2"	20	P110 HP	USS Eagle SFH	New	6-3/4"	11191	OBM	10.0 - 12.0	19882'	55 - 70		12	6983	13150	14360	729000	629000	1.9	2.1	3.3	2.8



U. S. Steel Tubular Products

5 1/2 20.00 lb (0.361) P110 HP

USS-EAGLE SFH™

	PIPE	CONNECTION	
MECHANICAL PROPERTIES			
Minimum Yield Strength	125,000		psi
Maximum Yield Strength	140,000		psi
Minimum Tensile Strength	130,000		psi
DIMENSIONS			
Outside Diameter	5.500	5.830	in.
Wall Thickness	0.361		in.
Inside Diameter	4.778	4.693	in.
Drift - API	4.653	4.653	in.
Nominal Linear Weight, T&C	20.00		lbs/ft
Plain End Weight	19.83		lbs/ft
SECTION AREA			
Cross Sectional Area Critical Area	5.828	5.027	sq. in.
Joint Efficiency		86.25	%
PERFORMANCE			
Minimum Collapse Pressure	13,150	13,150	psi
External Pressure Leak Resistance		10,000	psi
Minimum Internal Yield Pressure	14,360	14,360	psi
Minimum Pipe Body Yield Strength	729,000		lbs
Joint Strength		629,000	lbs
Compression Rating		629,000	lbs
Reference Length		21,146	ft
Maximum Uniaxial Bend Rating		89.9	deg/100 ft
MAKE-UP DATA			
Minimum Make-Up Torque		14,200	ft-lbs
Maximum Make-Up Torque		16,800	ft-lbs
Maximum Operating Torque		25,700	ft-lbs
Make-Up Loss		5.92	in.

Notes:

- 1) Other than proprietary collapse and connection values, performance properties have been calculated using standard equations defined by API 5C3 and do not incorporate any additional design or safety factors. Calculations assume nominal pipe OD, nominal wall thickness, and Specified Minimum Yield Strength (SMYS).
- 2) Compressive & Tensile Connection Efficiencies are calculated by dividing the connection critical area by the pipe body area.
- 3) Uniaxial bending rating shown is structural only, and equal to compression efficiency.
- 4) Torques have been calculated assuming a thread compound friction factor of 1.0 and are recommended only. Field make-up torques may require adjustment based on actual field conditions (e.g. make-up speed, temperature, thread compound, etc.).
- 5) Reference length is calculated by joint strength divided by plain end weight with 1.5 safety factor.
- 6) Connection external pressure resistance has been verified to 10,000 psi (Fit-For-Service testing protocol).

Legal Notice: All material contained in this publication is for general information only. This material should not therefore be used or relied upon for any specific application without independent competent professional examination and verification of accuracy, suitability, and applicability. Anyone making use of this material does so at their own risk and assumes any and all liability resulting from such use. U. S. Steel disclaims any and all expressed or implied warranties of fitness for any general or particular application.
Manuel USS Product Data Sheet 2017 rev26 (Sept)

Casing Assumptions

Interval	Length	Casing Size	Weight (#/ft)	Grade	Thread	Condition	Hole Size	TVD (ft)	Mud Type	Mud Weight Hole Control	Depth	Viscosity	Fluid Loss	Anticipated Mud Weight (ppg)	Max Pore Pressure (psi)	Collapse (psi)	Burst (psi)	Body Tensile Strength	Joint Tensile Strength	Collapse Safety Factor (Min 1.1)	Burst Safety Factor (Min 1.0)	Body Tensile Safety Factor (Min 1.8)	Joint Tensile Safety Factor (Min 1.8)
Conductor	120	20"				New		120															
Surface	910	10-3/4"	40.5	J-55	STC	New	14-3/4"	910	FW	8.4 - 9.0	1350'	32 - 34	NC	9	426	1580	3130	629000	420000	3.7	7.3	17.1	11.4
Intermediate	10550	7-5/8"	29.7	HCP110	LTC	New	9-7/8"	10550	Brine	8.7 - 9.0	11426'	28 - 29	NC	9	4937	6700	9460	940000	769000	1.4	1.9	3.0	2.5
Production	19190	5-1/2"	20	P110 HP	USS Eagle SFH	New	6-3/4"	11191	OBM	10.0 - 12.0	19882'	55 - 70		12	6983	13150	14360	729000	629000	1.9	2.1	3.3	2.8

**KAISER-FRANCIS OIL COMPANY
HYDROGEN SULFIDE (H₂S) CONTINGENCY PLAN
FOR DRILLING/COMPLETION WORKOVER/FACILITY**

**Bell Lake Unit North
SECTION 1 -T23S-R33E
SECTION 6 -T23S-R34E
SECTION 5 -T23S-R34E**

LEA COUNTY, NM

This well/facility is not expected to have H₂S, but due to the sensitive location, the following is submitted as requested.

TABLE OF CONTENTS

Emergency Response Activation and General Responsibilities	3
Individual Responsibilities During An H ₂ S Release	4
Procedure For Igniting An Uncontrollable Condition	5
Emergency Phone Numbers	6
Protection Of The General Public/Roe	7
Characteristics Of H ₂ S And SO ₂	8
Training	8
Public Relations	8
Maps	

EMERGENCY RESPONSE ACTIVATION AND GENERAL RESPONSIBILITIES

Activation of the Emergency Action Plan

In the event of any emergency situation, all personnel on location should first ensure that the following items are initiated. After that, they should refer to the appropriate Specific Emergency Guidance sections below for further responsibilities:

1. Notify the senior ranking contract representative on site.
2. Notify Kaiser-Francis representative in charge.
3. Notify civil authorities if the Kaiser-Francis Representative cannot be contacted and the situation dictates.
4. Perform rescue and first aid as required (without jeopardizing additional personnel).

General Responsibilities

In the event of an H₂S emergency, the following plan will be initiated.

- 1) All personnel will immediately evacuate to an up-wind and if possible up-hill "safe area".
- 2) If for any reason a person must enter the hazardous area, they must wear a SCBA (Self contained breathing apparatus).
- 3) Always use the "buddy system".
- 4) Isolate the well/problem if possible.
- 5) Account for all personnel
- 6) Display the proper colors, warning all unsuspecting personnel of the danger at hand
- 7) Contact the Company personnel as soon as possible if not at the location. (use the enclosed call list as instructed)

At this point the company representative will evaluate the situation and coordinate the necessary duties to bring the situation under control, and if necessary, the notification of emergency response agencies and residents.

INDIVIDUAL RESPONSIBILITIES DURING AN H₂S RELEASE

The following procedures and responsibilities will be implemented on activation of the H₂S siren and lights.

All Personnel:

1. On alarm, don escape unit (if available) and report to upwind briefing area.

Rig Manager/Tool Pusher:

1. Check that all personnel are accounted for and their condition.
2. Administer or arrange for first aid treatment, and/or call EMTs as needed.
3. Identify two people best suited to secure well and perform rescue and instruct them to don SCBA.
4. Notify Contract management and Kaiser-Francis Representative.
5. Remain at the briefing area, assess and monitor personnel and overall situation for hazards or conditions that might warrant a change in the action plan.

Two People Responsible for Shut-in and Rescue:

1. Don SCBA and acquire tools to secure well and perform rescue, i.e., wrenches, retrieval ropes, etc.
2. Utilize the buddy system to secure well and perform rescue(s).
3. Return to the briefing area and stand by for further instructions.

All Other Personnel:

1. Isolate the area and prevent entry by other persons into the 100 ppm ROE. Additionally, the first responder(s) must evacuate any public places encompassed by the 100 ppm ROE. First responder(s) must take care not to injure themselves during this operation. Company and/or local officials must be contacted to aid in this operation. Evacuation of the public should be beyond the 100 ppm ROE.

Kaiser-Francis Oil Company Representative:

1. Remain at the briefing area, assess and monitor personnel and overall situation for hazards or conditions that might warrant a change in the action plan.
2. Notify company management or Local Incident Commander, and Police, Fire Department, or other local emergency services as required.

PROCEDURE FOR IGNITING AN UNCONTROLLABLE CONDITION:

Should control of the well be considered lost and ignition considered, take care to protect against exposure to Sulfur Dioxide (SO₂). Intentional ignition must be coordinated with the NMOCD and local officials. Additionally, the NM State Police shall be the Incident Command of any major release.

The decision to ignite a well should be a last resort and one if not both of the following pertain.

- 1) Human life and/or property are in danger.
- 2) There is no hope of bringing the situation under control with the prevailing conditions at the site.

INSTRUCTIONS FOR IGNITION:

- 1) Two people are required. They must be equipped with positive pressure; self contained breathing apparatus and a "D"-ring style, full body, OSHA approved safety harness. Non-flammable rope will be attached.
- 2) One of the people will be a qualified safety person who will test the atmosphere for H₂S, Oxygen, & LFL. The other person will be the company supervisor; he is responsible for igniting the well.
- 3) Ignite up-wind from a distance no closer than necessary. Make sure that where you ignite from has the maximum escape avenue available. A 25mm flare gun shall be used, with a +/-500' range to ignite the gas.
- 4) Prior to ignition, make a final check for combustible gases.
- 5) Following ignition, continue with the emergency actions & procedures as before.

CONTACTING AUTHORITIES

Kaiser-Francis personnel must liaison with local and state agencies to ensure a proper response to a major release. Additionally, the OCD must be notified of the release as soon as possible but no later than 4 hours. Agencies will ask for information such as type and volume of release, wind direction, location of release, etc. Be prepared with all information available. The following call list of essential and potential responders has been prepared for use during a release. This response plan must be in coordination with the State of New Mexico's 'Hazardous Materials Emergency Response Plan' (HMER).

EMERGENCY CALL LIST: (Start and continue until ONE of these people have been reached)

	<u>OFFICE</u>	<u>MOBILE</u>
Kaiser-Francis Oil Co.	918/494-0000	
Bill Wilkinson	580/668-2335	580/221-4637
David Zerger	918/491-4350	918/557-6708
Charles Lock	918/491-4337	918/671-6510
Stuart Blake	918/491-4347	918/510-4126
Robert Sanford	918/491-4201	918/770-2682
Eric Hansen	918/491-4339	918/527-5260

EMERGENCY RESPONSE NUMBERS: Lea County, New Mexico

State Police – Artesia	575/748-9718
State Police – Hobbs	575/392-5580
State Police – Carlsbad	575/885-3138
Lea County Sheriff - Lovington	575/396-3611
Local Emergency Planning Center – Lea County	575/396-8607
Local Emergency Planning Center – Eddy County	575/885-3581
Fire Fighting, Rescue & Ambulance – Carlsbad	911 or 575/885-3125
Fire Fighting, Rescue & Ambulance – Hobbs	911 or 575/397-9308
Fire Fighting – Jal Volunteer Fire Department	911 or 505/395-2221
New Mexico Oil & Gas Commission – Artesia	575/748-1283
New Mexico Oil & Gas Commission – Hobbs	575/393-6161
Air Medical Transport Services – Hobbs	800/550-1025
Med Flight Air Ambulance – Albuquerque	505/842-4433
Angel MedFlight	844/553-9033
DXP	432/580-3770
BJ Services	575/392-5556
Halliburton	575/392-6531 800/844-8451

PROTECTION OF THE GENERAL PUBLIC/ROE:

In the event of a release with a concentration greater than 100 ppm H₂S, the ROE (Radius of Exposure) calculations will be done to determine if the following conditions have been met:

- Does the 100 ppm ROE include any public area (any place not associated with this site)
- Does the 500 ppm ROE include any public road (any road which the general public may travel)
- Is the 100 ppm ROE equal to or greater than 3000 feet

If any one of these conditions have been met then the Contingency Plan will be implemented. The following shows how to calculate the radius of exposure and an example.

Calculation for the 100 ppm ROE:

$$X = [(1.589)(\text{concentration})(Q)]^{(0.6258)}$$

(H₂S concentrations in decimal form)
 10,000 ppm +=1.+
 1,000 ppm +=.1+

Calculation for the 500 ppm ROE:

$$X+[(0.4546)(\text{concentration})(Q)]^{(0.6258)}$$

100 ppm +=.01+
 10 ppm +=.001+

EXAMPLE: If a well/facility has been determined to have 150 ppm H₂S in the gas mixture and the well/facility is producing at a gas rate of 200 MCFPD then:

ROE for 100 PPM $X=[(1.589)(.0150)(200)]^{(0.6258)}$
 $X=2.65'$

ROE for 500 PPM $X=[(.4546)(.0150)(200)]^{(0.6258)}$
 $X=1.2'$

(These calculations will be forwarded to the appropriate District NMOCD office when applicable.)

PUBLIC EVACUATION PLAN:

(When the supervisor has determined that the General Public will be involved, the following plan will be implemented)

- 1) Notification of the emergency response agencies of the hazardous condition and Implement evacuation procedures.
- 2) A trained person in H₂S safety, shall monitor with detection equipment the H₂S Concentration, wind and area of exposure (ROE). This person will determine the outer perimeter of the hazardous area. The extent of the evacuation area will be determined from the data being collected. Monitoring shall continue until the situation has been resolved. **(All monitoring equipment will be UL approved, for use in class I groups A,B,C & D, Division I, hazardous locations. All monitors will have a minimum capability of measuring H₂S, oxygen, and flammable values.)**
- 3) Law enforcement shall be notified to set up necessary barriers and maintain such for the duration of the situation as well as aid in the evacuation procedure.
- 4) The company supervising personnel shall stay in communication with all agencies through out the duration of the situation and inform such agencies when the situation has been contained and the effected area(s) is safe to enter.

CHARACTERISTICS OF H₂S AND SO₂

Common Name	Chemical Formula	Specific Gravity	Threshold Limit	Hazardous Limit	Lethal Concentration
Hydrogen Sulfide	H ₂ S	1.189 Air = 1	10 ppm	100 ppm	600 ppm
Sulfur Dioxide	SO ₂	2.21 Air = 1	2 ppm	N/A	1000 ppm

TRAINING:

All responders must have training in the detection of H₂S measures for protection against the gas, equipment used for protection and emergency response. Weekly drills by all crews will be conducted and recorded in the IADC daily log. Additionally, responders must be equipped with H₂S monitors at all times.

PUBLIC RELATIONS

Kaiser-Francis recognizes that the news media have a legitimate interest in incidents at Kaiser-Francis facilities that could affect the public. It is to the company's benefit to cooperate with the news media when incidents occur because these media are our best liaison with the public.

Our objective is to see that all reports of any emergency are factual and represent the company's position fairly and accurately. Cooperation with news media representatives is the most reliable guarantee that this objective will be met.

All contract and Kaiser-Francis employees are instructed **NOT** to make any statement to the media concerning the emergency incident. If a media representative contacts any employee, they should refer them to the designated Emergency Command Center where they should contact the Incident Commander or his designated relief for any information concerning the incident.



Kaiser Francis

Bell Lake Unit North 331H
Bell Lake Unit North 331H
Bell Lake Unit North 331H
Bell Lake Unit North 331H

Plan: 190328 Bell Lake Unit North 331H

Morcor Standard Plan

29 March, 2019

Morcor Engineering

Morcor Standard Plan

Kaiser-Francis Oil Company

Company:	Kaiser Francis	Local Co-ordinate Reference:	Well Bell Lake Unit North 331H
Project:	Bell Lake Unit North 331H	TVD Reference:	WELL @ 3465.3usft (Original Well Elev)
Site:	Bell Lake Unit North 331H	MD Reference:	WELL @ 3465.3usft (Original Well Elev)
Well:	Bell Lake Unit North 331H	North Reference:	Grid
Wellbore:	Bell Lake Unit North 331H	Survey Calculation Method:	Minimum Curvature
Design:	190328 Bell Lake Unit North 331H	Database:	EDM 5000.1 Single User Db

Project	Bell Lake Unit North 331H		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	Bell Lake Unit North 331H				
Site Position:		Northing:	485,463.22 usft	Latitude:	32° 19' 54.675 N
From:	Lat/Long	Easting:	798,914.15 usft	Longitude:	103° 29' 57.854 W
Position Uncertainty:	1.0 usft	Slot Radius:	17-1/2 "	Grid Convergence:	0.45 °

Well	Bell Lake Unit North 331H					
Well Position	+N/-S	0.0 usft	Northing:	485,463.22 usft	Latitude:	32° 19' 54.675 N
	+E/-W	0.0 usft	Easting:	798,914.15 usft	Longitude:	103° 29' 57.854 W
Position Uncertainty		1.0 usft	Wellhead Elevation:	usft	Ground Level:	3,443.3 usft

Wellbore	Bell Lake Unit North 331H				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2010	3/29/2019	6.59	60.10	47,909

Design	190328 Bell Lake Unit North 331H				
Audit Notes:					
Version:	Phase:	PLAN	Tie On Depth:	0.0	
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)	
	0.0	0.0	0.0	359.11	

Survey Tool Program	Date	3/29/2019			
From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description	
0.0	19,190.8	190328 Bell Lake Unit North 331H (Bell La	MWD	MWD - Standard	

Morcor Engineering

Morcor Standard Plan

Kaiser-Francis Oil Company

Company:	Kaiser Francis	Local Co-ordinate Reference:	Well Bell Lake Unit North 331H
Project:	Bell Lake Unit North 331H	TVD Reference:	WELL @ 3465.3usft (Original Well Elev)
Site:	Bell Lake Unit North 331H	MD Reference:	WELL @ 3465.3usft (Original Well Elev)
Well:	Bell Lake Unit North 331H	North Reference:	Grid
Wellbore:	Bell Lake Unit North 331H	Survey Calculation Method:	Minimum Curvature
Design:	190328 Bell Lake Unit North 331H	Database:	EDM 5000.1 Single User Db

Planned Survey											
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	TVDSS (usft)	N/S (usft)	E/W (usft)	Easting (usft)	Northing (usft)	V. Sec (usft)	DLeg (°/100usft)	
0.0	0.00	0.00	0.0	-3,465.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
50.0	0.00	0.00	50.0	-3,415.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
100.0	0.00	37.00	100.0	-3,365.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
120.0	0.00	37.00	120.0	-3,345.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
20" Conductor											
150.0	0.00	37.00	150.0	-3,315.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
200.0	0.00	37.00	200.0	-3,265.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
250.0	0.00	37.00	250.0	-3,215.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
300.0	0.00	37.00	300.0	-3,165.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
350.0	0.00	37.00	350.0	-3,115.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
400.0	0.00	37.00	400.0	-3,065.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
450.0	0.00	37.00	450.0	-3,015.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
500.0	0.00	37.00	500.0	-2,965.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
550.0	0.00	37.00	550.0	-2,915.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
600.0	0.00	37.00	600.0	-2,865.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
650.0	0.00	37.00	650.0	-2,815.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
700.0	0.00	37.00	700.0	-2,765.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
750.0	0.00	37.00	750.0	-2,715.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
800.0	0.00	37.00	800.0	-2,665.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
850.0	0.00	37.00	850.0	-2,615.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
900.0	0.00	37.00	900.0	-2,565.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
950.0	0.00	37.00	950.0	-2,515.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
1,000.0	0.00	37.00	1,000.0	-2,465.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
1,050.0	0.00	37.00	1,050.0	-2,415.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
1,100.0	0.00	37.00	1,100.0	-2,365.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
1,150.0	0.00	37.00	1,150.0	-2,315.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	

Morcor Engineering

Morcor Standard Plan

Kaiser-Francis Oil Company

Company:	Kaiser Francis	Local Co-ordinate Reference:	Well Bell Lake Unit North 331H
Project:	Bell Lake Unit North 331H	TVD Reference:	WELL @ 3465.3usft (Original Well Elev)
Site:	Bell Lake Unit North 331H	MD Reference:	WELL @ 3465.3usft (Original Well Elev)
Well:	Bell Lake Unit North 331H	North Reference:	Grid
Wellbore:	Bell Lake Unit North 331H	Survey Calculation Method:	Minimum Curvature
Design:	190328 Bell Lake Unit North 331H	Database:	EDM 5000.1 Single User Db

Planned Survey

MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	TVDSS (usft)	N/S (usft)	E/W (usft)	Easting (usft)	Northing (usft)	V. Sec (usft)	DLeg (°/100usft)
1,182.0	0.00	37.00	1,182.0	-2,283.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00
Rustler										
1,200.0	0.00	37.00	1,200.0	-2,265.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00
1,207.0	0.00	37.00	1,207.0	-2,258.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00
13 3/8" Surface Casing										
1,250.0	0.00	37.00	1,250.0	-2,215.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00
1,300.0	0.00	37.00	1,300.0	-2,165.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00
1,350.0	0.00	37.00	1,350.0	-2,115.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00
1,400.0	0.00	37.00	1,400.0	-2,065.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00
1,450.0	0.00	37.00	1,450.0	-2,015.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00
1,500.0	0.00	37.00	1,500.0	-1,965.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00
1,550.0	0.00	37.00	1,550.0	-1,915.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00
1,572.0	0.00	37.00	1,572.0	-1,893.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00
Salado										
1,600.0	0.00	37.00	1,600.0	-1,865.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00
1,650.0	0.00	37.00	1,650.0	-1,815.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00
1,700.0	0.00	37.00	1,700.0	-1,765.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00
1,750.0	0.00	37.00	1,750.0	-1,715.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00
1,772.0	0.00	37.00	1,772.0	-1,693.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00
Top of Salt										
1,800.0	0.00	37.00	1,800.0	-1,665.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00
1,850.0	0.00	37.00	1,850.0	-1,615.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00
1,900.0	0.00	37.00	1,900.0	-1,565.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00
1,950.0	0.00	37.00	1,950.0	-1,515.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00
2,000.0	0.00	37.00	2,000.0	-1,465.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00
2,050.0	0.00	37.00	2,050.0	-1,415.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00
2,100.0	0.00	37.00	2,100.0	-1,365.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00
2,150.0	0.00	37.00	2,150.0	-1,315.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00

Morcor Engineering

Morcor Standard Plan

Kaiser-Francis Oil Company

Company:	Kaiser Francis	Local Co-ordinate Reference:	Well Bell Lake Unit North 331H
Project:	Bell Lake Unit North 331H	TVD Reference:	WELL @ 3465.3usft (Original Well Elev)
Site:	Bell Lake Unit North 331H	MD Reference:	WELL @ 3465.3usft (Original Well Elev)
Well:	Bell Lake Unit North 331H	North Reference:	Grid
Wellbore:	Bell Lake Unit North 331H	Survey Calculation Method:	Minimum Curvature
Design:	190328 Bell Lake Unit North 331H	Database:	EDM 5000.1 Single User Db

Planned Survey											
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	TVDSS (usft)	N/S (usft)	E/W (usft)	Easting (usft)	Northing (usft)	V. Sec (usft)	DLeg (°/100usft)	
2,200.0	0.00	37.00	2,200.0	-1,265.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
2,250.0	0.00	37.00	2,250.0	-1,215.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
2,300.0	0.00	37.00	2,300.0	-1,165.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
2,350.0	0.00	37.00	2,350.0	-1,115.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
2,400.0	0.00	37.00	2,400.0	-1,065.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
2,450.0	0.00	37.00	2,450.0	-1,015.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
2,500.0	0.00	37.00	2,500.0	-965.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
2,550.0	0.00	37.00	2,550.0	-915.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
2,600.0	0.00	37.00	2,600.0	-865.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
2,650.0	0.00	37.00	2,650.0	-815.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
2,700.0	0.00	37.00	2,700.0	-765.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
2,750.0	0.00	37.00	2,750.0	-715.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
2,800.0	0.00	37.00	2,800.0	-665.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
2,850.0	0.00	37.00	2,850.0	-615.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
2,900.0	0.00	37.00	2,900.0	-565.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
2,950.0	0.00	37.00	2,950.0	-515.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
3,000.0	0.00	37.00	3,000.0	-465.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
3,050.0	0.00	37.00	3,050.0	-415.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
3,100.0	0.00	37.00	3,100.0	-365.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
3,150.0	0.00	37.00	3,150.0	-315.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
3,200.0	0.00	37.00	3,200.0	-265.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
3,250.0	0.00	37.00	3,250.0	-215.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
3,300.0	0.00	37.00	3,300.0	-165.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
3,350.0	0.00	37.00	3,350.0	-115.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
3,400.0	0.00	37.00	3,400.0	-65.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
3,450.0	0.00	37.00	3,450.0	-15.3	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
3,500.0	0.00	37.00	3,500.0	34.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00	

Morcor Engineering

Morcor Standard Plan

Kaiser-Francis Oil Company

Company:	Kaiser Francis	Local Co-ordinate Reference:	Well Bell Lake Unit North 331H
Project:	Bell Lake Unit North 331H	TVD Reference:	WELL @ 3465.3usft (Original Well Elev)
Site:	Bell Lake Unit North 331H	MD Reference:	WELL @ 3465.3usft (Original Well Elev)
Well:	Bell Lake Unit North 331H	North Reference:	Grid
Wellbore:	Bell Lake Unit North 331H	Survey Calculation Method:	Minimum Curvature
Design:	190328 Bell Lake Unit North 331H	Database:	EDM 5000.1 Single User Db

Planned Survey												
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	TVDSS (usft)	N/S (usft)	E/W (usft)	Easting (usft)	Northing (usft)	V. Sec (usft)	DLeg (°/100usft)		
3,550.0	0.00	37.00	3,550.0	84.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
3,600.0	0.00	37.00	3,600.0	134.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
3,650.0	0.00	37.00	3,650.0	184.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
3,700.0	0.00	37.00	3,700.0	234.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
3,750.0	0.00	37.00	3,750.0	284.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
3,800.0	0.00	37.00	3,800.0	334.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
3,850.0	0.00	37.00	3,850.0	384.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
3,900.0	0.00	37.00	3,900.0	434.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
3,950.0	0.00	37.00	3,950.0	484.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
4,000.0	0.00	37.00	4,000.0	534.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
4,050.0	0.00	37.00	4,050.0	584.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
4,100.0	0.00	37.00	4,100.0	634.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
4,150.0	0.00	37.00	4,150.0	684.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
4,200.0	0.00	37.00	4,200.0	734.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
4,250.0	0.00	37.00	4,250.0	784.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
4,300.0	0.00	37.00	4,300.0	834.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
4,350.0	0.00	37.00	4,350.0	884.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
4,400.0	0.00	37.00	4,400.0	934.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
4,450.0	0.00	37.00	4,450.0	984.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
4,500.0	0.00	37.00	4,500.0	1,034.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
4,550.0	0.00	37.00	4,550.0	1,084.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
4,600.0	0.00	37.00	4,600.0	1,134.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
4,650.0	0.00	37.00	4,650.0	1,184.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
4,700.0	0.00	37.00	4,700.0	1,234.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
4,722.0	0.00	37.00	4,722.0	1,256.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
Base of Salt												
4,750.0	0.00	37.00	4,750.0	1,284.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		

Morcor Engineering

Morcor Standard Plan

Kaiser-Francis Oil Company

Company:	Kaiser Francis	Local Co-ordinate Reference:	Well Bell Lake Unit North 331H
Project:	Bell Lake Unit North 331H	TVD Reference:	WELL @ 3465.3usft (Original Well Elev)
Site:	Bell Lake Unit North 331H	MD Reference:	WELL @ 3465.3usft (Original Well Elev)
Well:	Bell Lake Unit North 331H	North Reference:	Grid
Wellbore:	Bell Lake Unit North 331H	Survey Calculation Method:	Minimum Curvature
Design:	190328 Bell Lake Unit North 331H	Database:	EDM 5000.1 Single User Db

Planned Survey											
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	TVDSS (usft)	N/S (usft)	E/W (usft)	Easting (usft)	Northing (usft)	V. Sec (usft)	DLeg (°/100usft)	
4,800.0	0.00	37.00	4,800.0	1,334.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
4,850.0	0.00	37.00	4,850.0	1,384.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
4,900.0	0.00	37.00	4,900.0	1,434.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
4,922.0	0.00	37.00	4,922.0	1,456.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
Lamar											
4,950.0	0.00	37.00	4,950.0	1,484.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
5,000.0	0.00	37.00	5,000.0	1,534.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
5,050.0	0.00	37.00	5,050.0	1,584.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
5,100.0	0.00	37.00	5,100.0	1,634.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
5,147.0	0.00	37.00	5,147.0	1,681.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
9 5/8" Intermediate Casing											
5,150.0	0.00	37.00	5,150.0	1,684.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
5,172.0	0.00	37.00	5,172.0	1,706.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
Bell Canyon											
5,200.0	0.00	37.00	5,200.0	1,734.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
5,250.0	0.00	37.00	5,250.0	1,784.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
5,300.0	0.00	37.00	5,300.0	1,834.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
5,350.0	0.00	37.00	5,350.0	1,884.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
5,400.0	0.00	37.00	5,400.0	1,934.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
5,450.0	0.00	37.00	5,450.0	1,984.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
5,500.0	0.00	37.00	5,500.0	2,034.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
5,550.0	0.00	37.00	5,550.0	2,084.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
5,600.0	0.00	37.00	5,600.0	2,134.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
5,650.0	0.00	37.00	5,650.0	2,184.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
5,700.0	0.00	37.00	5,700.0	2,234.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
5,750.0	0.00	37.00	5,750.0	2,284.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00	
5,800.0	0.00	37.00	5,800.0	2,334.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00	

Morcor Engineering

Morcor Standard Plan

Kaiser-Francis Oil Company

Company:	Kaiser Francis	Local Co-ordinate Reference:	Well Bell Lake Unit North 331H
Project:	Bell Lake Unit North 331H	TVD Reference:	WELL @ 3465.3usft (Original Well Elev)
Site:	Bell Lake Unit North 331H	MD Reference:	WELL @ 3465.3usft (Original Well Elev)
Well:	Bell Lake Unit North 331H	North Reference:	Grid
Wellbore:	Bell Lake Unit North 331H	Survey Calculation Method:	Minimum Curvature
Design:	190328 Bell Lake Unit North 331H	Database:	EDM 5000.1 Single User Db

Planned Survey												
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	TVDSS (usft)	N/S (usft)	E/W (usft)	Easting (usft)	Northing (usft)	V. Sec (usft)	DLeg (°/100usft)		
5,850.0	0.00	37.00	5,850.0	2,384.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
5,900.0	0.00	37.00	5,900.0	2,434.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
5,950.0	0.00	37.00	5,950.0	2,484.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
6,000.0	0.00	37.00	6,000.0	2,534.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
6,050.0	0.00	37.00	6,050.0	2,584.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
6,072.0	0.00	37.00	6,072.0	2,606.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
Cherry Canyon												
6,100.0	0.00	37.00	6,100.0	2,634.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
6,150.0	0.00	37.00	6,150.0	2,684.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
6,200.0	0.00	37.00	6,200.0	2,734.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
6,250.0	0.00	37.00	6,250.0	2,784.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
6,300.0	0.00	37.00	6,300.0	2,834.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
6,350.0	0.00	37.00	6,350.0	2,884.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
6,400.0	0.00	37.00	6,400.0	2,934.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
6,450.0	0.00	37.00	6,450.0	2,984.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
6,500.0	0.00	37.00	6,500.0	3,034.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
6,550.0	0.00	37.00	6,550.0	3,084.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
6,600.0	0.00	37.00	6,600.0	3,134.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
6,650.0	0.00	37.00	6,650.0	3,184.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
6,700.0	0.00	37.00	6,700.0	3,234.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
6,750.0	0.00	37.00	6,750.0	3,284.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
6,800.0	0.00	37.00	6,800.0	3,334.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
6,850.0	0.00	37.00	6,850.0	3,384.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
6,900.0	0.00	37.00	6,900.0	3,434.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
6,950.0	0.00	37.00	6,950.0	3,484.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
7,000.0	0.00	37.00	7,000.0	3,534.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
7,050.0	0.00	37.00	7,050.0	3,584.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		

Morcor Engineering

Morcor Standard Plan

Kaiser-Francis Oil Company

Company:	Kaiser Francis	Local Co-ordinate Reference:	Well Bell Lake Unit North 331H
Project:	Bell Lake Unit North 331H	TVD Reference:	WELL @ 3465.3usft (Original Well Elev)
Site:	Bell Lake Unit North 331H	MD Reference:	WELL @ 3465.3usft (Original Well Elev)
Well:	Bell Lake Unit North 331H	North Reference:	Grid
Wellbore:	Bell Lake Unit North 331H	Survey Calculation Method:	Minimum Curvature
Design:	190328 Bell Lake Unit North 331H	Database:	EDM 5000.1 Single User Db

Planned Survey												
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	TVDSS (usft)	N/S (usft)	E/W (usft)	Easting (usft)	Northing (usft)	V. Sec (usft)	DLeg (°/100usft)		
7,100.0	0.00	37.00	7,100.0	3,634.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
7,150.0	0.00	37.00	7,150.0	3,684.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
7,200.0	0.00	37.00	7,200.0	3,734.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
7,250.0	0.00	37.00	7,250.0	3,784.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
7,300.0	0.00	37.00	7,300.0	3,834.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
7,350.0	0.00	37.00	7,350.0	3,884.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
7,400.0	0.00	37.00	7,400.0	3,934.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
7,450.0	0.00	37.00	7,450.0	3,984.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
7,472.0	0.00	37.00	7,472.0	4,006.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
Brushy Canyon												
7,500.0	0.00	37.00	7,500.0	4,034.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
7,550.0	0.00	37.00	7,550.0	4,084.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
7,600.0	0.00	37.00	7,600.0	4,134.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
7,650.0	0.00	37.00	7,650.0	4,184.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
7,700.0	0.00	37.00	7,700.0	4,234.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
7,750.0	0.00	37.00	7,750.0	4,284.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
7,800.0	0.00	37.00	7,800.0	4,334.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
7,850.0	0.00	37.00	7,850.0	4,384.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
7,900.0	0.00	37.00	7,900.0	4,434.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
7,950.0	0.00	37.00	7,950.0	4,484.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
8,000.0	0.00	37.00	8,000.0	4,534.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
8,050.0	0.00	37.00	8,050.0	4,584.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
8,100.0	0.00	37.00	8,100.0	4,634.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
8,150.0	0.00	37.00	8,150.0	4,684.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
8,200.0	0.00	37.00	8,200.0	4,734.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
8,250.0	0.00	37.00	8,250.0	4,784.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
8,300.0	0.00	37.00	8,300.0	4,834.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		

Morcor Engineering

Morcor Standard Plan



Company:	Kaiser Francis	Local Co-ordinate Reference:	Well Bell Lake Unit North 331H
Project:	Bell Lake Unit North 331H	TVD Reference:	WELL @ 3465.3usft (Original Well Elev)
Site:	Bell Lake Unit North 331H	MD Reference:	WELL @ 3465.3usft (Original Well Elev)
Well:	Bell Lake Unit North 331H	North Reference:	Grid
Wellbore:	Bell Lake Unit North 331H	Survey Calculation Method:	Minimum Curvature
Design:	190328 Bell Lake Unit North 331H	Database:	EDM 5000.1 Single User Db

Planned Survey												
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	TVDSS (usft)	N/S (usft)	E/W (usft)	Easting (usft)	Northing (usft)	V. Sec (usft)	DLeg (°/100usft)		
8,350.0	0.00	37.00	8,350.0	4,884.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
8,400.0	0.00	37.00	8,400.0	4,934.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
8,450.0	0.00	37.00	8,450.0	4,984.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
8,500.0	0.00	37.00	8,500.0	5,034.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
8,550.0	0.00	37.00	8,550.0	5,084.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
8,572.0	0.00	37.00	8,572.0	5,106.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
Bone Spring												
8,600.0	0.00	37.00	8,600.0	5,134.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
8,617.0	0.00	37.00	8,617.0	5,151.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
Avalon												
8,650.0	0.00	37.00	8,650.0	5,184.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
8,700.0	0.00	37.00	8,700.0	5,234.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
8,750.0	0.00	37.00	8,750.0	5,284.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
8,800.0	0.00	37.00	8,800.0	5,334.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
8,850.0	0.00	37.00	8,850.0	5,384.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
8,900.0	0.00	37.00	8,900.0	5,434.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
8,950.0	0.00	37.00	8,950.0	5,484.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
9,000.0	0.00	37.00	9,000.0	5,534.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
9,050.0	0.00	37.00	9,050.0	5,584.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
9,100.0	0.00	37.00	9,100.0	5,634.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
9,150.0	0.00	37.00	9,150.0	5,684.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
9,200.0	0.00	37.00	9,200.0	5,734.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
9,250.0	0.00	37.00	9,250.0	5,784.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
9,300.0	0.00	37.00	9,300.0	5,834.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
9,350.0	0.00	37.00	9,350.0	5,884.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
9,400.0	0.00	37.00	9,400.0	5,934.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		
9,450.0	0.00	37.00	9,450.0	5,984.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00		

Morcor Engineering

Morcor Standard Plan

Kaiser-Francis Oil Company

Company:	Kaiser Francis	Local Co-ordinate Reference:	Well Bell Lake Unit North 331H
Project:	Bell Lake Unit North 331H	TVD Reference:	WELL @ 3465.3usft (Original Well Elev)
Site:	Bell Lake Unit North 331H	MD Reference:	WELL @ 3465.3usft (Original Well Elev)
Well:	Bell Lake Unit North 331H	North Reference:	Grid
Wellbore:	Bell Lake Unit North 331H	Survey Calculation Method:	Minimum Curvature
Design:	190328 Bell Lake Unit North 331H	Database:	EDM 5000.1 Single User Db

Planned Survey

MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	TVDSS (usft)	N/S (usft)	E/W (usft)	Easting (usft)	Northing (usft)	V. Sec (usft)	DLeg (°/100usft)
9,500.0	0.00	37.00	9,500.0	6,034.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00
9,522.0	0.00	37.00	9,522.0	6,056.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00
1st Bone Spring										
9,550.0	0.00	37.00	9,550.0	6,084.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00
9,600.0	0.00	37.00	9,600.0	6,134.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00
9,650.0	0.00	37.00	9,650.0	6,184.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00
9,700.0	0.00	37.00	9,700.0	6,234.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00
9,750.0	0.00	37.00	9,750.0	6,284.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00
9,800.0	0.00	37.00	9,800.0	6,334.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00
9,850.0	0.00	37.00	9,850.0	6,384.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00
9,900.0	0.00	37.00	9,900.0	6,434.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00
9,950.0	0.00	37.00	9,950.0	6,484.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00
10,000.0	0.00	37.00	10,000.0	6,534.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00
10,032.0	0.00	37.00	10,032.0	6,566.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00
2nd Bone Spring										
10,050.0	0.00	37.00	10,050.0	6,584.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00
10,100.0	0.00	37.00	10,100.0	6,634.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00
10,150.0	0.00	37.00	10,150.0	6,684.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00
10,200.0	0.00	37.00	10,200.0	6,734.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00
10,250.0	0.00	37.00	10,250.0	6,784.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00
10,300.0	0.00	37.00	10,300.0	6,834.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00
10,350.0	0.00	37.00	10,350.0	6,884.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00
10,400.0	0.00	37.00	10,400.0	6,934.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00
10,450.0	0.00	37.00	10,450.0	6,984.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00
10,500.0	0.00	37.00	10,500.0	7,034.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00
10,522.0	0.00	37.00	10,522.0	7,056.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00
2nd Bone Spring Lime										

Morcor Engineering

Morcor Standard Plan

Kaiser-Francis Oil Company

Company:	Kaiser Francis	Local Co-ordinate Reference:	Well Bell Lake Unit North 331H
Project:	Bell Lake Unit North 331H	TVD Reference:	WELL @ 3465.3usft (Original Well Elev)
Site:	Bell Lake Unit North 331H	MD Reference:	WELL @ 3465.3usft (Original Well Elev)
Well:	Bell Lake Unit North 331H	North Reference:	Grid
Wellbore:	Bell Lake Unit North 331H	Survey Calculation Method:	Minimum Curvature
Design:	190328 Bell Lake Unit North 331H	Database:	EDM 5000.1 Single User Db

Planned Survey

MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	TVDSS (usft)	N/S (usft)	E/W (usft)	Easting (usft)	Northing (usft)	V. Sec (usft)	DLeg (°/100usft)
10,550.0	0.00	37.00	10,550.0	7,084.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00
10,594.0	0.00	37.00	10,594.0	7,128.7	0.0	0.0	798,914.15	485,463.22	0.00	0.00
Start Build 10.00										
10,600.0	0.60	37.00	10,600.0	7,134.7	0.0	0.0	798,914.17	485,463.25	0.02	10.00
10,650.0	5.60	37.00	10,649.9	7,184.6	2.2	1.6	798,915.79	485,465.41	2.16	10.00
10,694.0	10.00	37.00	10,693.5	7,228.2	7.0	5.2	798,919.39	485,470.17	6.87	10.00
Start DLS 10.00 TFO -19.70										
10,700.0	10.57	35.90	10,699.4	7,234.1	7.8	5.9	798,920.02	485,471.04	7.72	10.00
10,750.0	15.39	29.88	10,748.1	7,282.8	17.3	11.9	798,926.02	485,480.51	17.10	10.00
10,794.0	19.70	27.00	10,790.1	7,324.8	29.0	18.1	798,932.30	485,492.18	28.67	10.00
Start DLS 10.00 TFO -28.85										
10,800.0	20.23	26.16	10,795.7	7,330.4	30.8	19.1	798,933.21	485,494.01	30.49	10.00
10,850.0	24.75	20.54	10,841.9	7,376.6	48.4	26.6	798,940.70	485,511.58	47.94	10.00
10,894.0	28.85	17.00	10,881.2	7,415.9	67.1	32.9	798,947.04	485,530.37	66.63	10.00
Start DLS 10.00 TFO -33.33										
10,900.0	29.35	16.33	10,886.4	7,421.1	69.9	33.7	798,947.88	485,533.16	69.41	10.00
10,950.0	33.66	11.45	10,929.0	7,463.7	95.3	39.9	798,954.07	485,558.52	94.67	10.00
10,994.0	37.57	8.00	10,964.8	7,499.5	120.5	44.2	798,958.36	485,583.76	119.84	10.00
Start DLS 10.00 TFO -12.82										
11,000.0	38.15	7.78	10,969.5	7,504.2	124.2	44.7	798,958.87	485,587.41	123.48	10.00
11,000.6	38.21	7.76	10,970.0	7,504.7	124.6	44.8	798,958.92	485,587.78	123.85	10.00
3rd Bone Spring										
11,029.2	41.00	6.81	10,992.0	7,526.7	142.6	47.1	798,961.23	485,605.84	141.87	10.00
First PP										
11,050.0	43.04	6.18	11,007.5	7,542.2	156.5	48.7	798,962.80	485,619.70	155.71	10.00
11,094.0	47.36	5.00	11,038.5	7,573.2	187.5	51.7	798,965.83	485,650.77	186.72	10.00
Start DLS 10.00 TFO -14.65										
11,100.0	47.94	4.80	11,042.5	7,577.2	192.0	52.1	798,966.21	485,655.18	191.13	10.00

Morcor Engineering

Morcor Standard Plan

Kaiser-Francis Oil Company

Company:	Kaiser Francis	Local Co-ordinate Reference:	Well Bell Lake Unit North 331H
Project:	Bell Lake Unit North 331H	TVD Reference:	WELL @ 3465.3usft (Original Well Elev)
Site:	Bell Lake Unit North 331H	MD Reference:	WELL @ 3465.3usft (Original Well Elev)
Well:	Bell Lake Unit North 331H	North Reference:	Grid
Wellbore:	Bell Lake Unit North 331H	Survey Calculation Method:	Minimum Curvature
Design:	190328 Bell Lake Unit North 331H	Database:	EDM 5000.1 Single User Db

Planned Survey

MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	TVDSS (usft)	N/S (usft)	E/W (usft)	Easting (usft)	Northing (usft)	V. Sec (usft)	DLeg (°/100usft)
11,150.0	52.79	3.22	11,074.4	7,609.1	230.4	54.7	798,968.88	485,693.58	229.49	10.00
11,194.0	57.08	2.00	11,099.7	7,634.4	266.3	56.4	798,970.51	485,729.55	265.43	10.00
Start DLS 10.00 TFO -5.31										
11,200.0	57.68	1.93	11,102.9	7,637.6	271.4	56.5	798,970.69	485,734.60	270.47	10.00
11,250.0	62.66	1.42	11,127.8	7,662.5	314.7	57.8	798,971.95	485,777.95	313.79	10.00
11,294.0	67.04	1.00	11,146.5	7,681.2	354.5	58.6	798,972.79	485,817.76	353.58	10.00
Start DLS 10.00 TFO -2.25										
11,300.0	67.64	0.97	11,148.8	7,683.5	360.1	58.7	798,972.88	485,823.29	359.12	10.00
11,350.0	72.63	0.77	11,165.8	7,700.5	407.1	59.5	798,973.60	485,870.30	406.10	10.00
11,394.0	77.03	0.60	11,177.3	7,712.0	449.5	60.0	798,974.10	485,912.75	448.55	10.00
Start DLS 10.00 TFO -1.72										
11,400.0	77.63	0.58	11,178.6	7,713.3	455.4	60.0	798,974.17	485,918.60	454.40	10.00
11,450.0	82.63	0.43	11,187.2	7,721.9	504.6	60.5	798,974.60	485,967.85	503.63	10.00
11,494.0	87.03	0.30	11,191.1	7,725.8	548.4	60.7	798,974.88	486,011.66	547.43	10.00
Start DLS 10.02 TFO -5.77										
11,500.0	87.63	0.24	11,191.4	7,726.1	554.4	60.8	798,974.91	486,017.65	553.42	10.02
11,523.8	90.00	0.00	11,191.9	7,726.6	578.2	60.8	798,974.96	486,041.44	577.21	10.02
Start DLS 1.13 TFO -90.00										
11,550.0	90.00	359.70	11,191.9	7,726.6	604.4	60.7	798,974.89	486,067.64	603.41	1.13
11,600.0	90.00	359.14	11,191.9	7,726.6	654.4	60.2	798,974.38	486,117.64	653.41	1.13
11,639.1	90.00	358.69	11,191.9	7,726.6	693.5	59.5	798,973.64	486,156.73	692.51	1.13
First Take Point										
11,649.0	90.00	358.58	11,191.9	7,726.6	703.4	59.3	798,973.41	486,166.63	702.41	1.13
Start 7543.6 hold at 11649.0 MD										
11,650.0	90.00	358.58	11,191.9	7,726.6	704.4	59.2	798,973.38	486,167.63	703.41	0.00
11,700.0	90.00	358.58	11,191.9	7,726.6	754.4	58.0	798,972.14	486,217.61	753.40	0.00
11,750.0	90.00	358.58	11,191.9	7,726.6	804.4	56.8	798,970.90	486,267.60	803.40	0.00
11,800.0	90.00	358.58	11,191.9	7,726.6	854.4	55.5	798,969.66	486,317.58	853.40	0.00

Morcor Engineering

Morcor Standard Plan

Kaiser-Francis Oil Company

Company:	Kaiser Francis	Local Co-ordinate Reference:	Well Bell Lake Unit North 331H
Project:	Bell Lake Unit North 331H	TVD Reference:	WELL @ 3465.3usft (Original Well Elev)
Site:	Bell Lake Unit North 331H	MD Reference:	WELL @ 3465.3usft (Original Well Elev)
Well:	Bell Lake Unit North 331H	North Reference:	Grid
Wellbore:	Bell Lake Unit North 331H	Survey Calculation Method:	Minimum Curvature
Design:	190328 Bell Lake Unit North 331H	Database:	EDM 5000.1 Single User Db

Planned Survey											
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	TVDSS (usft)	N/S (usft)	E/W (usft)	Easting (usft)	Northing (usft)	V. Sec (usft)	DLeg (°/100usft)	
11,850.0	90.00	358.58	11,191.9	7,726.6	904.3	54.3	798,968.42	486,367.57	903.40	0.00	
11,900.0	90.00	358.58	11,191.9	7,726.6	954.3	53.0	798,967.19	486,417.55	953.39	0.00	
11,950.0	90.00	358.58	11,191.9	7,726.6	1,004.3	51.8	798,965.95	486,467.54	1,003.39	0.00	
12,000.0	90.00	358.58	11,191.9	7,726.6	1,054.3	50.6	798,964.71	486,517.52	1,053.39	0.00	
12,050.0	90.00	358.58	11,191.9	7,726.6	1,104.3	49.3	798,963.47	486,567.51	1,103.39	0.00	
12,100.0	90.00	358.58	11,191.9	7,726.6	1,154.3	48.1	798,962.23	486,617.49	1,153.39	0.00	
12,150.0	90.00	358.58	11,191.9	7,726.6	1,204.3	46.8	798,960.99	486,667.47	1,203.38	0.00	
12,200.0	90.00	358.58	11,191.9	7,726.6	1,254.2	45.6	798,959.75	486,717.46	1,253.38	0.00	
12,250.0	90.00	358.58	11,191.9	7,726.6	1,304.2	44.4	798,958.51	486,767.44	1,303.38	0.00	
12,300.0	90.00	358.58	11,191.9	7,726.6	1,354.2	43.1	798,957.27	486,817.43	1,353.38	0.00	
12,350.0	90.00	358.58	11,191.9	7,726.6	1,404.2	41.9	798,956.03	486,867.41	1,403.37	0.00	
12,400.0	90.00	358.58	11,191.9	7,726.6	1,454.2	40.6	798,954.79	486,917.40	1,453.37	0.00	
12,450.0	90.00	358.58	11,191.9	7,726.6	1,504.2	39.4	798,953.56	486,967.38	1,503.37	0.00	
12,500.0	90.00	358.58	11,191.9	7,726.6	1,554.1	38.2	798,952.32	487,017.37	1,553.37	0.00	
12,550.0	90.00	358.58	11,191.9	7,726.6	1,604.1	36.9	798,951.08	487,067.35	1,603.37	0.00	
12,600.0	90.00	358.58	11,191.9	7,726.6	1,654.1	35.7	798,949.84	487,117.34	1,653.36	0.00	
12,650.0	90.00	358.58	11,191.9	7,726.6	1,704.1	34.5	798,948.60	487,167.32	1,703.36	0.00	
12,700.0	90.00	358.58	11,191.9	7,726.6	1,754.1	33.2	798,947.36	487,217.31	1,753.36	0.00	
12,750.0	90.00	358.58	11,191.9	7,726.6	1,804.1	32.0	798,946.12	487,267.29	1,803.36	0.00	
12,800.0	90.00	358.58	11,191.9	7,726.6	1,854.1	30.7	798,944.88	487,317.28	1,853.36	0.00	
12,850.0	90.00	358.58	11,191.9	7,726.6	1,904.0	29.5	798,943.64	487,367.26	1,903.35	0.00	
12,900.0	90.00	358.58	11,191.9	7,726.6	1,954.0	28.3	798,942.40	487,417.24	1,953.35	0.00	
12,950.0	90.00	358.58	11,191.9	7,726.6	2,004.0	27.0	798,941.16	487,467.23	2,003.35	0.00	
13,000.0	90.00	358.58	11,191.9	7,726.6	2,054.0	25.8	798,939.93	487,517.21	2,053.35	0.00	
13,050.0	90.00	358.58	11,191.9	7,726.6	2,104.0	24.5	798,938.69	487,567.20	2,103.34	0.00	
13,100.0	90.00	358.58	11,191.9	7,726.6	2,154.0	23.3	798,937.45	487,617.18	2,153.34	0.00	
13,150.0	90.00	358.58	11,191.9	7,726.6	2,203.9	22.1	798,936.21	487,667.17	2,203.34	0.00	

Morcor Engineering

Morcor Standard Plan

Kaiser-Francis Oil Company

Company:	Kaiser Francis	Local Co-ordinate Reference:	Well Bell Lake Unit North 331H
Project:	Bell Lake Unit North 331H	TVD Reference:	WELL @ 3465.3usft (Original Well Elev)
Site:	Bell Lake Unit North 331H	MD Reference:	WELL @ 3465.3usft (Original Well Elev)
Well:	Bell Lake Unit North 331H	North Reference:	Grid
Wellbore:	Bell Lake Unit North 331H	Survey Calculation Method:	Minimum Curvature
Design:	190328 Bell Lake Unit North 331H	Database:	EDM 5000.1 Single User Db

Planned Survey

MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	TVDSS (usft)	N/S (usft)	E/W (usft)	Easting (usft)	Northing (usft)	V. Sec (usft)	DLeg (°/100usft)
13,200.0	90.00	358.58	11,191.9	7,726.6	2,253.9	20.8	798,934.97	487,717.15	2,253.34	0.00
13,250.0	90.00	358.58	11,191.9	7,726.6	2,303.9	19.6	798,933.73	487,767.14	2,303.34	0.00
13,300.0	90.00	358.58	11,191.9	7,726.6	2,353.9	18.3	798,932.49	487,817.12	2,353.33	0.00
13,350.0	90.00	358.58	11,191.9	7,726.6	2,403.9	17.1	798,931.25	487,867.11	2,403.33	0.00
13,400.0	90.00	358.58	11,191.9	7,726.6	2,453.9	15.9	798,930.01	487,917.09	2,453.33	0.00
13,450.0	90.00	358.58	11,191.9	7,726.6	2,503.9	14.6	798,928.77	487,967.08	2,503.33	0.00
13,500.0	90.00	358.58	11,191.9	7,726.6	2,553.8	13.4	798,927.54	488,017.06	2,553.33	0.00
13,550.0	90.00	358.58	11,191.9	7,726.6	2,603.8	12.1	798,926.30	488,067.04	2,603.32	0.00
13,600.0	90.00	358.58	11,191.9	7,726.6	2,653.8	10.9	798,925.06	488,117.03	2,653.32	0.00
13,650.0	90.00	358.58	11,191.9	7,726.6	2,703.8	9.7	798,923.82	488,167.01	2,703.32	0.00
13,700.0	90.00	358.58	11,191.9	7,726.6	2,753.8	8.4	798,922.58	488,217.00	2,753.32	0.00
13,750.0	90.00	358.58	11,191.9	7,726.6	2,803.8	7.2	798,921.34	488,266.98	2,803.31	0.00
13,800.0	90.00	358.58	11,191.9	7,726.6	2,853.7	6.0	798,920.10	488,316.97	2,853.31	0.00
13,850.0	90.00	358.58	11,191.9	7,726.6	2,903.7	4.7	798,918.86	488,366.95	2,903.31	0.00
13,900.0	90.00	358.58	11,191.9	7,726.6	2,953.7	3.5	798,917.62	488,416.94	2,953.31	0.00
13,950.0	90.00	358.58	11,191.9	7,726.6	3,003.7	2.2	798,916.38	488,466.92	3,003.31	0.00
14,000.0	90.00	358.58	11,191.9	7,726.6	3,053.7	1.0	798,915.14	488,516.91	3,053.30	0.00
14,050.0	90.00	358.58	11,191.9	7,726.6	3,103.7	-0.2	798,913.91	488,566.89	3,103.30	0.00
14,100.0	90.00	358.58	11,191.9	7,726.6	3,153.7	-1.5	798,912.67	488,616.88	3,153.30	0.00
14,150.0	90.00	358.58	11,191.9	7,726.6	3,203.6	-2.7	798,911.43	488,666.86	3,203.30	0.00
14,200.0	90.00	358.58	11,191.9	7,726.6	3,253.6	-4.0	798,910.19	488,716.85	3,253.29	0.00
14,250.0	90.00	358.58	11,191.9	7,726.6	3,303.6	-5.2	798,908.95	488,766.83	3,303.29	0.00
14,300.0	90.00	358.58	11,191.9	7,726.6	3,353.6	-6.4	798,907.71	488,816.81	3,353.29	0.00
14,350.0	90.00	358.58	11,191.9	7,726.6	3,403.6	-7.7	798,906.47	488,866.80	3,403.29	0.00
14,400.0	90.00	358.58	11,191.9	7,726.6	3,453.6	-8.9	798,905.23	488,916.78	3,453.29	0.00
14,450.0	90.00	358.58	11,191.9	7,726.6	3,503.5	-10.2	798,903.99	488,966.77	3,503.28	0.00
14,500.0	90.00	358.58	11,191.9	7,726.6	3,553.5	-11.4	798,902.75	489,016.75	3,553.28	0.00

Morcor Engineering

Morcor Standard Plan

Kaiser-Francis Oil Company

Company:	Kaiser Francis	Local Co-ordinate Reference:	Well Bell Lake Unit North 331H
Project:	Bell Lake Unit North 331H	TVD Reference:	WELL @ 3465.3usft (Original Well Elev)
Site:	Bell Lake Unit North 331H	MD Reference:	WELL @ 3465.3usft (Original Well Elev)
Well:	Bell Lake Unit North 331H	North Reference:	Grid
Wellbore:	Bell Lake Unit North 331H	Survey Calculation Method:	Minimum Curvature
Design:	190328 Bell Lake Unit North 331H	Database:	EDM 5000.1 Single User Db

Planned Survey											
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	TVDSS (usft)	N/S (usft)	E/W (usft)	Easting (usft)	Northing (usft)	V. Sec (usft)	DLeg (°/100usft)	
14,550.0	90.00	358.58	11,191.9	7,726.6	3,603.5	-12.6	798,901.52	489,066.74	3,603.28	0.00	
14,600.0	90.00	358.58	11,191.9	7,726.6	3,653.5	-13.9	798,900.28	489,116.72	3,653.28	0.00	
14,650.0	90.00	358.58	11,191.9	7,726.6	3,703.5	-15.1	798,899.04	489,166.71	3,703.28	0.00	
14,700.0	90.00	358.58	11,191.9	7,726.6	3,753.5	-16.3	798,897.80	489,216.69	3,753.27	0.00	
14,750.0	90.00	358.58	11,191.9	7,726.6	3,803.5	-17.6	798,896.56	489,266.68	3,803.27	0.00	
14,800.0	90.00	358.58	11,191.9	7,726.6	3,853.4	-18.8	798,895.32	489,316.66	3,853.27	0.00	
14,850.0	90.00	358.58	11,191.9	7,726.6	3,903.4	-20.1	798,894.08	489,366.65	3,903.27	0.00	
14,900.0	90.00	358.58	11,191.9	7,726.6	3,953.4	-21.3	798,892.84	489,416.63	3,953.26	0.00	
14,950.0	90.00	358.58	11,191.9	7,726.6	4,003.4	-22.5	798,891.60	489,466.62	4,003.26	0.00	
15,000.0	90.00	358.58	11,191.9	7,726.6	4,053.4	-23.8	798,890.36	489,516.60	4,053.26	0.00	
15,050.0	90.00	358.58	11,191.9	7,726.6	4,103.4	-25.0	798,889.12	489,566.58	4,103.26	0.00	
15,100.0	90.00	358.58	11,191.9	7,726.6	4,153.3	-26.3	798,887.89	489,616.57	4,153.26	0.00	
15,150.0	90.00	358.58	11,191.9	7,726.6	4,203.3	-27.5	798,886.65	489,666.55	4,203.25	0.00	
15,200.0	90.00	358.58	11,191.9	7,726.6	4,253.3	-28.7	798,885.41	489,716.54	4,253.25	0.00	
15,250.0	90.00	358.58	11,191.9	7,726.6	4,303.3	-30.0	798,884.17	489,766.52	4,303.25	0.00	
15,300.0	90.00	358.58	11,191.9	7,726.6	4,353.3	-31.2	798,882.93	489,816.51	4,353.25	0.00	
15,350.0	90.00	358.58	11,191.9	7,726.6	4,403.3	-32.5	798,881.69	489,866.49	4,403.24	0.00	
15,400.0	90.00	358.58	11,191.9	7,726.6	4,453.3	-33.7	798,880.45	489,916.48	4,453.24	0.00	
15,450.0	90.00	358.58	11,191.9	7,726.6	4,503.2	-34.9	798,879.21	489,966.46	4,503.24	0.00	
15,500.0	90.00	358.58	11,191.9	7,726.6	4,553.2	-36.2	798,877.97	490,016.45	4,553.24	0.00	
15,550.0	90.00	358.58	11,191.9	7,726.6	4,603.2	-37.4	798,876.73	490,066.43	4,603.24	0.00	
15,600.0	90.00	358.58	11,191.9	7,726.6	4,653.2	-38.7	798,875.49	490,116.42	4,653.23	0.00	
15,650.0	90.00	358.58	11,191.9	7,726.6	4,703.2	-39.9	798,874.26	490,166.40	4,703.23	0.00	
15,700.0	90.00	358.58	11,191.9	7,726.6	4,753.2	-41.1	798,873.02	490,216.38	4,753.23	0.00	
15,750.0	90.00	358.58	11,191.9	7,726.6	4,803.1	-42.4	798,871.78	490,266.37	4,803.23	0.00	
15,800.0	90.00	358.58	11,191.9	7,726.6	4,853.1	-43.6	798,870.54	490,316.35	4,853.23	0.00	
15,850.0	90.00	358.58	11,191.9	7,726.6	4,903.1	-44.8	798,869.30	490,366.34	4,903.22	0.00	

Morcor Engineering

Morcor Standard Plan

Kaiser-Francis Oil Company

Company:	Kaiser Francis	Local Co-ordinate Reference:	Well Bell Lake Unit North 331H
Project:	Bell Lake Unit North 331H	TVD Reference:	WELL @ 3465.3usft (Original Well Elev)
Site:	Bell Lake Unit North 331H	MD Reference:	WELL @ 3465.3usft (Original Well Elev)
Well:	Bell Lake Unit North 331H	North Reference:	Grid
Wellbore:	Bell Lake Unit North 331H	Survey Calculation Method:	Minimum Curvature
Design:	190328 Bell Lake Unit North 331H	Database:	EDM 5000.1 Single User Db

Planned Survey											
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	TVDSS (usft)	N/S (usft)	E/W (usft)	Easting (usft)	Northing (usft)	V. Sec (usft)	DLeg (°/100usft)	
15,900.0	90.00	358.58	11,191.9	7,726.6	4,953.1	-46.1	798,868.06	490,416.32	4,953.22	0.00	
15,950.0	90.00	358.58	11,191.9	7,726.6	5,003.1	-47.3	798,866.82	490,466.31	5,003.22	0.00	
16,000.0	90.00	358.58	11,191.9	7,726.6	5,053.1	-48.6	798,865.58	490,516.29	5,053.22	0.00	
16,050.0	90.00	358.58	11,191.9	7,726.6	5,103.1	-49.8	798,864.34	490,566.28	5,103.21	0.00	
16,100.0	90.00	358.58	11,191.9	7,726.6	5,153.0	-51.0	798,863.10	490,616.26	5,153.21	0.00	
16,150.0	90.00	358.58	11,191.9	7,726.6	5,203.0	-52.3	798,861.87	490,666.25	5,203.21	0.00	
16,200.0	90.00	358.58	11,191.9	7,726.6	5,253.0	-53.5	798,860.63	490,716.23	5,253.21	0.00	
16,250.0	90.00	358.58	11,191.9	7,726.6	5,303.0	-54.8	798,859.39	490,766.22	5,303.21	0.00	
16,300.0	90.00	358.58	11,191.9	7,726.6	5,353.0	-56.0	798,858.15	490,816.20	5,353.20	0.00	
16,350.0	90.00	358.58	11,191.9	7,726.6	5,403.0	-57.2	798,856.91	490,866.19	5,403.20	0.00	
16,400.0	90.00	358.58	11,191.9	7,726.6	5,452.9	-58.5	798,855.67	490,916.17	5,453.20	0.00	
16,450.0	90.00	358.58	11,191.9	7,726.6	5,502.9	-59.7	798,854.43	490,966.15	5,503.20	0.00	
16,500.0	90.00	358.58	11,191.9	7,726.6	5,552.9	-61.0	798,853.19	491,016.14	5,553.20	0.00	
16,550.0	90.00	358.58	11,191.9	7,726.6	5,602.9	-62.2	798,851.95	491,066.12	5,603.19	0.00	
16,600.0	90.00	358.58	11,191.9	7,726.6	5,652.9	-63.4	798,850.71	491,116.11	5,653.19	0.00	
16,650.0	90.00	358.58	11,191.9	7,726.6	5,702.9	-64.7	798,849.47	491,166.09	5,703.19	0.00	
16,700.0	90.00	358.58	11,191.9	7,726.6	5,752.9	-65.9	798,848.24	491,216.08	5,753.19	0.00	
16,750.0	90.00	358.58	11,191.9	7,726.6	5,802.8	-67.2	798,847.00	491,266.06	5,803.18	0.00	
16,800.0	90.00	358.58	11,191.9	7,726.6	5,852.8	-68.4	798,845.76	491,316.05	5,853.18	0.00	
16,850.0	90.00	358.58	11,191.9	7,726.6	5,902.8	-69.6	798,844.52	491,366.03	5,903.18	0.00	
16,900.0	90.00	358.58	11,191.9	7,726.6	5,952.8	-70.9	798,843.28	491,416.02	5,953.18	0.00	
16,950.0	90.00	358.58	11,191.9	7,726.6	6,002.8	-72.1	798,842.04	491,466.00	6,003.18	0.00	
17,000.0	90.00	358.58	11,191.9	7,726.6	6,052.8	-73.3	798,840.80	491,515.99	6,053.17	0.00	
17,050.0	90.00	358.58	11,191.9	7,726.6	6,102.7	-74.6	798,839.56	491,565.97	6,103.17	0.00	
17,100.0	90.00	358.58	11,191.9	7,726.6	6,152.7	-75.8	798,838.32	491,615.95	6,153.17	0.00	
17,150.0	90.00	358.58	11,191.9	7,726.6	6,202.7	-77.1	798,837.08	491,665.94	6,203.17	0.00	
17,200.0	90.00	358.58	11,191.9	7,726.6	6,252.7	-78.3	798,835.85	491,715.92	6,253.16	0.00	

Morcor Engineering

Morcor Standard Plan

Kaiser-Francis Oil Company

Company:	Kaiser Francis	Local Co-ordinate Reference:	Well Bell Lake Unit North 331H
Project:	Bell Lake Unit North 331H	TVD Reference:	WELL @ 3465.3usft (Original Well Elev)
Site:	Bell Lake Unit North 331H	MD Reference:	WELL @ 3465.3usft (Original Well Elev)
Well:	Bell Lake Unit North 331H	North Reference:	Grid
Wellbore:	Bell Lake Unit North 331H	Survey Calculation Method:	Minimum Curvature
Design:	190328 Bell Lake Unit North 331H	Database:	EDM 5000.1 Single User Db

Planned Survey											
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	TVDSS (usft)	N/S (usft)	E/W (usft)	Easting (usft)	Northing (usft)	V. Sec (usft)	DLeg (°/100usft)	
17,250.0	90.00	358.58	11,191.9	7,726.6	6,302.7	-79.5	798,834.61	491,765.91	6,303.16	0.00	
17,300.0	90.00	358.58	11,191.9	7,726.6	6,352.7	-80.8	798,833.37	491,815.89	6,353.16	0.00	
17,350.0	90.00	358.58	11,191.9	7,726.6	6,402.7	-82.0	798,832.13	491,865.88	6,403.16	0.00	
17,400.0	90.00	358.58	11,191.9	7,726.6	6,452.6	-83.3	798,830.89	491,915.86	6,453.16	0.00	
17,450.0	90.00	358.58	11,191.9	7,726.6	6,502.6	-84.5	798,829.65	491,965.85	6,503.15	0.00	
17,500.0	90.00	358.58	11,191.9	7,726.6	6,552.6	-85.7	798,828.41	492,015.83	6,553.15	0.00	
17,550.0	90.00	358.58	11,191.9	7,726.6	6,602.6	-87.0	798,827.17	492,065.82	6,603.15	0.00	
17,600.0	90.00	358.58	11,191.9	7,726.6	6,652.6	-88.2	798,825.93	492,115.80	6,653.15	0.00	
17,650.0	90.00	358.58	11,191.9	7,726.6	6,702.6	-89.5	798,824.69	492,165.79	6,703.15	0.00	
17,700.0	90.00	358.58	11,191.9	7,726.6	6,752.5	-90.7	798,823.45	492,215.77	6,753.14	0.00	
17,750.0	90.00	358.58	11,191.9	7,726.6	6,802.5	-91.9	798,822.22	492,265.76	6,803.14	0.00	
17,800.0	90.00	358.58	11,191.9	7,726.6	6,852.5	-93.2	798,820.98	492,315.74	6,853.14	0.00	
17,850.0	90.00	358.58	11,191.9	7,726.6	6,902.5	-94.4	798,819.74	492,365.72	6,903.14	0.00	
17,900.0	90.00	358.58	11,191.9	7,726.6	6,952.5	-95.6	798,818.50	492,415.71	6,953.13	0.00	
17,950.0	90.00	358.58	11,191.9	7,726.6	7,002.5	-96.9	798,817.26	492,465.69	7,003.13	0.00	
18,000.0	90.00	358.58	11,191.9	7,726.6	7,052.5	-98.1	798,816.02	492,515.68	7,053.13	0.00	
18,050.0	90.00	358.58	11,191.9	7,726.6	7,102.4	-99.4	798,814.78	492,565.66	7,103.13	0.00	
18,100.0	90.00	358.58	11,191.9	7,726.6	7,152.4	-100.6	798,813.54	492,615.65	7,153.13	0.00	
18,150.0	90.00	358.58	11,191.9	7,726.6	7,202.4	-101.8	798,812.30	492,665.63	7,203.12	0.00	
18,200.0	90.00	358.58	11,191.9	7,726.6	7,252.4	-103.1	798,811.06	492,715.62	7,253.12	0.00	
18,250.0	90.00	358.58	11,191.9	7,726.6	7,302.4	-104.3	798,809.82	492,765.60	7,303.12	0.00	
18,300.0	90.00	358.58	11,191.9	7,726.6	7,352.4	-105.6	798,808.59	492,815.59	7,353.12	0.00	
18,350.0	90.00	358.58	11,191.9	7,726.6	7,402.3	-106.8	798,807.35	492,865.57	7,403.12	0.00	
18,400.0	90.00	358.58	11,191.9	7,726.6	7,452.3	-108.0	798,806.11	492,915.56	7,453.11	0.00	
18,450.0	90.00	358.58	11,191.9	7,726.6	7,502.3	-109.3	798,804.87	492,965.54	7,503.11	0.00	
18,500.0	90.00	358.58	11,191.9	7,726.6	7,552.3	-110.5	798,803.63	493,015.52	7,553.11	0.00	
18,550.0	90.00	358.58	11,191.9	7,726.6	7,602.3	-111.8	798,802.39	493,065.51	7,603.11	0.00	

Morcor Engineering

Morcor Standard Plan

Kaiser-Francis Oil Company

Company:	Kaiser Francis	Local Co-ordinate Reference:	Well Bell Lake Unit North 331H
Project:	Bell Lake Unit North 331H	TVD Reference:	WELL @ 3465.3usft (Original Well Elev)
Site:	Bell Lake Unit North 331H	MD Reference:	WELL @ 3465.3usft (Original Well Elev)
Well:	Bell Lake Unit North 331H	North Reference:	Grid
Wellbore:	Bell Lake Unit North 331H	Survey Calculation Method:	Minimum Curvature
Design:	190328 Bell Lake Unit North 331H	Database:	EDM 5000.1 Single User Db

Planned Survey											
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	TVDSS (usft)	N/S (usft)	E/W (usft)	Easting (usft)	Northing (usft)	V. Sec (usft)	DLeg (°/100usft)	
18,600.0	90.00	358.58	11,191.9	7,726.6	7,652.3	-113.0	798,801.15	493,115.49	7,653.10	0.00	
18,650.0	90.00	358.58	11,191.9	7,726.6	7,702.3	-114.2	798,799.91	493,165.48	7,703.10	0.00	
18,700.0	90.00	358.58	11,191.9	7,726.6	7,752.2	-115.5	798,798.67	493,215.46	7,753.10	0.00	
18,750.0	90.00	358.58	11,191.9	7,726.6	7,802.2	-116.7	798,797.43	493,265.45	7,803.10	0.00	
18,800.0	90.00	358.58	11,191.9	7,726.6	7,852.2	-118.0	798,796.20	493,315.43	7,853.10	0.00	
18,850.0	90.00	358.58	11,191.9	7,726.6	7,902.2	-119.2	798,794.96	493,365.42	7,903.09	0.00	
18,900.0	90.00	358.58	11,191.9	7,726.6	7,952.2	-120.4	798,793.72	493,415.40	7,953.09	0.00	
18,950.0	90.00	358.58	11,191.9	7,726.6	8,002.2	-121.7	798,792.48	493,465.39	8,003.09	0.00	
19,000.0	90.00	358.58	11,191.9	7,726.6	8,052.1	-122.9	798,791.24	493,515.37	8,053.09	0.00	
19,050.0	90.00	358.58	11,191.9	7,726.6	8,102.1	-124.1	798,790.00	493,565.36	8,103.08	0.00	
19,100.0	90.00	358.58	11,191.9	7,726.6	8,152.1	-125.4	798,788.76	493,615.34	8,153.08	0.00	
19,150.0	90.00	358.58	11,191.9	7,726.6	8,202.1	-126.6	798,787.52	493,665.33	8,203.08	0.00	
19,190.8	90.00	358.58	11,191.9	7,726.6	8,242.9	-127.6	798,786.51	493,706.11	8,243.88	0.00	
TD at 19192.6 - Last Take Point - 5 1/2" Production Casing											

Casing Points						
Measured Depth (usft)	Vertical Depth (usft)	Name	Casing Diameter (")	Hole Diameter (")		
1,207.0	1,207.0	13 3/8" Surface Casing	13-3/8	17-1/2		
120.0	120.0	20" Conductor	20	26		
19,190.8	11,191.9	5 1/2" Production Casing	5-1/2	8-3/4		
5,147.0	5,147.0	9 5/8" Intermediate Casing	9-5/8	12-1/4		

Morcor Engineering

Morcor Standard Plan



Company:	Kaiser Francis	Local Co-ordinate Reference:	Well Bell Lake Unit North 331H
Project:	Bell Lake Unit North 331H	TVD Reference:	WELL @ 3465.3usft (Original Well Elev)
Site:	Bell Lake Unit North 331H	MD Reference:	WELL @ 3465.3usft (Original Well Elev)
Well:	Bell Lake Unit North 331H	North Reference:	Grid
Wellbore:	Bell Lake Unit North 331H	Survey Calculation Method:	Minimum Curvature
Design:	190328 Bell Lake Unit North 331H	Database:	EDM 5000.1 Single User Db

Formations						
Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)	
4,722.0	4,722.0	Base of Salt		0.00		
6,072.0	6,072.0	Cherry Canyon		0.00		
4,922.0	4,922.0	Lamar		0.00		
1,572.0	1,572.0	Salado		0.00		
1,182.0	1,182.0	Rustler		0.00		
9,522.0	9,522.0	1st Bone Spring		0.00		
8,617.0	8,617.0	Avalon		0.00		
8,572.0	8,572.0	Bone Spring		0.00		
7,472.0	7,472.0	Brushy Canyon		0.00		
10,522.0	10,522.0	2nd Bone Spring Lime		0.00		
5,172.0	5,172.0	Bell Canyon		0.00		
11,000.6	10,970.0	3rd Bone Spring		0.00		
1,772.0	1,772.0	Top of Salt		0.00		
10,032.0	10,032.0	2nd Bone Spring		0.00		

Morcor Engineering

Morcor Standard Plan



Company:	Kaiser Francis	Local Co-ordinate Reference:	Well Bell Lake Unit North 331H
Project:	Bell Lake Unit North 331H	TVD Reference:	WELL @ 3465.3usft (Original Well Elev)
Site:	Bell Lake Unit North 331H	MD Reference:	WELL @ 3465.3usft (Original Well Elev)
Well:	Bell Lake Unit North 331H	North Reference:	Grid
Wellbore:	Bell Lake Unit North 331H	Survey Calculation Method:	Minimum Curvature
Design:	190328 Bell Lake Unit North 331H	Database:	EDM 5000.1 Single User Db

Plan Annotations

Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
10,594.0	10,594.0	0.0	0.0	Start Build 10.00
10,694.0	10,693.5	7.0	5.2	Start DLS 10.00 TFO -19.70
10,794.0	10,790.1	29.0	18.1	Start DLS 10.00 TFO -28.85
10,894.0	10,881.2	67.1	32.9	Start DLS 10.00 TFO -33.33
10,994.0	10,964.8	120.5	44.2	Start DLS 10.00 TFO -12.82
11,029.2	10,992.0	142.6	47.1	First PP
11,094.0	11,038.5	187.5	51.7	Start DLS 10.00 TFO -14.65
11,194.0	11,099.7	266.3	56.4	Start DLS 10.00 TFO -5.31
11,294.0	11,146.5	354.5	58.6	Start DLS 10.00 TFO -2.25
11,394.0	11,177.3	449.5	60.0	Start DLS 10.00 TFO -1.72
11,494.0	11,191.1	548.4	60.7	Start DLS 10.02 TFO -5.77
11,523.8	11,191.9	578.2	60.8	Start DLS 1.13 TFO -90.00
11,639.1	11,191.9	693.5	59.5	First Take Point
11,649.0	11,191.9	703.4	59.3	Start 7543.6 hold at 11649.0 MD
19,190.8	11,191.9	8,242.9	-127.6	TD at 19192.6 - Last Take Point

Checked By: _____ Approved By: _____ Date: _____



GATES E & S NORTH AMERICA, INC.
7603 Prairie Oak Dr.
Houston, TX 77086

PHONE: 281-602-4119
FAX:
EMAIL: Troy.Schmidt@gat
WEB: www.gates.com

10K ASSEMBLY PRESSURE TEST CERTIFICATE

Customer :	A-7 AUSTIN INC DBA AUSTIN HOSE	Test Date:	10/3/2017
Customer Ref. :	4086301	Hose Serial No.:	H-100317-2
Invoice No. :	508588	Created By:	Irene Pizana

Product Description: 10K3.035.0CM4.1/16FLGE/E

End Fitting 1 :	4 -1/16 10K FLANGE - FIXED	End Fitting 2 :	4 -1/16 10K FLANGE - FLOATING
Gates Part No. :	68603010-9710398	Assembly Code :	L39789092117H-100317-2
Working Pressure :	10,000 PSI	Test Pressure :	15,000 PSI

Gates E & S North America, Inc. certifies that the following hose assembly has successfully passed all pressure testing requirements set forth in Section 9.7.7 and Table 10 of API 7K, Sixth Edition (December 2015).

Quality:	QUALITY
Date :	10/3/2017
Signature :	<i>Irene Pizana</i>

Production:	PRODUCTION
Date :	10/3/2017
Signature :	<i>Troy Schmidt</i>

Form PTC - 01 Rev.0 2






Gates E&S North America, Inc.
 7603 Prairie Oak Dr.
 Houston, TX. 77086
 PHONE :
 FAX:
Troy.Schmidt@gates.com

CERTIFICATE OF CONFORMANCE

This is to verify that all Parts and/or Materials included in this shipment have been manufactured and/or processed in Conformance with applicable drawings and specifications, and that Records of Required Tests are on file and subject to examination. The following items were assembled at **Gates E & S, North America Inc.**, facilities in Houston, TX, USA. This hose assembly was designed and manufactured to meet requirements of API Spec 7K.

CUSTOMER: A-7 AUSTIN INC DBA AUSTIN HOSE
CUSTOMERS P.O.#: 4086301
PART DESCRIPTION: 10K3.035.0CM4.1/16FLGE/E
SALES ORDER #: 508588
QUANTITY: 1
SERIAL #: H-100317-2

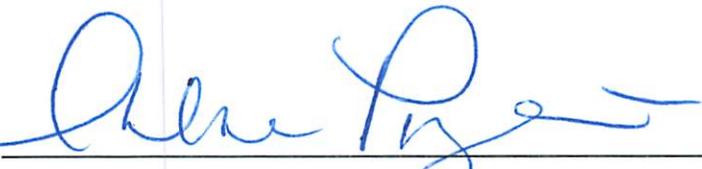SIGNATURE: 
TITLE: QUALITY ASSURANCE
DATE: 10/3/2017



JOB REPORT

COMPANY DETAILS

Company: Austin
 Contact:
 Phone:

Email: Irene.pizana@gates.com


JOB DETAILS

DATE October 03, 2017
 START TIME 10:38:29
 END TIME 11:00:25
 Gates Rep: Chris Olivo
 Recommendation: H-100317-2
 Working Pressure: 10000
 Ext Inspection: Pass
 Fitting Inspection: Pass
 Test pressure: 15000
 Serial No: H-100317-2

Length: 35'
 Inner Diameter: 3.0"
 Pressure Test: Pass
 Internal Inspection: N/A
 Fitting Type: 10K Flange ExE



SUMMARY GRAPH

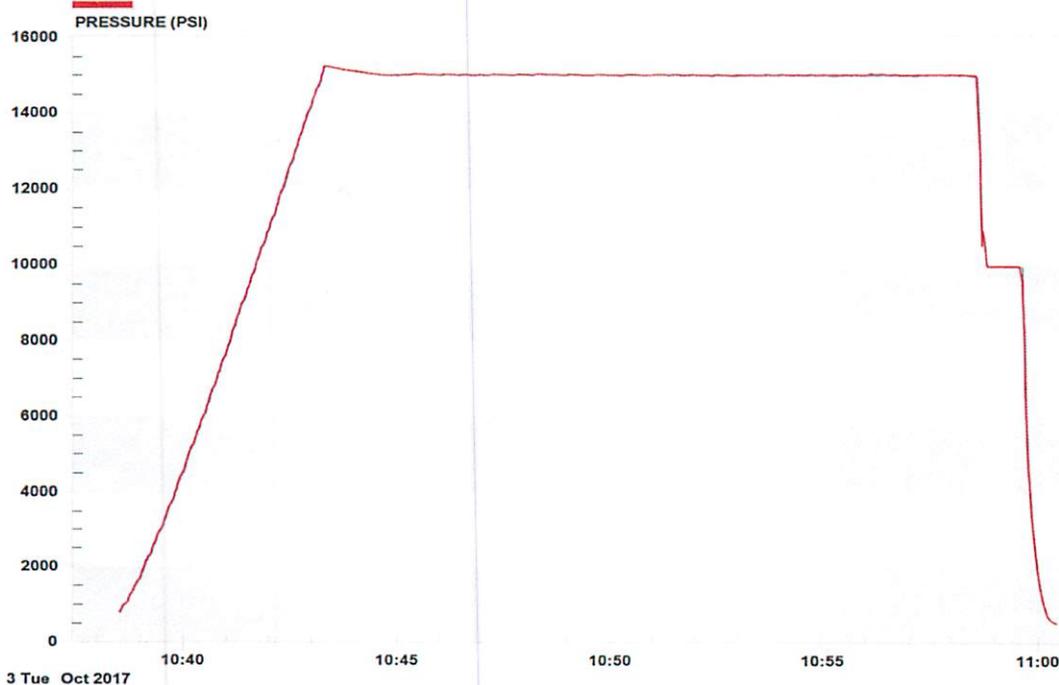

Report Created: 3-Oct-17



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

SUPO Data Report

04/19/2021

APD ID: 10400042505

Submission Date: 06/17/2019

Highlighted data
reflects the most
recent changes

Operator Name: KAISER FRANCIS OIL COMPANY

Well Name: BELL LAKE UNIT NORTH

Well Number: 331H

[Show Final Text](#)

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - Existing Roads

Will existing roads be used? YES

Existing Road Map:

BLUN_331H_Existing_Roads_20190604142409.pdf

Existing Road Purpose: ACCESS,FLUID TRANSPORT

Row(s) Exist? NO

ROW ID(s)

ID:

Do the existing roads need to be improved? NO

Existing Road Improvement Description:

Existing Road Improvement Attachment:

Section 2 - New or Reconstructed Access Roads

Will new roads be needed? YES

New Road Map:

BLUN_332H_Access_Road_20191112122115.pdf

New road type: RESOURCE

Length: 919 Feet

Width (ft.): 25

Max slope (%): 2

Max grade (%): 2

Army Corp of Engineers (ACOE) permit required? NO

ACOE Permit Number(s):

New road travel width: 15

New road access erosion control: Road construction requirements and regular maintenance would alleviate potential impacts to the access road from water erosion damage.

New road access plan or profile prepared? NO

New road access plan attachment:

Access road engineering design? NO

Access road engineering design attachment:

Operator Name: KAISER FRANCIS OIL COMPANY**Well Name:** BELL LAKE UNIT NORTH**Well Number:** 331H**Turnout?** N**Access surfacing type:** OTHER**Access topsoil source:** BOTH**Access surfacing type description:** Native caliche**Access onsite topsoil source depth:** 6**Offsite topsoil source description:** Material will be obtained from BLM caliche pit in SWSW Section 22-T24S-R34E or NENE Section 20-T23S-R33E**Onsite topsoil removal process:** The top 6 inches of topsoil is pushed off and stockpiled along the side of the location. An approximate 160' X 160' area is used within the proposed well site to remove caliche. Subsoil is removed and stockpiled within the pad site to build the location and road. Then subsoil is pushed back in the hole and caliche is spread accordingly across proposed access road.**Access other construction information:****Access miscellaneous information:****Number of access turnouts:****Access turnout map:**

Drainage Control

New road drainage crossing: OTHER**Drainage Control comments:** Proposed access road will be crowned and ditched and constructed of 6 inch rolled and compacted caliche. Water will be diverted where necessary to avoid ponding, maintain good drainage, and to be consistent with local drainage patterns.**Road Drainage Control Structures (DCS) description:** The ditches will be 3' wide with 3:1 slopes**Road Drainage Control Structures (DCS) attachment:**

Access Additional Attachments

Section 3 - Location of Existing Wells

Existing Wells Map? YES**Attach Well map:**

BLUN_331H_1_Mile_Wells_Map_20190604142742.pdf

BLUN_331H_1_MILE_WELLS_20190604142744.pdf

Section 4 - Location of Existing and/or Proposed Production Facilities

Submit or defer a Proposed Production Facilities plan? DEFER**Estimated Production Facilities description:** Production facilities are planned for the south side of pad. Plan for initial wells: 2-1000 bbl water tanks and 5-1000 bbl oil tanks, a temporary 6X20 horizontal 3-phase sep, a 48" X 10' 3-phase sep, a 8 X 20' heater treater and a 48"X 10' 2-phase sep

Operator Name: KAISER FRANCIS OIL COMPANY

Well Name: BELL LAKE UNIT NORTH

Well Number: 331H

Section 5 - Location and Types of Water Supply

Water Source Table

Water source type: OTHER

Describe type: BRINE WATER

Water source use type: INTERMEDIATE/PRODUCTION CASING

Source latitude:

Source longitude:

Source datum:

Water source permit type: PRIVATE CONTRACT

Water source transport method: TRUCKING

Source land ownership: PRIVATE

Source transportation land ownership: OTHER

Describe transportation land ownership:

Water source volume (barrels): 20000

Source volume (acre-feet): 2.577862

Source volume (gal): 840000

Water source type: OTHER

Describe type: FRESH WATER

Water source use type: STIMULATION
OTHER
SURFACE CASING

Describe use type: ROAD/PAD CONSTRUCTION AND

Source latitude:

Source longitude:

Source datum:

Water source permit type: PRIVATE CONTRACT

Water source transport method: TRUCKING

Source land ownership: PRIVATE

Source transportation land ownership: OTHER

Describe transportation land ownership:

Water source volume (barrels): 250000

Source volume (acre-feet): 32.223274

Source volume (gal): 10500000

Operator Name: KAISER FRANCIS OIL COMPANY

Well Name: BELL LAKE UNIT NORTH

Well Number: 331H

Water source and transportation map:

BLUN_331H_Water_Source_Map_20190604143539.pdf

Water source comments: Source transportation land ownership is a mixture of Federal, State and County.

New water well? NO

New Water Well Info

Well latitude:

Well Longitude:

Well datum:

Well target aquifer:

Est. depth to top of aquifer(ft):

Est thickness of aquifer:

Aquifer comments:

Aquifer documentation:

Well depth (ft):

Well casing type:

Well casing outside diameter (in.):

Well casing inside diameter (in.):

New water well casing?

Used casing source:

Drilling method:

Drill material:

Grout material:

Grout depth:

Casing length (ft.):

Casing top depth (ft.):

Well Production type:

Completion Method:

Water well additional information:

State appropriation permit:

Additional information attachment:

Section 6 - Construction Materials

Using any construction materials: YES

Construction Materials description: On site caliche will be used for construction if sufficient. In the event insufficient quantities of caliche are available onsite, caliche will be trucked in from BLM's caliche pit in SWSW Section 22-T24-R34E or NENE Section 20-T23S-R33E.

Construction Materials source location attachment:

Section 7 - Methods for Handling Waste

Waste type: DRILLING

Waste content description: Drilling fluids and cuttings

Amount of waste: 3900 barrels

Waste disposal frequency : One Time Only

Safe containment description: All drilling fluids will be stored safely and disposed of properly

Safe containmant attachment:

Operator Name: KAISER FRANCIS OIL COMPANY

Well Name: BELL LAKE UNIT NORTH

Well Number: 331H

Waste disposal type: HAUL TO COMMERCIAL FACILITY **Disposal location ownership:** COMMERCIAL FACILITY

Disposal type description:

Disposal location description: Cuttings will be hauled to R360's facility on US 62/180 at Halfway, NM

Waste type: SEWAGE

Waste content description: Human waste and grey water

Amount of waste: 1000 gallons

Waste disposal frequency : One Time Only

Safe containment description: Waste material will be stored safely and disposed of properly

Safe containmant attachment:

Waste disposal type: HAUL TO COMMERCIAL FACILITY **Disposal location ownership:** COMMERCIAL FACILITY

Disposal type description:

Disposal location description: Trucked to an approved disposal facility

Waste type: GARBAGE

Waste content description: Miscellaneous trash

Amount of waste: 500 pounds

Waste disposal frequency : One Time Only

Safe containment description: Trash produced during drilling and completion operations will be collected in a trash container and disposed of properly

Safe containmant attachment:

Waste disposal type: HAUL TO COMMERCIAL FACILITY **Disposal location ownership:** COMMERCIAL FACILITY

Disposal type description:

Disposal location description: Trucked to an approved disposal facility

Reserve Pit

Reserve Pit being used? NO

Temporary disposal of produced water into reserve pit?

Reserve pit length (ft.) **Reserve pit width (ft.)**

Reserve pit depth (ft.) **Reserve pit volume (cu. yd.)**

Is at least 50% of the reserve pit in cut?

Reserve pit liner

Reserve pit liner specifications and installation description

Operator Name: KAISER FRANCIS OIL COMPANY

Well Name: BELL LAKE UNIT NORTH

Well Number: 331H

Cuttings Area

Cuttings Area being used? NO

Are you storing cuttings on location? YES

Description of cuttings location Cuttings will be stored in roll off bins and hauled to R360 on US 62/180 near Halfway.

Cuttings area length (ft.)

Cuttings area width (ft.)

Cuttings area depth (ft.)

Cuttings area volume (cu. yd.)

Is at least 50% of the cuttings area in cut?

WCuttings area liner

Cuttings area liner specifications and installation description

Section 8 - Ancillary Facilities

Are you requesting any Ancillary Facilities?: NO

Ancillary Facilities attachment:

Comments:

Section 9 - Well Site Layout

Well Site Layout Diagram:

BLUN_331H_Wellpad_Layout_20190604143756.pdf

BLUN_331H_Drill_Site_Layout_20190604143759.pdf

Comments:

Section 10 - Plans for Surface Reclamation

Type of disturbance: New Surface Disturbance

Multiple Well Pad Name: NORTH BELL LAKE UNIT

Multiple Well Pad Number: 13

Recontouring attachment:

BLUN_Pad_13_IR_Plat_20191112122210.pdf

Drainage/Erosion control construction: During construction proper erosion control methods will be used to control erosion, runoff and siltation of the surrounding area. As per request of rancher, a berm will be constructed along the east side of well pad.

Drainage/Erosion control reclamation: Proper erosion control methods will be used on the area to control erosion, runoff and siltation of the surrounding area.

Operator Name: KAISER FRANCIS OIL COMPANY

Well Name: BELL LAKE UNIT NORTH

Well Number: 331H

Well pad proposed disturbance (acres): 5.97	Well pad interim reclamation (acres): 0.46	Well pad long term disturbance (acres): 5.51
Road proposed disturbance (acres): 0.460285	Road interim reclamation (acres): 0	Road long term disturbance (acres): 0.460285
Powerline proposed disturbance (acres): 0	Powerline interim reclamation (acres): 0	Powerline long term disturbance (acres): 0
Pipeline proposed disturbance (acres): 0	Pipeline interim reclamation (acres): 0	Pipeline long term disturbance (acres): 0
Other proposed disturbance (acres): 0	Other interim reclamation (acres): 0	Other long term disturbance (acres): 0
Total proposed disturbance: 6.430285	Total interim reclamation: 0.46	Total long term disturbance: 5.970285

Disturbance Comments:

Reconstruction method: The areas planned for interim reclamation will then be recontoured to the original contour if feasible, or if not feasible, to an interim contour that blends with the surrounding topography as much as possible. Where applicable, the fill material of the well pad will be backfilled into the cut to bring the area back to the original contour. The interim cut and fill slopes prior to re-seeding will not be steeper than a 3:1 ratio, unless the adjacent native topography is steeper. Note: Constructed slopes may be much steeper during drilling, but will be recontoured to the above ratios during interim reclamation.

Topsoil redistribution: Topsoil will be evenly respread and aggressively revegetated over the entire disturbed area not needed for all-weather operations

Soil treatment: To seed the area, the proper BLM seed mixture, free of noxious weeds, will be used. Final seedbed preparation will consist of contour cultivating to a depth of 4 to 6 inches within 24 hours prior to seeding, dozer tracking, or other imprinting in order to break the soil crust and create seed germination micro-sites.

Existing Vegetation at the well pad: The historic climax plant community is a grassland dominated by black grama, dropseeds, and blue stems with sand sage and shinnery oak distributed evenly throughout. Current landscape displays mesquite, shinnery oak, yucca, desert sage, fourwing saltbush, snakeweed, and bunch grasses

Existing Vegetation at the well pad attachment:

Existing Vegetation Community at the road: Refer to "Existing Vegetation at the well pad"

Existing Vegetation Community at the road attachment:

Existing Vegetation Community at the pipeline:

Existing Vegetation Community at the pipeline attachment:

Existing Vegetation Community at other disturbances:

Existing Vegetation Community at other disturbances attachment:

Non native seed used? NO

Non native seed description:

Seedling transplant description:

Will seedlings be transplanted for this project? NO

Seedling transplant description attachment:

Will seed be harvested for use in site reclamation? NO

Operator Name: KAISER FRANCIS OIL COMPANY

Well Name: BELL LAKE UNIT NORTH

Well Number: 331H

Seed harvest description:

Seed harvest description attachment:

Seed Management

Seed Table

Seed Summary

Total pounds/Acre:

Seed Type	Pounds/Acre
-----------	-------------

Seed reclamation attachment:

Operator Contact/Responsible Official Contact Info

First Name:

Last Name:

Phone: (432)684-9696

Email:

Seedbed prep:

Seed BMP:

Seed method:

Existing invasive species? NO

Existing invasive species treatment description:

Existing invasive species treatment attachment:

Weed treatment plan description: No invasive species present. Standard regular maintenance to maintain a clear location and road.

Weed treatment plan attachment:

Monitoring plan description: Identify areas supporting weeds prior to construction; prevent the introduction and spread of weeds from construction equipment during construction; and contain weed seeds and propagules by preventing segregated topsoil from being spread to adjacent areas. No invasive species present. Standard regular maintenance to maintain a clear location and road.

Monitoring plan attachment:

Success standards: To maintain all disturbed areas as per Gold Book standards

Pit closure description: N/A

Pit closure attachment:

Section 11 - Surface Ownership

Operator Name: KAISER FRANCIS OIL COMPANY

Well Name: BELL LAKE UNIT NORTH

Well Number: 331H

Disturbance type: WELL PAD

Describe:

Surface Owner:

Other surface owner description:

BIA Local Office:

BOR Local Office:

COE Local Office:

DOD Local Office:

NPS Local Office:

State Local Office:

Military Local Office:

USFWS Local Office:

Other Local Office:

USFS Region:

USFS Forest/Grassland:

USFS Ranger District:

Disturbance type: NEW ACCESS ROAD

Describe:

Surface Owner:

Other surface owner description:

BIA Local Office:

BOR Local Office:

COE Local Office:

DOD Local Office:

NPS Local Office:

State Local Office:

Military Local Office:

USFWS Local Office:

Other Local Office:

USFS Region:

USFS Forest/Grassland:

USFS Ranger District:

Operator Name: KAISER FRANCIS OIL COMPANY

Well Name: BELL LAKE UNIT NORTH

Well Number: 331H

Section 12 - Other Information

Right of Way needed? NO

Use APD as ROW?

ROW Type(s):

ROW Applications

SUPO Additional Information:

Use a previously conducted onsite? NO

Previous Onsite information:

Other SUPO Attachment

CONFIDENTIAL



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

PWD Data Report

04/19/2021

APD ID: 10400042505

Submission Date: 06/17/2019

Operator Name: KAISER FRANCIS OIL COMPANY

Well Name: BELL LAKE UNIT NORTH

Well Number: 331H

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - General

Would you like to address long-term produced water disposal? NO

Section 2 - Lined Pits

Would you like to utilize Lined Pit PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Lined pit PWD on or off channel:

Lined pit PWD discharge volume (bbl/day):

Lined pit specifications:

Pit liner description:

Pit liner manufacturers information:

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal permit:

Lined pit precipitated solids disposal schedule:

Lined pit precipitated solids disposal schedule attachment:

Lined pit reclamation description:

Lined pit reclamation attachment:

Leak detection system description:

Leak detection system attachment:

Operator Name: KAISER FRANCIS OIL COMPANY

Well Name: BELL LAKE UNIT NORTH

Well Number: 331H

Lined pit Monitor description:

Lined pit Monitor attachment:

Lined pit: do you have a reclamation bond for the pit?

Is the reclamation bond a rider under the BLM bond?

Lined pit bond number:

Lined pit bond amount:

Additional bond information attachment:

Section 3 - Unlined Pits

Would you like to utilize Unlined Pit PWD options? NO

Produced Water Disposal (PWD) Location:

PWD disturbance (acres):

PWD surface owner:

Unlined pit PWD on or off channel:

Unlined pit PWD discharge volume (bbl/day):

Unlined pit specifications:

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal permit:

Unlined pit precipitated solids disposal schedule:

Unlined pit precipitated solids disposal schedule attachment:

Unlined pit reclamation description:

Unlined pit reclamation attachment:

Unlined pit Monitor description:

Unlined pit Monitor attachment:

Do you propose to put the produced water to beneficial use?

Beneficial use user confirmation:

Estimated depth of the shallowest aquifer (feet):

Does the produced water have an annual average Total Dissolved Solids (TDS) concentration equal to or less than that of the existing water to be protected?

TDS lab results:

Geologic and hydrologic evidence:

State authorization:

Unlined Produced Water Pit Estimated percolation:

Unlined pit: do you have a reclamation bond for the pit?

Operator Name: KAISER FRANCIS OIL COMPANY

Well Name: BELL LAKE UNIT NORTH

Well Number: 331H

Is the reclamation bond a rider under the BLM bond?

Unlined pit bond number:

Unlined pit bond amount:

Additional bond information attachment:

Section 4 - Injection

Would you like to utilize Injection PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Injection PWD discharge volume (bbl/day):

Injection well mineral owner:

Injection well type:

Injection well number:

Injection well name:

Assigned injection well API number?

Injection well API number:

Injection well new surface disturbance (acres):

Minerals protection information:

Mineral protection attachment:

Underground Injection Control (UIC) Permit?

UIC Permit attachment:

Section 5 - Surface Discharge

Would you like to utilize Surface Discharge PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Surface discharge PWD discharge volume (bbl/day):

Surface Discharge NPDES Permit?

Surface Discharge NPDES Permit attachment:

Surface Discharge site facilities information:

Surface discharge site facilities map:

Section 6 - Other

Would you like to utilize Other PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Other PWD discharge volume (bbl/day):

Operator Name: KAISER FRANCIS OIL COMPANY

Well Name: BELL LAKE UNIT NORTH

Well Number: 331H

Other PWD type description:

Other PWD type attachment:

Have other regulatory requirements been met?

Other regulatory requirements attachment:



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Bond Info Data Report

04/19/2021

APD ID: 10400042505

Submission Date: 06/17/2019

Highlighted data reflects the most recent changes

Operator Name: KAISER FRANCIS OIL COMPANY

Well Name: BELL LAKE UNIT NORTH

Well Number: 331H

[Show Final Text](#)

Well Type: OIL WELL

Well Work Type: Drill

Bond Information

Federal/Indian APD: FED

BLM Bond number: WYB000055

BIA Bond number:

Do you have a reclamation bond? NO

Is the reclamation bond a rider under the BLM bond?

Is the reclamation bond BLM or Forest Service?

BLM reclamation bond number:

Forest Service reclamation bond number:

Forest Service reclamation bond attachment:

Reclamation bond number:

Reclamation bond amount:

Reclamation bond rider amount:

Additional reclamation bond information attachment:

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. Firs. St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office
 AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-025-48866		² Pool Code 98259		³ Pool Name Ojo Chiso; Bone Spring, Southwest	
⁴ Property Code 316707		⁵ Property Name BELL LAKE UNIT NORTH			⁶ Well Number 331H
⁷ OGRID No. 12361		⁸ Operator Name KAISER-FRANCIS OIL CO.			⁹ Elevation 3443.3

¹⁰ Surface Location


UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
L	5	23 S	34 E		1991	SOUTH	404	WEST	LEA

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
D	32	22 S	34 E		330	NORTH	350	WEST	LEA

¹² Dedicated Acres 480	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No. R-14527A
--------------------------------------	-------------------------------	----------------------------------	-------------------------------------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

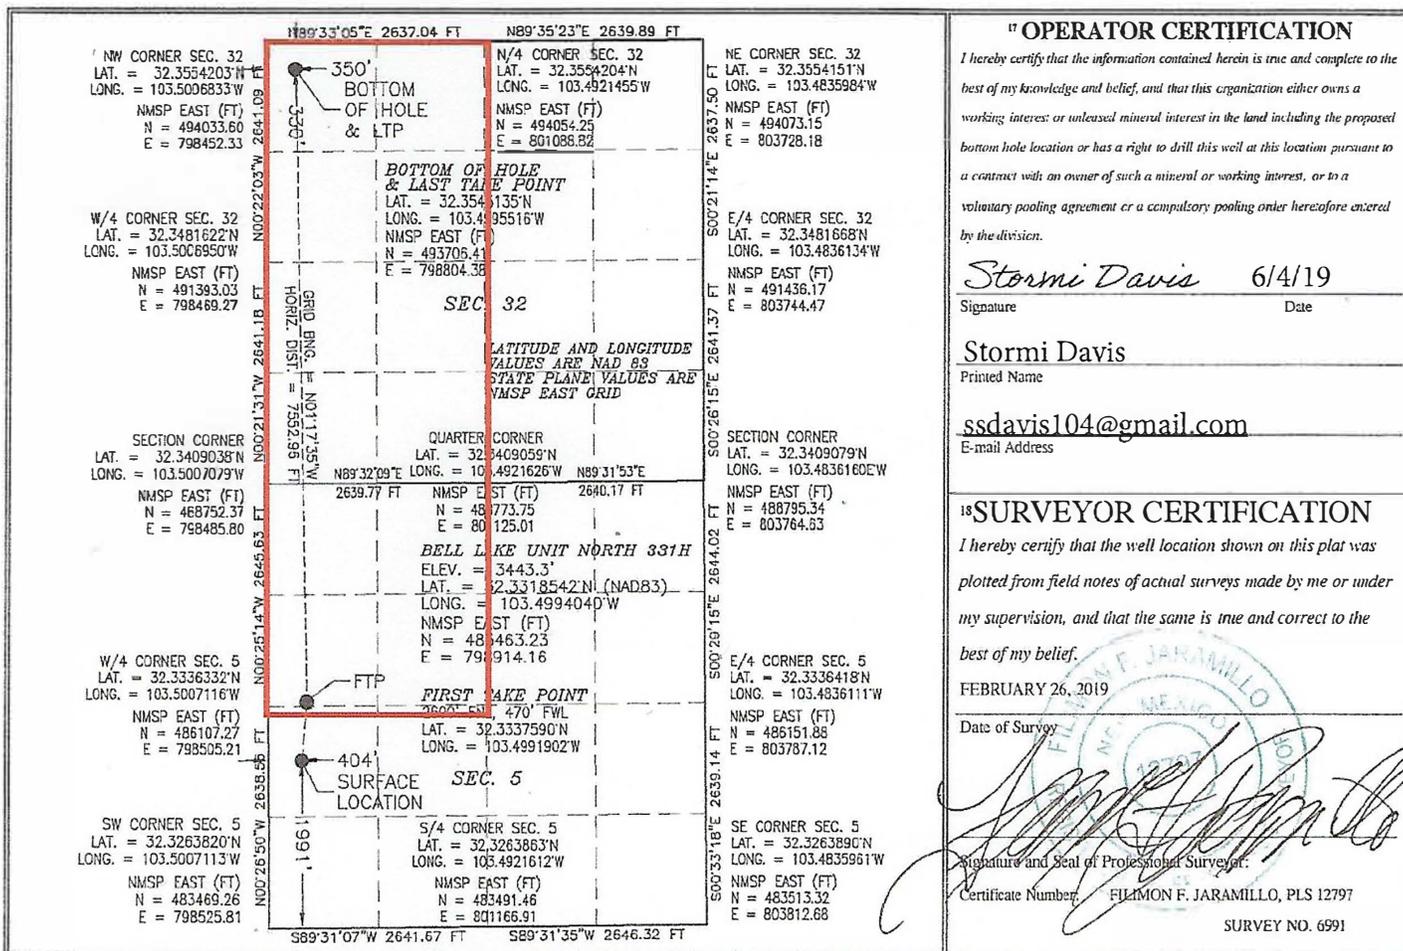

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources Department
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Submit Original
to Appropriate
District Office

GAS CAPTURE PLAN

Date: 01/26/2018

Original Operator & OGRID No.: Kaiser-Francis Oil Company, 12361
 Amended - Reason for Amendment: _____

This Gas Capture Plan outlines actions to be taken by the Operator to reduce well/production facility flaring/venting for new completion (new drill, recomplete to new zone, re-frac) activity.

Note: Form C-129 must be submitted and approved prior to exceeding 60 days allowed by Rule (Subsection A of 19.15.18.12 NMAC).

Well(s)/Production Facility – Name of facility

The well(s) that will be located at the production facility are shown in the table below.

Well Name	API	Well Location (ULSTR)	Footages	Expected MCF/D	Flared or Vented	Comments
Bell Lake Unit North 231H		5-23S-34E		2000	0	
Bell Lake Unit North 232H		5-23S-34E		2000	0	
Bell Lake Unit North 331H	30-025-48866	5-23S-34E		2000	0	
Bell Lake Unit North 332H		5-23S-34E		2000	0	
Bell Lake Unit North 431H		5-23S-34E		2000	0	
Bell Lake Unit North 432H		5-23S-34E		2000	0	

Gathering System and Pipeline Notification

Well(s) will be connected to a production facility after flowback operations are complete, if gas transporter system is in place. The gas produced from production facility is dedicated to Targa and will be connected to Targa low/high pressure gathering system located in Lea County, New Mexico. It will require 11,000' of pipeline to connect the facility to low/high pressure gathering system. Kaiser-Francis Oil Company provides (periodically) to Targa a drilling, completion and estimated first production date for wells that are scheduled to be drilled in the foreseeable future. In addition, Kaiser-Francis Oil Company and Targa have periodic conference calls to discuss changes to drilling and completion schedules. Gas from these wells will be processed at Targa Processing Plant located in Sec. 36, Twn. 19S, Rng. 36E, Lea County, New Mexico. The actual flow of the gas will be based on compression operating parameters and gathering system pressures.

Flowback Strategy

After the fracture treatment/completion operations, well(s) will be produced to temporary production tanks and gas will be flared or vented. During flowback, the fluids and sand content will be monitored. When the produced fluids contain minimal sand, the wells will be turned to production facilities. Gas sales should start as soon as the wells start flowing through the production facilities, unless there are operational issues on Targa system at that time. Based on current information, it is Kaiser-Francis Oil Company's belief the system can take this gas upon completion of the well(s).

Safety requirements during cleanout operations from the use of underbalanced air cleanout systems may necessitate that sand and non-pipeline quality gas be vented and/or flared rather than sold on a temporary basis.

Alternatives to Reduce Flaring

Below are alternatives considered from a conceptual standpoint to reduce the amount of gas flared.

- Power Generation – On lease
 - Only a portion of gas is consumed operating the generator, remainder of gas will be flared
- Compressed Natural Gas – On lease
 - Gas flared would be minimal, but might be uneconomical to operate when gas volume declines
- NGL Removal – On lease
 - Plants are expensive, residue gas is still flared, and uneconomical to operate when gas volume declines

Operator Name: KAISER FRANCIS OIL COMPANY

Well Name: BELL LAKE UNIT NORTH

Well Number: 331H

Pressure Rating (PSI): 10M

Rating Depth: 18000

Equipment: A 10M system will be installed according to Onshore Order #2 consisting of an Annular Preventer, BOP with two rams and a blind ram. BOP will be equipped with 2 side outlets (choke side shall be a minimum 3" line, and kill side will be a minimum 2" line). Kill line will be installed with (2) valves and a check valve (2" min) of proper pressure rating for the system. Remote kill line (2' min) will be installed and ran to the outer edge of the substructure and be unobstructed. A manual and hydraulic valve (3" min) will be installed on the choke line, 3 chokes will be used with one being remotely controlled. Fill up line will be installed above the uppermost preventer. Pressure gauge of proper pressure rating will be installed on choke manifold. Upper and lower kelly cocks will be utilized with handles readily available in plain sight. A float sub will be available at all times. All connections subject to well pressure will be flanged, welded, or clamped.

Requesting Variance? YES

Variance request: Flex Hose Variance

Testing Procedure: BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all of the components installed will be functional and tested.

Choke Diagram Attachment:

BLUN_331H_Choke_Manifold_20190604135618.pdf

BOP Diagram Attachment:

BLUN_331H_Multi_Bowl_Wellhead_20191112122518.pdf

BLUN_331H_FlexHose_20191112122554.pdf

BLUN_331H_BOP_20191112123630.pdf

Section 3 - Casing

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	14.75	10.75	NEW	API	N	0	910	0	910			910	J-55	40.5	ST&C	3.7	7.3	DRY	11.4	DRY	17.1
2	INTERMEDIATE	9.875	7.625	NEW	API	N	0	10550	0	10550			10550	HCP-110	29.7	LT&C	1.4	1.9	DRY	2.5	DRY	3
3	PRODUCTION	6.75	5.5	NEW	API	N	0	19190	0	11191			19190	P-110	20	OTHER - Eagle SF	1.9	2.1	DRY	2.8	DRY	3.3

Casing Attachments

Operator Name: KAISER FRANCIS OIL COMPANY

Well Name: BELL LAKE UNIT NORTH

Well Number: 331H

Casing Attachments

Casing ID: 1 **String Type:** SURFACE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

BLUN_331H_Casing_Assumptions_20190604140130.pdf

Casing ID: 2 **String Type:** INTERMEDIATE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

BLUN_331H_Casing_Assumptions_20190604140402.pdf

Casing ID: 3 **String Type:** PRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

BLUN_331H_Casing_Assumptions_20190604140535.pdf

5.5_x_20_P110_HP_USS_EAGLE_SFH_Performance_Sheet_20190604140620.pdf

Section 4 - Cement

Operator Name: KAISER FRANCIS OIL COMPANY

Well Name: BELL LAKE UNIT NORTH

Well Number: 331H

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead		0	910	577	1.74	13.5	1006	50	Halcem	Cemex Premium Plus C

INTERMEDIATE	Lead		0	1055 0	821	2.77	11	2277	15	Premium C	Extender
INTERMEDIATE	Tail		0	1055 0	437	1.23	15.6	537	15	Halcem	Cemex Premium H
PRODUCTION	Lead		1000 0	1919 0	769	1.22	14.5	940	15	Econocem	5% Salt

Section 5 - Circulating Medium

Mud System Type: Closed

Will an air or gas system be Used? NO

Description of the equipment for the circulating system in accordance with Onshore Order #2:

Diagram of the equipment for the circulating system in accordance with Onshore Order #2:

Describe what will be on location to control well or mitigate other conditions: Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times

Describe the mud monitoring system utilized: PVT/Pason/Visual Monitoring

Circulating Medium Table

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	PH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
1055 0	1119 1	OIL-BASED MUD	10	12							
910	1055 0	OTHER : Diesel- Brine Emulsion	8.8	9.2							
0	910	OTHER : Fresh Water	8.4	9							

Date: April 22, 2021

To: NMOCD

From: Charlotte Van Valkenburg

Re: Closed-Loop System

It is the intention of Kaiser-Francis Oil Company to use a closed-loop system during drilling of the following well:

Bell Lake Unit North 331H
Sec. 5-23S-34E
Lea Co., NM



Charlotte Van Valkenburg
Mgr., Regulatory Compliance
Kaiser-Francis Oil Company



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Drilling Plan Data Report

04/19/2021

APD ID: 10400042505

Submission Date: 06/17/2019

Highlighted data
reflects the most
recent changes

Operator Name: KAISER FRANCIS OIL COMPANY

Well Name: BELL LAKE UNIT NORTH

Well Number: 331H

[Show Final Text](#)

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - Geologic Formations

Formation ID	Formation Name	Elevation	True Vertical Depth	Measured Depth	Lithologies	Mineral Resources	Producing Formation
470992	---	3443	0	0		NONE	N
470993	RUSTLER	2261	1182	1182		NONE	N
470994	SALADO	1871	1572	1572		NONE	N
470995	TOP SALT	1671	1772	1772		NONE	N
470996	BASE OF SALT	-1279	4722	4722		NONE	N
470997	LAMAR	-1479	4922	4922		NATURAL GAS, OIL	N
470998	BELL CANYON	-1729	5172	5172		NATURAL GAS, OIL	N
470999	CHERRY CANYON	-2629	6072	6072		NATURAL GAS, OIL	N
471000	BRUSHY CANYON	-4029	7472	7472		NATURAL GAS, OIL	N
471001	BONE SPRING	-5129	8572	8572		NATURAL GAS, OIL	N
471002	AVALON SAND	-5174	8617	8617		NATURAL GAS, OIL	N
471003	BONE SPRING 1ST	-6079	9522	9522		NATURAL GAS, OIL	N
471004	BONE SPRING 2ND	-6589	10032	10032		NATURAL GAS, OIL	N
471034	BONE SPRING LIME	-7079	10522	10522		NATURAL GAS, OIL	N
471035	BONE SPRING 3RD	-7527	10970	10970		NATURAL GAS, OIL	Y

Section 2 - Blowout Prevention

Operator Name: KAISER FRANCIS OIL COMPANY

Well Name: BELL LAKE UNIT NORTH

Well Number: 331H

Pressure Rating (PSI): 10M

Rating Depth: 18000

Equipment: A 10M system will be installed according to Onshore Order #2 consisting of an Annular Preventer, BOP with two rams and a blind ram. BOP will be equipped with 2 side outlets (choke side shall be a minimum 3" line, and kill side will be a minimum 2" line). Kill line will be installed with (2) valves and a check valve (2" min) of proper pressure rating for the system. Remote kill line (2' min) will be installed and ran to the outer edge of the substructure and be unobstructed. A manual and hydraulic valve (3" min) will be installed on the choke line, 3 chokes will be used with one being remotely controlled. Fill up line will be installed above the uppermost preventer. Pressure gauge of proper pressure rating will be installed on choke manifold. Upper and lower kelly cocks will be utilized with handles readily available in plain sight. A float sub will be available at all times. All connections subject to well pressure will be flanged, welded, or clamped.

Requesting Variance? YES

Variance request: Flex Hose Variance

Testing Procedure: BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all of the components installed will be functional and tested.

Choke Diagram Attachment:

BLUN_331H_Choke_Manifold_20190604135618.pdf

BOP Diagram Attachment:

BLUN_331H_Multi_Bowl_Wellhead_20191112122518.pdf

BLUN_331H_FlexHose_20191112122554.pdf

BLUN_331H_BOP_20191112123630.pdf

Section 3 - Casing

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	14.75	10.75	NEW	API	N	0	910	0	910			910	J-55	40.5	ST&C	3.7	7.3	DRY	11.4	DRY	17.1
2	INTERMEDIATE	9.875	7.625	NEW	API	N	0	10550	0	10550			10550	HCP-110	29.7	LT&C	1.4	1.9	DRY	2.5	DRY	3
3	PRODUCTION	6.75	5.5	NEW	API	N	0	19190	0	11191			19190	P-110	20	OTHER - Eagle SF	1.9	2.1	DRY	2.8	DRY	3.3

Casing Attachments



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Drilling Plan Data Report

04/19/2021

APD ID: 10400042505

Submission Date: 06/17/2019

Highlighted data
reflects the most
recent changes

Operator Name: KAISER FRANCIS OIL COMPANY

Well Name: BELL LAKE UNIT NORTH

Well Number: 331H

[Show Final Text](#)

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - Geologic Formations

Formation ID	Formation Name	Elevation	True Vertical Depth	Measured Depth	Lithologies	Mineral Resources	Producing Formation
470992	---	3443	0	0		NONE	N
470993	RUSTLER	2261	1182	1182		NONE	N
470994	SALADO	1871	1572	1572		NONE	N
470995	TOP SALT	1671	1772	1772		NONE	N
470996	BASE OF SALT	-1279	4722	4722		NONE	N
470997	LAMAR	-1479	4922	4922		NATURAL GAS, OIL	N
470998	BELL CANYON	-1729	5172	5172		NATURAL GAS, OIL	N
470999	CHERRY CANYON	-2629	6072	6072		NATURAL GAS, OIL	N
471000	BRUSHY CANYON	-4029	7472	7472		NATURAL GAS, OIL	N
471001	BONE SPRING	-5129	8572	8572		NATURAL GAS, OIL	N
471002	AVALON SAND	-5174	8617	8617		NATURAL GAS, OIL	N
471003	BONE SPRING 1ST	-6079	9522	9522		NATURAL GAS, OIL	N
471004	BONE SPRING 2ND	-6589	10032	10032		NATURAL GAS, OIL	N
471034	BONE SPRING LIME	-7079	10522	10522		NATURAL GAS, OIL	N
471035	BONE SPRING 3RD	-7527	10970	10970		NATURAL GAS, OIL	Y

Section 2 - Blowout Prevention

Operator Name: KAISER FRANCIS OIL COMPANY

Well Name: BELL LAKE UNIT NORTH

Well Number: 331H

Pressure Rating (PSI): 10M

Rating Depth: 18000

Equipment: A 10M system will be installed according to Onshore Order #2 consisting of an Annular Preventer, BOP with two rams and a blind ram. BOP will be equipped with 2 side outlets (choke side shall be a minimum 3" line, and kill side will be a minimum 2" line). Kill line will be installed with (2) valves and a check valve (2" min) of proper pressure rating for the system. Remote kill line (2' min) will be installed and ran to the outer edge of the substructure and be unobstructed. A manual and hydraulic valve (3" min) will be installed on the choke line, 3 chokes will be used with one being remotely controlled. Fill up line will be installed above the uppermost preventer. Pressure gauge of proper pressure rating will be installed on choke manifold. Upper and lower kelly cocks will be utilized with handles readily available in plain sight. A float sub will be available at all times. All connections subject to well pressure will be flanged, welded, or clamped.

Requesting Variance? YES

Variance request: Flex Hose Variance

Testing Procedure: BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all of the components installed will be functional and tested.

Choke Diagram Attachment:

BLUN_331H_Choke_Manifold_20190604135618.pdf

BOP Diagram Attachment:

BLUN_331H_Multi_Bowl_Wellhead_20191112122518.pdf

BLUN_331H_FlexHose_20191112122554.pdf

BLUN_331H_BOP_20191112123630.pdf

Section 3 - Casing

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	14.75	10.75	NEW	API	N	0	910	0	910			910	J-55	40.5	ST&C	3.7	7.3	DRY	11.4	DRY	17.1
2	INTERMEDIATE	9.875	7.625	NEW	API	N	0	10550	0	10550			10550	HCP-110	29.7	LT&C	1.4	1.9	DRY	2.5	DRY	3
3	PRODUCTION	6.75	5.5	NEW	API	N	0	19190	0	11191			19190	P-110	20	OTHER - Eagle SF	1.9	2.1	DRY	2.8	DRY	3.3

Casing Attachments

District I
 1625 N. French Dr., Hobbs, NM 88240
 Phone:(575) 393-6161 Fax:(575) 393-0720

District II
 811 S. First St., Artesia, NM 88210
 Phone:(575) 748-1283 Fax:(575) 748-9720

District III
 1000 Rio Brazos Rd., Aztec, NM 87410
 Phone:(505) 334-6178 Fax:(505) 334-6170

District IV
 1220 S. St Francis Dr., Santa Fe, NM 87505
 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 25205

CONDITIONS OF APPROVAL

Operator:	KAISER-FRANCIS OIL CO	P.O. Box 21468	Tulsa, OK74121	OGRID:	12361	Action Number:	25205	Action Type:	FORM 3160-3
-----------	-----------------------	----------------	----------------	--------	-------	----------------	-------	--------------	-------------

OCD Reviewer	Condition
pkautz	Will require a File As Drilled C-102 and a Directional Survey with the C-104
pkautz	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string