

Submit 1 Copy To Appropriate District Office
 District I – (575) 393-6161
 1625 N. French Dr., Hobbs, NM 88240
 District II – (575) 748-1283
 811 S. First St., Artesia, NM 88210
 District III – (505) 334-6178
 1000 Rio Brazos Rd., Aztec, NM 87410
 District IV – (505) 476-3460
 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
 Energy, Minerals and Natural Resources

Form C-103
 Revised July 18, 2013

OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-015-48313
1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐		5. Indicate Type of Lease STATE ☒ FEE ☐
2. Name of Operator EOG Resources, Inc.		6. State Oil & Gas Lease No. 322721
3. Address of Operator P.O. Box 2267, Midland, Texas 79702		7. Lease Name or Unit Agreement Name Golden Graham 1 State Com
4. Well Location Unit Letter <u>N</u> : <u>215</u> feet from the <u>South</u> line and <u>1784</u> feet from the West line Section <u>1</u> <u>26S</u> Township <u>28E</u> Range <u>NMNM</u> Eddy County		8. Well Number 702H
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 2933' GR		9. OGRID Number 7377
		10. Pool name or Wildcat 98220 Purple Sage; Wolfcamp (Gas)

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK ☐	PLUG AND ABANDON ☐	REMEDIAL WORK ☐	ALTERING CASING ☐
TEMPORARILY ABANDON ☐	CHANGE PLANS ☒	COMMENCE DRILLING OPNS. ☐	P AND A ☐
PULL OR ALTER CASING ☐	MULTIPLE COMPL ☐	CASING/CEMENT JOB ☐	
DOWNHOLE COMMINGLE ☐			
CLOSED-LOOP SYSTEM ☐			
OTHER: ☐		OTHER: ☐	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

EOG respectfully requests an amendment to our approved APD for this well to reflect the following changes:

Update casing and cement program to current design.

Spud Date: Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE _____ TITLE Sr Regulatory Specialist DATE 11/9/2021

Type or print name Star Harrell E-mail address: star_harrell@eogresources.com PHONE: 432-848-9161

For State Use Only

APPROVED BY: _____ TITLE _____ DATE _____
 Conditions of Approval (if any): _____



Golden Graham 1 State Com #702H

Eddy County, New Mexico

Proposed Wellbore

Design A

KB: 2958'

GL: 2933'


215' FSL

1784' FWL

Section 1

T-26-S, R-28-E

API: 30-015-45323

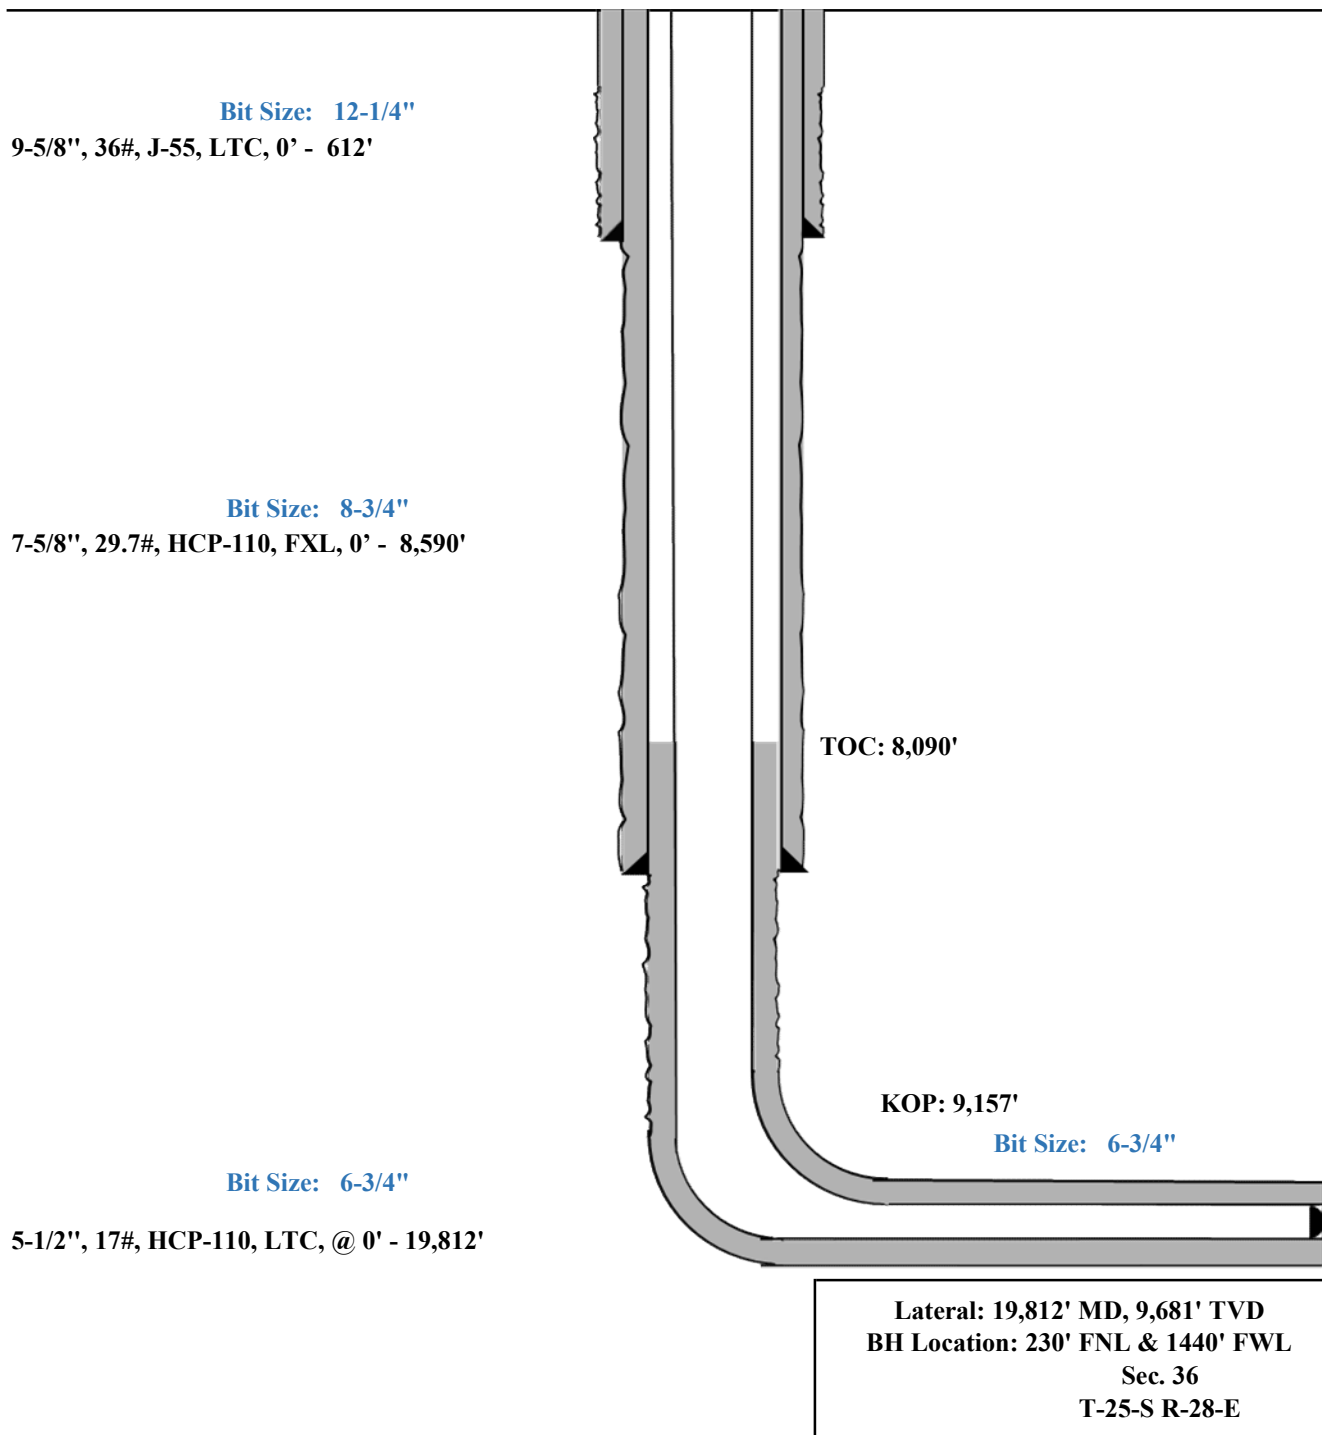




Golden Graham 1 State Com #702H
Eddy County, New Mexico
Proposed Wellbore
Design B

215' FSL
1784' FWL
Section 1
T-26-S, R-28-E

KB: 2958'
GL: 2933'

API: 30-015-45323

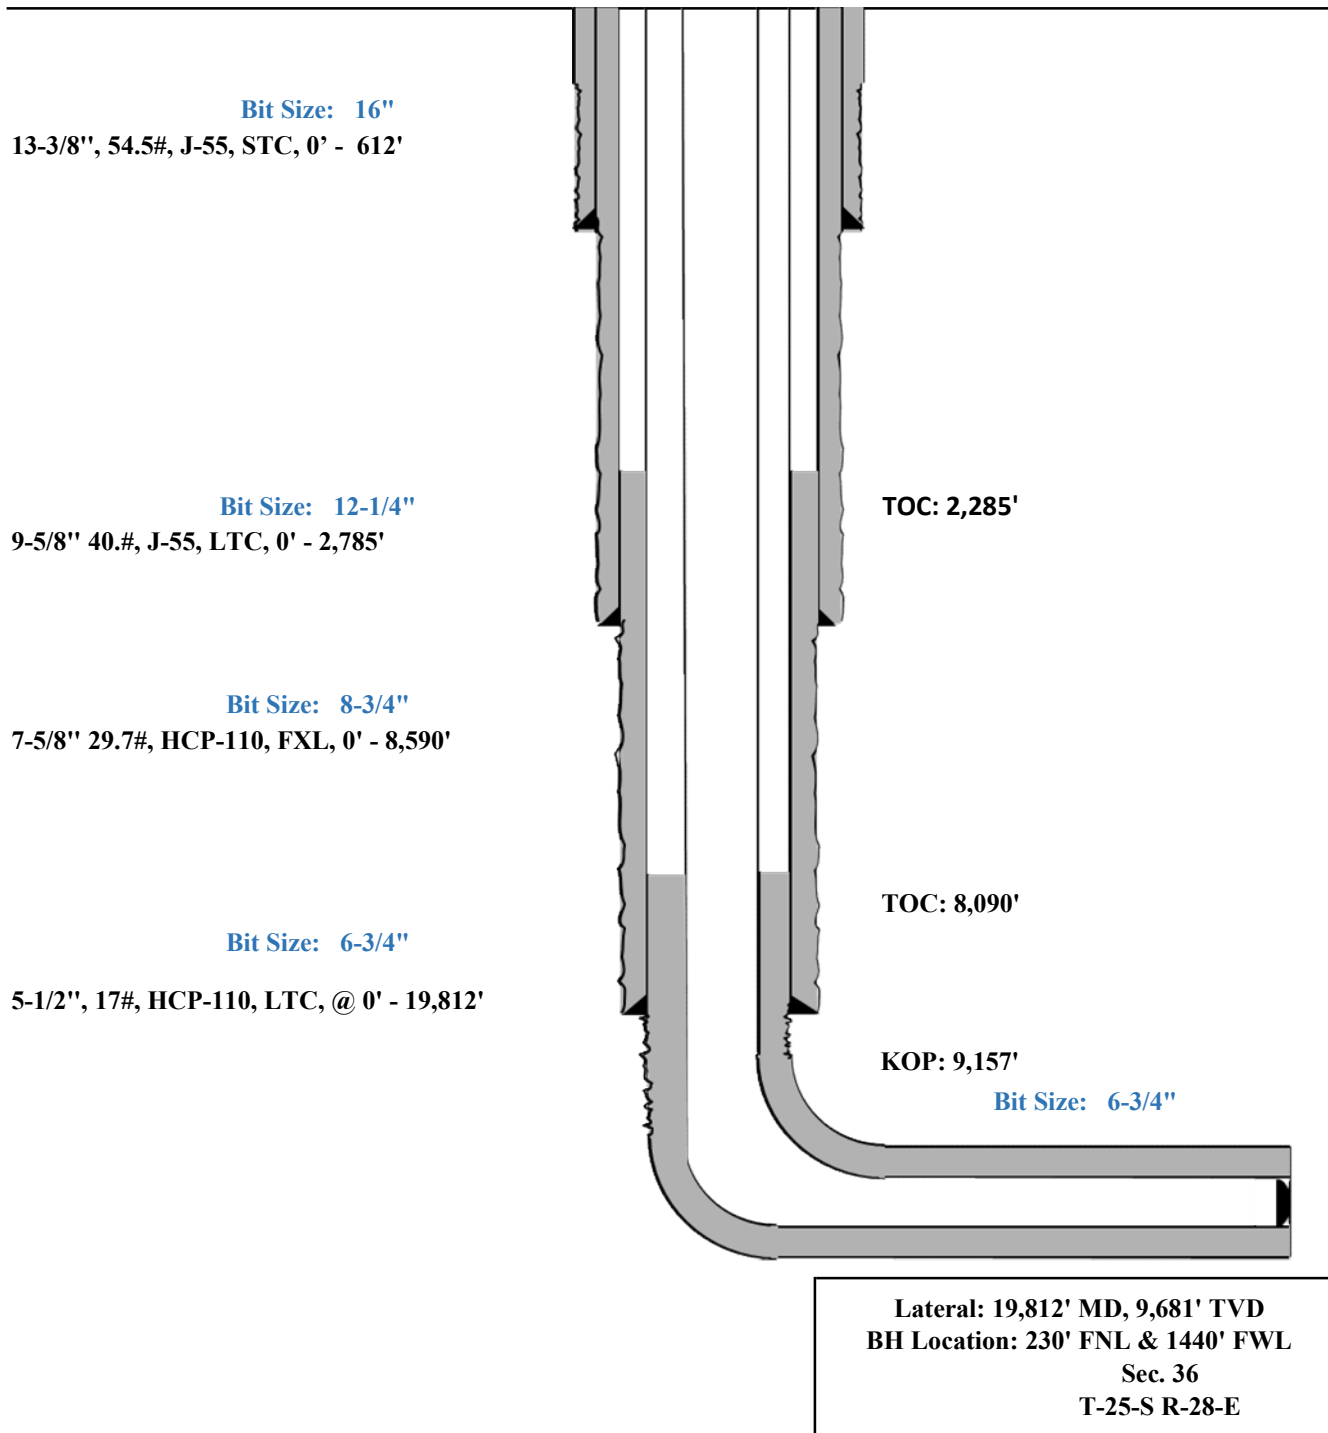



Golden Graham 1 State Com #702H

Permit Information:

Well Name: Golden Graham 1 State Com #702H

Location:

SHL: 215' FSL & 1784' FWL, Section 1, T-26-S, R-28-E, Eddy Co., N.M.

BHL: 230' FNL & 1440' FWL, Section 36, T-25-S, R-28-E, Eddy Co., N.M.

Design A

Casing Program:

Hole Size	Interval	Csg OD	Weight	Grade	Conn	DFmin Collapse	DFmin Burst	Dfmin Tension
12.25"	0' - 612'	9.625"	36#	J-55	LTC	1.125	1.25	1.6
8.75"	0' - 8,590'	7.625"	29.7#	HCP-110	FXL	1.125	1.25	1.6
6.75"	0' - 19,812'	5.5"	17#	HCP-110	LTC	1.125	1.25	1.6

Cement Program:

Depth	No. Sacks	Wt. ppg	Yld Ft3/sk	Slurry Description
612'	200	13.5	1.73	Class C + 4.0% Bentonite + 0.6% CD-32 + 0.5% CaCl ₂ + 0.25 lb/sk Cello-Flake (TOC @ Surface)
	80	14.8	1.34	Class C + 0.6% FL-62 + 0.25 lb/sk Cello-Flake + 0.2% Sodium Metasilicate
8,590'	470	14.2	1.11	1st Stage (Tail): Class C + 5% Salt (TOC @ 4,600')
	1000	14.8	1.5	2nd Stage (Bradenhead squeeze): Class C + 3% Salt + 1% PreMag-M + 6% Bentonite Gel (TOC @ surface)
19,812'	1000	14.2	1.31	Class H + 0.1% C-20 + 0.05% CSA-1000 + 0.20% C-49 + 0.40% C-17 (TOC @ 8,090')

Mud Program:

Depth	Type	Weight (ppg)	Viscosity	Water Loss
0 – 612'	Fresh - Gel	8.6-8.8	28-34	N/c
612' – 8,590'	Brine	10.0-10.2	28-34	N/c
8,590' – 9,157'	Oil Base	8.7-9.4	58-68	N/c - 6
9,157' – 19,812' Lateral	Oil Base	10.0-14.0	58-68	4 - 6



Golden Graham 1 State Com #702H

Design B**CASING PROGRAM**

Hole Size	Interval	Csg OD	Weight	Grade	Conn	DFmin Collapse	DFmin Burst	DFmin Tension
16"	0' - 612'	13.375"	54.5#	J-55	STC	1.125	1.25	1.6
12.25"	0' - 2,785'	9.625"	40#	J-55	LTC	1.125	1.25	1.6
8.75"	0' - 8,590'	7.625"	29.7#	HCP-110	FXL	1.125	1.25	1.6
6.75"	0' - 19,812'	5.5"	17#	HCP-110	FXL	1.125	1.25	1.6

Cementing Program:

Depth	No. Sacks	Wt. ppg	Yld Ft3/sk	Slurry Description
612'	180	13.5	1.73	Lead: Class C + 4.0% Bentonite Gel + 2.0% CaCl ₂ (TOC @ Surface)
	100	14.8	1.34	Tail: Class C + 0.6% FL-62 + 0.25 lb/sk Cello-Flake + 0.2% Sodium Metasilicate + 2.0% KCl (1.06 lb/sk)
2,785'	410	12.7	2.22	Lead: Class C + 0.15% C-20 + 11.63 pps Salt + 0.1% C-51 + 0.75% C-41P (TOC @ Surface)
	190	10.8	1.32	Tail: Class C + 0.13% C-20
8,590'	180	14.8	3.67	Lead: Class H + 0.40% D013 + 0.20% D046 + 0.10% D065 + 0.20% D167 (TOC @ 2,290')
	100	14.8	2.38	Tail: Class H + 94.0 pps D909 + 0.25% D065 + 0.30% D167 + 0.02% D208 + 0.15% D800 (TOC @ 7,086')
19,812'	1000	14.8	1.31	Class H + 0.1% C-20 + 0.05% CSA-1000 + 0.20% C-49 + 0.40% C-17 (TOC @ 8,086')

As a contingency, EOG requests to pump a two stage cement job on the 7-5/8" intermediate casing string with the first stage being pumped conventionally with the calculated top of cement at the Brushy Canyon (4,800') and the second stage performed as a bradenhead squeeze with planned cement from the Brushy Canyon to surface. If necessary, a top out consisting of 1,000 sacks of Class C cement + 3% Salt + 1% PreMag-M + 6% Bentonite Gel (1.5 yld, 14.8 ppg) will be executed.

Mud Program:

Depth	Type	Weight (ppg)	Viscosity	Water Loss
0 – 612'	Fresh - Gel	8.6-8.8	28-34	N/c
612' – 2,785'	Brine	10.0-10.2	28-34	N/c
2,785' – 8,590'	Oil Base	8.7-9.4	58-68	N/c - 6
8,590' – 19,812' Lateral	Oil Base	10.0-14.0	58-68	4 - 6

**Golden Graham 1 State Com #702H****Hydrogen Sulfide Plan Summary**

A. All personnel shall receive proper H₂S training in accordance with Onshore Order III.C.3.a.

B. Briefing Area: two perpendicular areas will be designated by signs and readily accessible.

C. Required Emergency Equipment:

■ Well control equipment

- a. Flare line 150' from wellhead to be ignited by flare gun.
- b. Choke manifold with a remotely operated choke.
- c. Mud/gas separator

■ Protective equipment for essential personnel.

Breathing apparatus:

- a. Rescue Packs (SCBA) — 1 unit shall be placed at each breathing area, 2 shall be stored in the safety trailer.
- b. Work/Escapes packs — 4 packs shall be stored on the rig floor with sufficient air hose not to restrict work activity.
- c. Emergency Escape Packs — 4 packs shall be stored in the doghouse for emergency evacuation.

Auxiliary Rescue Equipment:

- a. Stretcher
- b. Two OSHA full body harness
- c. 100 ft 5/8 inch OSHA approved rope
- d. 1-20# class ABC fire extinguisher

■ H₂S detection and monitoring equipment:

The stationary detector with three sensors will be placed in the upper dog house if equipped, set to visually alarm @ 10 ppm and audible @ 14 ppm. Calibrate a minimum of every 30 days or as needed. The sensors will be placed in the following places: Rig floor / Bell nipple / End of flow line or where well bore fluid is being discharged.

(Gas sample tubes will be stored in the safety trailer)

■ Visual warning systems.

- a. One color code condition sign will be placed at the entrance to the site reflecting the possible conditions at the site.
- b. A colored condition flag will be on display, reflecting the current condition at the site at the time.
- c. Two wind socks will be placed in strategic locations, visible from all angles.



Golden Graham 1 State Com #702H

■ Mud program:

The mud program has been designed to minimize the volume of H₂S circulated to surface. The operator will have the necessary mud products to minimize hazards while drilling in H₂S bearing zones.

■ Metallurgy:

All drill strings, casings, tubing, wellhead, blowout preventer, drilling spool, kill lines, choke manifold and lines, and valves shall be suitable for H₂S service.

■ Communication:

Communication will be via cell phones and land lines where available.



**Golden Graham 1 State Com #702H
Emergency Assistance Telephone List**

PUBLIC SAFETY: **911 or**

Lea County Sheriff's Department	(575) 396-3611
Rod Coffman	
Fire Department:	
Carlsbad	(575) 885-3125
Artesia	(575) 746-5050
Hospitals:	
Carlsbad	(575) 887-4121
Artesia	(575) 748-3333
Hobbs	(575) 392-1979
Dept. of Public Safety/Carlsbad	(575) 748-9718
Highway Department	(575) 885-3281
New Mexico Oil Conservation	(575) 476-3440
U.S. Dept. of Labor	(575) 887-1174

EOG Resources, Inc.

EOG / Midland	Office	(432) 686-3600
---------------	--------	----------------

Company Drilling Consultants:

David Dominique	Cell	(985) 518-5839
Mike Vann	Cell	(817) 980-5507

Drilling Engineer

Esteban Del Valle	Cell	(432) 269-7063
Daniel Moose	Cell	(432) 312-2803

Drilling Manager

Aj Dach	Office	(432) 686-3751
	Cell	(817) 480-1167

Drilling Superintendent

Jason Townsend	Office	(432) 848-9209
	Cell	(210) 776-5131

H&P Drilling

H&P Drilling	Office	(432) 563-5757
H&P 651 Drilling Rig	Rig	(903) 509-7131

Tool Pusher:

Johnathan Craig	Cell	(817) 760-6374
Brad Garrett		

Safety:

Brian Chandler (HSE Manager)	Office	(432) 686-3695
	Cell	(817) 239-0251



Midland

Eddy County, NM (NAD 83 NME)

Golden Graham 1 State Com

#702H

76103

OH

Plan: Plan #0.3

Standard Planning Report

09 November, 2021



EOG Resources

Planning Report

Database:	PEDM	Local Co-ordinate Reference:	Well #702H
Company:	Midland	TVD Reference:	KB = 26' @ 2959.0usft
Project:	Eddy County, NM (NAD 83 NME)	MD Reference:	KB = 26' @ 2959.0usft
Site:	Golden Graham 1 State Com	North Reference:	Grid
Well:	#702H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #0.3		

Project	Eddy County, NM (NAD 83 NME)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	Golden Graham 1 State Com		
Site Position:		Northing:	387,494.00 usft
From:	Map	Easting:	630,031.00 usft
Position Uncertainty:	0.0 usft	Slot Radius:	13-3/16 "
		Latitude:	32.0649774°N
		Longitude:	104.0470127°W

Well	#702H		
Well Position	+N/-S	0.0 usft	Northing: 387,485.00 usft
	+E/-W	0.0 usft	Easting: 631,116.00 usft
Position Uncertainty	0.0 usft	Wellhead Elevation:	usft
Grid Convergence:	0.15 °	Ground Level:	2,933.0 usft

Wellbore	OH				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2020	11/15/2021	6.70	59.67	47,311.14974440

Design	Plan #0.3			
Audit Notes:				
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.0	0.0	0.0	354.80

Plan Survey Tool Program	Date	11/9/2021		
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks
1	0.0	19,811.9 Plan #0.3 (OH)	MWD	
			OWSG MWD - Standard	

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,400.0	0.00	0.00	1,400.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,770.1	7.40	244.71	1,769.0	-10.2	-21.6	2.00	2.00	0.00	244.71	
4,361.6	7.40	244.71	4,339.0	-152.8	-323.4	0.00	0.00	0.00	0.00	
4,731.6	0.00	0.01	4,708.0	-163.0	-345.0	2.00	-2.00	0.00	180.00	
9,157.1	0.00	0.01	9,133.5	-163.0	-345.0	0.00	0.00	0.00	0.00	KOP(GG 1 SC #702H)
9,903.8	89.59	0.10	9,611.0	311.1	-344.2	12.00	12.00	0.01	0.10	
19,811.9	89.59	0.10	9,681.0	10,219.0	-327.0	0.00	0.00	0.00	0.00	PBHL(GG 1 SC #702H)

EOG Resources

Planning Report



Database:	PEDM	Local Co-ordinate Reference:	Well #702H
Company:	Midland	TVD Reference:	KB = 26' @ 2959.0usft
Project:	Eddy County, NM (NAD 83 NME)	MD Reference:	KB = 26' @ 2959.0usft
Site:	Golden Graham 1 State Com	North Reference:	Grid
Well:	#702H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #0.3		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	0.00	0.00	700.0	0.0	0.0	0.0	0.00	0.00	0.00
800.0	0.00	0.00	800.0	0.0	0.0	0.0	0.00	0.00	0.00
900.0	0.00	0.00	900.0	0.0	0.0	0.0	0.00	0.00	0.00
1,000.0	0.00	0.00	1,000.0	0.0	0.0	0.0	0.00	0.00	0.00
1,100.0	0.00	0.00	1,100.0	0.0	0.0	0.0	0.00	0.00	0.00
1,200.0	0.00	0.00	1,200.0	0.0	0.0	0.0	0.00	0.00	0.00
1,300.0	0.00	0.00	1,300.0	0.0	0.0	0.0	0.00	0.00	0.00
1,400.0	0.00	0.00	1,400.0	0.0	0.0	0.0	0.00	0.00	0.00
1,500.0	2.00	244.71	1,500.0	-0.7	-1.6	-0.6	2.00	2.00	0.00
1,600.0	4.00	244.71	1,599.8	-3.0	-6.3	-2.4	2.00	2.00	0.00
1,700.0	6.00	244.71	1,699.5	-6.7	-14.2	-5.4	2.00	2.00	0.00
1,770.1	7.40	244.71	1,769.0	-10.2	-21.6	-8.2	2.00	2.00	0.00
1,800.0	7.40	244.71	1,798.7	-11.8	-25.1	-9.5	0.00	0.00	0.00
1,900.0	7.40	244.71	1,897.9	-17.3	-36.7	-13.9	0.00	0.00	0.00
2,000.0	7.40	244.71	1,997.1	-22.8	-48.4	-18.4	0.00	0.00	0.00
2,100.0	7.40	244.71	2,096.2	-28.4	-60.0	-22.8	0.00	0.00	0.00
2,200.0	7.40	244.71	2,195.4	-33.9	-71.7	-27.2	0.00	0.00	0.00
2,300.0	7.40	244.71	2,294.6	-39.4	-83.3	-31.6	0.00	0.00	0.00
2,400.0	7.40	244.71	2,393.7	-44.9	-95.0	-36.1	0.00	0.00	0.00
2,500.0	7.40	244.71	2,492.9	-50.4	-106.6	-40.5	0.00	0.00	0.00
2,600.0	7.40	244.71	2,592.1	-55.9	-118.2	-44.9	0.00	0.00	0.00
2,700.0	7.40	244.71	2,691.2	-61.4	-129.9	-49.3	0.00	0.00	0.00
2,800.0	7.40	244.71	2,790.4	-66.9	-141.5	-53.8	0.00	0.00	0.00
2,900.0	7.40	244.71	2,889.6	-72.4	-153.2	-58.2	0.00	0.00	0.00
3,000.0	7.40	244.71	2,988.7	-77.9	-164.8	-62.6	0.00	0.00	0.00
3,100.0	7.40	244.71	3,087.9	-83.4	-176.5	-67.0	0.00	0.00	0.00
3,200.0	7.40	244.71	3,187.1	-88.9	-188.1	-71.5	0.00	0.00	0.00
3,300.0	7.40	244.71	3,286.2	-94.4	-199.8	-75.9	0.00	0.00	0.00
3,400.0	7.40	244.71	3,385.4	-99.9	-211.4	-80.3	0.00	0.00	0.00
3,500.0	7.40	244.71	3,484.6	-105.4	-223.1	-84.7	0.00	0.00	0.00
3,600.0	7.40	244.71	3,583.7	-110.9	-234.7	-89.2	0.00	0.00	0.00
3,700.0	7.40	244.71	3,682.9	-116.4	-246.4	-93.6	0.00	0.00	0.00
3,800.0	7.40	244.71	3,782.1	-121.9	-258.0	-98.0	0.00	0.00	0.00
3,900.0	7.40	244.71	3,881.2	-127.4	-269.7	-102.4	0.00	0.00	0.00
4,000.0	7.40	244.71	3,980.4	-132.9	-281.3	-106.9	0.00	0.00	0.00
4,100.0	7.40	244.71	4,079.6	-138.4	-293.0	-111.3	0.00	0.00	0.00
4,200.0	7.40	244.71	4,178.7	-143.9	-304.6	-115.7	0.00	0.00	0.00
4,300.0	7.40	244.71	4,277.9	-149.4	-316.2	-120.1	0.00	0.00	0.00
4,361.6	7.40	244.71	4,339.0	-152.8	-323.4	-122.9	0.00	0.00	0.00
4,400.0	6.63	244.71	4,377.1	-154.8	-327.7	-124.5	2.00	-2.00	0.00
4,500.0	4.63	244.71	4,476.6	-159.0	-336.5	-127.8	2.00	-2.00	0.00
4,600.0	2.63	244.71	4,576.4	-161.7	-342.3	-130.0	2.00	-2.00	0.00
4,700.0	0.63	244.71	4,676.4	-162.9	-344.8	-131.0	2.00	-2.00	0.00
4,731.6	0.00	0.01	4,708.0	-163.0	-345.0	-131.0	2.00	-2.00	0.00
4,800.0	0.00	0.00	4,776.4	-163.0	-345.0	-131.0	0.00	0.00	0.00
4,900.0	0.00	0.00	4,876.4	-163.0	-345.0	-131.0	0.00	0.00	0.00
5,000.0	0.00	0.00	4,976.4	-163.0	-345.0	-131.0	0.00	0.00	0.00



EOG Resources

Planning Report

Database:	PEDM	Local Co-ordinate Reference:	Well #702H
Company:	Midland	TVD Reference:	KB = 26' @ 2959.0usft
Project:	Eddy County, NM (NAD 83 NME)	MD Reference:	KB = 26' @ 2959.0usft
Site:	Golden Graham 1 State Com	North Reference:	Grid
Well:	#702H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #0.3		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
5,100.0	0.00	0.00	5,076.4	-163.0	-345.0	-131.0	0.00	0.00	0.00
5,200.0	0.00	0.00	5,176.4	-163.0	-345.0	-131.0	0.00	0.00	0.00
5,300.0	0.00	0.00	5,276.4	-163.0	-345.0	-131.0	0.00	0.00	0.00
5,400.0	0.00	0.00	5,376.4	-163.0	-345.0	-131.0	0.00	0.00	0.00
5,500.0	0.00	0.00	5,476.4	-163.0	-345.0	-131.0	0.00	0.00	0.00
5,600.0	0.00	0.00	5,576.4	-163.0	-345.0	-131.0	0.00	0.00	0.00
5,700.0	0.00	0.00	5,676.4	-163.0	-345.0	-131.0	0.00	0.00	0.00
5,800.0	0.00	0.00	5,776.4	-163.0	-345.0	-131.0	0.00	0.00	0.00
5,900.0	0.00	0.00	5,876.4	-163.0	-345.0	-131.0	0.00	0.00	0.00
6,000.0	0.00	0.00	5,976.4	-163.0	-345.0	-131.0	0.00	0.00	0.00
6,100.0	0.00	0.00	6,076.4	-163.0	-345.0	-131.0	0.00	0.00	0.00
6,200.0	0.00	0.00	6,176.4	-163.0	-345.0	-131.0	0.00	0.00	0.00
6,300.0	0.00	0.00	6,276.4	-163.0	-345.0	-131.0	0.00	0.00	0.00
6,400.0	0.00	0.00	6,376.4	-163.0	-345.0	-131.0	0.00	0.00	0.00
6,500.0	0.00	0.00	6,476.4	-163.0	-345.0	-131.0	0.00	0.00	0.00
6,600.0	0.00	0.00	6,576.4	-163.0	-345.0	-131.0	0.00	0.00	0.00
6,700.0	0.00	0.00	6,676.4	-163.0	-345.0	-131.0	0.00	0.00	0.00
6,800.0	0.00	0.00	6,776.4	-163.0	-345.0	-131.0	0.00	0.00	0.00
6,900.0	0.00	0.00	6,876.4	-163.0	-345.0	-131.0	0.00	0.00	0.00
7,000.0	0.00	0.00	6,976.4	-163.0	-345.0	-131.0	0.00	0.00	0.00
7,100.0	0.00	0.00	7,076.4	-163.0	-345.0	-131.0	0.00	0.00	0.00
7,200.0	0.00	0.00	7,176.4	-163.0	-345.0	-131.0	0.00	0.00	0.00
7,300.0	0.00	0.00	7,276.4	-163.0	-345.0	-131.0	0.00	0.00	0.00
7,400.0	0.00	0.00	7,376.4	-163.0	-345.0	-131.0	0.00	0.00	0.00
7,500.0	0.00	0.00	7,476.4	-163.0	-345.0	-131.0	0.00	0.00	0.00
7,600.0	0.00	0.00	7,576.4	-163.0	-345.0	-131.0	0.00	0.00	0.00
7,700.0	0.00	0.00	7,676.4	-163.0	-345.0	-131.0	0.00	0.00	0.00
7,800.0	0.00	0.00	7,776.4	-163.0	-345.0	-131.0	0.00	0.00	0.00
7,900.0	0.00	0.00	7,876.4	-163.0	-345.0	-131.0	0.00	0.00	0.00
8,000.0	0.00	0.00	7,976.4	-163.0	-345.0	-131.0	0.00	0.00	0.00
8,100.0	0.00	0.00	8,076.4	-163.0	-345.0	-131.0	0.00	0.00	0.00
8,200.0	0.00	0.00	8,176.4	-163.0	-345.0	-131.0	0.00	0.00	0.00
8,300.0	0.00	0.00	8,276.4	-163.0	-345.0	-131.0	0.00	0.00	0.00
8,400.0	0.00	0.00	8,376.4	-163.0	-345.0	-131.0	0.00	0.00	0.00
8,500.0	0.00	0.00	8,476.4	-163.0	-345.0	-131.0	0.00	0.00	0.00
8,600.0	0.00	0.00	8,576.4	-163.0	-345.0	-131.0	0.00	0.00	0.00
8,700.0	0.00	0.00	8,676.4	-163.0	-345.0	-131.0	0.00	0.00	0.00
8,800.0	0.00	0.00	8,776.4	-163.0	-345.0	-131.0	0.00	0.00	0.00
8,900.0	0.00	0.00	8,876.4	-163.0	-345.0	-131.0	0.00	0.00	0.00
9,000.0	0.00	0.00	8,976.4	-163.0	-345.0	-131.0	0.00	0.00	0.00
9,100.0	0.00	0.00	9,076.4	-163.0	-345.0	-131.0	0.00	0.00	0.00
9,157.1	0.00	0.01	9,133.5	-163.0	-345.0	-131.0	0.00	0.00	0.00
KOP(GG 1 SC #702H)									
9,175.0	2.14	0.10	9,151.3	-162.7	-345.0	-130.7	12.00	12.00	0.00
9,200.0	5.14	0.10	9,176.3	-161.1	-345.0	-129.1	12.00	12.00	0.00
9,225.0	8.14	0.10	9,201.1	-158.2	-345.0	-126.3	12.00	12.00	0.00
9,250.0	11.14	0.10	9,225.8	-154.0	-345.0	-122.1	12.00	12.00	0.00
9,275.0	14.14	0.10	9,250.2	-148.5	-345.0	-116.6	12.00	12.00	0.00
9,300.0	17.14	0.10	9,274.2	-141.8	-345.0	-109.9	12.00	12.00	0.00
9,325.0	20.14	0.10	9,297.9	-133.8	-344.9	-102.0	12.00	12.00	0.00
9,350.0	23.14	0.10	9,321.2	-124.6	-344.9	-92.8	12.00	12.00	0.00
9,375.0	26.14	0.10	9,343.9	-114.2	-344.9	-82.4	12.00	12.00	0.00
9,400.0	29.14	0.10	9,366.0	-102.6	-344.9	-70.9	12.00	12.00	0.00

EOG Resources

Planning Report



Database:	PEDM	Local Co-ordinate Reference:	Well #702H
Company:	Midland	TVD Reference:	KB = 26' @ 2959.0usft
Project:	Eddy County, NM (NAD 83 NME)	MD Reference:	KB = 26' @ 2959.0usft
Site:	Golden Graham 1 State Com	North Reference:	Grid
Well:	#702H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #0.3		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
9,425.0	32.14	0.10	9,387.5	-89.8	-344.9	-58.2	12.00	12.00	0.00
9,450.0	35.14	0.10	9,408.3	-76.0	-344.8	-44.4	12.00	12.00	0.00
9,475.0	38.14	0.10	9,428.4	-61.1	-344.8	-29.5	12.00	12.00	0.00
9,500.0	41.14	0.10	9,447.6	-45.1	-344.8	-13.7	12.00	12.00	0.00
9,525.0	44.14	0.10	9,466.0	-28.2	-344.8	3.2	12.00	12.00	0.00
9,550.0	47.14	0.10	9,483.5	-10.3	-344.7	21.0	12.00	12.00	0.00
9,575.0	50.14	0.10	9,500.0	8.5	-344.7	39.7	12.00	12.00	0.00
9,600.0	53.14	0.10	9,515.5	28.1	-344.7	59.2	12.00	12.00	0.00
9,625.0	56.14	0.10	9,530.0	48.5	-344.6	79.5	12.00	12.00	0.00
9,650.0	59.14	0.10	9,543.4	69.6	-344.6	100.5	12.00	12.00	0.00
9,675.0	62.14	0.10	9,555.6	91.4	-344.6	122.2	12.00	12.00	0.00
9,700.0	65.14	0.10	9,566.7	113.8	-344.5	144.5	12.00	12.00	0.00
9,720.5	67.61	0.10	9,575.0	132.6	-344.5	163.3	12.00	12.00	0.00
FTP(GG 1 SC #702H)									
9,725.0	68.14	0.10	9,576.6	136.7	-344.5	167.4	12.00	12.00	0.00
9,750.0	71.14	0.10	9,585.3	160.1	-344.4	190.7	12.00	12.00	0.00
9,775.0	74.14	0.10	9,592.8	184.0	-344.4	214.5	12.00	12.00	0.00
9,800.0	77.14	0.10	9,599.0	208.2	-344.4	238.6	12.00	12.00	0.00
9,825.0	80.14	0.10	9,603.9	232.7	-344.3	263.0	12.00	12.00	0.00
9,850.0	83.14	0.10	9,607.5	257.5	-344.3	287.6	12.00	12.00	0.00
9,875.0	86.14	0.10	9,609.9	282.3	-344.2	312.4	12.00	12.00	0.00
9,900.0	89.14	0.10	9,610.9	307.3	-344.2	337.3	12.00	12.00	0.00
9,903.8	89.59	0.10	9,611.0	311.1	-344.2	341.0	12.00	12.00	0.00
10,000.0	89.59	0.10	9,611.6	407.3	-344.0	436.8	0.00	0.00	0.00
10,100.0	89.59	0.10	9,612.3	507.3	-343.8	536.4	0.00	0.00	0.00
10,200.0	89.59	0.10	9,613.0	607.3	-343.7	636.0	0.00	0.00	0.00
10,300.0	89.59	0.10	9,613.8	707.3	-343.5	735.5	0.00	0.00	0.00
10,400.0	89.59	0.10	9,614.5	807.3	-343.3	835.1	0.00	0.00	0.00
10,500.0	89.59	0.10	9,615.2	907.3	-343.1	934.7	0.00	0.00	0.00
10,600.0	89.59	0.10	9,615.9	1,007.3	-343.0	1,034.2	0.00	0.00	0.00
10,700.0	89.59	0.10	9,616.6	1,107.3	-342.8	1,133.8	0.00	0.00	0.00
10,800.0	89.59	0.10	9,617.3	1,207.3	-342.6	1,233.4	0.00	0.00	0.00
10,900.0	89.59	0.10	9,618.0	1,307.3	-342.5	1,333.0	0.00	0.00	0.00
11,000.0	89.59	0.10	9,618.7	1,407.3	-342.3	1,432.5	0.00	0.00	0.00
11,100.0	89.59	0.10	9,619.4	1,507.3	-342.1	1,532.1	0.00	0.00	0.00
11,200.0	89.59	0.10	9,620.1	1,607.3	-341.9	1,631.7	0.00	0.00	0.00
11,300.0	89.59	0.10	9,620.8	1,707.3	-341.8	1,731.2	0.00	0.00	0.00
11,400.0	89.59	0.10	9,621.5	1,807.3	-341.6	1,830.8	0.00	0.00	0.00
11,500.0	89.59	0.10	9,622.2	1,907.3	-341.4	1,930.4	0.00	0.00	0.00
11,600.0	89.59	0.10	9,622.9	2,007.3	-341.2	2,029.9	0.00	0.00	0.00
11,700.0	89.59	0.10	9,623.7	2,107.3	-341.1	2,129.5	0.00	0.00	0.00
11,800.0	89.59	0.10	9,624.4	2,207.3	-340.9	2,229.1	0.00	0.00	0.00
11,900.0	89.59	0.10	9,625.1	2,307.3	-340.7	2,328.7	0.00	0.00	0.00
12,000.0	89.59	0.10	9,625.8	2,407.3	-340.5	2,428.2	0.00	0.00	0.00
12,100.0	89.59	0.10	9,626.5	2,507.3	-340.4	2,527.8	0.00	0.00	0.00
12,200.0	89.59	0.10	9,627.2	2,607.3	-340.2	2,627.4	0.00	0.00	0.00
12,300.0	89.59	0.10	9,627.9	2,707.3	-340.0	2,726.9	0.00	0.00	0.00
12,400.0	89.59	0.10	9,628.6	2,807.2	-339.9	2,826.5	0.00	0.00	0.00
12,500.0	89.59	0.10	9,629.3	2,907.2	-339.7	2,926.1	0.00	0.00	0.00
12,600.0	89.59	0.10	9,630.0	3,007.2	-339.5	3,025.6	0.00	0.00	0.00
12,700.0	89.59	0.10	9,630.7	3,107.2	-339.3	3,125.2	0.00	0.00	0.00
12,800.0	89.59	0.10	9,631.4	3,207.2	-339.2	3,224.8	0.00	0.00	0.00
12,900.0	89.59	0.10	9,632.1	3,307.2	-339.0	3,324.3	0.00	0.00	0.00
13,000.0	89.59	0.10	9,632.8	3,407.2	-338.8	3,423.9	0.00	0.00	0.00



EOG Resources

Planning Report

Database:	PEDM	Local Co-ordinate Reference:	Well #702H
Company:	Midland	TVD Reference:	KB = 26' @ 2959.0usft
Project:	Eddy County, NM (NAD 83 NME)	MD Reference:	KB = 26' @ 2959.0usft
Site:	Golden Graham 1 State Com	North Reference:	Grid
Well:	#702H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #0.3		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
13,100.0	89.59	0.10	9,633.5	3,507.2	-338.6	3,523.5	0.00	0.00	0.00
13,200.0	89.59	0.10	9,634.3	3,607.2	-338.5	3,623.1	0.00	0.00	0.00
13,300.0	89.59	0.10	9,635.0	3,707.2	-338.3	3,722.6	0.00	0.00	0.00
13,400.0	89.59	0.10	9,635.7	3,807.2	-338.1	3,822.2	0.00	0.00	0.00
13,500.0	89.59	0.10	9,636.4	3,907.2	-337.9	3,921.8	0.00	0.00	0.00
13,600.0	89.59	0.10	9,637.1	4,007.2	-337.8	4,021.3	0.00	0.00	0.00
13,700.0	89.59	0.10	9,637.8	4,107.2	-337.6	4,120.9	0.00	0.00	0.00
13,800.0	89.59	0.10	9,638.5	4,207.2	-337.4	4,220.5	0.00	0.00	0.00
13,900.0	89.59	0.10	9,639.2	4,307.2	-337.2	4,320.0	0.00	0.00	0.00
14,000.0	89.59	0.10	9,639.9	4,407.2	-337.1	4,419.6	0.00	0.00	0.00
14,100.0	89.59	0.10	9,640.6	4,507.2	-336.9	4,519.2	0.00	0.00	0.00
14,200.0	89.59	0.10	9,641.3	4,607.2	-336.7	4,618.8	0.00	0.00	0.00
14,300.0	89.59	0.10	9,642.0	4,707.2	-336.6	4,718.3	0.00	0.00	0.00
14,400.0	89.59	0.10	9,642.7	4,807.2	-336.4	4,817.9	0.00	0.00	0.00
14,500.0	89.59	0.10	9,643.4	4,907.2	-336.2	4,917.5	0.00	0.00	0.00
14,600.0	89.59	0.10	9,644.2	5,007.2	-336.0	5,017.0	0.00	0.00	0.00
14,700.0	89.59	0.10	9,644.9	5,107.2	-335.9	5,116.6	0.00	0.00	0.00
14,800.0	89.59	0.10	9,645.6	5,207.2	-335.7	5,216.2	0.00	0.00	0.00
14,900.0	89.59	0.10	9,646.3	5,307.2	-335.5	5,315.7	0.00	0.00	0.00
15,000.0	89.59	0.10	9,647.0	5,407.2	-335.3	5,415.3	0.00	0.00	0.00
15,100.0	89.59	0.10	9,647.7	5,507.2	-335.2	5,514.9	0.00	0.00	0.00
15,200.0	89.59	0.10	9,648.4	5,607.2	-335.0	5,614.5	0.00	0.00	0.00
15,300.0	89.59	0.10	9,649.1	5,707.2	-334.8	5,714.0	0.00	0.00	0.00
15,400.0	89.59	0.10	9,649.8	5,807.2	-334.6	5,813.6	0.00	0.00	0.00
15,500.0	89.59	0.10	9,650.5	5,907.2	-334.5	5,913.2	0.00	0.00	0.00
15,600.0	89.59	0.10	9,651.2	6,007.2	-334.3	6,012.7	0.00	0.00	0.00
15,700.0	89.59	0.10	9,651.9	6,107.2	-334.1	6,112.3	0.00	0.00	0.00
15,800.0	89.59	0.10	9,652.6	6,207.2	-334.0	6,211.9	0.00	0.00	0.00
15,900.0	89.59	0.10	9,653.3	6,307.2	-333.8	6,311.4	0.00	0.00	0.00
16,000.0	89.59	0.10	9,654.1	6,407.2	-333.6	6,411.0	0.00	0.00	0.00
16,100.0	89.59	0.10	9,654.8	6,507.2	-333.4	6,510.6	0.00	0.00	0.00
16,200.0	89.59	0.10	9,655.5	6,607.1	-333.3	6,610.2	0.00	0.00	0.00
16,300.0	89.59	0.10	9,656.2	6,707.1	-333.1	6,709.7	0.00	0.00	0.00
16,400.0	89.59	0.10	9,656.9	6,807.1	-332.9	6,809.3	0.00	0.00	0.00
16,498.6	89.59	0.10	9,657.6	6,905.8	-332.7	6,907.5	0.00	0.00	0.00
TGT#1(GOLDEN GRAHAM 1 ST COM #702H)									
16,500.0	89.59	0.10	9,657.6	6,907.1	-332.7	6,908.9	0.00	0.00	0.00
16,600.0	89.59	0.10	9,658.3	7,007.1	-332.6	7,008.4	0.00	0.00	0.00
16,700.0	89.59	0.10	9,659.0	7,107.1	-332.4	7,108.0	0.00	0.00	0.00
16,800.0	89.59	0.10	9,659.7	7,207.1	-332.2	7,207.6	0.00	0.00	0.00
16,900.0	89.59	0.10	9,660.4	7,307.1	-332.0	7,307.1	0.00	0.00	0.00
17,000.0	89.59	0.10	9,661.1	7,407.1	-331.9	7,406.7	0.00	0.00	0.00
17,100.0	89.59	0.10	9,661.8	7,507.1	-331.7	7,506.3	0.00	0.00	0.00
17,200.0	89.59	0.10	9,662.5	7,607.1	-331.5	7,605.9	0.00	0.00	0.00
17,300.0	89.59	0.10	9,663.2	7,707.1	-331.4	7,705.4	0.00	0.00	0.00
17,400.0	89.59	0.10	9,663.9	7,807.1	-331.2	7,805.0	0.00	0.00	0.00
17,500.0	89.59	0.10	9,664.7	7,907.1	-331.0	7,904.6	0.00	0.00	0.00
17,600.0	89.59	0.10	9,665.4	8,007.1	-330.8	8,004.1	0.00	0.00	0.00
17,700.0	89.59	0.10	9,666.1	8,107.1	-330.7	8,103.7	0.00	0.00	0.00
17,800.0	89.59	0.10	9,666.8	8,207.1	-330.5	8,203.3	0.00	0.00	0.00
17,900.0	89.59	0.10	9,667.5	8,307.1	-330.3	8,302.8	0.00	0.00	0.00
18,000.0	89.59	0.10	9,668.2	8,407.1	-330.1	8,402.4	0.00	0.00	0.00
18,100.0	89.59	0.10	9,668.9	8,507.1	-330.0	8,502.0	0.00	0.00	0.00



EOG Resources

Planning Report

Database:	PEDM	Local Co-ordinate Reference:	Well #702H
Company:	Midland	TVD Reference:	KB = 26' @ 2959.0usft
Project:	Eddy County, NM (NAD 83 NME)	MD Reference:	KB = 26' @ 2959.0usft
Site:	Golden Graham 1 State Com	North Reference:	Grid
Well:	#702H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #0.3		


Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
18,200.0	89.59	0.10	9,669.6	8,607.1	-329.8	8,601.5	0.00	0.00	0.00
18,300.0	89.59	0.10	9,670.3	8,707.1	-329.6	8,701.1	0.00	0.00	0.00
18,400.0	89.59	0.10	9,671.0	8,807.1	-329.4	8,800.7	0.00	0.00	0.00
18,500.0	89.59	0.10	9,671.7	8,907.1	-329.3	8,900.3	0.00	0.00	0.00
18,600.0	89.59	0.10	9,672.4	9,007.1	-329.1	8,999.8	0.00	0.00	0.00
18,700.0	89.59	0.10	9,673.1	9,107.1	-328.9	9,099.4	0.00	0.00	0.00
18,800.0	89.59	0.10	9,673.8	9,207.1	-328.8	9,199.0	0.00	0.00	0.00
18,900.0	89.59	0.10	9,674.6	9,307.1	-328.6	9,298.5	0.00	0.00	0.00
19,000.0	89.59	0.10	9,675.3	9,407.1	-328.4	9,398.1	0.00	0.00	0.00
19,100.0	89.59	0.10	9,676.0	9,507.1	-328.2	9,497.7	0.00	0.00	0.00
19,200.0	89.59	0.10	9,676.7	9,607.1	-328.1	9,597.2	0.00	0.00	0.00
19,300.0	89.59	0.10	9,677.4	9,707.1	-327.9	9,696.8	0.00	0.00	0.00
19,400.0	89.59	0.10	9,678.1	9,807.1	-327.7	9,796.4	0.00	0.00	0.00
19,500.0	89.59	0.10	9,678.8	9,907.1	-327.5	9,896.0	0.00	0.00	0.00
19,600.0	89.59	0.10	9,679.5	10,007.1	-327.4	9,995.5	0.00	0.00	0.00
19,700.0	89.59	0.10	9,680.2	10,107.1	-327.2	10,095.1	0.00	0.00	0.00
19,800.0	89.59	0.10	9,680.9	10,207.1	-327.0	10,194.7	0.00	0.00	0.00
19,811.9	89.59	0.10	9,681.0	10,219.0	-327.0	10,206.6	0.00	0.00	0.00
PBHL(GG 1 SC #702H)									

Design Targets									
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
KOP(GG 1 SC #702H)	0.00	0.01	9,133.5	-163.0	-345.0	387,322.00	630,771.00	32.0644992°N	104.0446253°W
- plan hits target center									
- Polygon									
Point 1			9,133.5	50.0	-60.0	387,372.00	630,711.01		
Point 2			9,133.5	50.0	60.0	387,371.99	630,831.01		
Point 3			9,133.5	-30.0	60.0	387,291.99	630,831.00		
Point 4			9,133.5	-30.0	-60.0	387,292.00	630,711.00		
FTP(GG 1 SC #702H)	0.00	0.00	9,611.0	117.0	-345.0	387,602.00	630,771.00	32.0652689°N	104.0446229°W
- plan misses target center by 39.3usft at 9720.5usft MD (9575.0 TVD, 132.6 N, -344.5 E)									
- Point									
PBHL(GG 1 SC #702H)	90.00	0.10	9,681.0	10,219.0	-327.0	397,704.00	630,789.00	32.0930385°N	104.0444775°W
- plan hits target center									
- Rectangle (sides W60.0 H0.0 D9,992.5)									

Eddy County, NM (NAD 83 NME)

Golden Graham 1 State Com #702H

Plan #0.3

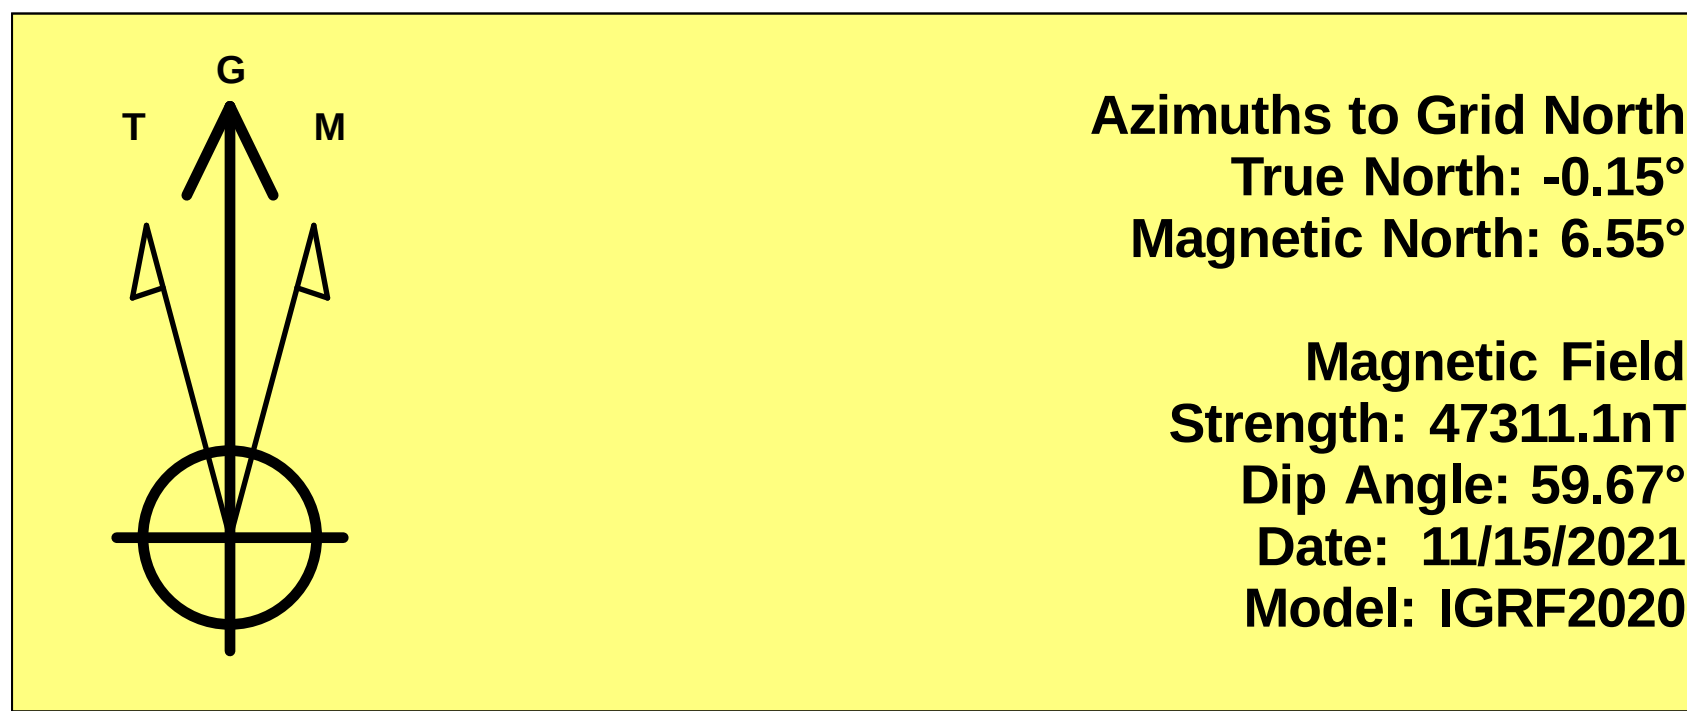

To convert a Magnetic Direction to a Grid Direction, Add 6.55°
To convert a Magnetic Direction to a True Direction, Add 6.70° East
To convert a True Direction to a Grid Direction, Subtract 0.15°

PROJECT DETAILS: Eddy County, NM (NAD 83 NME)



Geodetic System: US State Plane 1983
Datum: North American Datum 1983
Ellipsoid: GRS 1980
Zone: New Mexico Eastern Zone
System Datum: Mean Sea Level

WELL DETAILS: #702H				
KB = 26' @ 2959.0usft				2933.0
Northing	Easting	Latitude	Longitude	
387485.00	631116.00	32.0649447°N	104.0435102°W	

SECTION DETAILS										
Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSect	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	1400.0	0.00	0.00	1400.0	0.0	0.0	0.00	0.00	0.0	
3	1770.1	7.40	244.71	1769.0	-10.2	-21.6	2.00	244.71	-8.2	
4	4361.6	7.40	244.71	4339.0	-152.8	-323.4	0.00	0.00	-122.9	
5	4731.6	0.00	0.01	4708.0	-163.0	-345.0	2.00	180.00	-131.0	KOP(GG 1 SC #702H)
6	9157.1	0.00	0.01	9133.5	-163.0	-345.0	0.00	0.00	-131.0	
7	9903.8	89.59	0.10	9611.0	311.1	-344.2	12.00	0.10	341.0	
8	19811.9	89.59	0.10	9681.0	10219.0	-327.0	0.00	0.00	10206.6	PBHL(GG 1 SC #702H)

CASING DETAILS
No casing data is available

WELLBORE TARGET DETAILS (MAP CO-ORDINATES)					
Name	TVD	+N/-S	+E/-W	Northing	Easting
KOP(GG 1 SC #702H)	9133.5	-163.0	-345.0	387322.00	630771.00
PBHL(GG 1 SC #702H)	9681.0	10219.0	-327.0	397704.00	630789.00
FTP(GG 1 SC #702H)	9611.0	117.0	-345.0	387602.00	630771.00

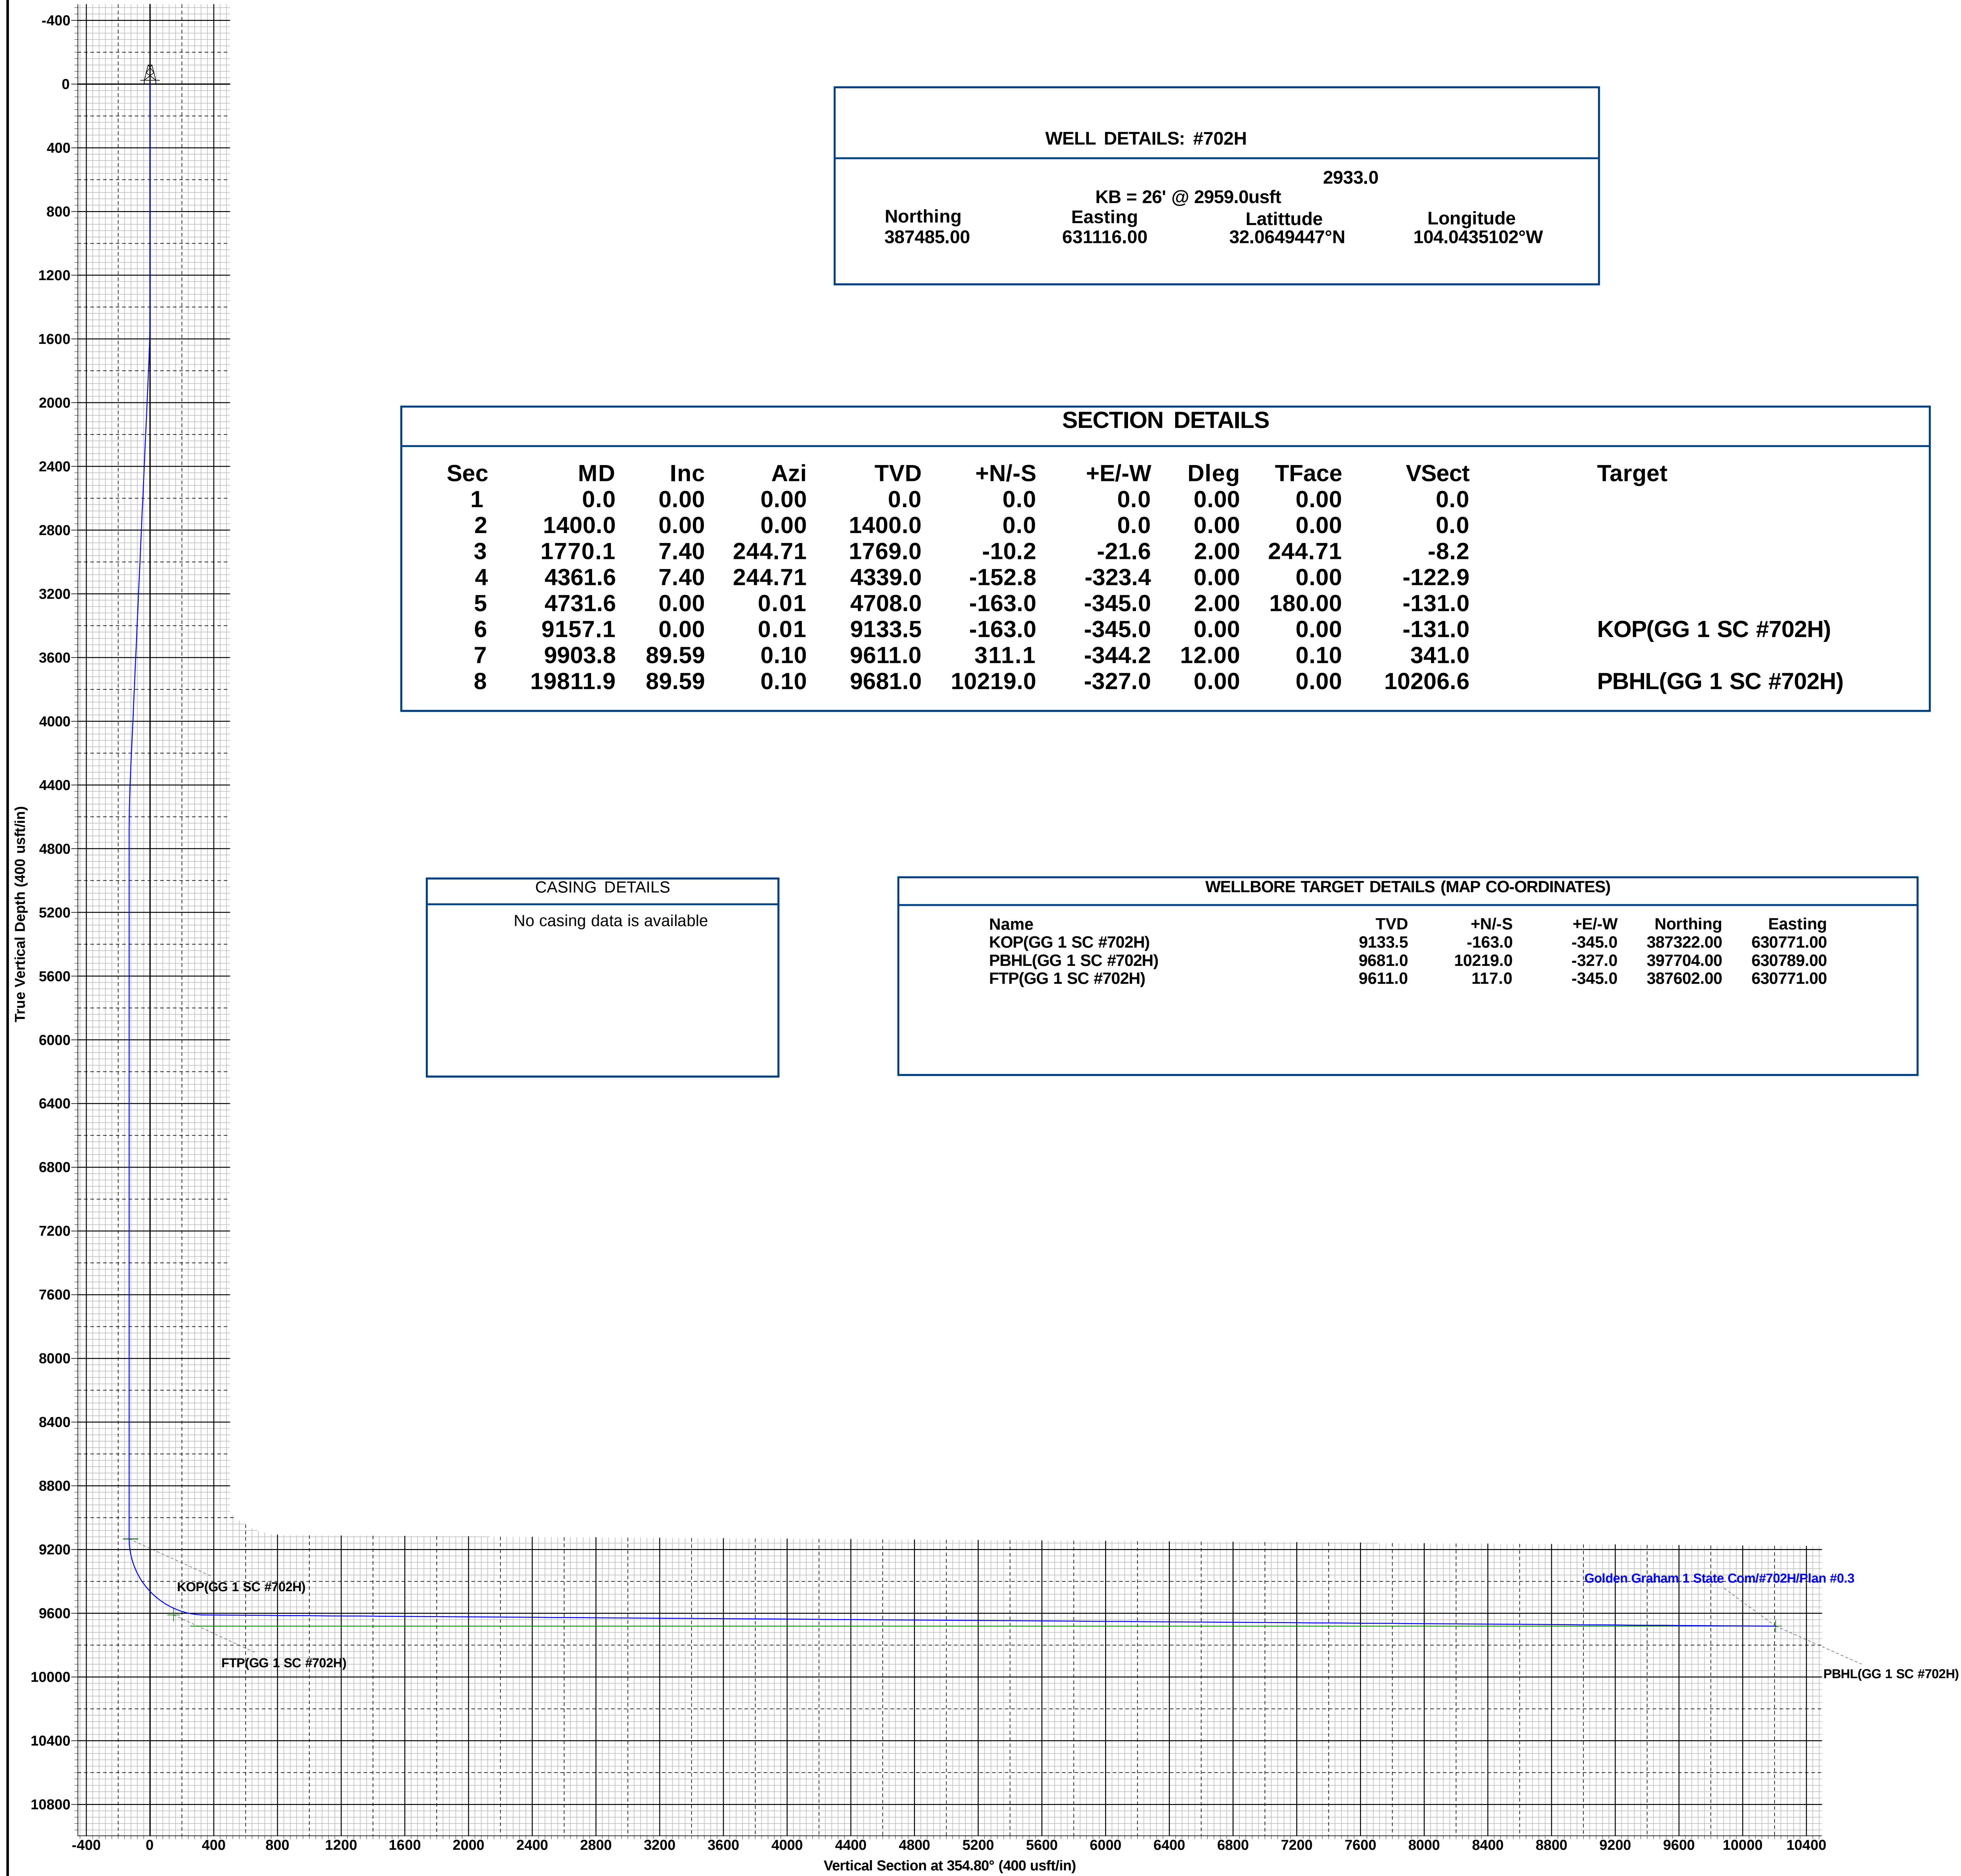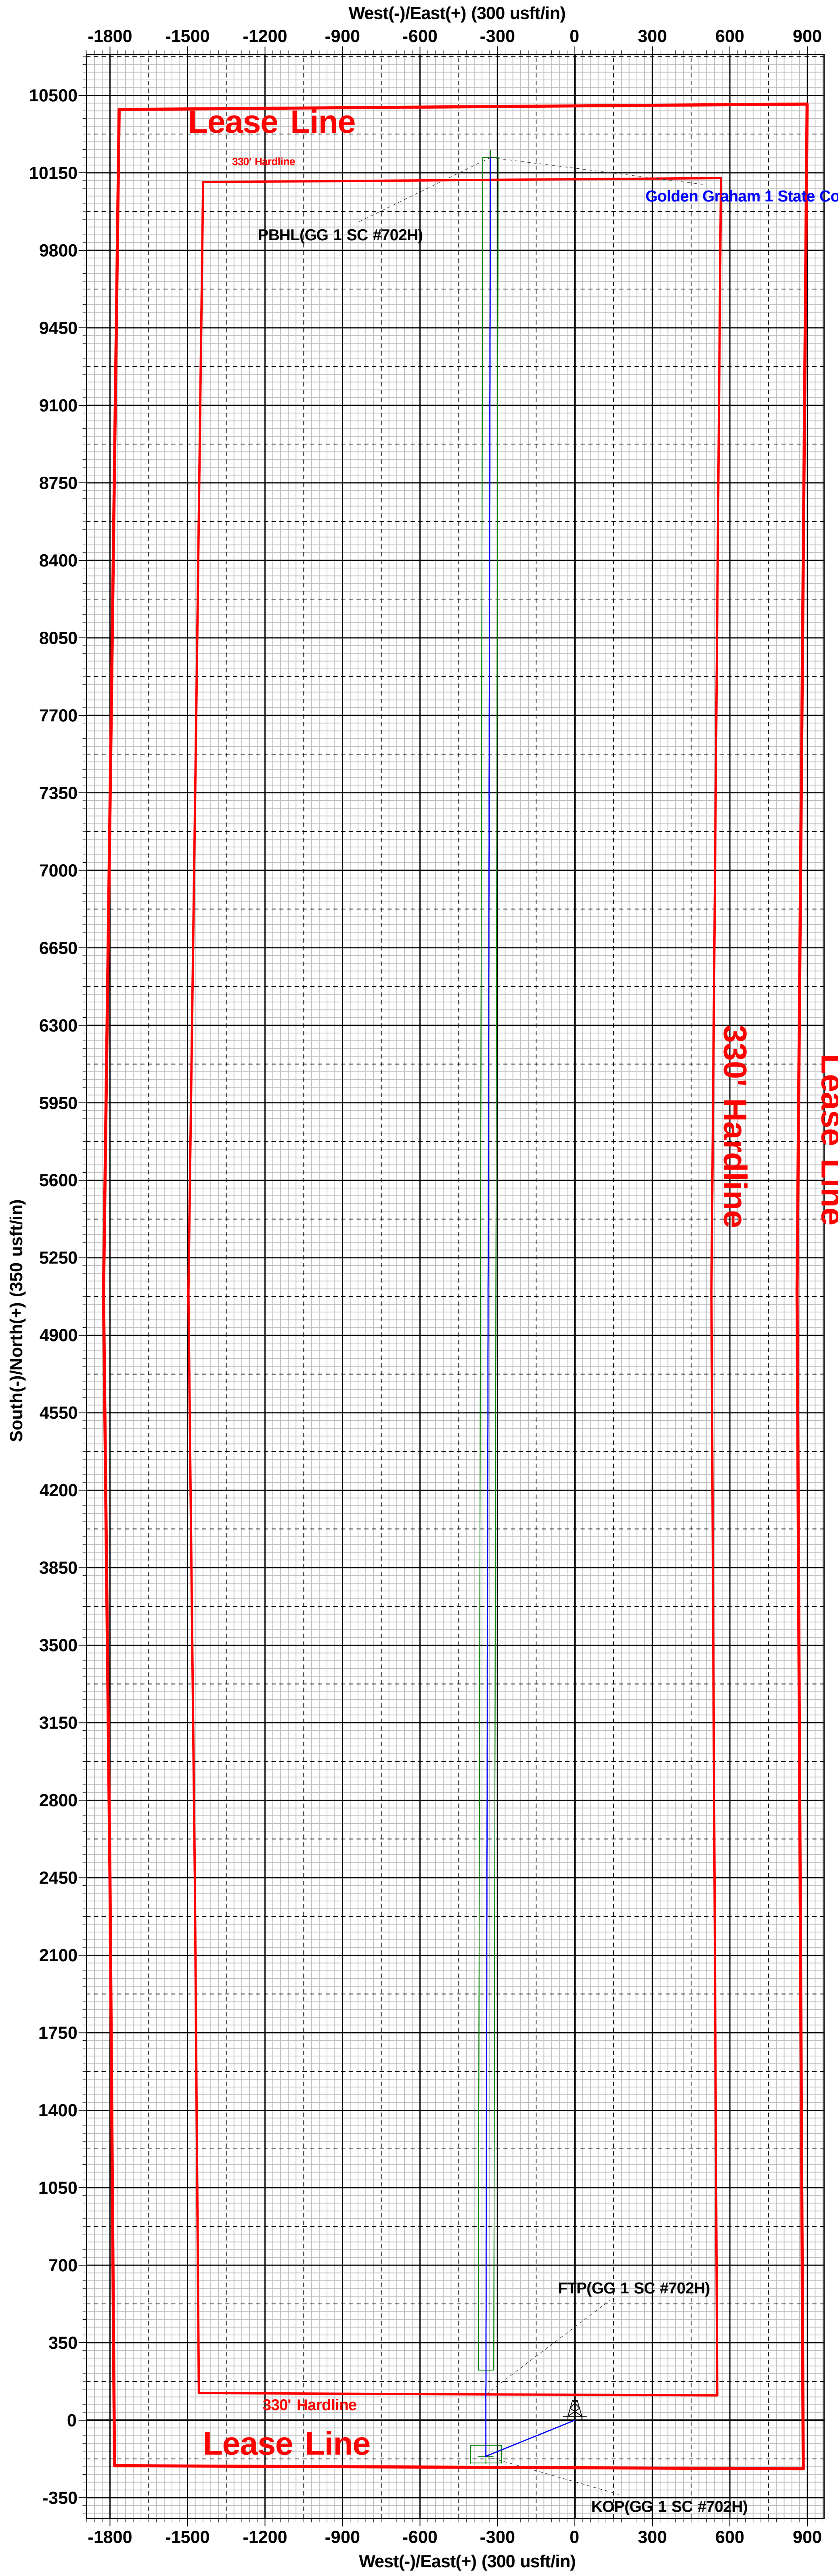

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 61088

CONDITIONS

Operator: EOG RESOURCES INC P.O. Box 2267 Midland, TX 79702	OGRID: 7377
	Action Number: 61088
	Action Type: [C-103] NOI Change of Plans (C-103A)

CONDITIONS

Created By	Condition	Condition Date
kpickford	Adhere to previous NMOCD Conditions of Approval	11/18/2021