Sundry Print Report

U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

Well Name: YUKON 20 FED COM Well Location: T24S / R34E / SEC 20 / County or Parish/State: LEA /

NENE / 32.2085745 / -103.487085

Well Number: 504H Type of Well: OIL WELL Allottee or Tribe Name:

Lease Number: NMNM17241 Unit or CA Name: Unit or CA Number:

US Well Number: 00 Well Status: Approved Application for Operator: EOG RESOURCES

Permit to Drill INCORPORATED

Notice of Intent

Sundry ID: 2643522

Type of Submission: Notice of Intent

Type of Action: Other

Date Sundry Submitted: 11/08/2021 Time Sundry Submitted: 03:12

Date proposed operation will begin: 11/28/2021

Procedure Description: EOG respectfully requests an amendment to our approved APD for this well to reflect the following changes: Change name from #701H to #504H. Change SHL to T-24-S, R-34-E, Sec 20, 493' FNL, 2172' FWL, Lea Co., N.M. Change BHL to T-24-S, R-34-E, Sec 29, 100' FSL, 1485' FWL, Lea Co., N.M. Change target formation to Second Bone Spring Sand. Update casing and cement program to current design.

Surface Disturbance

Is any additional surface disturbance proposed?: No

NOI Attachments

Procedure Description

YUKON_20_FED_COM_504H_C_102_20211108151225.pdf

10_M_Choke_Manifold_20211108151127.pdf

EOG_BLM_Variance_1c___10M_Annular_Variance___3_String_Large_surface_hole_20211108151121.pdf

EOG_Cameron_3_String_13in_10M_MNDS_20211108151122.PDF

Co_Flex_Hose_Test_Chart_20211108151121.pdf

 $Co_Flex_Hose_Certification_20211108151121.pdf$

10_M_BOP_Diagram_13.625_in_20211108151120.pdf

Received by OCD: 11/23/2021 2:51:40 PM Well Name: YUKON 20 FED COM Well Location: T24S / R34E / SEC 20 / County or Parish/State: LE

NENE / 32.2085745 / -103.487085

Well Number: 504H Type of Well: OIL WELL Allottee or Tribe Name:

Lease Number: NMNM17241 Unit or CA Name: Unit or CA Number:

US Well Number: 00 Well Status: Approved Application for Operator: EOG RESOURCES

Permit to Drill INCORPORATED

Yukon_20_Fed_Com_504H_Sundry_Info___Rev_Name__SHL__BHL__tgt__csg_11.5.2021_20211108151044 .pdf

Operator Certification

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a submission of Form 3160-5 or a Sundry Notice.

Operator Electronic Signature: STAR HARRELL Signed on: NOV 08, 2021 03:12 PM

Name: EOG RESOURCES INCORPORATED

Title: Regulatory Specialist

Street Address: 5509 CHAMPIONS DRIVE

City: MIDLAND State: TX

Phone: (432) 848-9161

Email address: STAR_HARRELL@EOGRESOURCES.COM

Field Representative

Representative Name: Eric Brorman

Street Address: 5509 Champions Drive

City: Midland State: TX Zip: 79706

Phone: (432)556-1276

Email address: eric_brorman@eogresources.com

BLM Point of Contact

BLM POC Name: CHRISTOPHER WALLS

BLM POC Title: Petroleum Engineer

BLM POC Phone: 5752342234 BLM POC Email Address: cwalls@blm.gov

Disposition: Approved **Disposition Date:** 11/23/2021

Signature: Chris Walls

Page 2 of 2

County

District I 1625 N. French Dr., Hobbs, NM 88240 Phone: (575) 393-6161 Fax: (575) 393-0720 District II 811 S. First St., Artesia, NM 88210 Phone: (575) 748-1283 Fax: (575) 748-9720 District III 1000 Rio Brazos Road, Aztec, NM 87410 Phone: (505) 334-6178 Fax: (505) 334-6170 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505 Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources
Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

FORM C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

AMENDED REPORT

East/West line

WELL LOCATION AND ACREAGE DEDICATION PLAT


¹ API Number 30-025-46970		Pool Code 96434 Red Hills; Bone Spring,		, North
⁴ Property Code 327233			operty Name 20 FED COM	⁶ Well Number #504H
⁷ OGRID №. 7377			perator Name SOURCES, INC.	⁹ Elevation 3535'

¹⁰Surface Location

North/South line

C	20	24-S	34-E	— Lot 1411	493'	NORTH	2172'	WEST	LEA	
	11Bottom Hole Location If Different From Surface									
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County	
N	29	24-S	34-E	-	100'	SOUTH	1485'	WEST	LEA	
12Dedicated Acres	¹³ Joint or l	Infill 14Co	onsolidation Cod	le ¹⁵ Ord	er No.					
640.00										

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

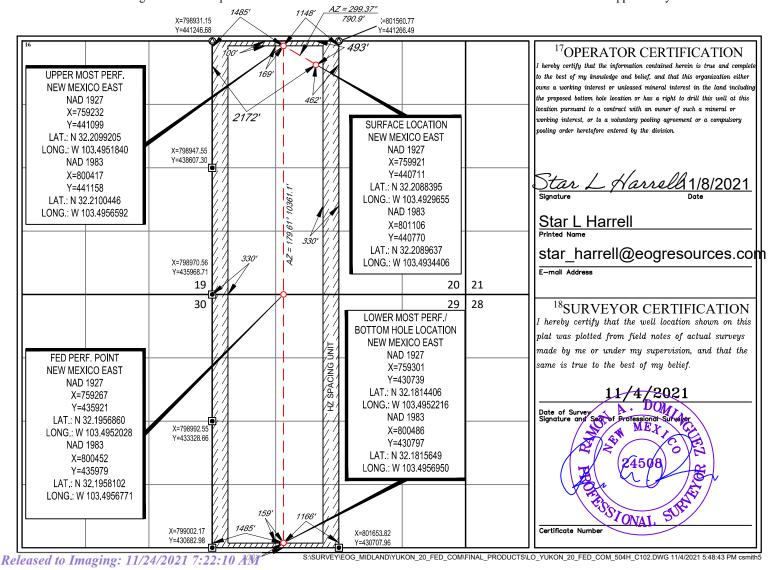



Yukon 20 Fed Com 504H

Revised Permit Information 11/05/2021:

Well Name: Yukon 20 Fed Com 504H

Location: SHL: 493' FNL & 2172' FWL, Section 20, T-24-S, R-34-E, Lea Co., N.M.

BHL: 100' FSL & 1485' FWL, Section 29, T-24-S, R-34-E, Lea Co., N.M.

Casing Program:

Hole		Csg				DFmin	DFmin	DFmin
Size	Interval	OD	Weight	Grade	Conn	Collapse	Burst	Tension
16"	0' - 1,320'	13.375"	54.5#	J-55	STC	1.125	1.25	1.6
12.25"	0' - 4,000'	9.625"	40#	J-55	LTC	1.125	1.25	1.6
12.25"	4,000' - 5,220'	9.625"	40#	HCK-55	LTC	1.125	1.25	1.6
8.75"	0' - 11,159'	5.5"	17#	HCP-110	LTC	1.125	1.25	1.6
8.5"	11,159' - 21,092'	5.5"	17#	HCP-110	LTC	1.125	1.25	1.6

Variance is requested to waive the centralizer requirements for the 9-5/8" casing in the 12-1/4" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 12-1/4" hole interval to maximize cement bond and zonal isolation.

Variance is also requested to waive any centralizer requirements for the 5-1/2" casing in the 8-3/4" and 8-1/2" hole sizes. An expansion additive will be utilized, in the cement slurry, for the entire length of the 8-3/4" and 8-1/2" hole intervals to maximize cement bond and zonal isolation.

Cementing Program:

Wt. Yld						
		W L.		Slurry Description		
Depth	No. Sacks	ppg	Ft3/sk	, ,		
1,320'	400	13.5	1.73	Lead: Class C + 4.0% Bentonite Gel + 0.5% CaCl2 + 0.25 lb/sk		
13.375"				Cello-Flake (TOC @ Surface)		
	100	14.8	1.34	Tail: Class C + 0.6% FL-62 + 0.25 lb/sk Cello-Flake + 0.2%		
				Sodium Metasilicate (TOC @ 1,120')		
5,220'	760	12.7	2.22	Lead: Class C + 10% NaCl + 6% Bentonite Gel + 3% MagOx		
9.625"				(TOC @ Surface)		
	330	14.8	1.32	Tail: Class C + 10% NaCL + 3% MagOx (TOC @ 4,170')		
21,092'	580	11.0	3.21	Lead: Class H + 0.4% Halad-344 + 0.35% HR-601 + 3%		
5.5"				Microbond (TOC @ 4,717')		
	2590	14.4	1.2	Tail: Class H + 0.4% Halad-344 + 0.35% HR-601 + 3%		
				Microbond (TOC @ 10,409')		



Yukon 20 Fed Com 504H

Additive	Purpose		
Bentonite Gel	Lightweight/Lost circulation prevention		
Calcium Chloride	Accelerator		
Cello-flake	Lost circulation prevention		
Sodium Metasilicate	Accelerator		
MagOx	Expansive agent		
Pre-Mag-M	Expansive agent		
Sodium Chloride	Accelerator		
FL-62	Fluid loss control		
Halad-344	Fluid loss control		
Halad-9	Fluid loss control		
HR-601	Retarder		
Microbond	Expansive Agent		

Note: Cement volumes based on bit size plus at least 25% excess in the open hole plus 10% excess in the cased-hole overlap section.

Mud Program:

Depth	Type	Weight (ppg)	Viscosity	Water Loss
0 – 1,320'	Fresh - Gel	8.6-8.8	28-34	N/c
1,320' – 5,220'	Brine	8.6-8.8	28-34	N/c
5,220' – 21,092'	Oil Base	8.8-9.5	58-68	N/c - 6

Wellhead:

EOG Resources Inc. (EOG) respectfully requests a variance from the minimum standards for well control equipment testing of Onshore Order No. 2 (item III.A.2.i) to allow a testing schedule of the blow out preventer (BOP) and blow out prevention equipment (BOPE) to include the following:

- Full BOPE test at first installation on the pad.
- Full BOPE test every 30 days per Onshore Order No. 2.
- Function test BOP elements per Onshore Order No. 2.
- Break testing BOP and BOPE coupled with batch drilling operations and production sections that do not penetrate the Wolfcamp or deeper formations.
- After the well section is cemented the BOP will be disconnected from the wellhead and walked with the rig to another well on the pad. The cemented well will be secured with a blind flange and a pressure gauge for monitoring.



Yukon 20 Fed Com 504H


493' FNL 2172' FWL **Revised Wellbore**

KB: 3560' GL: 3535'

Section 20

T-24-S, R-34-E

API: 30-025-46970

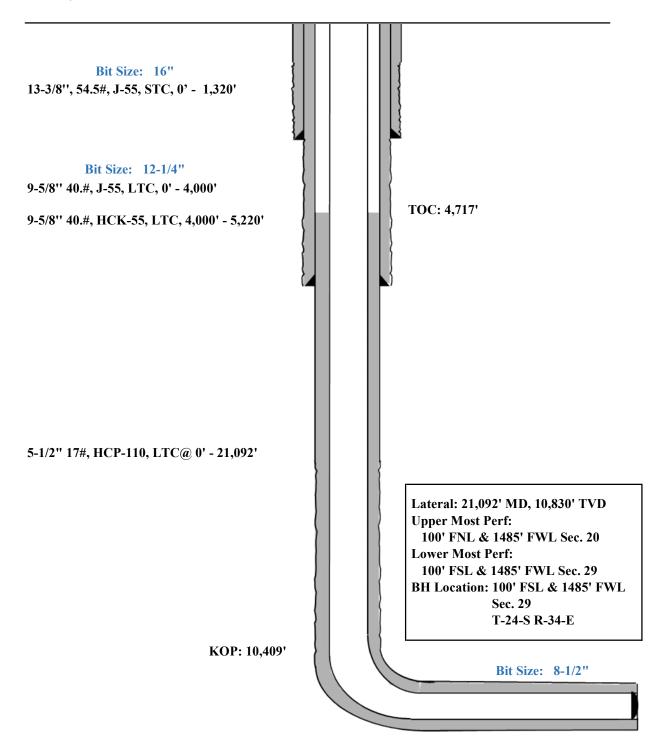

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

District II 811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720

District III 1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. **Santa Fe, NM 87505**

CONDITIONS

Action 63425

CONDITIONS

Operator:	OGRID:
EOG RESOURCES INC	7377
P.O. Box 2267	Action Number:
Midland, TX 79702	63425
	Action Type:
	[C-103] NOI Change of Plans (C-103A)

CONDITIONS

Created By	Condition	Condition Date	
pkautz	None	11/24/2021	