

Office
 District I – (575) 393-6161
 1625 N. French Dr., Hobbs, NM 88240
 District II – (575) 748-1283
 811 S. First St., Artesia, NM 88210
 District III – (505) 334-6178
 1000 Rio Brazos Rd., Aztec, NM 87410
 District IV – (505) 476-3460
 1220 S. St. Francis Dr., Santa Fe, NM
 87505

State of New Mexico
 Energy, Minerals and Natural Resources

Form C-103
 Revised August 1, 2011

OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

WELL API NO. 30-015-27010
5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name Pardue Farms 27
8. Well Number: 10
9. OGRID Number 4323
10. Pool name or Wildcat E. Loving Delaware (Brushy Canyon)
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3,035' GL, 3,047' KB

SUNDRY NOTICES AND REPORTS ON WELLS
 (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well Gas Well Other

2. Name of Operator
Chevron Midcontinent L.P.

3. Address of Operator
6301 DEAUVILLE BLVD., MIDLAND, TX 79706

4. Well Location
 Unit Letter I : 1980 feet from the South line and 785 feet from the East line
 Section 27 Township 23S Range 28E NMPM County Eddy

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

<p>NOTICE OF INTENTION TO:</p> <p>PERFORM REMEDIAL WORK <input type="checkbox"/> PLUG AND ABANDON <input checked="" type="checkbox"/></p> <p>TEMPORARILY ABANDON <input type="checkbox"/> CHANGE PLANS <input type="checkbox"/></p> <p>PULL OR ALTER CASING <input type="checkbox"/> MULTIPLE COMPL <input type="checkbox"/></p> <p>DOWNHOLE COMMINGLE <input type="checkbox"/></p> <p>OTHER: <input type="checkbox"/></p>	<p>SUBSEQUENT REPORT OF:</p> <p>REMEDIAL WORK <input type="checkbox"/> ALTERING CASING <input type="checkbox"/></p> <p>COMMENCE DRILLING OPNS. <input type="checkbox"/> P AND A <input type="checkbox"/></p> <p>CASING/CEMENT JOB <input type="checkbox"/></p> <p>OTHER: <input type="checkbox"/></p>
---	--

Notify OCD 24 hrs. prior to any work done

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion. **8-5/8" @ 504' TOC Surface, 5-1/2" @ 6,795' TOC 2,310' via CBL, Perforations 6,323'-6,739', CIBP at 6,316' w/ 76' of fill, Perforations: 5,924'-6,275', CIBP at 5,870' w/ 37' of cement.**

Chevron respectfully request to abandon this well as follows:

Cement calculations utilize 1.32 yld for Class C and 1.18 yld for Class H. If using a different yield please re-calculate as necessary.

1. Notify NMOCD 24 hrs. prior to starting work.
2. Fill well with freshwater and pressure test casing t/ 1,000 psi f/ 15 minutes rig-less or maximum expected pressure for the job.
3. MIRU CTU.
4. Kill well as necessary. Check pressures on all strings and bubble test. If sustained casing pressure is noted, Chevron intends to utilize another means of eliminating the pressure (Zonite, Nano-Seal, Cut and pull casing, etc) as agreed upon by the NMOCD.
5. N/U BOP and pressure test as per SOP's.
 - a. 10-minute-high test for CTU BOP's.
6. TIH and tag TOC at 5,833'
7. Spot MLF between cement plugs in accordance w/ NMOCD regulations. Wait to spot MLF if casing pressure test failed due to potentially wasting fluid.
8. Spot 25 sx CL "C" cement f/ 5,833' t/ 5,580'. (DV Tool).
 - a. TOC must be at 5,673' or shallower.
9. Spot 25 sx CL "C" Cement f/ 4,772 t/ 4,526' (Brushy Canyon).
 - a. TOC must be at 4,672' or shallower.
10. Spot 25 sx CL "C" Cement f/ 3,520' t/ 3,274' (Cherry Canyon).
 - a. TOC must be at 3,370' or shallower.
11. Spot 25 sx CL "C" Cement f/ 2,682' t/ 2,436' (Bell Canyon).

- a. TOC must be at 2,532' or shallower for the Chevron Barrier Standard.
- 12. Perforate at 554' and squeeze 145 sx CL "C" Cement f/ Surface t/ 554' (T.Salt, Shoe, FW).
 - a. Deepest freshwater in the area is ~84'.
- 13. Cut off wellhead 3' below grade, Verify Cement to Surface, install required dry hole marker as per COA's, turn over to reclamation.

Note: All cement plugs class "C" (<7,500') or "H" (>7,500') with closed loop system used, and MLF spotted between plugs.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE [Signature] TITLE P&A Engineer, Attorney in fact DATE 12/01/2021

Type or print name Howie Lucas E-mail address: howie.lucas@chevron.com PHONE: (832)-588-4044

For State Use Only

APPROVED BY: [Signature] TITLE Staff Manager DATE 12/3/2021
Conditions of Approval (if any):

****SEE ATTACHED COA's****

Must be plugged by 3/3/2022

**Pardue Farms 27-10
CURRENT TA WELLBORE DIAGRAM**

Created: 04/05/16 By: RJ DeBruin
 Updated: 01/19/20 By: RJ DeBruin
 Updated: _____ By: _____
 Lease: Pardue Farms 27
 Field: East Loving Delaware
 Surf. Loc.: 1980' FSL & 785' FEL
 Bot. Loc.: _____
 County: Eddy St.: NM
 Status: TA'd Oil Well (since 7/22/2016).

Well #: 10 St. Lse: Fee
 API: 30-015-27010
 Surface TSHP/Rng: 23S / 28E
 Unit Ltr.: I Section: 27
 Bottom Hole TSHP/Rng: _____
 Unit Ltr.: _____ Section: _____


Surface Casing

Size: 8-5/8"
 Wt., Grd.: 24#, K-55
 Depth: 504'
 Sxs Cmt: 325
 Circulate: Yes
 TOC: Surface
 Hole Size: 12-1/4"

KB: 3,046'
 DF: _____
 GL: 3034'
 Ini. Spud: 6/11/1992
 Ini. Comp.: 9/5/1992

Production Casing

Size: 5-1/2"
 Wt., Grd.: 15.5# & 17#, K-55
 Depth: 6,795'
 Sxs Cmt: 1,100
 Circulate: No
 TOC: 2,310' (CBL)
 Hole Size: 7-7/8"

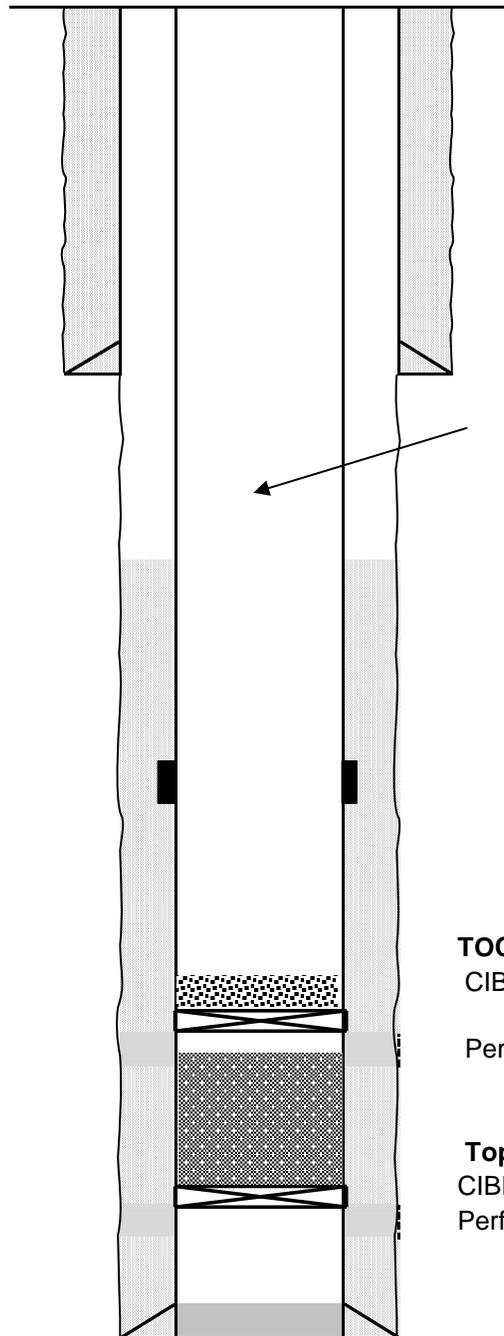

TOC @ 2,310' (CBL)

5-1/2" casing displaced w/ packer fluid

DV Tool @ 5,723'

TOC tagged @ 5,833' (7/22/2016)

CIBP @ 5,870' (w/ 37' cmt)

Perfs: 5,924' - 6,275' (1 SPF, 18 holes)

Delaware (Brushy Canyon)

Top of Fill tagged @ 6,240' (7/22/2016)

CIBP @ 6,316' (w/ 76' of Fill)

Perfs: 6,323' - 6,739' (1 SPF, 17 holes)

Bone Spring

PBTD: 6,788'
 TD: 6,800'

**Pardue Farms 27-10
PROPOSED WELLBORE DIAGRAM**

Created: _____ By: _____
 Updated: 03/31/20 By: H Lucas
 Updated: _____ By: _____
 Lease: Pardue Farms 27
 Field: East Loving Delaware
 Surf. Loc.: 1980' FSL & 785' FEL
 Bot. Loc.: _____
 County: Eddy St.: NM
 Status: TA'd Oil Well (since 7/22/2016).

Well #: 10 St. Lse: Fee
 API: 30-015-27010
 Surface TSHP/Rng: 23S / 28E
 Unit Ltr.: I Section: 27
 Bottom Hole TSHP/Rng: _____
 Unit Ltr.: _____ Section: _____
 COST CTR: BCUS10820
 CHEVNO: QU2649


Surface Casing

Size: 8-5/8"
 Wt., Grd.: 24#, K-55
 Depth: 504'
 Sxs Cmt: 325
 Circulate: Yes
 TOC: Surface
 Hole Size: 12-1/4"

KB: 3,046'
 DF: _____
 GL: 3034'
 Ini. Spud: 6/11/1992
 Ini. Comp.: 9/5/1992

TOC @ 2,310' (CBL)

Formation Top; Depth (MD)	Depth (MD)
T Salt	400 (est.)
B Salt	2400 (est.)
Lamar LS	2602
Bell Canyon	2632
Cherry Canyon	3470
Brushy Canyon	4722
Bone Spring	6280
1st Bone Spring	below TD

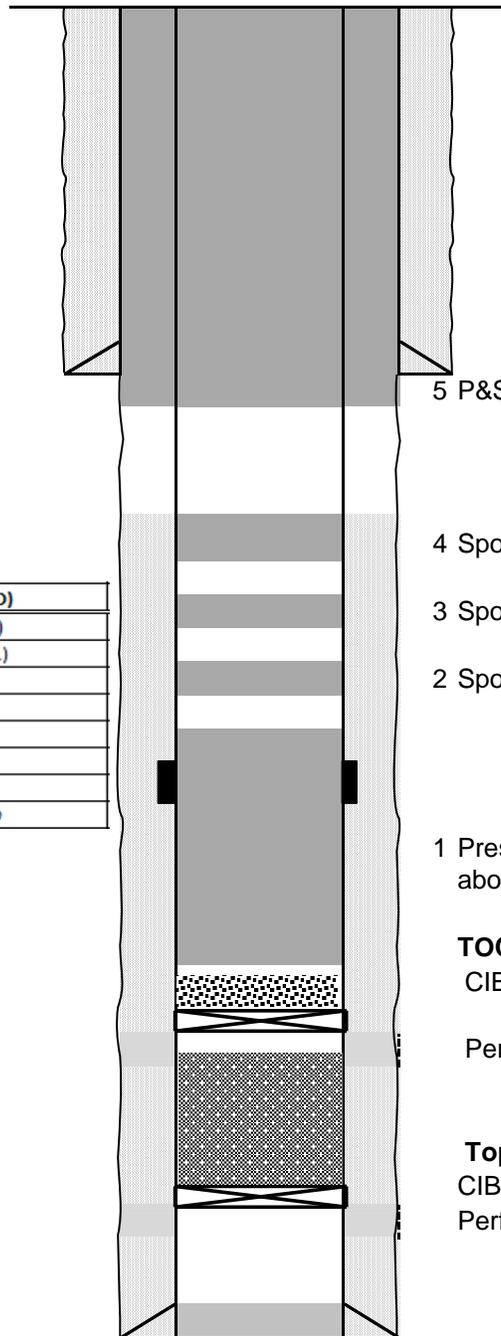

Production Casing

Size: 5-1/2"
 Wt., Grd.: 15.5# & 17#, K-55
 Depth: 6,795'
 Sxs Cmt: 1,100
 Circulate: No
 TOC: 2,310' (CBL)
 Hole Size: 7-7/8"

5 P&S across shoe to surface

4 Spot across Bell Canyon

3 Spot cement across Cherry Canyon

2 Spot cement across Brushy Canyon

DV Tool @ 5,723'

1 Pressure test casing, spot cement t/ above DV Tool

TOC tagged @ 5,833' (7/22/2016)

CIBP @ 5,870' (w/ 37' cmt)

Perfs: 5,924' - 6,275' (1 SPF, 18 holes)
 Delaware (Brushy Canyon)

Top of Fill tagged @ 6,240' (7/22/2016)

CIBP @ 6,316' (w/ 76' of Fill)

Perfs: 6,323' - 6,739' (1 SPF, 17 holes)
 Bone Spring

PBTD: 6,788'
 TD: 6,800'

CONDITIONS FOR PLUGGING AND ABANDONMENT

OCD - Southern District

The following is a guide or checklist in preparation of a plugging program, this is not all inclusive and care must be exercised in establishing special plugging programs in unique and unusual cases, **Notify NMOCD District Office II at (575)-748-1283 at least 24 hours before beginning work. After MIRU rig will remain on well until it is plugged to surface. OCD is to be notified before rig down. Company representative will be on location during plugging procedures.**

1. A notice of intent to plug and abandon a wellbore is required to be approved before plugging operations are conducted. A cement evaluation tool is required in order to ensure isolation of producing formations, protection of water and correlative rights. A cement bond log or other accepted cement evaluation tool is to be provided to the division for evaluation if one has not been previously run or if the well did not have cement circulated to surface during the original casing cementing job or subsequent cementing jobs. Insure all bradenheads have been exposed, identified and valves are operational prior to rig up.
2. Closed loop system is to be used for entire plugging operation. Upon completion, contents of steel pits are to be hauled to a permitted disposal location.
3. Trucking companies being used to haul oilfield waste fluids to a disposal – commercial or private – shall have an approved NMOCD C-133 permit. A copy of this permit shall be available in each truck used to haul waste products. It is the responsibility of the operator as well as the contractor, to verify that this permit is in place prior to performing work. Drivers shall be able to produce a copy upon request of an NMOCD Field inspector.
4. Filing a subsequent C-103 will serve as notification that the well has been plugged.
5. A final C-103 shall be filed (and a site inspection by NMOCD Inspector to determine if the location is satisfactorily cleaned, all equipment, electric poles and trash has been removed to Meet NMOCD standards) before bonding can be released.
6. If work has not begun within 1 Year of the approval of this procedure, an extension request must be file stating the reason the well has not been plugged.
7. Squeeze pressures are not to exceed 500 psi, unless approval is given by NMOCD.
8. Produced water **will not** be used during any part of the plugging operation.
9. Mud laden fluids must be placed between all cement plugs mixed at 25 sacks per 100 bbls of water.
10. All cement plugs will be a minimum of 100' in length or a minimum of 25 sacks of cement, whichever is greater. 50' of calculated cement excess required for inside casing plugs and 100% calculated cement excess required on outside casing plugs.
11. Class 'C' cement will be used above 7500 feet.
12. Class 'H' cement will be used below 7500 feet.
13. A cement plug is required to be set 50' above and 50' below, casing stubs, DV tools, attempted casing cut offs, cement tops outside casing, salt sections and anywhere the casing is perforated, these plugs require a 4 hour WOC and then will be tagged
14. All Casing Shoes Will Be Perforated 50' below shoe depth and Attempted to be Squeezed, cement needs to be 50' above and 50' Below Casing Shoe inside the Production Casing.

16. When setting the top out cement plug in production, intermediate and surface casing, wellbores should remain full at least 30 minutes after plugs are set
17. A CIBP is to be set within 100' of production perforations, capped with 100' of cement, WOC 4 hours and tag.
18. A CIBP with 35' of cement may be used in lieu of the 100' plug if set with a bailer. This plug will be placed within 100' of the top perforation, (WOC 4 hrs and tag).
19. No more than 3000' is allowed between cement plugs in cased hole and 2000' in open hole.
20. Some of the Formations to be isolated with cement plugs are: These plugs to be set to isolate formation tops
 - A) Fusselman
 - B) Devonian
 - C) Morrow
 - D) Wolfcamp
 - E) Bone Springs
 - F) Delaware
 - G) Any salt sections
 - H) Abo
 - I) Glorieta
 - J) Yates.
 - K) Potash---(In the R-111-P Area (Page 3 & 4), a solid cement plug must be set across the salt section. Fluid used to mix the cement shall be saturated with the salts that are common to the section penetrated and in suitable proportions, not more than 3% calcium chloride (by weight of cement) will be considered the desired mixture whenever possible, WOC 4 hours and tag, this plug will be 50' below the bottom and 50' above the top of the Formation.
21. If cement does not exist behind casing strings at recommended formation depths, the casing can be cut and pulled with plugs set at recommended depths. If casing is not pulled, perforations will be shot and cement squeezed behind casing, WOC and tagged. These plugs will be set 50' below formation bottom to 50' above formation top inside the casing

DRY HOLE MARKER REQUIREMENTS

The operator shall mark the exact location of the plugged and abandoned well with a steel marker not less than four inches in diameter, 3' below ground level with a plate of at least ¼" welded to the top of the casing and the dry hole marker welded on the plate with the following information welded on the dry hole marker:

1. Operator name 2. Lease and Well Number 3. API Number 4. Unit Letter 5. Quarter Section (feet from the North, South, East or West) 6. Section, Township and Range 7. Plugging Date 8. County (SPECIAL CASES)-----AGRICULTURE OR PRARIE CHICKEN BREEDING AREAS

In these areas, a below ground marker is required with all pertinent information mentioned above on a plate, set 3' below ground level, a picture of the plate will be supplied to NMOCD for record, the exact location of the marker (longitude and latitude by GPS) will be provided to NMOCD (We typically require a current survey to verify the GPS)

SITE REMEDIATION DUE WITHIN ONE YEAR OF WELL PLUGGING COMPLETION

R-111-P Area

T 18S – R 30E

Sec 10 Unit P. Sec 11 Unit M,N. Sec 13 Unit L,M,N. Sec 14 Unit C -P. Sec 15 Unit A G,H,I,J,K,N,O,P. Sec 22 Unit All except for M. Sec 23, Sec 24 Unit C,D,E,L, Sec 26 Unit A-G, Sec 27 Unit A,B,C

T 19S – R 29E

Sec 11 Unit P. Sec 12 Unit H-P. Sec 13. Sec 14 Unit A,B,F-P. Sec 15 Unit P. Sec 22 Unit A,B,C,F,G,H,I,J K,N,O,P. Sec 23. Sec 24. Sec 25 Unit D. Sec 26 Unit A- F. Sec 27 Unit A,B,C,F,G,H.

T 19S – R 30E

Sec 2 Unit K,L,M,N. Sec 3 Unit I,L,M,N,O,P. Sec 4 Unit C,D,E,F,G,I-P. Sec 5 Unit A,B,C,E-P. Sec 6 Unit I,O,P. Sec 7 – Sec 10. Sec 11 Unit D, G—P. Sec 12 Unit A,B,E-P. Sec 13 Unit A-O. Sec 14-Sec 18. Sec 19 Unit A-L, P. Sec 20 – Sec 23. Sec 24 Unit C,D,E,F,L,M,N. Sec 25 Unit D. Sec 26 Unit A-G, I-P. Sec 27, Sec 28, Sec 29 Unit A,B,C,D,F,G,H,I,J,O,P. Sec 32 Unit A,B,G,H,I,J,N,O,P. Sec 33. Sec 34. Sec 35. Sec 36 Unit D,E,F,I-P.

T 19S – R 31E

Sec 7 Unit C,D,E,F,L. Sec 18 Unit C,D,E,F,G,K,L. Sec 31 Unit M. Sec 34 Unit P. Sec 35 Unit M,N,O. Sec 36 Unit O,P.

T 20S – R 29E

Sec 1 Unit H,I,P. Sec 13 Unit E,L,M,N. Sec 14 Unit B-P. Sec 15 Unit A,H,I,J,N,O,P. Sec 22 Unit A,B,C,F,G,H,I,J,O,P. Sec 23. Sec 24 Unit C,D,E,F,G,J-P. Sec 25 Unit A-O. Sec 26. Sec 27 Unit A,B,G,H,I,J,O,P. Sec 34 Unit A,B,G,H. Sec 35 Unit A-H. Sec 36 Unit B-G.

T 20S – R 30E

Sec 1 – Sec 4. Sec 5 Unit A,B,C,E-P. Sec 6 Unit E,G-P. Sec 7 Unit A-H,I,J,O,P. Sec 8 – 17. Sec 18 Unit A,B,G,H,I,J,O,P. Sec 19 Unit A,B,G,H,I,J,O,P. Sec 20 – 29. Sec 30 Unit A-L,N,O,P. Sec 31 Unit A,B,G,H,I,P. Sec 32 – Sec 36.

T 20S – R 31E

Sec 1 Unit A,B,C,E-P. Sec 2. Sec 3 Unit A,B,G,H,I,J,O,P. Sec 6 Unit D,E,F,J-P. Sec 7. Sec 8 Unit E-P. Sec 9 Unit E,F,J-P. Sec 10 Unit A,B,G-P. Sec 11 – Sec 36.

T 21S – R 29E

Sec 1 – Sec 3. Sec 4 Unit L1 – L16,I,J,K,O,P. Sec 5 Unit L1. Sec 10 Unit A,B,H,P. Sec 11 – Sec 14. Sec 15 Unit A,H,I. Sec 23 Unit A,B. Sec 24 Unit A,B,C,D,F,G,H,I,J,O,P. Sec 25 Unit A,O,P. Sec 35 Unit G,H,I,J,K,N,O,P. Sec 36 A,B,C,F – P.

T 21S – R 30E

Sec 1 – Sec 36

T 21S – R 31E

Sec 1 – Sec 36

T 22S – R 28E

Sec 36 Unit A,H,I,P.

T 22S – R 29E

Sec 1. Sec2. Sec 3 Unit I,J,N,O,P. Sec 9 Unit G – P. Sec 10 – Sec 16. Sec 19 Unit H,I,J. Sec 20 – Sec 28. Sec 29 Unit A,B,C,D,G,H,I,J,O,P. Sec 30 Unit A. Section 31 Unit C – P. Sec 32 – Sec 36

T 22S – R 30E

Sec 1 – Sec 36

T 22S – R 31E

Sec 1 – Sec 11. Sec 12 Unit B,C,D,E,F,L. Sec 13 Unit E,F,K,L,M,N. Sec 14 – Sec 23. Sec 24 Unit C,D,E,F,K,L,M,N. Sec 25 Unit A,B,C,D. Sec 26 Unit A,BC,D,G,H. Sec 27 – Sec 34.

T 23S – R 28E

Sec 1 Unit A

T 23S – R 29E

Sec 1 – Sec 5. Sec 6 Unit A – I, N,O,P. Sec 7 Unit A,B,C,G,H,I,P. Sec 8 Unit A – L, N,O,P. Sec 9 – Sec 16. Sec 17 Unit A,B,G,H,I,P. Sec 21 – Sec 23. Sec 24 Unit A – N. Sec 25 Unit D,E,L. Sec 26. Sec 27. Sec 28 Unit A – J, N,O,P. Sec 33 Unit A,B,C. Sec 34 Unit A,B,C,D,F,G,H. Sec 35. Sec 36 Unit B,C,D,E,F,G,K,L.

T 23S – R 30E

Sec 1 – Sec 18. Sec 19 Unit A – I,N,O,P. Sec 20, Sec 21. Sec 22 Unit A – N, P. Sec 23, Sec 24, Sec 25. Sec 26 Unit A,B,F-P. Sec 27 Unit C,D,E,I,N,O,P. Sec 28 Unit A – H, K,L,M,N. Sec 29 Unit A – J, O,P. Sec 30 Unit A,B. Sec 32 A,B. Sec 33 Unit C,D,H,I,O,P. Sec 34, Sec 35, Sec 36.

T 23S – R 31E

Sec 2 Unit D,E,J,O. Sec 3 – Sec 7. Sec 8 Unit A – G, K – N. Sec 9 Unit A,B,C,D. Sec 10 Unit D,P. Sec 11 Unit G,H,I,J,M,N,O,P. Sec 12 Unit E,L,K,M,N. Sec 13 Unit C,D,E,F,G,J,K,L,M,N,O. Sec 14. Sec 15 Unit A,B,E – P. Sec 16 Unit I, K – P. Sec 17 Unit B,C,D,E, I – P. Sec 18 – Sec 23. Sec 24 Unit B – G, K,L,M,N. Sec 25 Unit B – G, J,K,L. Sec 26 – Sec 34. Sec 35 Unit C,D,E.

T 24S – R 29E

Sec 2 Unit A, B, C, D. Sec 3 Unit A

T 24S – R 30E

Sec 1 Unit A – H, J – N. Sec 2, Sec 3. Sec 4 Unit A,B,F – K, M,N,O,P. Sec 9 Unit A – L. Sec 10 Unit A – L, O,P. Sec 11. Sec 12 Unit D,E,L. Sec 14 Unit B – G. Sec 15 Unit A,B,G,H.

T 24S – R 31E

Sec 3 Unit B – G, J – O. Sec 4. Sec 5 Unit A – L, P. Sec 6 Unit A – L. Sec 9 Unit A – J, O,P. Sec 10 Unit B – G, K – N. Sec 35 Unit E – P. Sec 36 Unit E,K,L,M,N.

T 25S – R 31E

Sec 1 Unit C,D,E,F. Sec 2 Unit A – H.

District I
 1625 N. French Dr., Hobbs, NM 88240
 Phone:(575) 393-6161 Fax:(575) 393-0720

District II
 811 S. First St., Artesia, NM 88210
 Phone:(575) 748-1283 Fax:(575) 748-9720

District III
 1000 Rio Brazos Rd., Aztec, NM 87410
 Phone:(505) 334-6178 Fax:(505) 334-6170

District IV
 1220 S. St Francis Dr., Santa Fe, NM 87505
 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS
 Action 64609

CONDITIONS

Operator: CHEVRON U S A INC 6301 Deauville Blvd Midland, TX 79706	OGRID: 4323
	Action Number: 64609
	Action Type: [C-103] NOI Plug & Abandon (C-103F)

CONDITIONS

Created By	Condition	Condition Date
gcordero	None	12/3/2021