Form 3160-5 FORM APPROVED UNITED STATES OMB No. 1004-0137 (August 2007) DEPARTMENT OF THE INTERIOR Expires: July 31, 2010 **BUREAU OF LAND MANAGEMENT** 5 Lease Serial No. NMNM71036X SUNDRY NOTICES AND REPORTS ON WELLS 6 If Indian, Allottee or Tribe Name Do not use this form proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals. 7. If Unit of CA/Agreement, Name and/or No. SUBMIT IN TRIPLICATE - Other instructions on page 2. 1. Type of Well NMNM71036X 8. Well Name and No. Oil Well Gas Well Other South Lucky Lake Queen Unit #2B 2. Name of Operator 9. API Well No. 30-005-60375 Mack Energy Corporation 3a Address 3b. Phone No. (include area code) 10 Field and Pool or Exploratory Area P.O. Box 960 Artesia, NM 88210-0960 (575) 748-1288 41320 Lucky Lake Queen, South 4. Location of Well (Footage, Sec., T,R,M, or Survey Description) II Country or Parish, State 990 FSL & 330 FWL, Sec. 22 T15S R29E Chaves, NM 12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA TYPE OF SUBMISSION TYPE OF ACTION Acidize Deepen Water Shut-Off Production (Start/Resume) Notice of Intent Alter Casing Fracture Treat Reclamation Well Integrity Casing Repair New Construction Recomplete Subsequent Report Plug and Abandon Change Plans Temporarily Abandon Final Abandonment Notice Convert to Injection Plug Back Water Disposal 13. Describe Proposed or Completed Operation. Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.) Mack Energy proposes to P&A the South Lucky Lake Queen Unit #2B within the forth quarter of 2022. Procedure 1. MIRU plugging equipment. POH w/ 1768' of 2 3/8" tbg 2. Set 41/2" CIBP@ 1723'. Circ hole w/ MLF. Pressure test csg. Spot 25 sx cmt@ 1723-1423'. 3. Spot 25 sx cmt@ 1080-780'. WOC & Tag (Yates) 4. Perf & Sqz 50 sx cmt@ 306 to surface (T/Salt & 8 5/8" Shoe) 5. Cut off well head, verify cmt @ surface, install Dry Hole Marker. See Conditions of Approval 14. I hereby certify that the foregoing is true and correct. Name (Printed Typed) Jerry W. Sherrell Title Regulatory Supervisor wisher Signature Date 10/18/21 Accepted for record - NMOCD THIS SPACE FOR FEDERAL OR STATE OFFICE USE Approved by 10/19/2021 Petroleum Engineer Conditions of approval of any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would **RFO** entitle the applicant to conduct operations thereon Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for my person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. (Instructions on page 2)

Plug Abandonment NOI Proposed

OPERATOR NAME: Bar V Barb, LLC

LEASE NO.: NMNM71036X

WELL NAIME & NO.: South Lucky Lake Queen Unit #2B

US WELL NUMBER: 30-005-60375

LOCATION: Sec 22, T15S, R29E

COUNTY: Chaves, New Mexico

1. MIRU plugging equipment. POH w/ 1768' of 2 3/8" tbg

2. Set 4 1/2" CIBP @ 1723'. Circ hole w/ MLF. Pressure test csg. Spot 25 sx cmt @ 1723-1423'.


3. Spot 25 sx cmt @ 1080-780'. WOC & Tag (Yates)

4. Perf & Sqz 50 sx cmt @ 306 to surface (T/Salt & 8 5/8" Shoe)

5. Cut off well head, verify cmt @ surface, cut of Dry Hole Marker.

Bar V Barb, LLC		Current		
Author:	Abby & BCM			
Well Name	South Lucky Lake Qn Unit	Well No.	#2B	
Field/Pool		API#:	30-005-60375	
County	Chaves	Location:	Sec 22, T158, R29E	
State	Now Mexico		990 FSL & 330 FWL	
Spud Date	4/3/1978	GL:		

Description	O.D.	Grade	Weight	Depth	Hote	Crnt Sx	TOC
Surface Cag	8 5/8		20#	256	11	150	0
Prod Cag	4 1/2		9.52	1,870	7 7/8	275	277 +/-

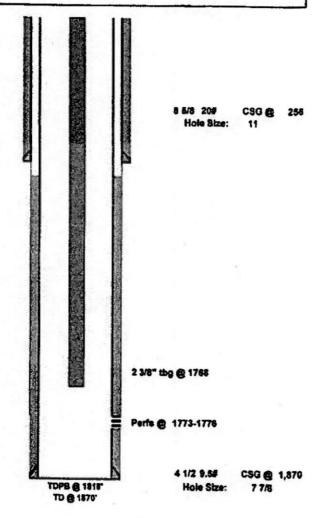


Formation	Тор
Rustler	257
Salado	277
Yates	1029
7 Rivers	1163

Bar V Barb, LLC		Proposed		
Author:	Abby @ BCM			
Well Name	South Lucky Lake Qn Unit	Well No.	#2B	
Field/Pool		API#:	30-005-60375	
County	Chaves	Location:	Sec 22, T153, R29E	
State	New Mexico		990 FSL & 330 FWL	
Spud Date	4/3/1976	GL:		
	*			

Description	O.D.	Grade	Weight	Depth	Hole	Cmt Sx	TOC
Surface Cag	8 5/8		20#	256	11	150	0
Prod Ceg	4 1/2		9.5#	1,870	7 7/8	275	277 +/- Calc

Formation 1	ОР
Rustler	257
Salado	277
Yates	1029
7 Rivers	1163

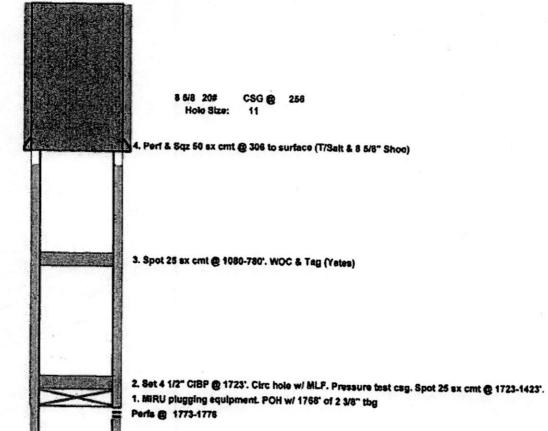

4 1/2 9.50

Hole Size:

CSG @ 1,870

7 7/8

TDPB @ 1818"

South Lucky Lake Queen Unit 2B 30-005-60375 Mack Energy Corporation October 19, 2021 Conditions of Approval

- 1. Operator shall place CIBP at 1,723' (50'-100' above top most perf) and place 25 sx of Class C cement on top as proposed. WOC and TAG.
- 2. Operator shall place a Class C cement plug from 1,080'-780' to seal the Yates Formation and the Bottom of the Salt.
- 3. Operator shall perf at 306' and squeeze class C Cement to surface to seal the top of Salt and the 8-5/8'' casing shoe.
- 4. Surface reclamation will need to be completed once the well bore has been plugged. Please contact <u>rflores@blm.gov</u> for additional information.
- 5. See Attached for general plugging stipulations.

JAM 10192021

BUREAU OF LAND MANAGEMENT Roswell Field Office 2909 W. Second Street Roswell, New Mexico 88201 575-627-0272

General Requirements for Plug Backs

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within <u>ninety (90)</u> days from this approval.

If you are unable to plug back the well by the 90th day provide this office, prior to the 90th day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged back. Failure to do so will result in enforcement action.

- 2. <u>Notification:</u> Contact the appropriate BLM office at least 24 hours prior to the commencing of any plug back operations. Call 575-627-0205.
- 3. <u>Blowout Preventers</u>: A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.
- 4. <u>Mud Requirement:</u> Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of **brine** water. Minimum nine (9) pounds per gallon.
- 5. <u>Cement Requirement</u>: Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. Before pumping cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

- 6. <u>Subsequent Plug back Reporting:</u> Within 30 days after plug back work is completed, file one original and three copies of the Subsequent Report, Form 3160-5 to BLM. The report should give in detail the manner in which the plug back work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. <u>Show date work was completed.</u>
- 7. <u>Trash:</u> All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720 District II

811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720 District III

1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. **Santa Fe, NM 87505**

CONDITIONS

Action 75938

CONDITIONS

Operator:	OGRID:
BAR V BARB LLC	371067
P.O. Box 4435	Action Number:
Roswell, NM 88202	75938
	Action Type:
	[C-103] NOI Plug & Abandon (C-103F)

CONDITIONS

Cre	ated By		Condition Date
go	ordero	None	1/27/2022