

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources

Form C-104
Revised August 1, 2011

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Submit one copy to appropriate District Office

☒ AMENDED REPORT

I. REQUEST FOR ALLOWABLE AND AUTHORIZATION TO TRANSPORT

¹ Operator name and Address SPUR ENERGY PARTNERS LLC 9655 KATY FREEWAY, SUITE 500 HOUSTON, TX 77024		² OGRID Number 328947
		³ Reason for Filing Code/ Effective Date NW 01/07/2022
⁴ API Number 30 - 0 15-48109	⁵ Pool Name LOCO HILLS; GLORIETA-YESO	⁶ Pool Code 96718
⁷ Property Code 325889	⁸ Property Name POSEIDON 3 FEDERAL	⁹ Well Number 20H

II. ¹⁰ Surface Location

Ul or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South Line	Feet from the	East/West line	County
I	4	17S	30E		1560	SOUTH	755	EAST	EDDY

¹¹ Bottom Hole Location

FTP: 2265' FSL 102' FWL LTP: 2279' FSL 186' FEL

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
I	3	17S	30E		2279	SOUTH	83	EAST	EDDY
¹² Lse Code F	¹³ Producing Method Code P	¹⁴ Gas Connection Date TBD	¹⁵ C-129 Permit Number		¹⁶ C-129 Effective Date		¹⁷ C-129 Expiration Date		

III. Oil and Gas Transporters

¹⁸ Transporter OGRID	¹⁹ Transporter Name and Address	²⁰ O/G/W
221115	FRONTIER FIELD SERVICES, LLC 4200 EAST SKELLY DRIVE, SUITE 700, TULSA, OK 74135	G
33479	HOLLYFRONTIER REFINING & MARKETING 2828 N. HARWOOD, SUITE 1300, DALLAS, TX 75201	O

IV. Well Completion Data

²¹ Spud Date 04/04/2021	²² Ready Date 08/11/2021	²³ TD 4780'V/10400'M	²⁴ PBTD 4780'V/10400'M	²⁵ Perforations 5305'-10287'	²⁶ DHC, MC
²⁷ Hole Size		²⁸ Casing & Tubing Size		²⁹ Depth Set	³⁰ Sacks Cement
17-1/2"		13-3/8" 54.5# J-55 BTC		418'	360 SXS (CIRC TO SURFACE)
13-3/8"		9-5/8" 36# J-55 BTC		1700'	460 SXS (CIRC TO SURFACE)
8-3/4"		7" 32# L-80 BK-HT 5-1/2" 20# L-80 BK-HT		5048' 10400'	1510 SXS (CIRC TO SURFACE)
		J-55 TBG		4963'	

V. Well Test Data

³¹ Date New Oil 08/13/2021	³² Gas Delivery Date 08/13/2021	³³ Test Date 09/05/2021	³⁴ Test Length 24-HOUR	³⁵ Tbg. Pressure 147	³⁶ Csg. Pressure 99
³⁷ Choke Size NA	³⁸ Oil 743	³⁹ Water 2360	⁴⁰ Gas 807		⁴¹ Test Method PUMPING

⁴² I hereby certify that the rules of the Oil Conservation Division have been complied with and that the information given above is true and complete to the best of my knowledge and belief. Signature: <i>Sarah Chapman</i> Printed name: SARAH CHAPMAN Title: REGULATORY DIRECTOR E-mail Address: SCHAPMAN@SPUREPLLC.COM Date: 01/07/2022	Phone: 832-930-8613	OIL CONSERVATION DIVISION	
	Approved by: <i>PATRICIA MARTINEZ</i>		
	Title: <i>PETROLEUM SPECIALIST</i>		
	Approval Date: <i>2/16/2022</i>		

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720

District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170

District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

☒ AMENDED REPORT
AS-DRILLED

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-015-48109	² Pool Code 96718	³ Pool Name LOCO HILLS; GLORIETA-YESO
⁴ Property Code 325889	⁵ Property Name POSEIDON 3 FED	
⁷ OGRID NO. 328947	⁸ Operator Name SPUR ENERGY PARTNERS LLC.	⁶ Well Number 20H ⁹ Elevation 3713'

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet From the	East/West line	County
I	4	17S	30E		1560	SOUTH	755	EAST	EDDY

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
I	3	17S	30E		2279	SOUTH	83	EAST	EDDY

12 Dedicated Acres	13 Joint or Infill	14 Consolidation Code	15 Order No.
320			

No allowable will be assigned to this completion until all interest have been consolidated or a non-standard unit has been approved by the division.

16

GEODEIC DATA
NAD 83 GRID - NM EAST

SURFACE LOCATION (SL)
N: 677001.8 - E: 652651.2
LAT: 32.8605753° N
LONG: 103.9708173° W

FIRST TAKE POINT (FTP)
2265' FSL & 102' FWL - SEC 3
N: 677707.7 - E: 653505.4
LAT: 32.8625075° N
LONG: 103.9680275° W
MD: 5305.0 - TVD: 4746.3

LAST TAKE POINT (LTP)
2279' FSL & 186' FEL - SEC 3
N: 677733.2 - E: 658496.0
LAT: 32.8625289° N
LONG: 103.9517743° W
MD: 10,297.0 - TVD: 4779.1

BOTTOM HOLE (BH)
N: 677733.1 - E: 658599.0
LAT: 32.8625277° N
LONG: 103.9514389° W
MD: 10,400.0 - TVD 4780.0

CORNER DATA
NAD 83 GRID - NM EAST

A: FOUND BRASS CAP "1916" N: 675436.4 - E: 648128.9	H: FOUND BRASS CAP "1916" N: 678091.2 - E: 658681.2
B: FOUND BRASS CAP "1916" N: 678076.6 - E: 648121.2	I: FOUND BRASS CAP "1916" N: 675454.6 - E: 658689.2
C: FOUND BRASS CAP "1916" N: 680696.5 - E: 648110.9	J: FOUND BRASS CAP "1916" N: 675443.0 - E: 653411.2
D: FOUND BRASS CAP "1916" N: 680704.7 - E: 650751.6	k: FOUND BRASS CAP "1916" N: 675440.1 - E: 650770.1
E: FOUND BRASS CAP "1916" N: 680713.3 - E: 653392.4	L: FOUND BRASS CAP "1916" N: 678082.1 - E: 653402.4
F: FOUND BRASS CAP "1916" N: 680722.0 - E: 656032.0	
G: FOUND BRASS CAP "1916" N: 680729.8 - E: 658673.7	

The survey plat shows a grid of lots labeled LOT 1 through LOT 4. A dashed red line indicates the boundary between Section 3 and Section 4. The First Take Point (FTP) is located at the intersection of the section boundary and the lot boundary. The Last Take Point (LTP) is located at the corner of the lot. The Bottom Hole (BH) is located near the LTP. Dimensions are provided for the distances from the FTP to the SL (1560') and from the LTP to the BH (2279').

17 OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Sarah Chapman 08/10/2021
Signature Date

SARAH CHAPMAN

Printed Name

SCHAPMAN@SPUREPLLC.COM

E-mail Address

18 SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

5-22-2021
Date of Survey

Signature and Seal of Professional Surveyor:

19680
Certificate Number

ROBERT M. HOWETT
NEW MEXICO
19680
PROFESSIONAL SURVEYOR

15200904104D



I **Larry Wright** certify that I am employed by **Wellbenders Directional Services**. That I did on the day(s) of **05/14/21** thru **05/21/21** conduct or supervise the taking of a **MWD Survey** from a depth of **418'** to a depth of **10400'**; that the data is true, correct, complete and within the limitations of the tool as set forth by **Wellbenders Directional Services**; that I am authorized and qualified to make this report; that this survey was conducted at the request of **Spur Energy Partners** for the **Poseidon 3 Fed 20H API No. 30-015-48109** in **Eddy County, New Mexico**; and that I have reviewed this report and find that it conforms to the principles and procedures as set forth by **Wellbenders Directional Services**.

Larry Wright

1125 Beach Airport Rd, Conroe, Texas
77301



Spur Energy Partners, LLC

Eddy County, NM (NAD 83 - NME)

Poseidon 3 Fed

#20H

Wellbore #1

Design: Wellbore #1

Standard Survey Report

22 May, 2021





Survey Report



Company:	Spur Energy Partners, LLC	Local Co-ordinate Reference:	Well #20H
Project:	Eddy County, NM (NAD 83 - NME)	TVD Reference:	RKB = 20' @ 3733.00usft (Akita 57)
Site:	Poseidon 3 Fed	MD Reference:	RKB = 20' @ 3733.00usft (Akita 57)
Well:	#20H	North Reference:	Grid
Wellbore:	Wellbore #1	Survey Calculation Method:	Minimum Curvature
Design:	Wellbore #1	Database:	WBDS_SQL_2

Project	Eddy County, NM (NAD 83 - NME)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	Poseidon 3 Fed		
Site Position:		Northing:	677,001.80 usft
From:	Map	Easting:	652,651.20 usft
Position Uncertainty:	0.00 usft	Slot Radius:	13.200 in
		Latitude:	32.8605754
		Longitude:	-103.9708173
		Grid Convergence:	0.197 °

Well	#20H		
Well Position	+N/-S	0.00 usft	Northing: 677,001.80 usft
	+E/-W	0.00 usft	Easting: 652,651.20 usft
Position Uncertainty	0.00 usft	Wellhead Elevation:	usft
		Latitude:	32.8605754
		Longitude:	-103.9708173
		Ground Level:	3,713.00 usft

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2020	5/16/2021	6.791	60.421	47,834.96135652

Design	Wellbore #1				
Audit Notes:					
Version:	1.0	Phase:	ACTUAL	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)	
	0.00	0.00	0.00	89.87	

Survey Program	Date	5/22/2021			
From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description	
20.00	418.00	INVICTUS TOOLS (Wellbore #1)	MWD+IGRF	OWSG MWD + IGRF or WMM	
467.00	10,400.00	Survey #2 (Wellbore #1)	MWD+IGRF	OWSG MWD + IGRF or WMM	

Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
POSEIDON 3 FEDERAL #12: TD ?' MD - FEDERAL KK #3: TD 2997' MD - FEDERAL JJ W12: TD 3111' MD - POSEIDON 3										
20.00	0.00	359.80	20.00	0.00	0.00	0.00	0.00	0.00	0.00	
133.00	0.90	351.62	133.00	0.88	-0.13	-0.13	0.80	0.80	0.00	
161.00	0.60	320.62	160.99	1.21	-0.25	-0.25	1.77	-1.07	-110.71	
188.00	0.80	303.62	187.99	1.42	-0.50	-0.50	1.06	0.74	-62.96	
245.00	0.30	310.62	244.99	1.74	-0.95	-0.94	0.88	-0.88	12.28	
277.00	1.00	276.62	276.99	1.83	-1.29	-1.28	2.41	2.19	-106.25	
340.00	3.40	273.62	339.94	2.01	-3.70	-3.69	3.81	3.81	-4.76	
371.00	3.70	265.62	370.88	1.99	-5.61	-5.61	1.87	0.97	-25.81	



Survey Report



Company:	Spur Energy Partners, LLC	Local Co-ordinate Reference:	Well #20H
Project:	Eddy County, NM (NAD 83 - NME)	TVD Reference:	RKB = 20' @ 3733.00usft (Akita 57)
Site:	Poseidon 3 Fed	MD Reference:	RKB = 20' @ 3733.00usft (Akita 57)
Well:	#20H	North Reference:	Grid
Wellbore:	Wellbore #1	Survey Calculation Method:	Minimum Curvature
Design:	Wellbore #1	Database:	WBDS_SQL_2

Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
403.00	3.60	254.62	402.81	1.64	-7.61	-7.61	2.21	-0.31	-34.37
418.00	2.90	259.62	417.79	1.45	-8.44	-8.43	5.03	-4.67	33.33
467.00	3.60	260.86	466.71	0.98	-11.18	-11.17	1.44	1.43	2.53
1st MWD SVY: 467.00' MD/ 466.71' TVD									
588.00	4.40	291.45	587.43	2.08	-19.25	-19.24	1.86	0.66	25.28
707.00	5.93	304.81	705.94	7.26	-28.54	-28.53	1.63	1.29	11.23
828.00	7.65	333.64	826.12	18.04	-37.26	-37.21	3.11	1.42	23.83
949.00	10.42	353.59	945.64	36.14	-42.05	-41.97	3.42	2.29	16.49
1,069.00	11.03	357.54	1,063.54	58.40	-43.76	-43.63	0.80	0.51	3.29
1,191.00	10.86	359.83	1,183.33	81.55	-44.29	-44.11	0.38	-0.14	1.88
1,313.00	11.91	352.88	1,302.93	105.54	-45.89	-45.65	1.41	0.86	-5.70
1,439.00	12.26	350.69	1,426.14	131.64	-49.66	-49.37	0.46	0.28	-1.74
1,565.00	11.74	355.52	1,549.39	157.62	-52.83	-52.47	0.90	-0.41	3.83
1,642.00	11.56	357.28	1,624.80	173.14	-53.81	-53.42	0.52	-0.23	2.29
1,770.00	11.52	357.10	1,750.21	198.71	-55.06	-54.61	0.04	-0.03	-0.14
1,896.00	11.60	356.57	1,873.66	223.92	-56.46	-55.95	0.11	0.06	-0.42
2,022.00	11.43	355.43	1,997.12	249.01	-58.21	-57.65	0.23	-0.13	-0.90
2,149.00	11.43	352.88	2,121.60	274.05	-60.77	-60.15	0.40	0.00	-2.01
2,276.00	11.69	358.77	2,246.03	299.40	-62.61	-61.93	0.95	0.20	4.64
2,429.00	11.91	356.66	2,395.80	330.65	-63.86	-63.11	0.32	0.14	-1.38
2,555.00	11.78	354.64	2,519.12	356.44	-65.82	-65.01	0.34	-0.10	-1.60
2,682.00	11.91	352.80	2,643.41	382.35	-68.67	-67.81	0.31	0.10	-1.45
2,807.00	12.40	358.24	2,765.61	408.56	-70.70	-69.78	1.00	0.39	4.35
2,933.00	12.70	357.89	2,888.60	435.92	-71.63	-70.64	0.25	0.24	-0.28
3,059.00	12.79	357.72	3,011.50	463.70	-72.69	-71.64	0.08	0.07	-0.13
3,186.00	11.52	356.49	3,135.65	490.40	-74.03	-72.92	1.02	-1.00	-0.97
3,312.00	11.69	356.84	3,259.07	515.71	-75.50	-74.33	0.15	0.13	0.28
3,438.00	11.78	355.52	3,382.44	541.28	-77.21	-75.98	0.22	0.07	-1.05
3,564.00	11.78	356.31	3,505.79	566.93	-79.04	-77.76	0.13	0.00	0.63
3,690.00	11.91	357.72	3,629.10	592.76	-80.39	-79.04	0.25	0.10	1.12
3,752.00	11.78	359.39	3,689.78	605.48	-80.71	-79.34	0.59	-0.21	2.69
3,789.96	11.00	7.92	3,727.00	612.94	-80.25	-78.86	4.89	-2.06	22.48
PLAN 20H: KOP @ 3788.25' MD									
3,814.00	10.64	13.89	3,750.61	617.37	-79.40	-78.00	4.89	-1.49	24.81
3,877.00	10.42	26.46	3,812.56	628.12	-75.47	-74.04	3.66	-0.35	19.95
3,940.00	12.18	43.16	3,874.35	638.07	-68.38	-66.93	5.87	2.79	26.51
4,003.00	14.68	54.93	3,935.64	647.51	-57.30	-55.83	5.86	3.97	18.68
4,066.00	17.27	65.30	3,996.21	656.00	-42.26	-40.77	6.10	4.11	16.46
4,129.00	20.40	71.63	4,055.84	663.37	-23.34	-21.83	5.93	4.97	10.05
4,192.00	23.60	76.20	4,114.25	669.85	-0.66	0.86	5.76	5.08	7.25
4,255.00	27.03	79.63	4,171.19	675.43	25.67	27.21	5.92	5.44	5.44
4,318.00	30.73	81.56	4,226.35	680.37	55.69	57.23	6.06	5.87	3.06
4,380.00	34.42	83.76	4,278.59	684.60	88.79	90.34	6.25	5.95	3.55



Survey Report



Company:	Spur Energy Partners, LLC	Local Co-ordinate Reference:	Well #20H
Project:	Eddy County, NM (NAD 83 - NME)	TVD Reference:	RKB = 20' @ 3733.00usft (Akita 57)
Site:	Poseidon 3 Fed	MD Reference:	RKB = 20' @ 3733.00usft (Akita 57)
Well:	#20H	North Reference:	Grid
Wellbore:	Wellbore #1	Survey Calculation Method:	Minimum Curvature
Design:	Wellbore #1	Database:	WBDS_SQL_2

Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
4,443.00	38.20	85.52	4,329.35	688.06	125.92	127.48	6.22	6.00	2.79
4,507.00	41.85	85.52	4,378.35	691.28	166.95	168.52	5.70	5.70	0.00
4,570.00	45.41	85.70	4,423.94	694.60	210.29	211.86	5.65	5.65	0.29
4,633.00	48.48	87.01	4,466.94	697.52	256.22	257.80	5.10	4.87	2.08
4,696.00	52.18	87.89	4,507.16	699.66	304.66	306.24	5.97	5.87	1.40
4,759.00	56.09	88.42	4,544.06	701.30	355.68	357.27	6.24	6.21	0.84
4,820.00	59.65	89.12	4,576.50	702.40	407.31	408.91	5.92	5.84	1.15
START TANGENT: 4820.00' MD/ 4576.50' TVD									
4,852.00	59.91	88.77	4,592.60	702.91	434.96	436.55	1.25	0.81	-1.09
4,883.00	60.00	88.68	4,608.12	703.51	461.79	463.38	0.38	0.29	-0.29
4,915.00	60.26	88.42	4,624.06	704.21	489.53	491.12	1.08	0.81	-0.81
4,946.00	60.35	88.24	4,639.42	705.00	516.44	518.04	0.58	0.29	-0.58
4,978.00	60.57	87.80	4,655.19	705.96	544.27	545.87	1.38	0.69	-1.37
5,009.00	60.79	87.63	4,670.37	707.04	571.28	572.88	0.86	0.71	-0.55
END TANGENT: 5009.00' MD/ 4670.37' TVD									
5,072.00	66.64	89.65	4,698.26	708.35	627.72	629.32	9.72	9.29	3.21
5,135.00	73.27	92.20	4,719.85	707.37	686.85	688.46	11.19	10.52	4.05
5,198.00	79.47	91.76	4,734.69	705.26	748.01	749.61	9.86	9.84	-0.70
5,259.00	84.13	89.04	4,743.39	704.84	808.37	809.96	8.82	7.64	-4.46
5,302.79	87.31	88.55	4,746.66	705.76	852.02	853.62	7.34	7.25	-1.13
PLAT Poseidon #20H: FTP/ LP (100' FWL)									
5,303.22	87.34	88.54	4,746.68	705.77	852.45	854.05	7.34	7.25	-1.12
FINAL FTP/ 100' FWL @ 5303.22' MD									
5,322.00	88.70	88.33	4,747.33	706.29	871.21	872.81	7.34	7.25	-1.12
5,448.00	89.27	87.80	4,749.56	710.54	997.12	998.73	0.62	0.45	-0.42
5,574.00	89.76	87.37	4,750.62	715.85	1,123.00	1,124.62	0.52	0.39	-0.34
5,700.00	90.29	86.93	4,750.57	722.11	1,248.84	1,250.48	0.55	0.42	-0.35
5,826.00	88.57	88.16	4,751.82	727.51	1,374.71	1,376.36	1.68	-1.37	0.98
5,946.00	89.01	88.07	4,754.36	731.46	1,494.62	1,496.28	0.37	0.37	-0.07
6,067.00	88.79	89.83	4,756.68	733.67	1,615.57	1,617.23	1.47	-0.18	1.45
6,188.00	89.19	89.12	4,758.81	734.78	1,736.55	1,738.21	0.67	0.33	-0.59
6,308.00	88.70	90.18	4,761.02	735.52	1,856.52	1,858.19	0.97	-0.41	0.88
6,429.00	88.92	89.47	4,763.53	735.89	1,977.50	1,979.16	0.61	0.18	-0.59
6,549.00	88.79	91.14	4,765.93	735.25	2,097.47	2,099.13	1.40	-0.11	1.39
6,669.00	91.47	91.32	4,765.66	732.67	2,217.43	2,219.09	2.24	2.23	0.15
6,791.00	91.56	91.14	4,762.44	730.05	2,339.36	2,341.01	0.16	0.07	-0.15
6,911.00	90.73	90.53	4,760.04	728.31	2,459.32	2,460.97	0.86	-0.69	-0.51
7,031.00	90.51	90.09	4,758.74	727.66	2,579.31	2,580.95	0.41	-0.18	-0.37
7,157.00	90.73	90.00	4,757.38	727.56	2,705.30	2,706.95	0.19	0.17	-0.07
7,283.00	88.97	89.21	4,757.71	728.43	2,831.29	2,832.94	1.53	-1.40	-0.63
7,410.00	90.02	89.47	4,758.82	729.89	2,958.28	2,959.93	0.85	0.83	0.20
7,537.00	88.40	89.91	4,760.58	730.58	3,085.26	3,086.91	1.32	-1.28	0.35
7,663.00	88.84	90.09	4,763.61	730.58	3,211.22	3,212.87	0.38	0.35	0.14
7,789.00	88.66	90.09	4,766.36	730.38	3,337.19	3,338.84	0.14	-0.14	0.00



Survey Report



Company:	Spur Energy Partners, LLC	Local Co-ordinate Reference:	Well #20H
Project:	Eddy County, NM (NAD 83 - NME)	TVD Reference:	RKB = 20' @ 3733.00usft (Akita 57)
Site:	Poseidon 3 Fed	MD Reference:	RKB = 20' @ 3733.00usft (Akita 57)
Well:	#20H	North Reference:	Grid
Wellbore:	Wellbore #1	Survey Calculation Method:	Minimum Curvature
Design:	Wellbore #1	Database:	WBDS_SQL_2

Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
7,916.00	90.29	89.91	4,767.52	730.38	3,464.18	3,465.83	1.29	1.28	-0.14
8,041.00	90.86	89.56	4,766.27	730.96	3,589.17	3,590.82	0.54	0.46	-0.28
8,167.00	91.25	89.21	4,763.95	732.31	3,715.15	3,716.80	0.42	0.31	-0.28
8,293.00	91.38	88.86	4,761.06	734.43	3,841.09	3,842.75	0.30	0.10	-0.28
8,420.00	90.68	89.56	4,758.77	736.18	3,968.06	3,969.72	0.78	-0.55	0.55
8,546.00	89.23	90.35	4,758.87	736.28	4,094.06	4,095.72	1.31	-1.15	0.63
8,672.00	89.49	90.53	4,760.28	735.31	4,220.04	4,221.70	0.25	0.21	0.14
8,797.00	88.31	90.62	4,762.68	734.06	4,345.01	4,346.67	0.95	-0.94	0.07
8,923.00	88.62	90.71	4,766.05	732.60	4,470.96	4,472.61	0.26	0.25	0.07
9,049.00	88.92	90.27	4,768.76	731.52	4,596.92	4,598.57	0.42	0.24	-0.35
9,175.00	89.19	90.18	4,770.84	731.02	4,722.91	4,724.55	0.23	0.21	-0.07
9,302.00	89.67	90.27	4,772.10	730.52	4,849.90	4,851.54	0.38	0.38	0.07
9,427.00	89.98	90.18	4,772.48	730.03	4,974.90	4,976.54	0.26	0.25	-0.07
9,554.00	90.02	89.39	4,772.48	730.51	5,101.89	5,103.54	0.62	0.03	-0.62
9,679.00	90.55	89.04	4,771.86	732.22	5,226.88	5,228.53	0.51	0.42	-0.28
9,805.00	89.23	89.74	4,772.10	733.56	5,352.87	5,354.52	1.19	-1.05	0.56
FEDERAL KK #2: TD 3050' MD									
9,933.00	89.63	89.47	4,773.38	734.45	5,480.86	5,482.51	0.38	0.31	-0.21
10,059.00	88.70	91.23	4,775.21	733.68	5,606.84	5,608.49	1.58	-0.74	1.40
POSEIDON 3 FEDERAL #16: TD ?' MD									
10,183.00	89.01	90.44	4,777.69	731.87	5,730.80	5,732.44	0.68	0.25	-0.64
10,307.00	89.54	90.09	4,779.26	731.30	5,854.79	5,856.43	0.51	0.43	-0.28
10,328.00	89.54	90.00	4,779.43	731.28	5,875.79	5,877.43	0.43	0.00	-0.43
10,383.32	89.54	90.00	4,779.87	731.28	5,931.10	5,932.74	0.00	0.00	0.00
FINAL LTP/ 100' FEL @ 10383.32' MD									
10,383.35	89.54	90.00	4,779.87	731.28	5,931.14	5,932.78	0.00	0.00	0.00
PLAT Poseidon #20H: LTP (100' FEL)									
10,400.00	89.54	90.00	4,780.01	731.28	5,947.78	5,949.43	0.00	0.00	0.00
TD: Y= 677733.08 / X= 658598.98 - Projection to Bit: 10400.00' MD/ 4780.01' TVD - Final Station Closure Distance= 5992.1									

Design Targets									
Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
FINAL FTP/ 100' FWL - actual wellpath hits target center - Point	0.00	0.00	4,746.68	705.77	852.45	677,707.57	653,503.65	32.8625072	-103.9680332
FINAL LTP/ 100' FEL - actual wellpath hits target center - Point	0.00	0.01	4,779.87	731.28	5,931.10	677,733.08	658,582.30	32.8625279	-103.9514932
FINAL TD/ 83' FWL @ - actual wellpath hits target center - Point	0.00	0.00	4,780.01	731.28	5,947.78	677,733.08	658,598.99	32.8625277	-103.9514388



Survey Report



Company:	Spur Energy Partners, LLC	Local Co-ordinate Reference:	Well #20H
Project:	Eddy County, NM (NAD 83 - NME)	TVD Reference:	RKB = 20' @ 3733.00usft (Akita 57)
Site:	Poseidon 3 Fed	MD Reference:	RKB = 20' @ 3733.00usft (Akita 57)
Well:	#20H	North Reference:	Grid
Wellbore:	Wellbore #1	Survey Calculation Method:	Minimum Curvature
Design:	Wellbore #1	Database:	WBDS_SQL_2

Design Annotations

Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
467.00	466.71	0.98	-11.18	1st MWD SVY: 467.00' MD/ 466.71' TVD
4,820.00	4,576.50	702.40	407.31	START TANGENT: 4820.00' MD/ 4576.50' TVD
5,009.00	4,670.37	707.04	571.28	END TANGENT: 5009.00' MD/ 4670.37' TVD
10,400.00	4,780.01	731.28	5,947.78	TD: Y= 677733.08 / X= 658598.98
10,400.00	4,780.01	731.28	5,947.78	Projection to Bit: 10400.00' MD/ 4780.01' TVD
10,400.00	4,780.01	731.28	5,947.78	Final Station Closure Distance= 5992.57 /Direction= 82.99
10,400.00	4,780.01	731.28	5,947.78	TD: Latitude= 32.8625277 / Longitude= -103.9514388

Checked By: _____ Approved By: _____ Date: _____



Company: Spur Energy Partners, LLC
Project: Eddy County, NM (NAD 83 - NME)
Site: Poseidon 3 Fed
Well: #20H
Wellbore: Wellbore #1
Rig: Akita 57
Design: Plan #4 / 8:26, May 22 2021



WELL DETAILS: #20H

PLAT Poseidon #20H: SHL (1560' FSL & 755' FEL) RKB = 20' @ 3733.00usft (Akita 57)

+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
0.00	0.00	677001.80	652651.20	32.8605753	-103.9708173

1st MWD SVY: 467.00' MD/ 466.71' TVD

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	VSec
1	7789.00	88.66	90.09	4766.36	730.38	3337.19	0.00	3338.84
2	7808.09	90.52	90.50	4766.49	730.28	3356.28	10.00	3357.93
3	8154.39	90.52	90.50	4763.32	727.27	3702.55	0.00	3704.19
4	8217.05	89.44	89.87	4763.34	727.07	3765.21	2.00	3766.85
5	10433.05	89.44	89.87	4785.00	732.10	5981.10	0.00	5982.75

PLAT Poseidon #20H: PBHL (2280' FSL & 50' FEL)

DESIGN TARGET DETAILS


Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
PLAT Poseidon #20H: SHL (1560' FSL & 755' FEL)	0.00	0.00	0.00	677001.80	652651.20	32.8605753	-103.9708173
PLAT Poseidon #20H: FTP/ LP (100' FWL)	4735.00	720.90	852.40	677722.70	653503.60	32.8625487	-103.9680332
FINAL FTP/ 100' FWL @ 5303.22' MD	4746.68	705.77	852.45	677707.57	653503.65	32.8625071	-103.9680332
FINAL LTP/ 100' FEL @ 10383.32' MD	4779.87	731.28	5931.10	677733.08	658582.30	32.8625279	-103.9514932
FINAL TD/ 83' FWL @ 10400' MD	4780.01	731.28	5947.78	677733.08	658598.98	32.8625277	-103.9514388
PLAT Poseidon #20H: LTP (100' FEL)	4784.51	732.00	5931.10	677733.80	658582.30	32.8625298	-103.9514932
PLAT Poseidon #20H: PBHL (2280' FSL & 50' FEL)	4785.00	732.10	5981.10	677733.90	658632.30	32.8625296	-103.9513303

PROJECT DETAILS: Eddy County, NM (NAD 83 - NME)

Geodetic System: US State Plane 1983
Datum: North American Datum 1983
Ellipsoid: GRS 1980
Zone: New Mexico Eastern Zone
System Datum: Mean Sea Level

Disclaimer:

All Plan Details, boundary lines and offset well location/ survey data is provided by customer and subject to customer approval.

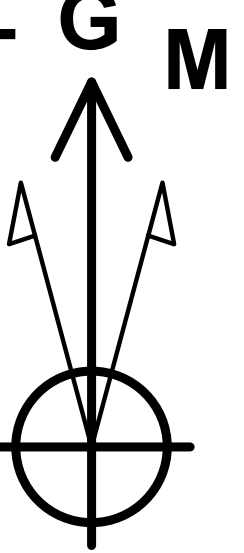

Azimuths to Grid North
True North: -0.20°
Magnetic North: 6.59°

Magnetic Field
Strength: 47835.0nT
Dip Angle: 60.42°
Date: 5/16/2021
Model: IGRF2020

CORRECTION REFERENCE DATA:

To convert a Magnetic Direction to a Grid Direction, Add 6.594°
To convert a True Direction to a Grid Direction, Subtract 0.197°
To convert a Magnetic Direction to a True Direction, Add 6.791° East
Magnetic Declination: 6.791°
Grid Convergence: 0.197° West
Magnetic Dip Angle: 60.421°
Magnetic Field Strength: 47834.96135653nT

START TANGENT: 4820.00' MD/ 4576.50' TVD

END TANGENT: 5009.00' MD/ 4670.37' TVD

FINAL FTP/ 100' FWL @ 5303.22' MD

PLAT Poseidon #20H: FTP/ LP (100' FWL)

FINAL LTP/ 100' FEL @ 10383.32' MD

FINAL TD/ 83' FWL @ 10400' MD

#20H PVA SURVEY





TD: Y= 677733.08 / X= 658598.98

Projection to Bit: 10400.00' MD/ 4780.01' TVD

Final Station Closure Distance= 5992.57 /Direction= 82.99

TD: Latitude= 32.8625277 / Longitude= -103.9514388

Vertical Section at 89.87° (200 usft/in)

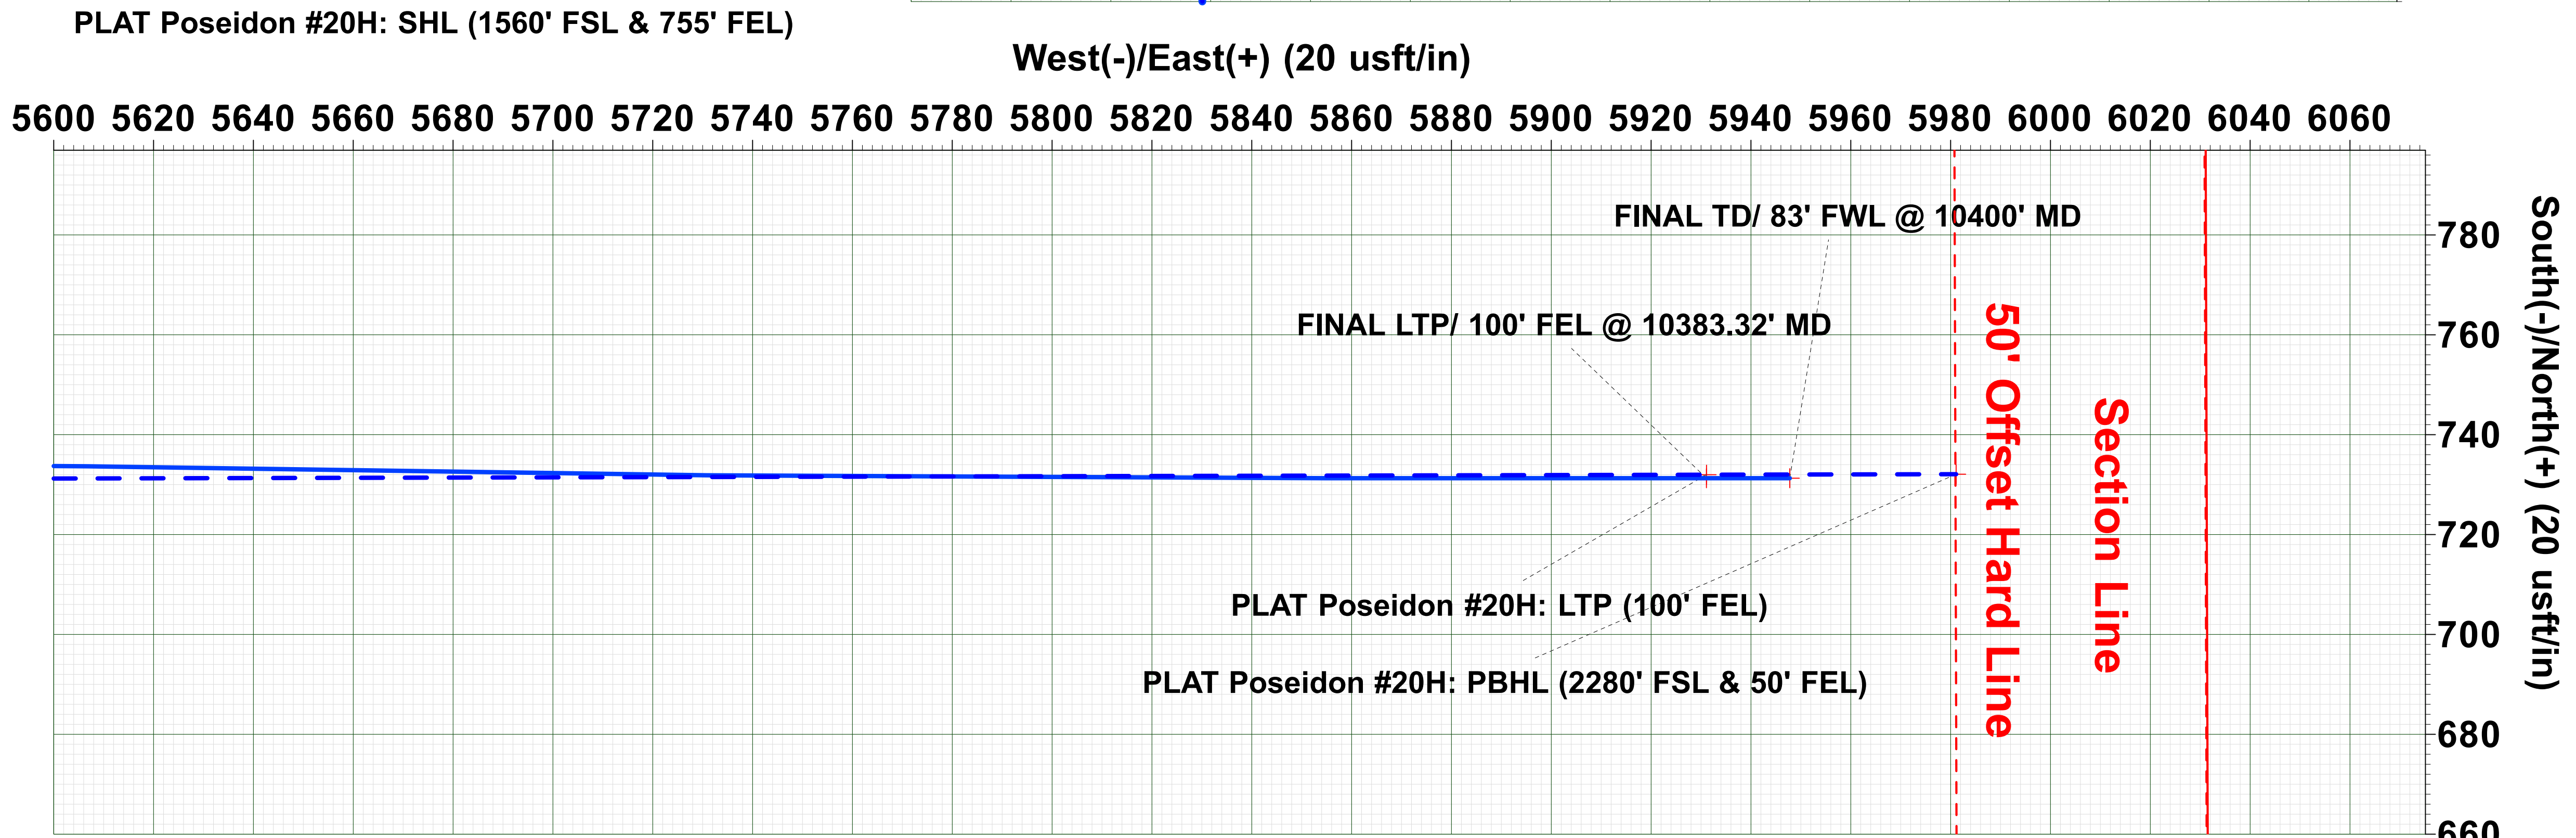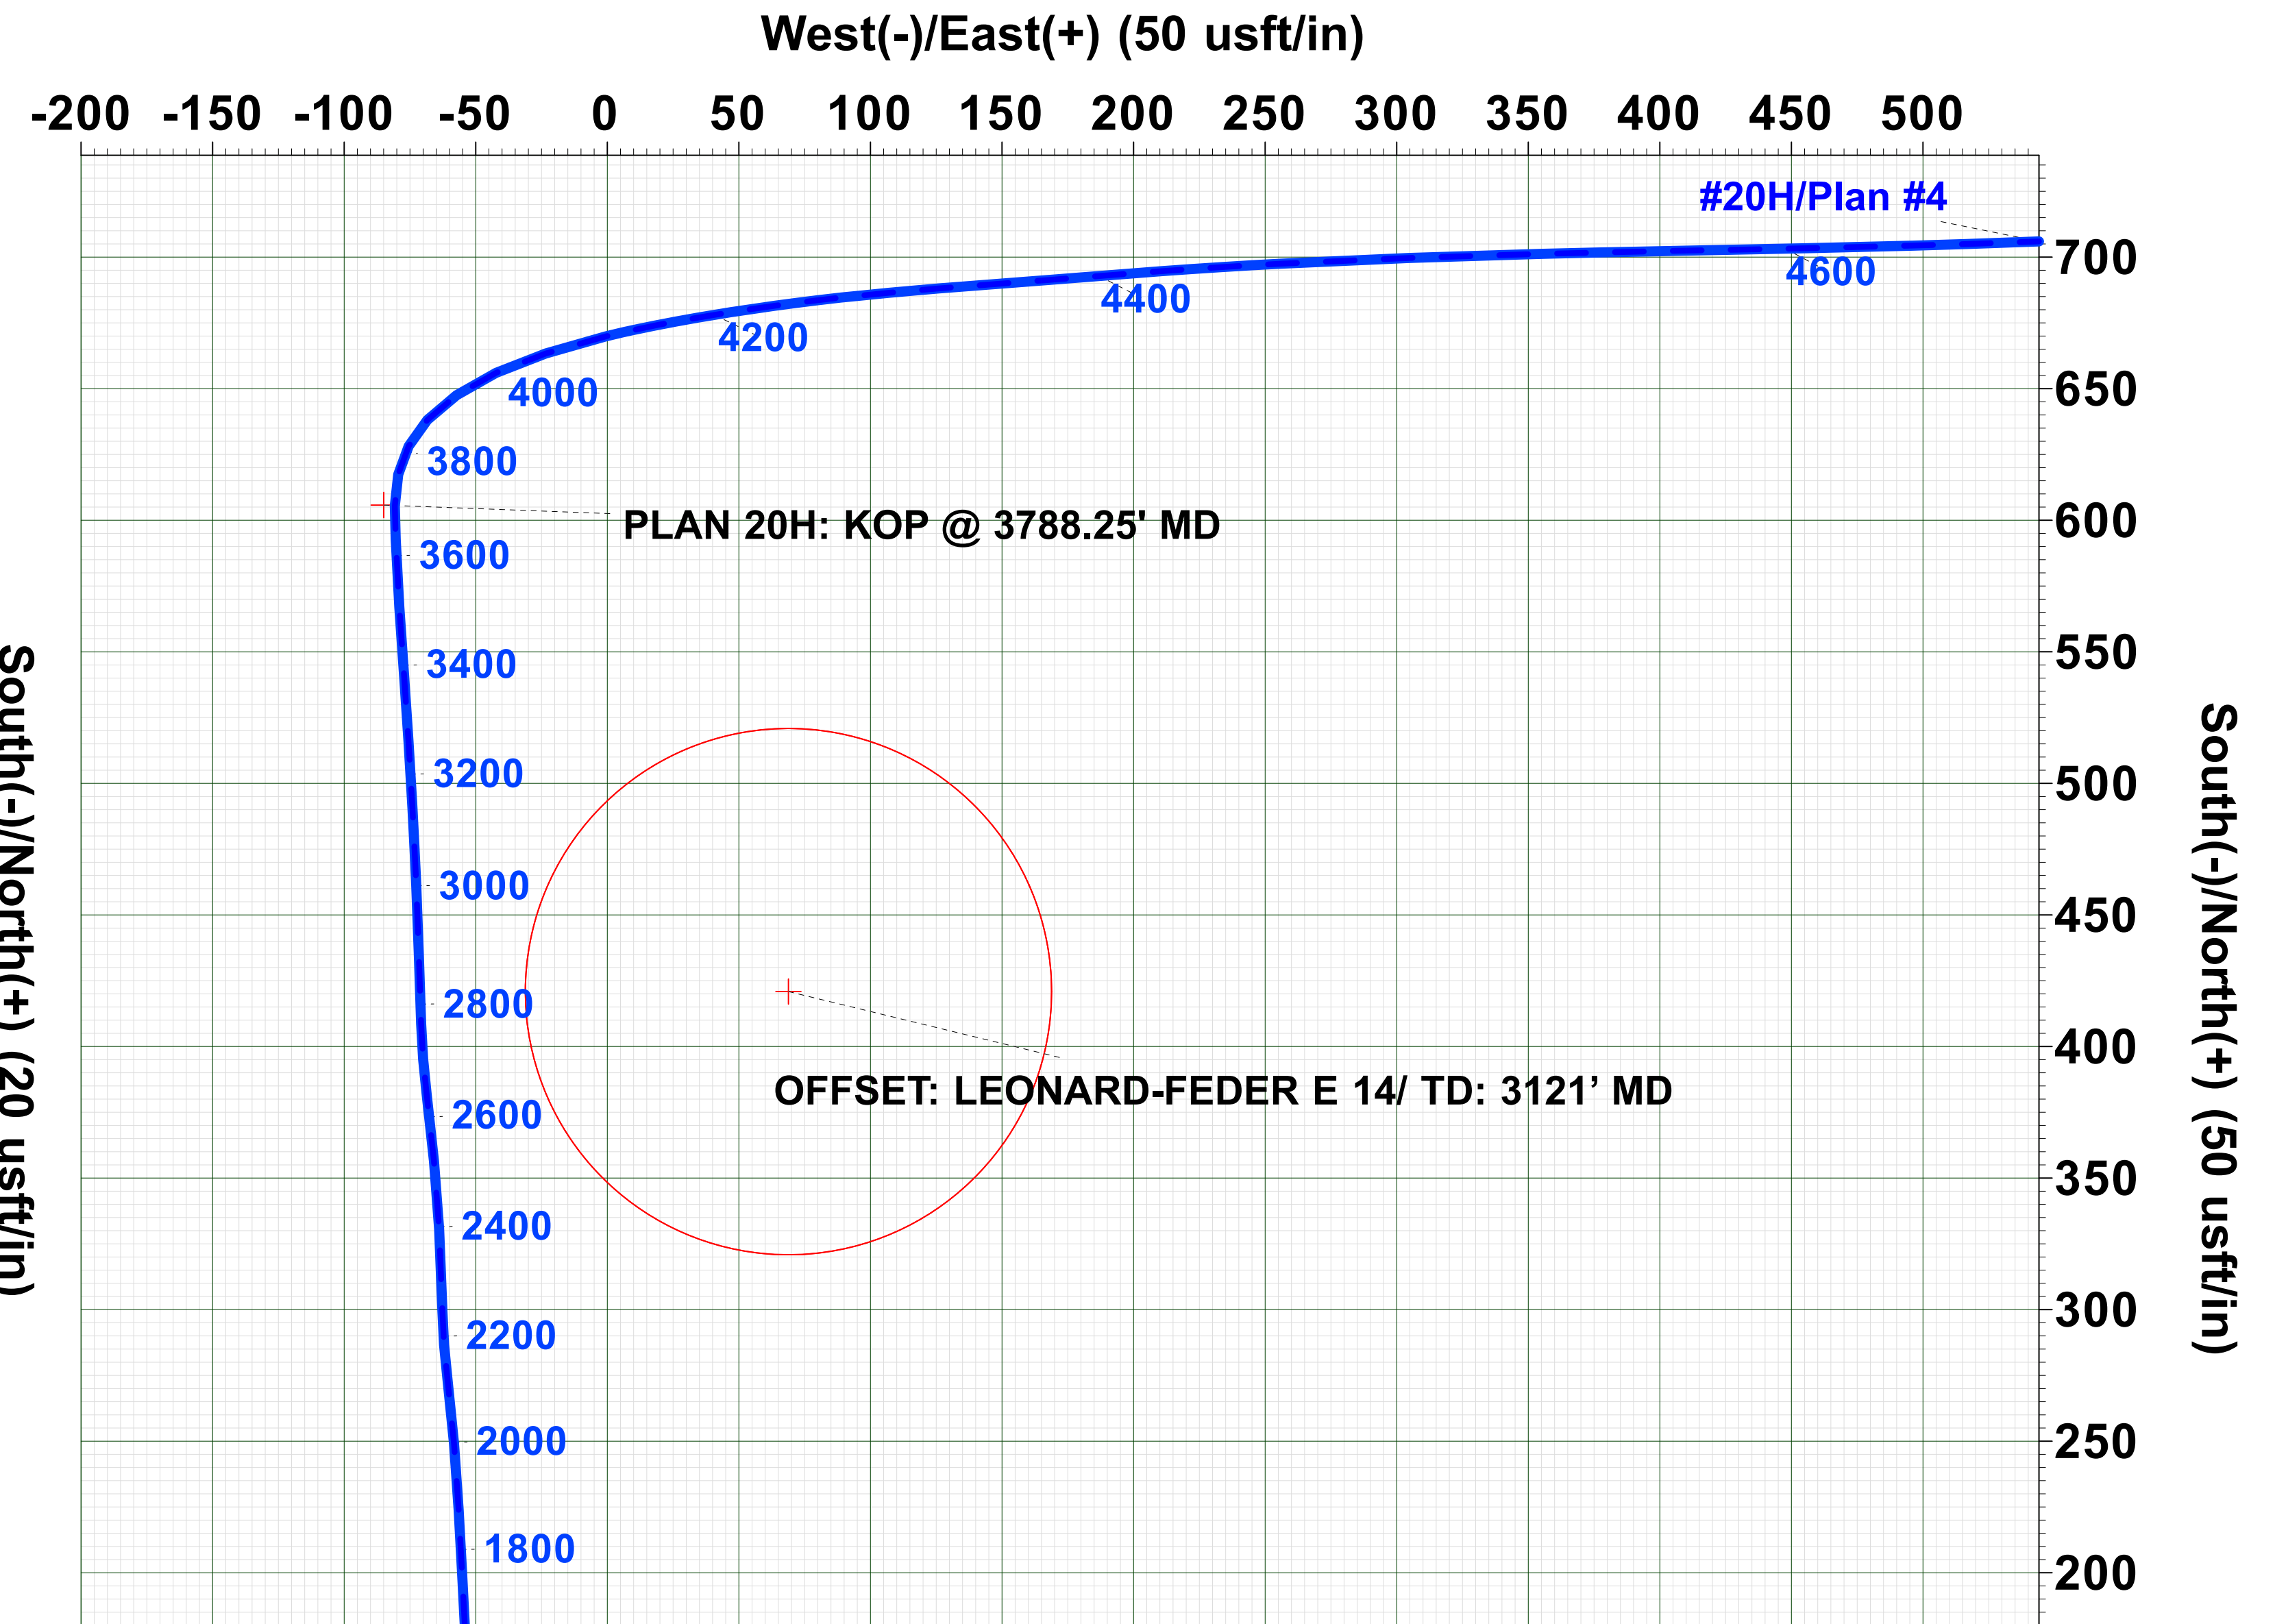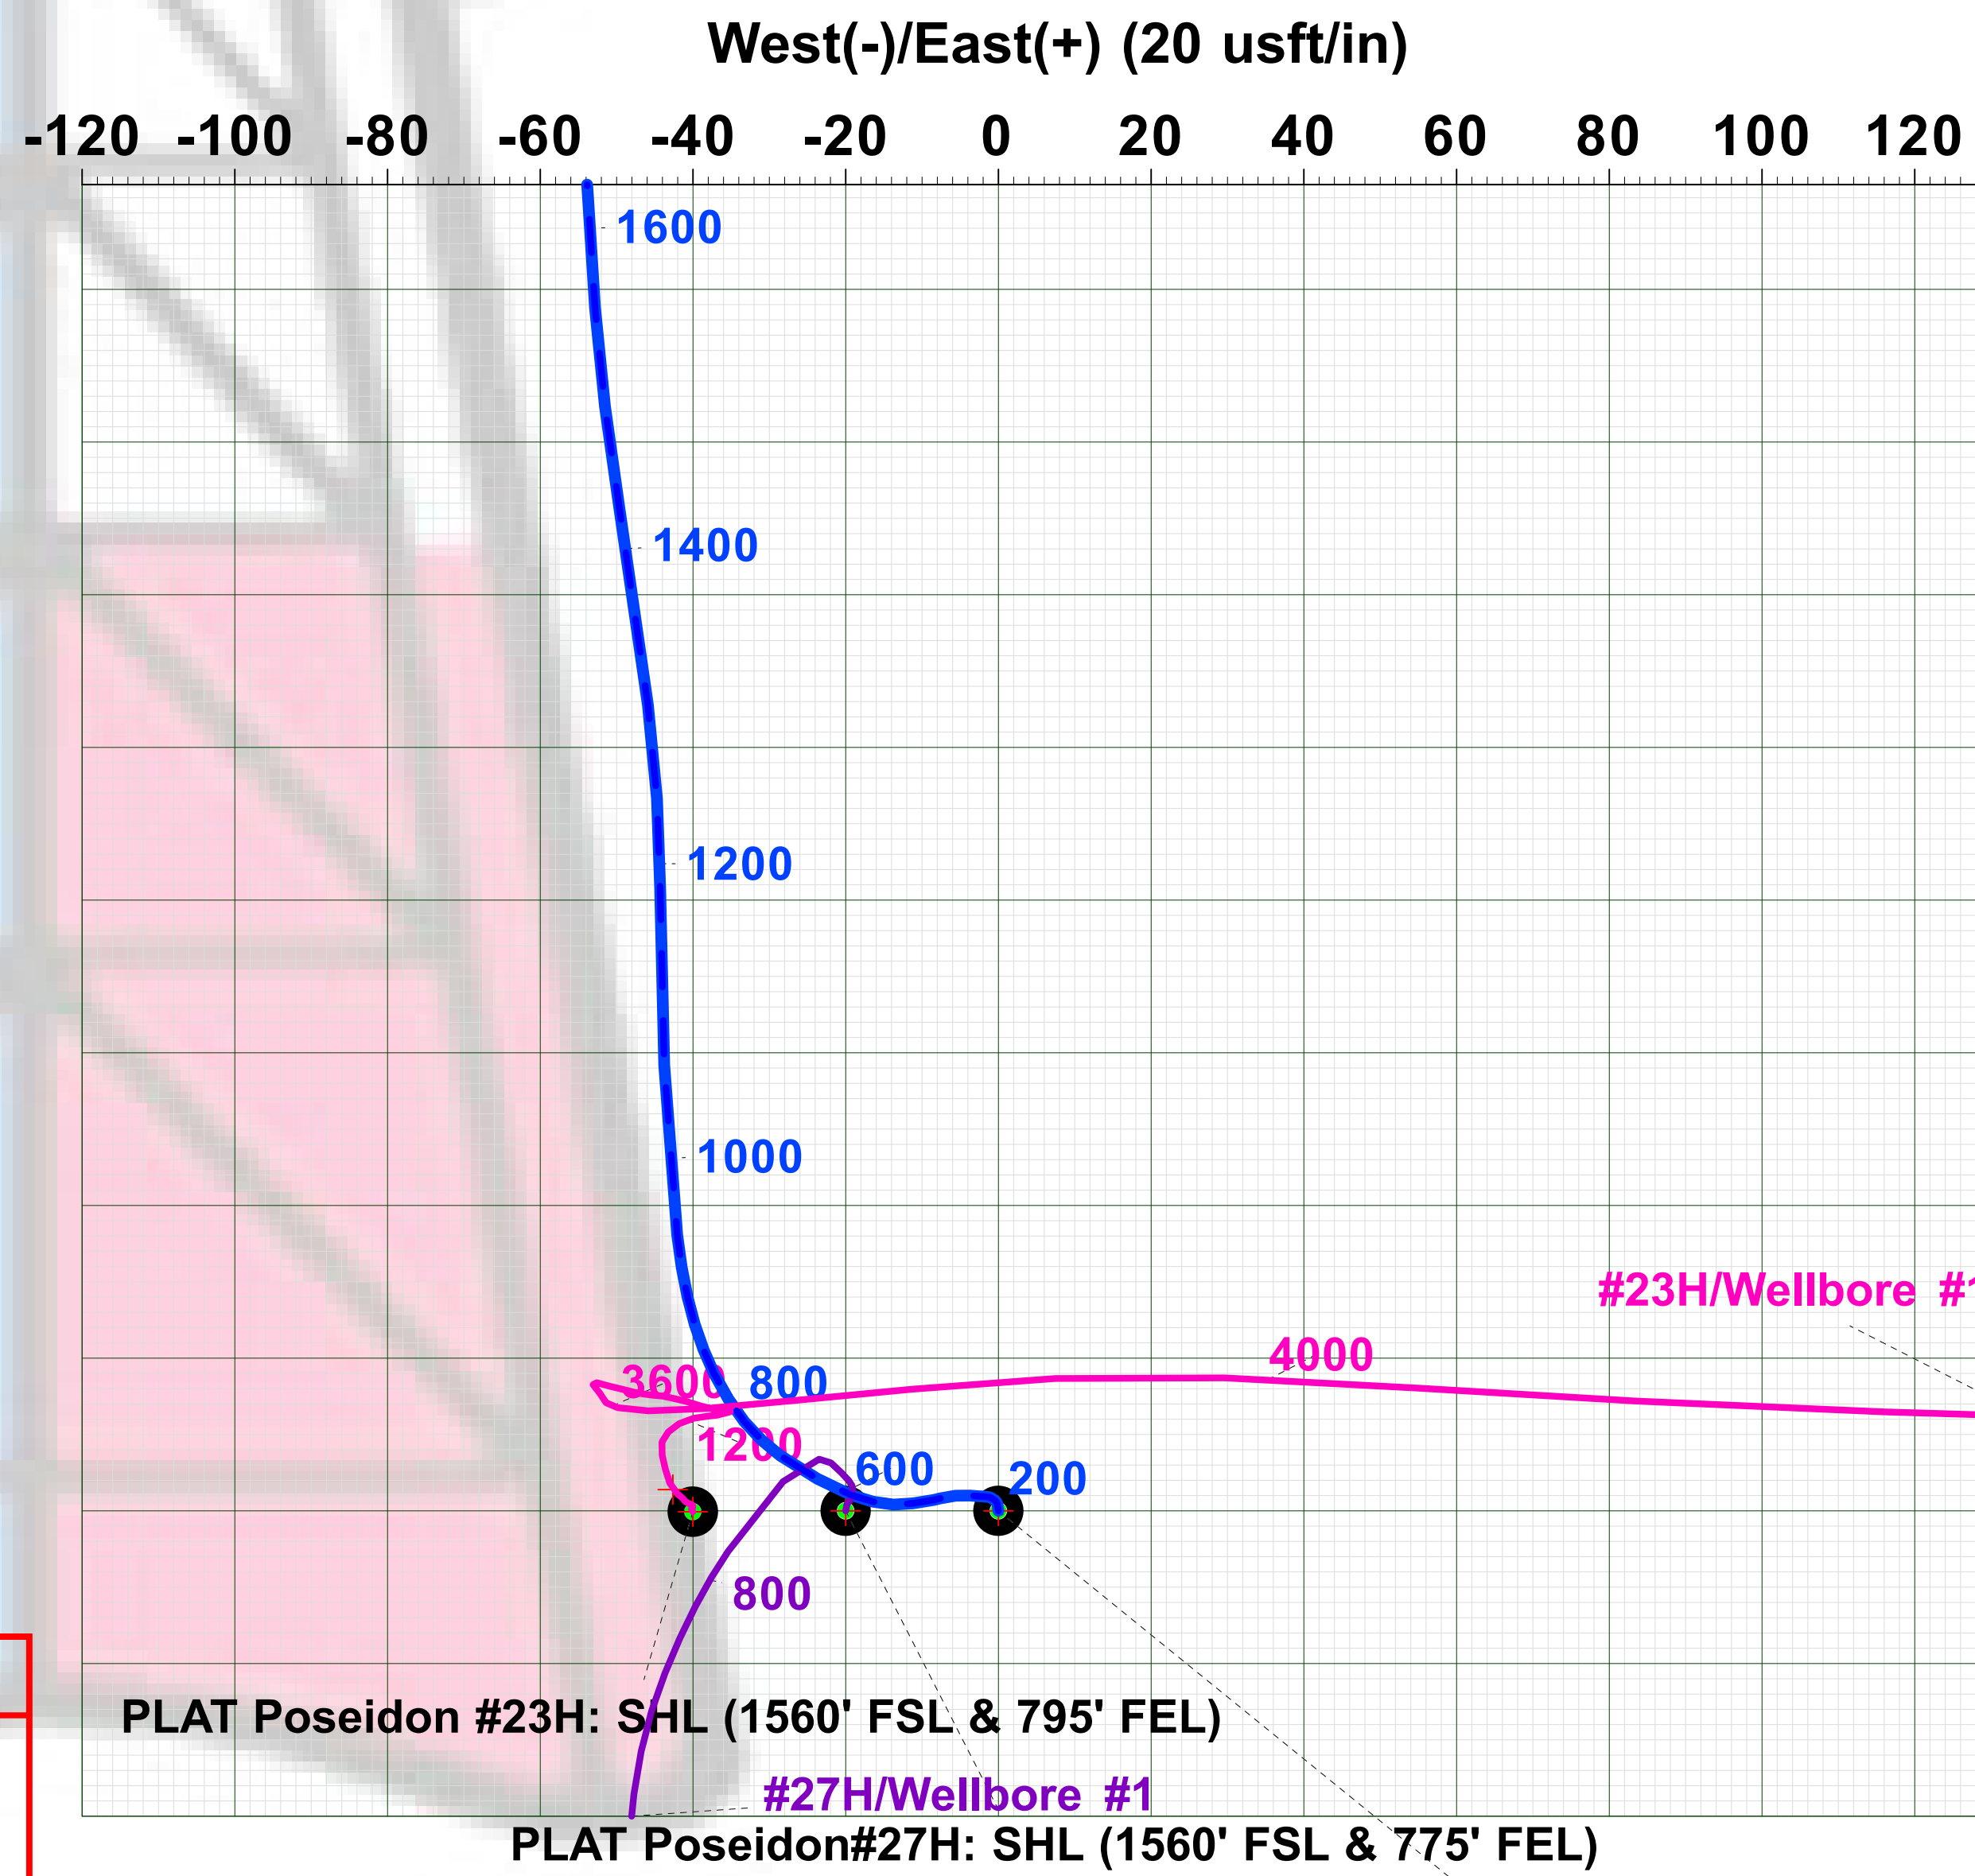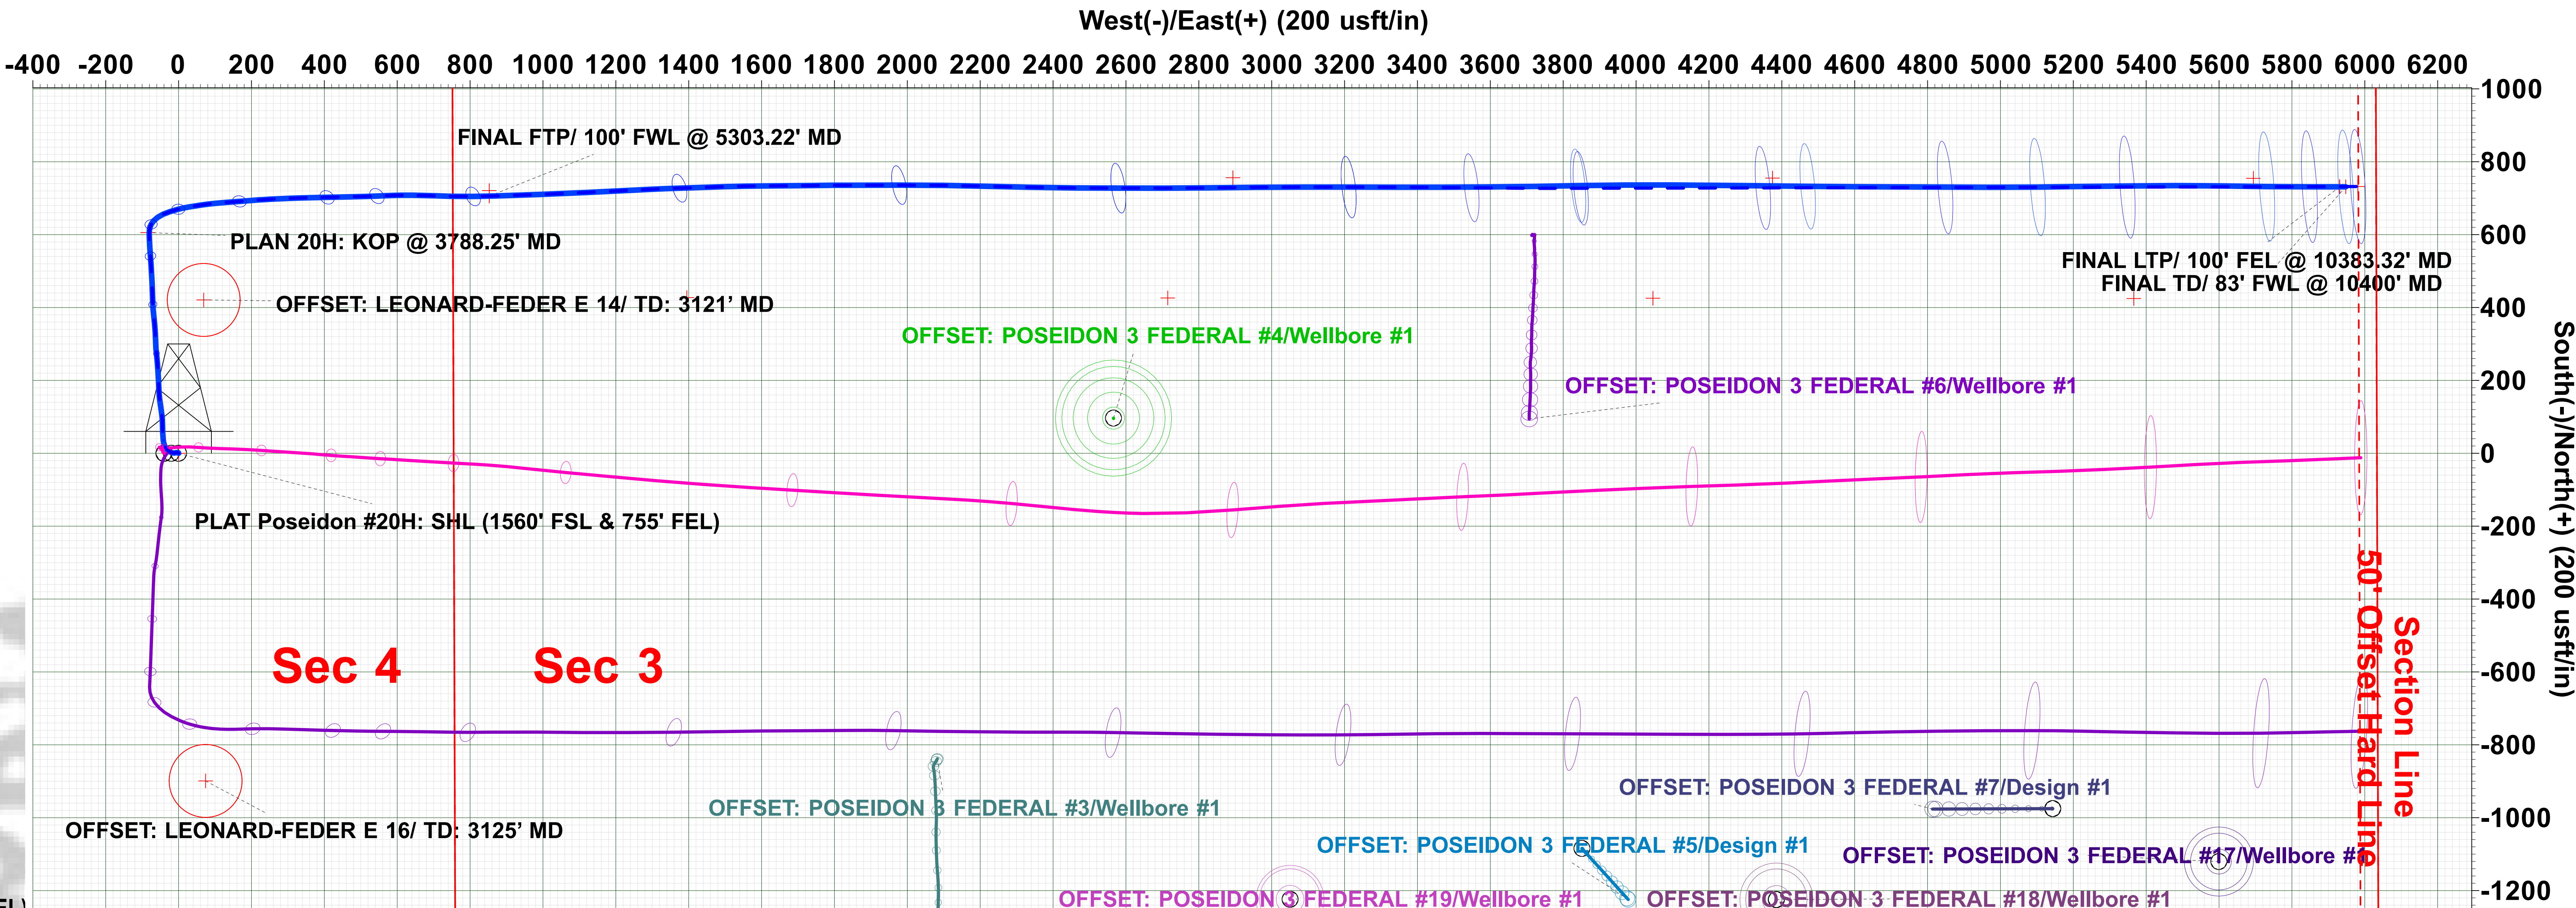

Plan: Plan #4 (#20H/Wellbore #1) Akita 57

Created By: Matthew May Date: 8:26, May 22 2021

Well Name: POSEIDON 3 FEDERAL	Well Location: T17S / R30E / SEC 4 / NESE / 32.8605753 / -103.9708173	County or Parish/State: EDDY / NM
Well Number: 20H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMLC060325	Unit or CA Name:	Unit or CA Number:
US Well Number: 3001548109	Well Status: Drilling Well	Operator: SPUR ENERGY PARTNERS LLC

Subsequent Report

Sundry ID: 2628153
Type of Submission: Subsequent Report
Date Sundry Submitted: 08/10/2021
Date Operation Actually Began: 07/12/2021
Type of Action: Hydraulic Fracturing
Time Sundry Submitted: 12:22

Actual Procedure: 7/12/2021 Pressure test csg to 6000# for 30 minutes, good test. 7/23/2021 RIH & cleanout to PBTD @ 10400'. RIH & perf from 5305'-10297', total 900 shots/ft @ .42 shot size. Frac in 25 stages w/ 13173426gal slickwater and 5034208# sand. 8/3/2021 rig down wireline and cleanout. Will file tubing sundry once in hole.

Operator Certification

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a submission of Form 3160-5 or a Sundry Notice.

Operator Electronic Signature: SARAH CHAPMAN
Signed on: AUG 10, 2021 12:22 PM
Name: SPUR ENERGY PARTNERS LLC
Title: Regulatory Directory
Street Address: 9655 KATY FREEWAY, SUITE 500
City: Houston State: TX
Phone: (832) 930-8613
Email address: SCHAPMAN@SPUREPLLC.COM

Field Representative

Representative Name:
Street Address:
City: State: Zip:
Phone:
Email address:

Well Name: POSEIDON 3 FEDERAL	Well Location: T17S / R30E / SEC 4 / NESE / 32.8605753 / -103.9708173	County or Parish/State: EDDY / NM
Well Number: 20H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMLC060325	Unit or CA Name:	Unit or CA Number:
US Well Number: 3001548109	Well Status: Drilling Well	Operator: SPUR ENERGY PARTNERS LLC

BLM Point of Contact

BLM POC Name: Jonathon W Shepard	BLM POC Title: Petroleum Engineer
BLM POC Phone: 5752345972	BLM POC Email Address: jshepard@blm.gov
Disposition: Accepted	Disposition Date: 10/14/2021
Signature: Jonathon Shepard	

Well Name: POSEIDON 3 FEDERAL	Well Location: T17S / R30E / SEC 4 / NESE / 32.8605753 / -103.9708173	County or Parish/State: EDDY / NM
Well Number: 20H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMLC060325	Unit or CA Name:	Unit or CA Number:
US Well Number: 3001548109	Well Status: Drilling Well	Operator: SPUR ENERGY PARTNERS LLC

Subsequent Report

Sundry ID: 2633544

Type of Submission: Subsequent Report	Type of Action: Workover Operations
Date Sundry Submitted: 09/10/2021	Time Sundry Submitted: 08:45
Date Operation Actually Began: 08/10/2021	

Actual Procedure: : 8/10/2021 RU tubing test truck, RIH w/ 3-1/2" J-55 tbg @ 4963'. Rig down and rig release 8/11/2021.

Operator Certification

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a submission of Form 3160-5 or a Sundry Notice.

Operator Electronic Signature: SARAH CHAPMAN	Signed on: SEP 10, 2021 08:45 AM
Name: SPUR ENERGY PARTNERS LLC	
Title: Regulatory Directory	
Street Address: 9655 KATY FREEWAY, SUITE 500	
City: Houston	State: TX
Phone: (832) 930-8613	
Email address: SCHAPMAN@SPUREPLLC.COM	

Field Representative

Representative Name:

Street Address:

City:	State:	Zip:
Phone:		
Email address:		

Received by OCD: 1/7/2022 11:48:59 AM

Page 14 of 19

Well Name: POSEIDON 3 FEDERAL	Well Location: T17S / R30E / SEC 4 / NESE / 32.8605753 / -103.9708173	County or Parish/State: EDDY / NM
Well Number: 20H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMLC060325	Unit or CA Name:	Unit or CA Number:
US Well Number: 3001548109	Well Status: Drilling Well	Operator: SPUR ENERGY PARTNERS LLC

BLM Point of Contact

BLM POC Name: Jonathon W Shepard	BLM POC Title: Petroleum Engineer
BLM POC Phone: 5752345972	BLM POC Email Address: jshepard@blm.gov
Disposition: Accepted	Disposition Date: 10/22/2021
Signature: Jonathon Shepard	

Submit To Appropriate District Office Two Copies <u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 <u>District II</u> 811 S. First St., Artesia, NM 88210 <u>District III</u> 1000 Rio Brazos Rd., Aztec, NM 87410 <u>District IV</u> 1220 S. St. Francis Dr., Santa Fe, NM 87505		State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505			Form C-105 Revised April 3, 2017					
WELL COMPLETION OR RECOMPLETION REPORT AND LOG								1. WELL API NO. 30-015-48109		
4. Reason for filing: ☒ COMPLETION REPORT (Fill in boxes #1 through #31 for State and Fee wells only) ☐ C-144 CLOSURE ATTACHMENT (Fill in boxes #1 through #9, #15 Date Rig Released and #32 and/or #33; attach this and the plat to the C-144 closure report in accordance with 19.15.17.13.K NMAC)								2. Type of Lease ☐ STATE ☐ FEE ☒ FED/INDIAN		
								3. State Oil & Gas Lease No.		
5. Lease Name or Unit Agreement Name POSEIDON 3 FEDERAL								6. Well Number: 20H		
7. Type of Completion: ☒ NEW WELL ☐ WORKOVER ☐ DEEPENING ☐ PLUGBACK ☐ DIFFERENT RESERVOIR ☐ OTHER _____										
8. Name of Operator SPUR ENERGY PARTNERS LLC						9. OGRID 328947				
10. Address of Operator 9655 KATY FREEWAY, SUITE 500, HOUSTON, TX 77024						11. Pool name or Wildcat LOCO HILLS; GLORIETA-YESO				
12. Location	Unit Ltr	Section	Township	Range	Lot	Feet from the	N/S Line	Feet from the	E/W Line	County
Surface:	I	4	17S	30E		1560	SOUTH	755	EAST	EDDY
BH:	I	3	17S	30E		2279	SOUTH	83	EAST	EDDY
13. Date Spudded 04/04/2021	14. Date T.D. Reached 05/13/2021		15. Date Rig Released 5/23/2021			16. Date Completed (Ready to Produce) 08/11/2021		17. Elevations (DF and RKB, RT, GR, etc.) 3713' GR		
18. Total Measured Depth of Well 4780'V/10400'M			19. Plug Back Measured Depth 4780'V/10400'M			20. Was Directional Survey Made? YES		21. Type Electric and Other Logs Run GAMMA RAY		
22. Producing Interval(s), of this completion - Top, Bottom, Name 4305'-10287'										
23. CASING RECORD (Report all strings set in well)										
CASING SIZE		WEIGHT LB./FT.		DEPTH SET		HOLE SIZE		CEMENTING RECORD		AMOUNT PULLED
13-3/8"		54.5		418'		17-1/2"		360 SXS (CIRC TO SURFACE)		0
9-5/8"		36		1700'		12-1/4"		460 SXS (CIRC TO SURFACE)		0
7"		32		5048'		8-3/4"		1510 SXS (CIRC TO SURFACE)		0
5-1/2"		20		10400'		8-3/4"		1510 SXS (CIRC TO SURFACE)		0
24. LINER RECORD										
SIZE	TOP	BOTTOM	SACKS CEMENT	SCREEN		25. TUBING RECORD				
						SIZE		DEPTH SET	PACKER SET	
						3-1/2"		4963'		
26. Perforation record (interval, size, and number) 7/12/2021 Pressure test csg to 6000# for 30 minutes, good test. 7/23/2021 RIH & cleanout to PBTD @ 10400'. RIH & perf from 5305'-10297', total 900 shots/ft @ .42 shot size. Frac in 25 stages w/ 13173426gal slickwater and 5034208# sand. 8/3/2021 rig down wireline and cleanout. RIH w/ 3-1/2" J-55 tbg @ 4963'						27. ACID, SHOT, FRACTURE, CEMENT, SQUEEZE, ETC.				
						DEPTH INTERVAL		AMOUNT AND KIND MATERIAL USED		
						5305'-10297'		13173426gal slickwater and 5034208# sand		
28. PRODUCTION										
Date First Production 08/13/2021		Production Method (Flowing, gas lift, pumping - Size and type pump) PUMPING ON ESP				Well Status (Prod. or Shut-in) PRODUCING				
Date of Test 09/05/2021	Hours Tested 24-HOURS	Choke Size NA	Prod'n For Test Period	Oil - Bbl 743	Gas - MCF 807	Water - Bbl. 2360	Gas - Oil Ratio			
Flow Tubing Press. 147	Casing Pressure 99	Calculated 24-Hour Rate	Oil - Bbl. 743	Gas - MCF 807	Water - Bbl. 2360	Oil Gravity - API - (Corr.)				
29. Disposition of Gas (Sold, used for fuel, vented, etc.) SOLD								30. Test Witnessed By JERRY MATHEWS		
31. List Attachments WBD, AS-DRILLED C-102, DIRECTIONAL PLANS AND FINAL C-104										
32. If a temporary pit was used at the well, attach a plat with the location of the temporary pit.								33. Rig Release Date:		
34. If an on-site burial was used at the well, report the exact location of the on-site burial: Latitude _____ Longitude _____ NAD83										
I hereby certify that the information shown on both sides of this form is true and complete to the best of my knowledge and belief Printed _____ Signature <i>Sarah Chapman</i> Name SARAH CHAPMAN Title REGULATORY DIRECTOR Date 02/16/2022 E-mail Address SCHAPMAN@SPURENERGY.COM										

INSTRUCTIONS

This form is to be filed with the appropriate District Office of the Division not later than 20 days after the completion of any newly-drilled or deepened well and not later than 60 days after completion of closure. When submitted as a completion report, this shall be accompanied by one copy of all electrical and radio-activity logs run on the well and a summary of all special tests conducted, including drill stem tests. All depths reported shall be measured depths. In the case of directionally drilled wells, true vertical depths shall also be reported. For multiple completions, items 11, 12 and 26-31 shall be reported for each zone.

INDICATE FORMATION TOPS IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE

Southeastern New Mexico		Northwestern New Mexico	
T. Anhy	T. Canyon	T. Ojo Alamo	T. Penn A"
T. Salt 500	T. Strawn	T. Kirtland	T. Penn. "B"
B. Salt 1000	T. Atoka	T. Fruitland	T. Penn. "C"
T. Yates 1350	T. Miss	T. Pictured Cliffs	T. Penn. "D"
T. 7 Rivers	T. Devonian	T. Cliff House	T. Leadville
T. Queen	T. Silurian	T. Menefee	T. Madison
T. Grayburg	T. Montoya	T. Point Lookout	T. Elbert
T. San Andres	T. Simpson	T. Mancos	T. McCracken
T. Glorieta 4425'	T. McKee	T. Gallup	T. Ignacio Otzte
T. Paddock	T. Ellenburger	Base Greenhorn	T. Granite
T. Blinebry	T. Gr. Wash	T. Dakota	
T. Tubb	T. Delaware Sand	T. Morrison	
T. Drinkard	T. Bone Springs	T. Todilto	
T. Abo	T. YESO 4500'	T. Entrada	
T. Wolfcamp	T.	T. Wingate	
T. Penn	T.	T. Chinle	
T. Cisco (Bough C)	T.	T. Permian	

OIL OR GAS SANDS OR ZONES

No. 1, from.....to.....

No. 3, from.....to.....

No. 2, from.....to.....

No. 4, from.....to.....

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.


No. 1, from.....to.....feet.....

No. 2, from.....to.....feet.....

No. 3, from.....to.....feet.....

LITHOLOGY RECORD (Attach additional sheet if necessary)

From	To	Thickness In Feet	Lithology	From	To	Thickness In Feet	Lithology
500	1000	500	SALT				
1000	1350	350	SILTSTONE				
1350	4425	3075	DOLOMITE				
4425	4500	75	DOLOMITE				

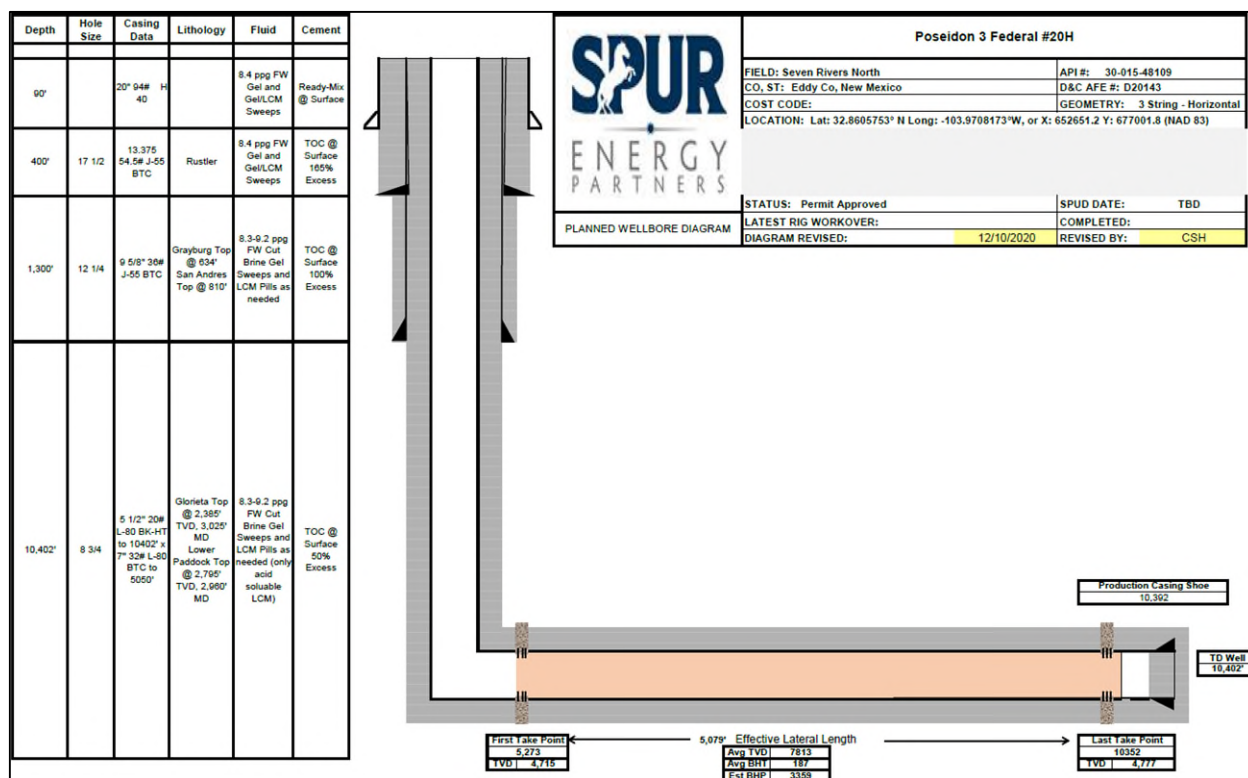

District I

1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

ACKNOWLEDGMENTS

Action 71047

ACKNOWLEDGMENTS

Operator: Spur Energy Partners LLC 9655 Katy Freeway Houston, TX 77024	OGRID: 328947
	Action Number: 71047
	Action Type: [C-104] Completion Packet (C-104C)

ACKNOWLEDGMENTS

☒	I hereby certify that the required Water Use Report has been, or will be, submitted for this wells completion.
☒	I hereby certify that the required FracFocus disclosure has been, or will be, submitted for this wells completion.

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 71047

CONDITIONS

Operator: Spur Energy Partners LLC 9655 Katy Freeway Houston, TX 77024	OGRID: 328947
	Action Number: 71047
	Action Type: [C-104] Completion Packet (C-104C)

CONDITIONS

Created By	Condition	Condition Date
plmartinez	File BLM 3160-4 Completion Report within 10 days to NMOCD after BLM approval.	2/16/2022