

Form 3160-5
(June 2019)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: October 31, 2021

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No. NMSF078771
6. If Indian, Allottee or Tribe Name

SUBMIT IN TRIPLICATE - Other instructions on page 2

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		7. If Unit of CA/Agreement, Name and/or No. NMNM78407E
2. Name of Operator LOGOS OPERATING LLC		8. Well Name and No. ROSA UNIT 652H
3a. Address 2010 AFTON PLACE FARMINGTON, NM 87401	3b. Phone No. (include area code) (505) 278-8720	9. API Well No. 30-039-31413
4. Location of Well (Footage, Sec., T.,R.,M., or Survey Description) SEC 25 T31N R06W NE/NE (A) 1075 FNL 259 FEL		10. Field and Pool or Exploratory Area BASIN MANCOS
		11. Country or Parish, State RIO ARRIBA COUNTY, NM

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION				
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off	
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Hydraulic Fracturing	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity	
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other	
	<input checked="" type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon		
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal		

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)
LOGOS Operating request a change in plans for the following:

Original bottom-hole location from 1089' FNL & 560' FWL to **new bottom-hole location 1219' FNL & 148' FWL**

Original TD @ 16,236' MD 6787' TVD to **new TD @ 16,346' MD 6984' TVD.**

Geology tops have been updated per changes.

Original KOP @ 6408' MD 6382' TVD to **new KOP @ 6334' MD 6322' TVD**

Original Landing point @ 7483' MD 7073' TVD to new **Landing point @ 7362' MD 6986' TVD**

Original Intermediate 8.75" hole size, 7" casing @ 6308' MD to **new hole size 12.25", 9.625" Intermediate casing @ 6244' MD 6232' TVD**

Original Production 6.125" hole size, 4.5" casing liner @ 16,236' MD to **new hole size 8.5", 5.5" Production casing, 16,346' MD 6984' TVD**

The 9.625" Intermediate & 5.5" production casing grade, weight and cement sacks have been update per casing depth changes.

Attached: New C102, Operation and Directional Drill plans.

14. I hereby certify that the foregoing is true and correct. Name (Printed/Typed) Etta Trujillo	Title Regulatory Specialist
Signature <i>Etta Trujillo</i>	Date 01/03/2022

THE SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

1625 N. French Drive, Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First Street, Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Drive, Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

Submit one copy to
Appropriate District Office

OIL CONSERVATION DIVISION
1220 South St. Francis Drive
Santa Fe, NM 87505

AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-039-31413		² Pool Code 97232		³ Pool Name BASIN MANCOS	
⁴ Property Code 320608		⁵ Property Name ROSA UNIT		⁶ Well Number 652H	
⁷ GRID No. 289408		⁸ Operator Name LOGOS OPERATING, LLC		⁹ Elevation 6372'	

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
A	25	31N	6W	1	1075	NORTH	259	EAST	RIO ARRIBA

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
D	26	31N	6W		1219	NORTH	148	WEST	RIO ARRIBA

¹² Dedicated Acres 592.16	N/2 - Section 25 N/2 - Section 26	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No. R-13457
---	--------------------------------------	-------------------------------	----------------------------------	------------------------------------

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

<p>LAST TAKE POINT (D) 1219' FNL, 148' FWL SECTION 26, T31N, R6W LAT: 36.874516°N LONG: 107.440078°W DATUM: NAD1927</p>	<p>FIRST PERFORATION (C) 1222' FNL, 330' FWL SECTION 26, T31N, R6W LAT: 36.874507°N LONG: 107.439454°W DATUM: NAD1927</p>	<p>FIRST TAKE POINT (B) 1369' FNL, 639' FWL SECTION 25, T31N, R6W LAT: 36.874092°N LONG: 107.409369°W DATUM: NAD1927</p>	<p>SURFACE LOCATION (A) 1075' FNL, 259' FWL SECTION 25, T31N, R6W LAT: 36.874900°N LONG: 107.408068°W DATUM: NAD1927</p>
<p>LAT: 36.8745218°N LONG: 107.4406816°W DATUM: NAD1983</p>	<p>LAT: 36.8745133°N LONG: 107.4400579°W DATUM: NAD1983</p>	<p>LAT: 36.8740982°N LONG: 107.4099716°W DATUM: NAD1983</p>	<p>LAT: 36.874906°N LONG: 107.408671°W DATUM: NAD1983</p>

17 OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom-hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Etta Trujillo 12/29/2021
Signature Date
Etta Trujillo
Printed Name
etrujillo@logosresourcesllc.com
E-mail Address


18 SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

Date Revised: DECEMBER 28, 2021
Date of Survey: MARCH 15, 2019
Signature and Seal of Professional Surveyor



JASON C. EDWARDS
Certificate Number 15269

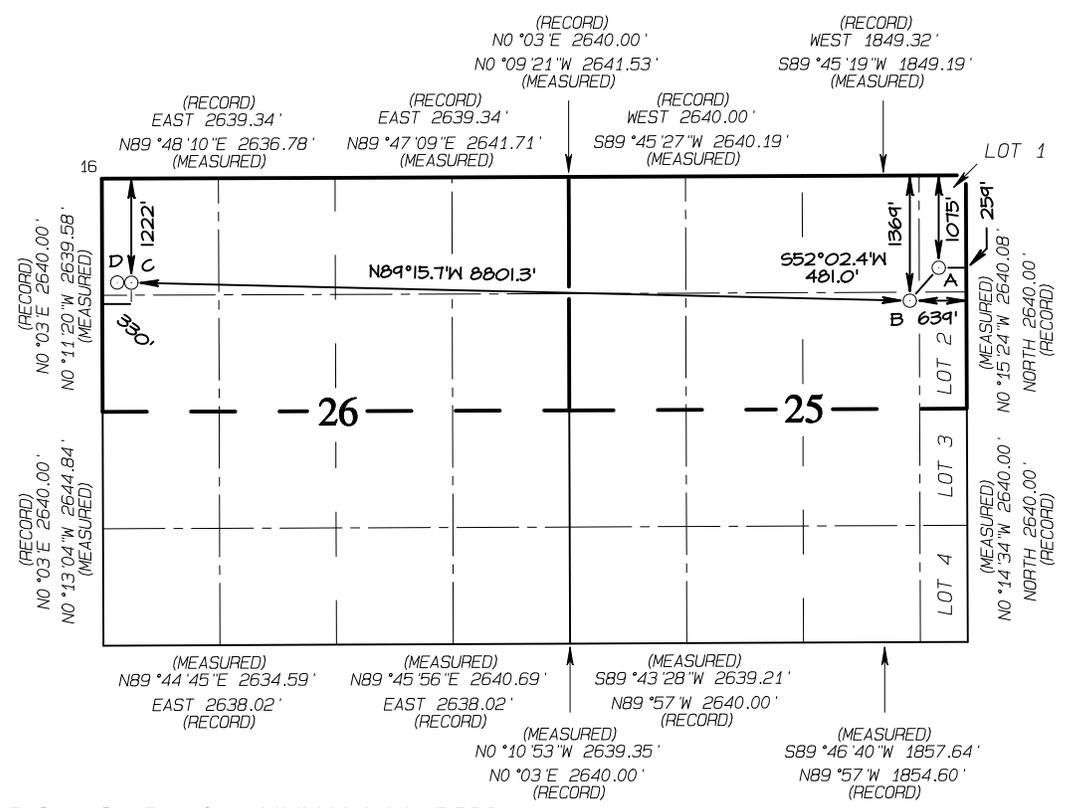



Company: Logos Operating LLC
 Project: Rio Arriba, NM NAD83
 Site: Rosa Unit 29
 Well: Rosa Unit #652H
 Wellbore: OH
 Design: Plan #6

PROJECT DETAILS: Rio Arriba, NM NAD83

Geodetic System: US State Plane 1983
 Datum: North American Datum 1983
 Ellipsoid: GRS 1980
 Zone: New Mexico Western Zone
 System Datum: Mean Sea Level
 Local North: True



WELL DETAILS: Rosa Unit #652H



GL 6372' & RKB 25' @ 6397.00usft

+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
0.00	0.00	2138066.74	2847299.69	36.8749060	-107.4086710 A6 (652H)

Plan: Plan #6 (Rosa Unit #652H/OH)

Created By: Janie Collins Date: 9:53, November 16 2021



Azimuths to True North:
 Magnetic North: 8.2°

Magnetic Field
 Strength: 49909.0 nT
 Dip Angle: 63.4°
 Date: 3/6/2019
 Model: HDGM2021_F1

DESIGN TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
Rosa 652H POE Rev 2	6986.00	-294.09	-380.42	2137770.96	2846920.58	36.8740982	-107.4099716
Rosa 652H BHL Rev 1	6984.00	-138.30	-9362.85	2137886.80	2837937.55	36.8745218	-107.4406816
Rosa 652H FPerf	6984.00	-141.07	-9202.87	2137884.74	2838097.54	36.8745143	-107.4401346

SECTION DETAILS


MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSect
0.00	0.00	0.000	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.000	400.00	0.00	0.00	0.00	0.00	0.00
522.19	3.67	136.982	522.10	-2.86	2.67	3.00	136.98	-2.62
6333.78	3.67	136.982	6321.81	-274.52	256.15	0.00	0.00	-252.07
7362.21	90.01	270.994	6986.00	-294.09	-380.42	9.00	133.95	384.72
16345.99	90.01	270.994	6984.00	-138.30	-9362.85	0.00	0.00	9363.87

CASING DETAILS

No casing data is available

FORMATION DETAILS

TVDPath	MDPath	Formation
2495.00	2499.13	Ojo Alamo
2623.00	2627.39	Kirtland
3084.00	3089.34	Fruitland
3413.00	3419.01	Pictured Cliffs
3507.00	3513.20	Lewis
4594.00	4602.43	Chacara
5421.00	5431.13	Cliff House
5469.00	5479.22	Menefee
5671.00	5681.64	Point Lookout
6157.00	6168.64	Mancos

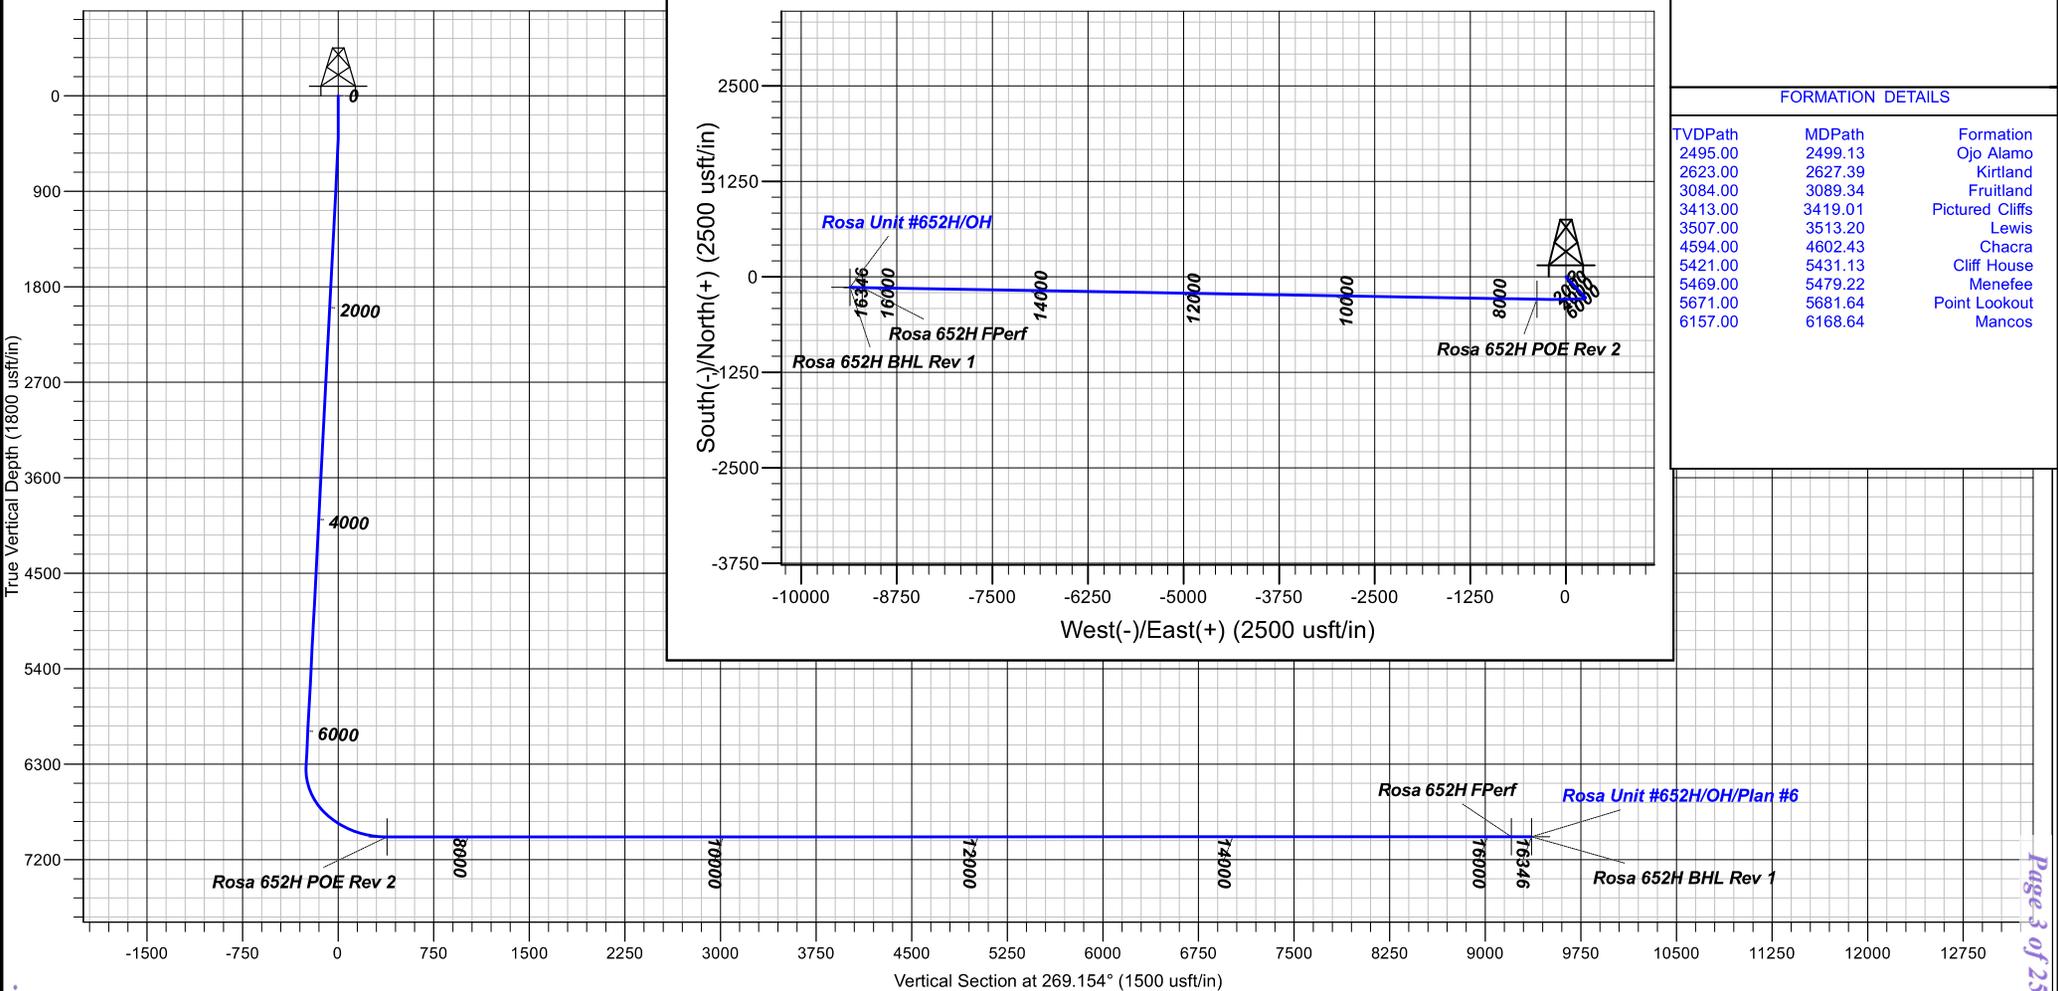

Released to Imaging: 3/2/2023 3:56:17 PM

Received by OCD: 3/2/2023 9:53 AM

Page 3 of 25



Logos Operating LLC

Rio Arriba, NM NAD83

Rosa Unit 29

Rosa Unit #652H - Slot A6 (652H)

OH

Plan: Plan #6

Standard Planning Report

16 November, 2021





Lonestar Consulting, LLC

Planning Report



Database:	Grand Junction	Local Co-ordinate Reference	Well Rosa Unit #652H - Slot A6 (652H)
Company:	Logos Operating LLC	TVD Reference:	GL 6372' & RKB 25' @ 6397.00usft
Project:	Rio Arriba, NM NAD83	MD Reference:	GL 6372' & RKB 25' @ 6397.00usft
Site:	Rosa Unit 29	North Reference:	True
Well:	Rosa Unit #652H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #6		

Project	Rio Arriba, NM NAD83		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Western Zone		

Site	Rosa Unit 29				
Site Position:		Northing:	2,138,126.53 usft	Latitude:	36.8750715
From:	Map	Easting:	2,847,195.58 usft	Longitude:	-107.4090261
Position Uncertainty:	0.00 usft	Slot Radius:	13.20 in	Grid Convergence:	0.25 °

Well	Rosa Unit #652H - Slot A6 (652H)					
Well Position	+N/-S	-60.26 usft	Northing:	2,138,066.74 usft	Latitude:	36.8749060
	+E/-W	103.84 usft	Easting:	2,847,299.69 usft	Longitude:	-107.4086710
Position Uncertainty		0.00 usft	Wellhead Elevation:	0.00 usft	Ground Level:	6,372.00 usft

Wellbore	OH				
Magnetics	Model Name	Sample Date	Declination	Dip Angle	Field Strength
			(°)	(°)	(nT)
	HDGM2021_FILE	3/6/2019	8.88	63.42	49,909.20000000

Design	Plan #6			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD)	+N/-S	+E/-W	Direction
	(usft)	(usft)	(usft)	(°)
	0.00	0.00	0.00	269.154

Plan Survey Tool Program	Date	11/16/2021		
Depth From	Depth To	Survey (Wellbore)	Tool Name	Remarks
(usft)	(usft)			
1	0.00	16,345.99 Plan #6 (OH)	MWD+HDGM	
			OWSG MWD + HDGM	

Plan Sections										
Measured	Inclination	Azimuth	Vertical	+N/-S	+E/-W	Dogleg	Build	Turn	TFO	Target
Depth	(°)	(°)	Depth	(usft)	(usft)	Rate	Rate	Rate	(°)	
(usft)			(usft)			(°/100usft)	(°/100usft)	(°/100usft)		
0.00	0.00	0.000	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
400.00	0.00	0.000	400.00	0.00	0.00	0.00	0.00	0.00	0.00	
522.19	3.67	136.982	522.10	-2.86	2.67	3.00	3.00	0.00	136.98	
6,333.78	3.67	136.982	6,321.81	-274.52	256.15	0.00	0.00	0.00	0.00	
7,362.21	90.01	270.994	6,986.00	-294.09	-380.42	9.00	8.40	13.03	133.95	Rosa 652H POE Rev
16,345.99	90.01	270.994	6,984.00	-138.30	-9,362.85	0.00	0.00	0.00	0.00	Rosa 652H BHL Rev



Lonestar Consulting, LLC

Planning Report



Database:	Grand Junction	Local Co-ordinate Reference	Well Rosa Unit #652H - Slot A6 (652H)
Company:	Logos Operating LLC	TVD Reference:	GL 6372' & RKB 25' @ 6397.00usft
Project:	Rio Arriba, NM NAD83	MD Reference:	GL 6372' & RKB 25' @ 6397.00usft
Site:	Rosa Unit 29	North Reference:	True
Well:	Rosa Unit #652H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #6		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
0.00	0.00	0.000	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100.00	0.00	0.000	100.00	0.00	0.00	0.00	0.00	0.00	0.00	
200.00	0.00	0.000	200.00	0.00	0.00	0.00	0.00	0.00	0.00	
300.00	0.00	0.000	300.00	0.00	0.00	0.00	0.00	0.00	0.00	
400.00	0.00	0.000	400.00	0.00	0.00	0.00	0.00	0.00	0.00	
500.00	3.00	136.982	499.95	-1.91	1.79	-1.76	3.00	3.00	0.00	
522.19	3.67	136.982	522.10	-2.86	2.67	-2.62	3.00	3.00	0.00	
600.00	3.67	136.982	599.76	-6.49	6.06	-5.96	0.00	0.00	0.00	
700.00	3.67	136.982	699.55	-11.17	10.42	-10.26	0.00	0.00	0.00	
800.00	3.67	136.982	799.35	-15.84	14.78	-14.55	0.00	0.00	0.00	
900.00	3.67	136.982	899.14	-20.52	19.14	-18.84	0.00	0.00	0.00	
1,000.00	3.67	136.982	998.94	-25.19	23.51	-23.13	0.00	0.00	0.00	
1,100.00	3.67	136.982	1,098.73	-29.87	27.87	-27.42	0.00	0.00	0.00	
1,200.00	3.67	136.982	1,198.53	-34.54	32.23	-31.72	0.00	0.00	0.00	
1,300.00	3.67	136.982	1,298.33	-39.22	36.59	-36.01	0.00	0.00	0.00	
1,400.00	3.67	136.982	1,398.12	-43.89	40.95	-40.30	0.00	0.00	0.00	
1,500.00	3.67	136.982	1,497.92	-48.56	45.31	-44.59	0.00	0.00	0.00	
1,600.00	3.67	136.982	1,597.71	-53.24	49.68	-48.88	0.00	0.00	0.00	
1,700.00	3.67	136.982	1,697.51	-57.91	54.04	-53.18	0.00	0.00	0.00	
1,800.00	3.67	136.982	1,797.30	-62.59	58.40	-57.47	0.00	0.00	0.00	
1,900.00	3.67	136.982	1,897.10	-67.26	62.76	-61.76	0.00	0.00	0.00	
2,000.00	3.67	136.982	1,996.89	-71.94	67.12	-66.05	0.00	0.00	0.00	
2,100.00	3.67	136.982	2,096.69	-76.61	71.49	-70.35	0.00	0.00	0.00	
2,200.00	3.67	136.982	2,196.48	-81.29	75.85	-74.64	0.00	0.00	0.00	
2,300.00	3.67	136.982	2,296.28	-85.96	80.21	-78.93	0.00	0.00	0.00	
2,400.00	3.67	136.982	2,396.08	-90.63	84.57	-83.22	0.00	0.00	0.00	
2,500.00	3.67	136.982	2,495.87	-95.31	88.93	-87.51	0.00	0.00	0.00	
2,600.00	3.67	136.982	2,595.67	-99.98	93.29	-91.81	0.00	0.00	0.00	
2,700.00	3.67	136.982	2,695.46	-104.66	97.66	-96.10	0.00	0.00	0.00	
2,800.00	3.67	136.982	2,795.26	-109.33	102.02	-100.39	0.00	0.00	0.00	
2,900.00	3.67	136.982	2,895.05	-114.01	106.38	-104.68	0.00	0.00	0.00	
3,000.00	3.67	136.982	2,994.85	-118.68	110.74	-108.98	0.00	0.00	0.00	
3,100.00	3.67	136.982	3,094.64	-123.36	115.10	-113.27	0.00	0.00	0.00	
3,200.00	3.67	136.982	3,194.44	-128.03	119.46	-117.56	0.00	0.00	0.00	
3,300.00	3.67	136.982	3,294.23	-132.70	123.83	-121.85	0.00	0.00	0.00	
3,400.00	3.67	136.982	3,394.03	-137.38	128.19	-126.14	0.00	0.00	0.00	
3,500.00	3.67	136.982	3,493.82	-142.05	132.55	-130.44	0.00	0.00	0.00	
3,600.00	3.67	136.982	3,593.62	-146.73	136.91	-134.73	0.00	0.00	0.00	
3,700.00	3.67	136.982	3,693.42	-151.40	141.27	-139.02	0.00	0.00	0.00	
3,800.00	3.67	136.982	3,793.21	-156.08	145.63	-143.31	0.00	0.00	0.00	
3,900.00	3.67	136.982	3,893.01	-160.75	150.00	-147.61	0.00	0.00	0.00	
4,000.00	3.67	136.982	3,992.80	-165.43	154.36	-151.90	0.00	0.00	0.00	
4,100.00	3.67	136.982	4,092.60	-170.10	158.72	-156.19	0.00	0.00	0.00	
4,200.00	3.67	136.982	4,192.39	-174.77	163.08	-160.48	0.00	0.00	0.00	
4,300.00	3.67	136.982	4,292.19	-179.45	167.44	-164.77	0.00	0.00	0.00	
4,400.00	3.67	136.982	4,391.98	-184.12	171.80	-169.07	0.00	0.00	0.00	
4,500.00	3.67	136.982	4,491.78	-188.80	176.17	-173.36	0.00	0.00	0.00	
4,600.00	3.67	136.982	4,591.57	-193.47	180.53	-177.65	0.00	0.00	0.00	
4,700.00	3.67	136.982	4,691.37	-198.15	184.89	-181.94	0.00	0.00	0.00	
4,800.00	3.67	136.982	4,791.17	-202.82	189.25	-186.23	0.00	0.00	0.00	
4,900.00	3.67	136.982	4,890.96	-207.50	193.61	-190.53	0.00	0.00	0.00	
5,000.00	3.67	136.982	4,990.76	-212.17	197.97	-194.82	0.00	0.00	0.00	
5,100.00	3.67	136.982	5,090.55	-216.84	202.34	-199.11	0.00	0.00	0.00	



Database:	Grand Junction	Local Co-ordinate Reference	Well Rosa Unit #652H - Slot A6 (652H)
Company:	Logos Operating LLC	TVD Reference:	GL 6372' & RKB 25' @ 6397.00usft
Project:	Rio Arriba, NM NAD83	MD Reference:	GL 6372' & RKB 25' @ 6397.00usft
Site:	Rosa Unit 29	North Reference:	True
Well:	Rosa Unit #652H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #6		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
5,200.00	3.67	136.982	5,190.35	-221.52	206.70	-203.40	0.00	0.00	0.00	
5,300.00	3.67	136.982	5,290.14	-226.19	211.06	-207.70	0.00	0.00	0.00	
5,400.00	3.67	136.982	5,389.94	-230.87	215.42	-211.99	0.00	0.00	0.00	
5,500.00	3.67	136.982	5,489.73	-235.54	219.78	-216.28	0.00	0.00	0.00	
5,600.00	3.67	136.982	5,589.53	-240.22	224.14	-220.57	0.00	0.00	0.00	
5,700.00	3.67	136.982	5,689.32	-244.89	228.51	-224.86	0.00	0.00	0.00	
5,800.00	3.67	136.982	5,789.12	-249.57	232.87	-229.16	0.00	0.00	0.00	
5,900.00	3.67	136.982	5,888.91	-254.24	237.23	-233.45	0.00	0.00	0.00	
6,000.00	3.67	136.982	5,988.71	-258.91	241.59	-237.74	0.00	0.00	0.00	
6,100.00	3.67	136.982	6,088.51	-263.59	245.95	-242.03	0.00	0.00	0.00	
6,200.00	3.67	136.982	6,188.30	-268.26	250.31	-246.33	0.00	0.00	0.00	
6,300.00	3.67	136.982	6,288.10	-272.94	254.68	-250.62	0.00	0.00	0.00	
6,333.78	3.67	136.982	6,321.81	-274.52	256.15	-252.07	0.00	0.00	0.00	
6,400.00	4.31	233.341	6,387.93	-277.55	255.60	-251.47	9.00	0.98	145.51	
6,500.00	12.69	259.183	6,486.77	-281.87	241.76	-237.57	9.00	8.37	25.84	
6,600.00	21.57	264.299	6,582.24	-285.76	212.63	-208.39	9.00	8.88	5.12	
6,700.00	30.52	266.510	6,672.00	-289.14	168.91	-164.62	9.00	8.95	2.21	
6,800.00	39.49	267.787	6,753.83	-291.92	111.67	-107.35	9.00	8.97	1.28	
6,900.00	48.47	268.654	6,825.72	-294.03	42.34	-37.99	9.00	8.98	0.87	
7,000.00	57.45	269.308	6,885.89	-295.42	-37.39	41.75	9.00	8.98	0.65	
7,100.00	66.44	269.842	6,932.87	-296.06	-125.54	129.90	9.00	8.99	0.53	
7,200.00	75.43	270.307	6,965.50	-295.93	-219.96	224.31	9.00	8.99	0.47	
7,300.00	84.42	270.735	6,982.98	-295.03	-318.31	322.64	9.00	8.99	0.43	
7,362.21	90.01	270.994	6,986.00	-294.09	-380.42	384.72	9.00	8.99	0.42	
7,400.00	90.01	270.994	6,985.99	-293.44	-418.20	422.49	0.00	0.00	0.00	
7,500.00	90.01	270.994	6,985.97	-291.70	-518.19	522.44	0.00	0.00	0.00	
7,600.00	90.01	270.994	6,985.95	-289.97	-618.17	622.39	0.00	0.00	0.00	
7,700.00	90.01	270.994	6,985.92	-288.23	-718.16	722.34	0.00	0.00	0.00	
7,800.00	90.01	270.994	6,985.90	-286.50	-818.14	822.29	0.00	0.00	0.00	
7,900.00	90.01	270.994	6,985.88	-284.76	-918.13	922.23	0.00	0.00	0.00	
8,000.00	90.01	270.994	6,985.86	-283.03	-1,018.11	1,022.18	0.00	0.00	0.00	
8,100.00	90.01	270.994	6,985.84	-281.30	-1,118.10	1,122.13	0.00	0.00	0.00	
8,200.00	90.01	270.994	6,985.81	-279.56	-1,218.08	1,222.08	0.00	0.00	0.00	
8,300.00	90.01	270.994	6,985.79	-277.83	-1,318.07	1,322.03	0.00	0.00	0.00	
8,400.00	90.01	270.994	6,985.77	-276.09	-1,418.05	1,421.98	0.00	0.00	0.00	
8,500.00	90.01	270.994	6,985.75	-274.36	-1,518.04	1,521.92	0.00	0.00	0.00	
8,600.00	90.01	270.994	6,985.72	-272.63	-1,618.02	1,621.87	0.00	0.00	0.00	
8,700.00	90.01	270.994	6,985.70	-270.89	-1,718.01	1,721.82	0.00	0.00	0.00	
8,800.00	90.01	270.994	6,985.68	-269.16	-1,817.99	1,821.77	0.00	0.00	0.00	
8,900.00	90.01	270.994	6,985.66	-267.42	-1,917.98	1,921.72	0.00	0.00	0.00	
9,000.00	90.01	270.994	6,985.64	-265.69	-2,017.96	2,021.67	0.00	0.00	0.00	
9,100.00	90.01	270.994	6,985.61	-263.96	-2,117.95	2,121.62	0.00	0.00	0.00	
9,200.00	90.01	270.994	6,985.59	-262.22	-2,217.93	2,221.56	0.00	0.00	0.00	
9,300.00	90.01	270.994	6,985.57	-260.49	-2,317.92	2,321.51	0.00	0.00	0.00	
9,400.00	90.01	270.994	6,985.55	-258.75	-2,417.90	2,421.46	0.00	0.00	0.00	
9,500.00	90.01	270.994	6,985.52	-257.02	-2,517.89	2,521.41	0.00	0.00	0.00	
9,600.00	90.01	270.994	6,985.50	-255.28	-2,617.87	2,621.36	0.00	0.00	0.00	
9,700.00	90.01	270.994	6,985.48	-253.55	-2,717.86	2,721.31	0.00	0.00	0.00	
9,800.00	90.01	270.994	6,985.46	-251.82	-2,817.84	2,821.25	0.00	0.00	0.00	
9,900.00	90.01	270.994	6,985.44	-250.08	-2,917.83	2,921.20	0.00	0.00	0.00	
10,000.00	90.01	270.994	6,985.41	-248.35	-3,017.81	3,021.15	0.00	0.00	0.00	
10,100.00	90.01	270.994	6,985.39	-246.61	-3,117.80	3,121.10	0.00	0.00	0.00	
10,200.00	90.01	270.994	6,985.37	-244.88	-3,217.78	3,221.05	0.00	0.00	0.00	



Lonestar Consulting, LLC

Planning Report



Database:	Grand Junction	Local Co-ordinate Reference	Well Rosa Unit #652H - Slot A6 (652H)
Company:	Logos Operating LLC	TVD Reference:	GL 6372' & RKB 25' @ 6397.00usft
Project:	Rio Arriba, NM NAD83	MD Reference:	GL 6372' & RKB 25' @ 6397.00usft
Site:	Rosa Unit 29	North Reference:	True
Well:	Rosa Unit #652H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #6		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
10,300.00	90.01	270.994	6,985.35	-243.15	-3,317.77	3,321.00	0.00	0.00	0.00	
10,400.00	90.01	270.994	6,985.32	-241.41	-3,417.75	3,420.95	0.00	0.00	0.00	
10,500.00	90.01	270.994	6,985.30	-239.68	-3,517.74	3,520.89	0.00	0.00	0.00	
10,600.00	90.01	270.994	6,985.28	-237.94	-3,617.72	3,620.84	0.00	0.00	0.00	
10,700.00	90.01	270.994	6,985.26	-236.21	-3,717.71	3,720.79	0.00	0.00	0.00	
10,800.00	90.01	270.994	6,985.23	-234.48	-3,817.69	3,820.74	0.00	0.00	0.00	
10,900.00	90.01	270.994	6,985.21	-232.74	-3,917.68	3,920.69	0.00	0.00	0.00	
11,000.00	90.01	270.994	6,985.19	-231.01	-4,017.66	4,020.64	0.00	0.00	0.00	
11,100.00	90.01	270.994	6,985.17	-229.27	-4,117.65	4,120.58	0.00	0.00	0.00	
11,200.00	90.01	270.994	6,985.15	-227.54	-4,217.63	4,220.53	0.00	0.00	0.00	
11,300.00	90.01	270.994	6,985.12	-225.80	-4,317.62	4,320.48	0.00	0.00	0.00	
11,400.00	90.01	270.994	6,985.10	-224.07	-4,417.60	4,420.43	0.00	0.00	0.00	
11,500.00	90.01	270.994	6,985.08	-222.34	-4,517.59	4,520.38	0.00	0.00	0.00	
11,600.00	90.01	270.994	6,985.06	-220.60	-4,617.57	4,620.33	0.00	0.00	0.00	
11,700.00	90.01	270.994	6,985.03	-218.87	-4,717.56	4,720.27	0.00	0.00	0.00	
11,800.00	90.01	270.994	6,985.01	-217.13	-4,817.54	4,820.22	0.00	0.00	0.00	
11,900.00	90.01	270.994	6,984.99	-215.40	-4,917.53	4,920.17	0.00	0.00	0.00	
12,000.00	90.01	270.994	6,984.97	-213.67	-5,017.51	5,020.12	0.00	0.00	0.00	
12,100.00	90.01	270.994	6,984.95	-211.93	-5,117.50	5,120.07	0.00	0.00	0.00	
12,200.00	90.01	270.994	6,984.92	-210.20	-5,217.48	5,220.02	0.00	0.00	0.00	
12,300.00	90.01	270.994	6,984.90	-208.46	-5,317.47	5,319.97	0.00	0.00	0.00	
12,400.00	90.01	270.994	6,984.88	-206.73	-5,417.45	5,419.91	0.00	0.00	0.00	
12,500.00	90.01	270.994	6,984.86	-205.00	-5,517.44	5,519.86	0.00	0.00	0.00	
12,600.00	90.01	270.994	6,984.83	-203.26	-5,617.42	5,619.81	0.00	0.00	0.00	
12,700.00	90.01	270.994	6,984.81	-201.53	-5,717.41	5,719.76	0.00	0.00	0.00	
12,800.00	90.01	270.994	6,984.79	-199.79	-5,817.39	5,819.71	0.00	0.00	0.00	
12,900.00	90.01	270.994	6,984.77	-198.06	-5,917.38	5,919.66	0.00	0.00	0.00	
13,000.00	90.01	270.994	6,984.75	-196.33	-6,017.36	6,019.60	0.00	0.00	0.00	
13,100.00	90.01	270.994	6,984.72	-194.59	-6,117.35	6,119.55	0.00	0.00	0.00	
13,200.00	90.01	270.994	6,984.70	-192.86	-6,217.33	6,219.50	0.00	0.00	0.00	
13,300.00	90.01	270.994	6,984.68	-191.12	-6,317.32	6,319.45	0.00	0.00	0.00	
13,400.00	90.01	270.994	6,984.66	-189.39	-6,417.30	6,419.40	0.00	0.00	0.00	
13,500.00	90.01	270.994	6,984.63	-187.65	-6,517.29	6,519.35	0.00	0.00	0.00	
13,600.00	90.01	270.994	6,984.61	-185.92	-6,617.27	6,619.30	0.00	0.00	0.00	
13,700.00	90.01	270.994	6,984.59	-184.19	-6,717.26	6,719.24	0.00	0.00	0.00	
13,800.00	90.01	270.994	6,984.57	-182.45	-6,817.24	6,819.19	0.00	0.00	0.00	
13,900.00	90.01	270.994	6,984.54	-180.72	-6,917.23	6,919.14	0.00	0.00	0.00	
14,000.00	90.01	270.994	6,984.52	-178.98	-7,017.21	7,019.09	0.00	0.00	0.00	
14,100.00	90.01	270.994	6,984.50	-177.25	-7,117.20	7,119.04	0.00	0.00	0.00	
14,200.00	90.01	270.994	6,984.48	-175.52	-7,217.18	7,218.99	0.00	0.00	0.00	
14,300.00	90.01	270.994	6,984.46	-173.78	-7,317.17	7,318.93	0.00	0.00	0.00	
14,400.00	90.01	270.994	6,984.43	-172.05	-7,417.15	7,418.88	0.00	0.00	0.00	
14,500.00	90.01	270.994	6,984.41	-170.31	-7,517.14	7,518.83	0.00	0.00	0.00	
14,600.00	90.01	270.994	6,984.39	-168.58	-7,617.12	7,618.78	0.00	0.00	0.00	
14,700.00	90.01	270.994	6,984.37	-166.85	-7,717.11	7,718.73	0.00	0.00	0.00	
14,800.00	90.01	270.994	6,984.34	-165.11	-7,817.09	7,818.68	0.00	0.00	0.00	
14,900.00	90.01	270.994	6,984.32	-163.38	-7,917.08	7,918.63	0.00	0.00	0.00	
15,000.00	90.01	270.994	6,984.30	-161.64	-8,017.06	8,018.57	0.00	0.00	0.00	
15,100.00	90.01	270.994	6,984.28	-159.91	-8,117.05	8,118.52	0.00	0.00	0.00	
15,200.00	90.01	270.994	6,984.26	-158.17	-8,217.03	8,218.47	0.00	0.00	0.00	
15,300.00	90.01	270.994	6,984.23	-156.44	-8,317.02	8,318.42	0.00	0.00	0.00	
15,400.00	90.01	270.994	6,984.21	-154.71	-8,417.00	8,418.37	0.00	0.00	0.00	
15,500.00	90.01	270.994	6,984.19	-152.97	-8,516.99	8,518.32	0.00	0.00	0.00	



Lonestar Consulting, LLC

Planning Report



Database:	Grand Junction	Local Co-ordinate Reference	Well Rosa Unit #652H - Slot A6 (652H)
Company:	Logos Operating LLC	TVD Reference:	GL 6372' & RKB 25' @ 6397.00usft
Project:	Rio Arriba, NM NAD83	MD Reference:	GL 6372' & RKB 25' @ 6397.00usft
Site:	Rosa Unit 29	North Reference:	True
Well:	Rosa Unit #652H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #6		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
15,600.00	90.01	270.994	6,984.17	-151.24	-8,616.97	8,618.26	0.00	0.00	0.00	
15,700.00	90.01	270.994	6,984.14	-149.50	-8,716.96	8,718.21	0.00	0.00	0.00	
15,800.00	90.01	270.994	6,984.12	-147.77	-8,816.94	8,818.16	0.00	0.00	0.00	
15,900.00	90.01	270.994	6,984.10	-146.04	-8,916.93	8,918.11	0.00	0.00	0.00	
16,000.00	90.01	270.994	6,984.08	-144.30	-9,016.91	9,018.06	0.00	0.00	0.00	
16,100.00	90.01	270.994	6,984.05	-142.57	-9,116.90	9,118.01	0.00	0.00	0.00	
16,200.00	90.01	270.994	6,984.03	-140.83	-9,216.88	9,217.95	0.00	0.00	0.00	
16,300.00	90.01	270.994	6,984.01	-139.10	-9,316.87	9,317.90	0.00	0.00	0.00	
16,345.99	90.01	270.994	6,984.00	-138.30	-9,362.85	9,363.87	0.00	0.00	0.00	

Design Targets										
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude	
Rosa 652H FPerf - hit/miss target - Shape	0.00	0.000	6,984.00	-141.07	-9,202.87	2,137,884.73	2,838,097.54	36.8745143	-107.4401347	
- plan misses target center by 0.04usft at 16185.98usft MD (6984.04 TVD, -141.08 N, -9202.87 E)										
- Point										
Rosa 652H BHL Rev 1 - plan hits target center - Point	0.00	0.000	6,984.00	-138.30	-9,362.85	2,137,886.80	2,837,937.55	36.8745218	-107.4406816	
Rosa 652H POE Rev 2 - plan hits target center - Point	0.00	0.000	6,986.00	-294.09	-380.42	2,137,770.96	2,846,920.58	36.8740982	-107.4099716	

Formations						
Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)	
2,499.13	2,495.00	Ojo Alamo		0.00	0.000	
2,627.39	2,623.00	Kirtland		0.00	0.000	
3,089.34	3,084.00	Fruitland		0.00	0.000	
3,419.01	3,413.00	Pictured Cliffs		0.00	0.000	
3,513.20	3,507.00	Lewis		0.00	0.000	
4,602.43	4,594.00	Chacra		0.00	0.000	
5,431.13	5,421.00	Cliff House		0.00	0.000	
5,479.22	5,469.00	Menefee		0.00	0.000	
5,681.64	5,671.00	Point Lookout		0.00	0.000	
6,168.64	6,157.00	Mancos		0.00	0.000	



Lonestar Consulting, LLC
Planning Report



Database:	Grand Junction	Local Co-ordinate Reference	Well Rosa Unit #652H - Slot A6 (652H)
Company:	Logos Operating LLC	TVD Reference:	GL 6372' & RKB 25' @ 6397.00usft
Project:	Rio Arriba, NM NAD83	MD Reference:	GL 6372' & RKB 25' @ 6397.00usft
Site:	Rosa Unit 29	North Reference:	True
Well:	Rosa Unit #652H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #6		

Plan Annotations				
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
400.00	400.00	0.00	0.00	Start Build 3.00
522.19	522.10	-2.86	2.67	Start 5811.59 hold at 522.19 MD
6,333.78	6,321.81	-274.52	256.15	Start DLS 9.00 TFO 133.95
7,362.21	6,986.00	-294.09	-380.42	Start 8983.78 hold at 7362.21 MD
16,185.99	6,984.04	-141.08	-9,202.87	First Perf @ 16,185' MD
16,185.99	6,984.04	-141.08	-9,202.87	36.8745143, -107.4401347
16,345.99	6,984.00	-138.30	-9,362.85	TD at 16345.99



LOGOS Operating, LLC Operations Plan

Note: This procedure will be adjusted onsite based upon actual conditions

Date:	December 10, 2021	Pool:	Basin Mancos
Well Name:	Rosa Unit 652H	GL Elevation:	6,372'
Surface Location:	Sec 25, T31N, R6W 1075 FNL, 259 FEL (36.874906° N, 107.408671° W – NAD83)	Measured Depth:	16,346' (KB)
Bottom Hole Location:	Sec 26, T31N, R6W 1219 FNL, 148 FWL (36.8745218° N, 107.4406816° W – NAD83)	County:	Rio Arriba

Lease Serial #NMSF078771, CA Serial #NMNM78407E

I. GEOLOGY

A. Formation Tops (Based on 25' KB Elevation): Estimated top of important geological markers:
SURFACE FORMATION – NACIMIENTO

NAME	MD	TVD	NAME	MD	TVD
OJO ALAMO	2499	2495	*POINT LOOKOUT	5682	5671
KIRTLAND	2627	2623	*MANCOS	6169	6157
*FRUITLAND	3089	3084	KICKOFF POINT	6334	6322
*PICTURED CLIFFS	3419	3413	LANDING POINT	7362	6986
LEWIS	3513	3507			
CHACRA	4602	4594			
*CLIFF HOUSE	5431	5421			
MENEFEE	5479	5469	TD	16,346	6,984

* Indicates depth at which anticipated water, oil, gas or other mineral bearing formations are expected to be encountered.

B. MUD LOGGING PROGRAM: Mudlogger on location from KOP to TD.

C. LOGGING PROGRAM: LWD GR from surface casing to TD.

D. NATURAL GAUGES: Gauge any noticeable increases in gas flow. Record all gauges in Tour book and on morning reports.

II. DRILLING

A. MUD PROGRAM: LSND mud (WBM) will be used to drill the 17-1/2" surface hole as well as the 12-1/4" directional vertical hole. A LSND (WBM) or (OBM) will be used to drill the 8-1/2" curve and lateral portion of the wellbore. Treat for lost circulation as necessary. Obtain 100% returns prior to cementing. Notify Engineering of any mud losses.

Above ground steel pits will be used for fluid and cuttings while drilling. In the unlikely event that a tank develops a leak, upon immediate visual discovery, the fluid would be transferred to another tank and contaminated soil would be removed and disposed. Any leaks, spills or other undesirable events will be reported in accordance with BLM NTL 3A. Rig crews will monitor the tanks at all times.

ROSA UNIT 652H



- B. BOP TESTING:** The BOPE will be tested to **250 psi (Low) for 5 minutes** and **1500 psi (High) for 10 minutes**. Pressure test surface casing to **600 psi for 30 minutes** and intermediate casing to **1500 psi for 30 minutes**. Utilize a BOPE Testing Unit with a recording chart and appropriate test plug for testing. The drum brakes will be inspected and tested each tour. BOP equipment will be tested every 30 days, after any repairs are made to the BOP equipment, and after the BOP equipment is subjected to pressure. Annular preventers will be functionally operated at least once per week. Pipe and blind rams shall be activated each trip or but not more than once a day. The New Mexico Oil & Gas Conservation Commission and the BLM will be notified 24 hours in advance of testing of BOPE. **All tests and inspections will be recorded and logged with time and results.** A full BOP test will be conducted when initially installed for the first well on the pad or if seals subject to test pressure are broken, following related repairs and at a minimum of 30 day intervals. A BOPE Shell Test only will be conducted for subsequent wells on the pad when seals subject to pressure have not been broken or repaired and fall within the 30 day interval of first full test.

III. MATERIALS

A. CASING EQUIPMENT:

CASING TYPE	OHSIZE (IN)	GL DEPTH (MD)	CSG SIZE	WEIGHT	GRADE	CONN
SURFACE	17.5"	320' or greater	13.375"	54.5 LBS	J-55 or equiv	LTC/BTC
INTERMEDIATE	12.25"	6,244'	9.625"	43.5 LBS	N-80 or equiv	LTC/BTC
PRODUCTION	8.5"	16,346'	5.5"	20 LBS	P-110 or equiv	LTC/BTC

NOTE: All casing depths are approximate, based on 25' KB elevation and will be adjusted based on actual drilling KB and drilling conditions +/- 50'. Weights, grades and connections will be based on availability and may vary but will be equivalent or greater.

B. FLOAT EQUIPMENT:

- SURFACE CASING:** 13-3/8" notched regular pattern guide shoe. Run (1) standard centralizer on each of the bottom (3) joints of Surface Casing.
- INTERMEDIATE CASING:** 9-5/8" cement nose guide shoe with a self-fill insert float. Place float collar one joint above the shoe. Install (1) centralizer on each of the bottom (3) joints and one standard centralizer every (3) joints to 2,500 ft. Run (1) centralizer at 2,500 ft., 2,300ft., 2,000ft., 1,500 ft., and 1,000 ft. Optional use of DV Tools (2) will be strategically placed above loss circulation zones anticipated in the Mesaverde and Fruitland Coal. Optional use of cancellation plugs for DV tools may be used if losses while cementing are not encountered.
- PRODUCTION CASING:** Run 5-1/2" casing with cement nose guide Float Shoe, 5-1/2" full or pup joints as necessary, Landing Collar, 5-1/2" full or pup joints as necessary, at least (1) one Toe Sleeve (Sliding Sleeve) positioned inside the applicable production area. Centralizer program will be determined by wellbore conditions. Production casing to be pressure tested during completion operations with frac stack installed.

C. CEMENTING:

(Note: Cement type and volumes may be adjusted onsite due to actual conditions and availability)

- SURFACE:** Casing shall be set at ~ 320' and cemented to surface. TOC at Surface. 263 sks of 15.8 ppg Type Neat G, 1.18 cuft/sk yield or equivalent 223 sks of 14.6 ppg Type III with 1.39 cuft/sk yield, 30% excess.



2. **INTERMEDIATE:** Intermediate casing shall be kept fluid filled while running in to the hole to meet BLM minimum collapse requirements. The intermediate casing will be cemented in 2 or 3 stages using DV/STAGE tools in order to reduce cement losses and maximize cement coverage. Operator proposes optional DV tools above anticipated loss circulation zones in the Mesaverde and in the Fruitland coal. If losses are not observed during the second stage a cancelation plug will be pumped and the remaining cement will be pumped during stage 2. If cement does not circulate to the DV tool(s) or to surface, a CBL will be run to determine TOC.

	Top (ft)	Footage (ft)	Cement (ft3/ft) Annular Capacity	Excess (30%)	Total (ft3)	Total (bbl)	Slurry Yield (ft3/sk)	Sacks Cement	Density (PPG)
Stage 1 Tail	5,782	462	0.31318	1.3	206	37	1.15	179	15.8
Stage 1 Lead	4,653	1,129	0.31318	1.3	460	82	2.30	200	12.3
					665	118		379	
Stage 2 Tail	3,619	1,034	0.31318	1.3	421	75	1.50	281	13.5
Stage 2 Lead	3,139	480	0.31318	1.3	195	35	2.30	85	12.3
					616	110		366	
Stage 3 Tail	2,389	750	0.31318	1.3	305	54	1.99	153	12.8
Stage 3 Lead	320	2,069	0.31318	1.3	842	150	2.53	333	12
Stage 3 Lead	-	320	0.36268	1	116	21	2.53	46	12
					1,264	225		532	
All Stage Totals					2,545	453		1,277	

Calculations based on 30% excess for open hole and cement to surface. Actual excess pumped will be determined by well conditions.

3. **PRODUCTION:** Production casing will be cemented in 1 stage with 100' of cement overlap above intermediate shoe. A CBL, or alternatively, a Temperature Survey will be used to determine TOC.

	Top (ft)	Footage (ft)	Cement (ft3/ft) Annular Capacity	Excess (15%)	Total (ft3)	Total (bbl)	Slurry Yield (ft3/sk)	Sacks Cement	Density (PPG)
Cased Lead	6,144	100	0.2531	1	25	5	1.56	16	13
Open Hole Lead	6,244	10,102	0.2291	1.15	2,672	476	1.56	1,713	13
					2,697	480		1,729	

Calculations based on 15% excess for open hole and 100' overlap into intermediate casing. Actual volumes will vary.

Cement calculations are used for volume estimation. Well conditions will dictate final cement job design. Actual volumes will be calculated and determined by conditions onsite. All cement slurries will meet or exceed minimum BLM and New Mexico Oil Conservation Division requirements. Slurries used will be the slurries listed above or equivalent slurries depending on service provider selected. Cement yields may change depending on slurries selected. All waiting on cement times shall be a minimum of 8 hours or adequate to achieve a minimum of 500 psi compressive strength at the casing shoe prior to drilling out.

IV. COMPLETION

A. CBL

CBLs and/or Temperature Surveys will be performed as needed or required to determine cement top if cement is not circulated.

B. PRESSURE TEST

C. Pressure test 5-1/2" casing to 1537 psi (0.22 psi/ft * 6986' TVD) for 30 minutes. Increase pressure to Open Toe sleeves.

D. STIMULATION

ROSA UNIT 652H



Stimulate with sand and water. Isolate stages with flow through or dissolvable frac plugs. Drill out frac plugs as required and flowback lateral.



E. PRODUCTION TUBING

2-7/8", 6.5#, J-55 or L-80, EUE tubing will be run once volumes and pressures dictate. Due to the extremely high initial flow rates and pressures seen in offset wells, tubing will be installed once it is safe to do so, typically 12-18 months after completion.

*NOTE: Although this horizontal well may be drilled past the applicable setbacks, an unorthodox location application is not required because the completed interval in this well, as defined by 19.15.16.7 8(1) NMAC, will be entirely within the applicable setbacks. This approach complies with all applicable rules, including 19.15.16.14 A(3) NMAC, 19.15.16.14 8(2) NMAC, 19.15.16.15 8(2)NMAC, and 19.15.16.15. 8(4) NMAC.



3M 11" B.O.P.E Diagram

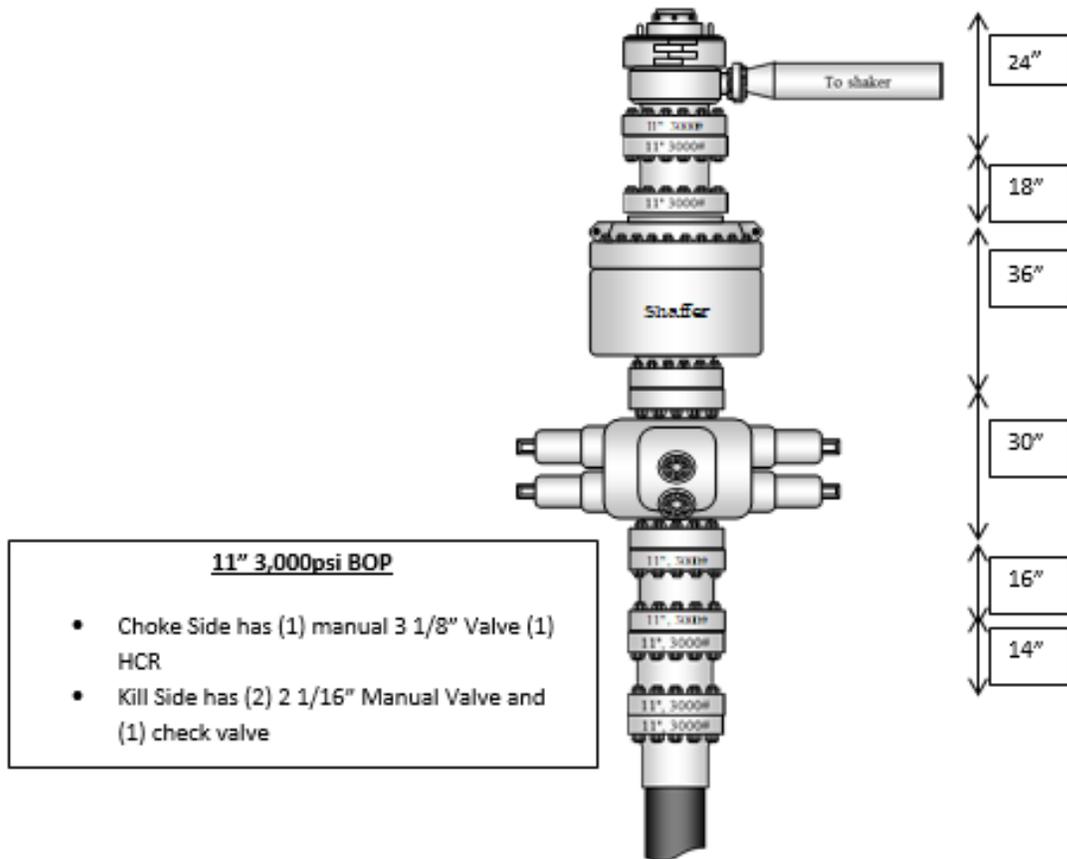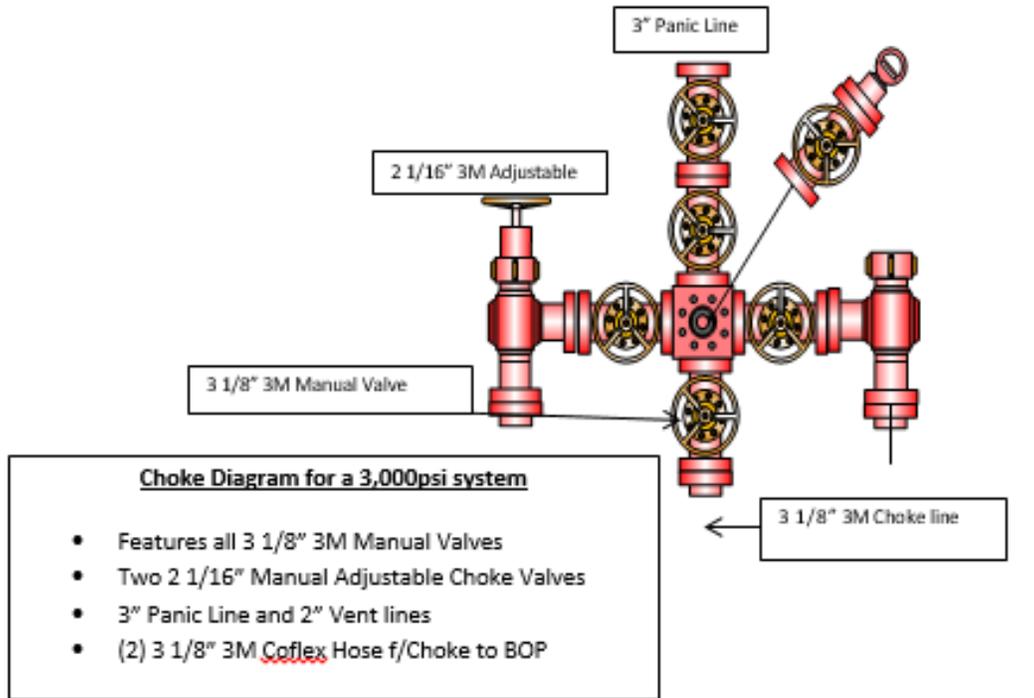

ROSA UNIT 652H

State of New Mexico
 Energy, Minerals and Natural Resources Department

Submit Electronically
 Via E-permitting

Oil Conservation Division
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description Effective May 25, 2021

I. Operator: LOGOS Operating, LLC **OGRID:** 289408 **Date:** 03/02/2022

II. Type: Original Amendment due to 19.15.27.9.D(6)(a) NMAC 19.15.27.9.D(6)(b) NMAC Other.

If Other, please describe: _____

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
Rosa Unit 650H	30-039-31412	A 25 T31N R6W	1060FNL 285FEL	N/A	9,590	440
Rosa Unit 652H	30-039-31413	A 25 T31N R6W	1075FNL 259FEL	N/A	9,590	450

IV. Central Delivery Point Name: Harvest Gathering System [See 19.15.27.9(D)(1) NMAC]

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
Rosa Unit 650H	30-039-31412	Pending	Pending	Pending	Pending	Pending
Rosa Unit 652H	30-039-31413	Pending	Pending	Pending	Pending	Pending

VI. Separation Equipment: Attach a complete description of how Operator will size separation equipment to optimize gas capture.

VII. Operational Practices: Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices: Attach a complete description of Operator’s best management practices to minimize venting during active and planned maintenance.

Section 3 - Certifications

Effective May 25, 2021

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

If Operator checks this box, Operator will select one of the following:

Well Shut-In. Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

Venting and Flaring Plan. Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

Section 4 - Notices

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature:	<i>Etta Trujillo</i>
Printed Name:	Etta Trujillo
Title:	Regulatory Specialist
E-mail Address:	etrujillo@logosresourcesllc.com
Date:	03/02/2022
Phone:	(505) 324-4154

OIL CONSERVATION DIVISION
(Only applicable when submitted as a standalone form)

Approved By:
Title:
Approval Date:
Conditions of Approval:

LOGOS Operating, LLC

VI. Separation Equipment

The operator will select separation equipment for the maximum anticipated throughput and pressure to optimize gas capture. Separation equipment is sized according to manufacturer's design specifications. Separation vessels are built following the A.S.M.E. section VII division 1 codes for pressure vessel design, fabrication, inspection, testing and certification. Anticipated well pressures and production rates are evaluated to select separation equipment according to the equipment's designed operating pressure and throughput.

After completion, the operator utilizes flowback equipment, including separators, to manage wellbore fluids and solids during the initial separation period. After the initial flowback period is complete the operator utilizes iterative facility separation equipment to ensure that optimal separation is achieved.

VII. Operational Practices 19.15.27.8 NMAC A through F

- A. The operator will maximize the recovery of natural gas and minimize the amount of gas vented or flared when technically and safely feasible as further described and detailed within the following subsections (B-F of 19.15.27.8). In all cases where natural gas venting and flaring requires regulatory reporting, reporting will be submitted accurately and within the required time frames.
- B. Venting and flaring during drilling operations:
 - a. New Drill HZ Gas Wells: The operator drills wells in the area by utilizing a balanced mud to safely drill the wellbore. This technique prevents gas from coming to surface during the drilling process. If there is an emergency or malfunction and natural gas does come to surface the natural gas will be captured and routed to sales if technically and safely feasible.
- C. Venting and flaring during completion or recompletion operations:
 - a. New Drill HZ Gas Wells: The operator's facilities are designed to handle the maximum throughput and pressures from the newly drilled and completed wellbores. The amount of gas vented and flared will be minimized when technically and safely feasible. During initial flowback and initial separation flowback the operator will utilize contracted flowback equipment, including separators, to manage wellbore fluids and solids. The initial flowback period will be minimized and flow will be sent to separation equipment as soon as possible to reduce the amount of gas that is vented to atmosphere. The natural gas will be utilized on site as needed for fuel gas and natural gas will be sold.
- D. Venting and flaring during production operations:
 - a. New Drill HZ Gas Wells: The operator's facilities are designed to handle the maximum throughput and pressures from producing wellbores. The amount of gas vented and flared will be minimized when technically and safely feasible.

Operations will effectively manage the following scenarios to minimize the quantity of natural gas that is vented or flared:

- (a) If there is an emergency or malfunction vented or flared natural gas will be reported, if required, and the emergency or malfunction will be resolved as soon as technically and safely feasible.
- (b) If the wellbore needs to be unloaded to atmosphere the operator will not vent the well after the well has achieved a stabilized rate and pressure. The operator will remain on site during unloading. Plunger lift systems will be optimized to reduce the amount of natural gas venting. Downhole maintenance, such as workovers, swabbing, etc. will only be conducted as needed and best management practices will be utilized to reduce venting of natural gas.
- (c) The operator will minimize the amount of time that natural gas is vented to atmosphere from gauging and sampling a storage tank or low-pressure vessel, automatic tank gauges will be the primary means of gauging. The formation is only anticipated to produce water and therefore tank emissions are anticipated to be negligible.
- (d) The operator will reduce the amount of time needed for loading out liquids from a storage tanks or other low-pressure vessels whenever feasible. Operations will always utilize the water transfer systems when available. Water loading emissions are anticipated to be negligible.
- (e) Equipment will be repaired and maintained routinely to minimize the venting or flaring of natural gas. Repairs and maintenance will be conducted in a manner that minimizes the amount of natural gas vented to atmosphere through the isolation of the equipment that is being repaired or maintained.
- (f) Electric controllers and pumps will be installed to replace pneumatic controllers whenever feasible. Pneumatic controllers and pumps will be inspected frequently to ensure that no excess gas is vented to atmosphere.
- (g) No dehydration or amine units are anticipated to be set on location.
- (h) Compressors, compressor engines, turbines, flanges, connectors, valves, storage tanks, and other low-pressure vessels and flanges will be routinely inspected to ensure that no excess venting occurs outside of normal operations.
- (i) Regulatory required testing, such as bradenhead and packer testing will be performed in a manner that minimizes the amount of natural gas vented to atmosphere.
- (j) If natural gas does not meet gathering pipeline specifications gas samples will be collected twice per week to determine when pipeline specification gas content has been achieved. During this time frame gas will be flared and not vented to atmosphere. Natural gas that meets pipeline specifications will be sold via pipeline and natural gas that can be utilized for fuel gas will be used during this time.
- (k) If pipeline, equipment, or facilities need purged of impurities gas losses will be minimized as much as technically and safely feasible.

E. Performance standards:

- a. The production facilities are designed to handle the maximum throughput and pressures from producing wellbores and will be designed to minimize waste. The amount of gas vented and flared will be minimized when technically and safely feasible.
- b. All tanks that are routed to a control device that is installed after 5/25/2021 will have an automatic gauging system to minimize the amount of vented natural gas.
- c. If a flare stack is installed or replaced after 5/25/2021 it will be equipped with an automatic ignitor or continuous pilot. The flare stack will be properly sized and designed to ensure proper combustion efficiency. The flare stack will be located 100 feet away from the nearest wellhead or storage tank.
- d. AVO inspections will be conducted weekly for the year after completion and for all wells producing greater than 60,000 cubic feet of natural gas daily. The AVO inspection will include all components, including flare stacks, thief hatches, closed vent systems, pumps, compressors, pressure relief devices, valves, lines, flanges, connectors, and associated pipeline to identify any leaks and releases by comprehensive auditory, visual, and olfactory inspection. The AVO inspection records will be maintained for 5 years which will be available at the department's request. Identified leaks will be repaired as soon as feasible to minimize the amount of vented natural gas.

F. Measurement or estimation of vented and flared natural gas.

- a. The volume of natural gas that is vented, flared or consumed for beneficial use will be measured when possible, or estimated, during drilling, completions, or production operations.
- b. Equipment will be installed to measure the volume of natural gas flared for all APD's issued after 5/25/2021 on facilities that will have an average daily gas rate greater than 60,000 cubic feet of natural gas. Measurement equipment will conform to API MPMS Chapter 14.10 regulations. The measurement equipment will not have a manifold that allows the diversion of natural gas around the metering element except for the sole purpose of inspecting and servicing the measurement equipment. If metering is not practical then the volume of gas will be estimated.

Well Name: ROSA UNIT	Well Location: T31N / R6W / SEC 25 / NENE /	County or Parish/State: RIO ARRIBA / NM
Well Number: 652H	Type of Well: CONVENTIONAL GAS WELL	Allottee or Tribe Name:
Lease Number: NMSF078771	Unit or CA Name: ROSA UNIT-MANCOS PA	Unit or CA Number: NMNM78407E
US Well Number: 300393141300X1	Well Status: Temporarily Abandoned	Operator: LOGOS OPERATING LLC

Notice of Intent

Sundry ID: 2650722

Type of Submission: Notice of Intent

Type of Action: Other

Date Sundry Submitted: 01/03/2022

Time Sundry Submitted: 10:25

Date proposed operation will begin: 04/01/2022

Procedure Description: LOGOS Operating request a change in plans for the following: Original bottom-hole location from 1089' FNL & 560' FWL to new bottom-hole location 1219' FNL & 148' FWL Original TD @ 16,236' MD 6787' TVD to new TD @ 16,346' MD 6984' TVD. Geology tops have been updated per changes. Original KOP @ 6408' MD 6382' TVD to new KOP @ 6334' MD 6322' TVD Original Landing point @ 7483' MD 7073' TVD to new Landing point @ 7362' MD 6986' TVD Original Intermediate 8.75" hole size, 7" casing @ 6308' MD to new hole size 12.25", 9.625" Intermediate casing @ 6244' MD 6232' TVD Original Production 6.125" hole size, 4.5" casing liner @ 16,236' MD to new hole size 8.5", 5.5" Production casing, 16,346' MD 6984' TVD The 9.625" Intermediate & 5.5" production casing grade, weight and cement sacks have been update per casing depth changes. Attached: New C102, Operation and Directional Drill plans.

Surface Disturbance

Is any additional surface disturbance proposed?: No

NOI Attachments

Procedure Description

3160_5_Rosa_Unit_652H_INT_PROD_Change_of_Plans_Revised_FPerf_20220103_20220103102334.pdf

Well Name: ROSA UNIT

Well Location: T31N / R6W / SEC 25 / NENE /

County or Parish/State: RIO ARRIBA / NM

Well Number: 652H

Type of Well: CONVENTIONAL GAS WELL

Allottee or Tribe Name:

Lease Number: NMSF078771

Unit or CA Name: ROSA UNIT-MANCOS PA

Unit or CA Number: NMNM78407E

US Well Number: 300393141300X1

Well Status: Temporarily Abandoned

Operator: LOGOS OPERATING LLC

Operator Certification

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a submission of Form 3160-5 or a Sundry Notice.

Operator Electronic Signature: ETTA TRUJILLO

Signed on: JAN 03, 2022 10:24 AM

Name: LOGOS OPERATING LLC

Title: Regulatory Specialist

Street Address: 2010 AFTON PLACE

City: Farmington **State:** NM

Phone: (505) 324-4154

Email address: ETRUJILLO@LOGOSRESOURCESLLC.COM

Field Representative

Representative Name:

Street Address:

City: **State:** **Zip:**

Phone:

Email address:

BLM Point of Contact

BLM POC Name: DAVE J MANKIEWICZ

BLM POC Title: AFM-Minerals

BLM POC Phone: 5055647761

BLM POC Email Address: DMANKIEW@BLM.GOV

Disposition: Approved

Disposition Date: 01/06/2022

Signature: Dave Mankiewicz

District I
 1625 N. French Dr., Hobbs, NM 88240
 Phone:(575) 393-6161 Fax:(575) 393-0720

District II
 811 S. First St., Artesia, NM 88210
 Phone:(575) 748-1283 Fax:(575) 748-9720

District III
 1000 Rio Brazos Rd., Aztec, NM 87410
 Phone:(505) 334-6178 Fax:(505) 334-6170

District IV
 1220 S. St Francis Dr., Santa Fe, NM 87505
 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

COMMENTS

Action 70808

COMMENTS

Operator: LOGOS OPERATING, LLC 2010 Afton Place Farmington, NM 87401	OGRID: 289408
	Action Number: 70808
	Action Type: [C-103] NOI Change of Plans (C-103A)

COMMENTS

Created By	Comment	Comment Date
kpickford	KP GEO review 01/07/2022	1/7/2022

District I
 1625 N. French Dr., Hobbs, NM 88240
 Phone:(575) 393-6161 Fax:(575) 393-0720

District II
 811 S. First St., Artesia, NM 88210
 Phone:(575) 748-1283 Fax:(575) 748-9720

District III
 1000 Rio Brazos Rd., Aztec, NM 87410
 Phone:(505) 334-6178 Fax:(505) 334-6170

District IV
 1220 S. St Francis Dr., Santa Fe, NM 87505
 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS
 Action 70808

CONDITIONS

Operator: LOGOS OPERATING, LLC 2010 Afton Place Farmington, NM 87401	OGRID: 289408
	Action Number: 70808
	Action Type: [C-103] NOI Change of Plans (C-103A)

CONDITIONS

Created By	Condition	Condition Date
kpickford	Adhere to previous NMOCD Conditions of Approval	3/2/2022