

I. REQUEST FOR ALLOWABLE AND AUTHORIZATION TO TRANSPORT

¹ Operator name and Address SPUR ENERGY PARTNERS LLC 9655 KATY FREEWAY, SUITE 500 HOUSTON, TX 77024		² OGRID Number 328947
		³ Reason for Filing Code/ Effective Date RT 08/16/2021
⁴ API Number 30 - 0 15-48121	⁵ Pool Name LOCO HILLS; GLORIETA-YESO	⁶ Pool Code 96718
⁷ Property Code 330331	⁸ Property Name SHORTY 2 STATE COM	⁹ Well Number 20H

II. ¹⁰ Surface Location

UL or lot no. E	Section 02	Township 17S	Range 30E	Lot Idn	Feet from the 2081	North/South Line NORTH	Feet from the 205	East/West line WEST	County EDDY
--------------------	---------------	-----------------	--------------	---------	-----------------------	---------------------------	----------------------	------------------------	----------------

¹¹ Bottom Hole Location FTP: 2406' FNL 863' FWL LTP: 2414' FNL 403' FEL

UL or lot no. H	Section 02	Township 17S	Range 30E	Lot Idn	Feet from the 2413	North/South line NORTH	Feet from the 245	East/West line EAST	County EDDY
¹² Lse Code S	¹³ Producing Method Code P	¹⁴ Gas Connection Date TBD	¹⁵ C-129 Permit Number	¹⁶ C-129 Effective Date	¹⁷ C-129 Expiration Date				

III. Oil and Gas Transporters

¹⁸ Transporter OGRID	¹⁹ Transporter Name and Address	²⁰ O/G/W
221115	FRONTIER FIELD SERVICES, LLC 4200 EAST SKELLY DRIVE, SUITE 700, TULSA OK 74135	G
33479	HOLLYFRONTIER REFINING & MARKETING 2828 N. HARWOOD, SUITE 1300, DALLAS, TX 75201	O

IV. Well Completion Data

²¹ Spud Date 05/13/2021	²² Ready Date 08/16/2021	²³ TD 4843'V/9528'M	²⁴ PBTD 4843'V/9528'M	²⁵ Perforations 5355'-9370'	²⁶ DHC, MC
²⁷ Hole Size	²⁸ Casing & Tubing Size	²⁹ Depth Set	³⁰ Sacks Cement		
17-1/2"	13-3/8" 54.5# J-55 BTC	415'	395 SXS (CIRC TO SURFACE)		
13-3/8"	9-5/8" 36# J-55 BTC	1815'	565 SXS (CIRC TO SURFACE)		
8-3/4"	7" 32# L-80 BK-HT 5-1/2" 20# L-80 BK-HT	5121' 9528'	1435 SXS (CIRC TO SURFACE)		

V. Well Test Data

³¹ Date New Oil	³² Gas Delivery Date	³³ Test Date	³⁴ Test Length	³⁵ Tbg. Pressure	³⁶ Csg. Pressure
³⁷ Choke Size	³⁸ Oil	³⁹ Water	⁴⁰ Gas		⁴¹ Test Method

⁴² I hereby certify that the rules of the Oil Conservation Division have been complied with and that the information given above is true and complete to the best of my knowledge and belief. Signature: <i>Sarah Chapman</i> Printed name: SARAH CHAPMAN Title: REGULATORY DIRECTOR E-mail Address: SCHAPMAN@SPUREPLLC.COM Date: 08/16/2021	Phone: 832-930-8613	OIL CONSERVATION DIVISION Approved by: <i>PATRICIA MARTINEZ</i> Title: <i>PETROLEUM SPECIALIST</i> Approval Date: <i>4/14/2022</i>
---	------------------------	---

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

☒ AMENDED REPORT
AS-DRILLED

WELL LOCATION AND ACREAGE DEDICATION PLAT

1 API Number 30-015-48121		2 Pool Code 96718		3 Pool Name LOCO HILLS; GLORIETA-YESO					
4 Property Code 330331		5 Property Name SHORTY 2 STATE COM						6 Well Number 20H	
7 GRID NO. 328947		8 Operator Name SPUR ENERGY PARTNERS LLC						9 Elevation 3752'	
10 Surface Location									
UL or lot no. E	Section 2	Township 17S	Range 30E	Lot Idn	Feet from the 2018	North/South line NORTH	Feet From the 205	East/West line WEST	County EDDY
11 Bottom Hole Location If Different From Surface									
UL or lot no. H	Section 2	Township 17S	Range 30E	Lot Idn	Feet from the 2413	North/South line NORTH	Feet from the 245	East/West line EAST	County EDDY
12 Dedicated Acres 160		13 Joint or Infill		14 Consolidation Code		15 Order No.			

No allowable will be assigned to this completion until all interest have been consolidated or a non-standard unit has been approved by the division.

16 <u>GEODETIC DATA</u> NAD 83 GRID - NM EAST <u>SURFACE LOCATION (SL)</u> N: 678713.2 - E: 658884.0 LAT: 32.8652188° N LONG: 103.9504991° W <u>FIRST TAKE POINT (FTP)</u> 2406' FNL & 863' FWL N: 678327.1 - E: 659543.7 LAT: 32.8641511° N LONG: 103.9483553° W MD: 5355.0 - TVD: 4836.9 <u>LAST TAKE POINT (LTP)</u> 2414' FNL & 403' FEL N: 678332.6 - E: 663557.7 LAT: 32.8641252° N LONG: 103.9352824° W MD: 9470.0 - TVD: 4842.6		<u>BOTTOM HOLE (BH)</u> N: 678334.1 - E: 663715.7 LAT: 32.8641276° N LONG: 103.9347679° W MD: 9528.0 - TVD: 4843.2 <u>CORNER DATA</u> NAD 83 GRID - NM EAST A: FOUND BRASS CAP "1916" N 675443.0 - E 653411.2 B: FOUND BRASS CAP "1916" N 678082.1 - E 653402.4 C: FOUND BRASS CAP "1916" N 680713.3 - E 653392.4 D: FOUND BRASS CAP "1916" N 680722.0 - E 656032.0		E: FOUND BRASS CAP "1916" N 680729.8 - E 658673.7 F: FOUND BRASS CAP "1916" N 680738.2 - E 661314.5 G: FOUND BRASS CAP "1916" N 680747.5 - E 663952.3 H: FOUND BRASS CAP "1916" N 678115.0 - E 663961.8 I: FOUND BRASS CAP "1916" N 675482.0 - E 663970.7 J: FOUND BRASS CAP "1916" N 675465.0 - E 661330.4 K: FOUND BRASS CAP "1916" N 675454.6 - E 658689.2 L: FOUND BRASS CAP "1916" N 678091.2 - E 658681.2		17 OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. <i>Sarah Chapman</i> 08/16/2021 Signature Date SARAH CHAPMAN Printed Name SCHAPMAN@SPUREPLLC.COM E-mail Address	
18 SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. 08-12-2021 Date of Survey Signature and Seal of Professional Surveyor: <i>Robert M. Howett</i> 19680 Certificate Number		Job No: LS21010061-AC					



I **Larry Wright** certify that I am employed by **Wellbenders Directional Services**. That I did on the day(s) of **06/12/21** thru **06/18/21** conduct or supervise the taking of a **MWD Survey** from a depth of **407'** to a depth of **9528'**; that the data is true, correct, complete and within the limitations of the tool as set forth by **Wellbenders Directional Services**; that I am authorized and qualified to make this report; that this survey was conducted at the request of **Spur Energy Partners** for the **Shorty 2 State Com 20H** API No. **30-015-48121** in **Eddy County, New Mexico**; and that I have reviewed this report and find that it conforms to the principles and procedures as set forth by **Wellbenders Directional Services**.

Larry Wright

1125 Beach Airport Rd, Conroe, Texas
77301



Spur Energy Partners, LLC

Eddy County, NM (NAD 83 - NME)

SHORTY 2 STATE COM (10-20-70)

#20H

Wellbore #1

Design: Wellbore #1

Standard Survey Report

18 June, 2021





Survey Report



Company:	Spur Energy Partners, LLC	Local Co-ordinate Reference:	Well #20H
Project:	Eddy County, NM (NAD 83 - NME)	TVD Reference:	RKB = 20' @ 3772.00usft
Site:	SHORTY 2 STATE COM (10-20-70)	MD Reference:	RKB = 20' @ 3772.00usft
Well:	#20H	North Reference:	Grid
Wellbore:	Wellbore #1	Survey Calculation Method:	Minimum Curvature
Design:	Wellbore #1	Database:	WBDS_SQL_2

Project	Eddy County, NM (NAD 83 - NME)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	SHORTY 2 STATE COM (10-20-70)		
Site Position:		Northing:	678,753.20 usft
From:	Map	Easting:	658,884.00 usft
Position Uncertainty:	0.00 usft	Slot Radius:	13.200 in
		Latitude:	32.8653287
		Longitude:	-103.9504986
		Grid Convergence:	0.208 °

Well	#20H		
Well Position	+N/-S	0.00 usft	Northing: 678,713.20 usft
	+E/-W	0.00 usft	Easting: 659,079.00 usft
Position Uncertainty	0.00 usft	Wellhead Elevation:	usft
		Latitude:	32.8652169
		Longitude:	-103.9498640
		Ground Level:	3,752.00 usft

Wellbore	Wellbore #1		
Magnetics	Model Name	Sample Date	Declination (°)
	IGRF2020	5/19/2021	6.781
			Dip Angle (°) 60.428
			Field Strength (nT) 47,838.75268647

Design	Wellbore #1		
Audit Notes:			
Version:	1.0	Phase:	ACTUAL
		Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)
	0.00	0.00	0.00
			Direction (°) 89.81

Survey Program	Date 6/18/2021		
From (usft)	To (usft)	Survey (Wellbore)	Tool Name
20.00	407.00	INVICTUS TOOL (Wellbore #1)	MWD+IGRF
468.00	9,528.00	Survey #2 (Wellbore #1)	MWD+IGRF
			Description
			OWSG MWD + IGRF or WMM
			OWSG MWD + IGRF or WMM

Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20.00	0.00	359.79	20.00	0.00	0.00	0.00	0.00	0.00	0.00
109.00	0.10	312.59	109.00	0.05	-0.06	-0.06	0.11	0.11	0.00
167.00	0.20	275.59	167.00	0.10	-0.20	-0.19	0.23	0.17	-63.79
195.00	0.20	226.59	195.00	0.07	-0.28	-0.28	0.59	0.00	-175.00
222.00	0.30	228.59	222.00	-0.01	-0.37	-0.37	0.37	0.37	7.41
250.00	0.60	227.59	250.00	-0.16	-0.53	-0.53	1.07	1.07	-3.57
281.00	0.70	239.59	281.00	-0.36	-0.81	-0.81	0.54	0.32	38.71
312.00	0.90	244.59	311.99	-0.56	-1.20	-1.20	0.68	0.65	16.13
344.00	0.90	255.59	343.99	-0.73	-1.67	-1.67	0.54	0.00	34.37



Survey Report



Company:	Spur Energy Partners, LLC	Local Co-ordinate Reference:	Well #20H
Project:	Eddy County, NM (NAD 83 - NME)	TVD Reference:	RKB = 20' @ 3772.00usft
Site:	SHORTY 2 STATE COM (10-20-70)	MD Reference:	RKB = 20' @ 3772.00usft
Well:	#20H	North Reference:	Grid
Wellbore:	Wellbore #1	Survey Calculation Method:	Minimum Curvature
Design:	Wellbore #1	Database:	WBDS_SQL_2

Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
375.00	1.20	247.59	374.98	-0.92	-2.20	-2.21	1.07	0.97	-25.81
407.00	1.20	249.59	406.98	-1.16	-2.83	-2.83	0.13	0.00	6.25
468.00	0.92	233.77	467.97	-1.68	-3.82	-3.83	0.66	-0.46	-25.93
591.00	2.73	213.47	590.90	-4.70	-6.23	-6.25	1.54	1.47	-16.50
710.00	5.27	212.32	709.60	-11.69	-10.72	-10.76	2.14	2.13	-0.97
831.00	8.18	214.08	829.76	-23.51	-18.51	-18.59	2.41	2.40	1.45
951.00	10.02	213.73	948.24	-39.27	-29.10	-29.23	1.53	1.53	-0.29
1,071.00	10.59	212.06	1,066.30	-57.30	-40.75	-40.94	0.54	0.47	-1.39
1,191.00	10.77	211.80	1,184.23	-76.17	-52.51	-52.76	0.16	0.15	-0.22
1,314.00	10.64	211.71	1,305.08	-95.60	-64.53	-64.85	0.11	-0.11	-0.07
1,439.00	10.42	211.27	1,427.98	-115.08	-76.46	-76.85	0.19	-0.18	-0.35
1,565.00	10.20	210.22	1,551.95	-134.46	-87.99	-88.44	0.23	-0.17	-0.83
1,692.00	9.85	210.48	1,677.01	-153.54	-99.16	-99.67	0.28	-0.28	0.20
1,751.00	9.80	210.22	1,735.14	-162.22	-104.25	-104.79	0.11	-0.08	-0.44
1,899.00	9.49	209.07	1,881.05	-183.77	-116.52	-117.13	0.25	-0.21	-0.78
2,025.00	7.69	223.84	2,005.65	-198.93	-127.41	-128.07	2.25	-1.43	11.72
2,148.00	7.16	222.96	2,127.61	-210.48	-138.33	-139.03	0.44	-0.43	-0.72
2,298.00	6.90	223.57	2,276.49	-223.85	-150.91	-151.65	0.18	-0.17	0.41
2,424.00	6.33	223.05	2,401.65	-234.41	-160.87	-161.65	0.45	-0.45	-0.41
2,550.00	5.71	220.24	2,526.95	-244.27	-169.66	-170.47	0.54	-0.49	-2.23
2,676.00	7.16	219.53	2,652.15	-255.11	-178.71	-179.55	1.15	1.15	-0.56
2,802.00	6.59	217.77	2,777.25	-266.88	-188.14	-189.02	0.48	-0.45	-1.40
2,928.00	8.70	218.74	2,902.12	-280.03	-198.53	-199.46	1.68	1.67	0.77
3,054.00	9.10	217.86	3,026.60	-295.33	-210.61	-211.58	0.34	0.32	-0.70
3,180.00	9.10	217.33	3,151.02	-311.12	-222.76	-223.79	0.07	0.00	-0.42
3,306.00	9.01	216.46	3,275.45	-326.98	-234.67	-235.75	0.13	-0.07	-0.69
3,433.00	7.60	210.48	3,401.11	-342.22	-244.84	-245.97	1.30	-1.11	-4.71
3,559.00	7.56	210.74	3,526.01	-356.52	-253.30	-254.48	0.04	-0.03	0.21
3,686.00	7.69	210.66	3,651.89	-371.01	-261.91	-263.13	0.10	0.10	-0.06
3,749.00	8.00	211.36	3,714.30	-378.38	-266.34	-267.59	0.51	0.49	1.11
3,812.00	6.33	192.90	3,776.82	-385.51	-269.39	-270.67	4.48	-2.65	-29.30
3,875.00	6.81	157.74	3,839.43	-392.35	-268.75	-270.05	6.33	0.76	-55.81
3,938.00	9.67	135.07	3,901.79	-399.56	-263.60	-264.92	6.79	4.54	-35.98
4,002.00	12.79	123.20	3,964.56	-407.25	-253.87	-255.22	6.04	4.87	-18.55
4,065.00	15.30	115.03	4,025.68	-414.59	-240.50	-241.88	5.07	3.98	-12.97
4,128.00	18.51	109.14	4,085.95	-421.38	-223.52	-224.91	5.77	5.10	-9.35
4,190.00	21.45	105.98	4,144.22	-427.73	-203.32	-204.73	5.05	4.74	-5.10
4,253.00	24.75	103.43	4,202.16	-433.97	-179.41	-180.85	5.47	5.24	-4.05
4,317.00	27.12	100.18	4,259.71	-439.66	-152.02	-153.47	4.32	3.70	-5.08
4,380.00	30.02	94.38	4,315.05	-443.40	-122.16	-123.63	6.37	4.60	-9.21
4,443.00	33.67	87.43	4,368.57	-443.82	-88.97	-90.45	8.20	5.79	-11.03
4,506.00	36.62	86.82	4,420.08	-442.00	-52.76	-54.22	4.72	4.68	-0.97
4,569.00	40.70	87.43	4,469.27	-440.03	-13.46	-14.92	6.50	6.48	0.97



Survey Report



Company:	Spur Energy Partners, LLC	Local Co-ordinate Reference:	Well #20H
Project:	Eddy County, NM (NAD 83 - NME)	TVD Reference:	RKB = 20' @ 3772.00usft
Site:	SHORTY 2 STATE COM (10-20-70)	MD Reference:	RKB = 20' @ 3772.00usft
Well:	#20H	North Reference:	Grid
Wellbore:	Wellbore #1	Survey Calculation Method:	Minimum Curvature
Design:	Wellbore #1	Database:	WBDS_SQL_2

Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
4,633.00	45.80	86.99	4,515.87	-437.89	30.32	28.87	7.98	7.97	-0.69
4,694.00	48.88	86.29	4,557.20	-435.26	75.10	73.66	5.12	5.05	-1.15
4,753.00	51.87	86.03	4,594.82	-432.21	120.44	119.00	5.08	5.07	-0.44
4,814.00	55.21	84.97	4,631.07	-428.35	169.34	167.92	5.65	5.48	-1.74
4,874.00	59.78	84.71	4,663.30	-423.80	219.72	218.31	7.63	7.62	-0.43
4,904.00	60.26	84.44	4,678.29	-421.34	245.59	244.19	1.78	1.60	-0.90
4,934.00	60.35	84.44	4,693.15	-418.82	271.53	270.14	0.30	0.30	0.00
4,964.00	60.35	84.44	4,707.99	-416.29	297.47	296.09	0.00	0.00	0.00
4,994.00	60.44	84.44	4,722.81	-413.76	323.44	322.06	0.30	0.30	0.00
5,024.00	60.48	84.27	4,737.61	-411.20	349.41	348.04	0.51	0.13	-0.57
5,054.00	60.48	84.36	4,752.39	-408.61	375.39	374.03	0.26	0.00	0.30
5,083.00	62.33	85.06	4,766.27	-406.27	400.74	399.39	6.72	6.38	2.41
5,114.00	64.62	86.11	4,780.11	-404.13	428.39	427.05	7.98	7.39	3.39
5,176.00	68.92	85.41	4,804.56	-399.92	485.20	483.87	7.01	6.94	-1.13
5,235.00	76.04	84.80	4,822.31	-395.11	541.22	539.90	12.11	12.07	-1.03
5,296.00	83.16	85.67	4,833.31	-390.14	600.97	599.67	11.76	11.67	1.43
5,356.00	90.02	86.38	4,836.88	-385.99	660.68	659.40	11.49	11.43	1.18
5,416.00	90.99	86.11	4,836.35	-382.06	720.55	719.28	1.68	1.62	-0.45
5,536.00	90.95	87.96	4,834.32	-375.85	840.37	839.12	1.54	-0.03	1.54
5,656.00	90.29	88.75	4,833.02	-372.41	960.31	959.07	0.86	-0.55	0.66
5,776.00	90.68	89.01	4,832.01	-370.06	1,080.28	1,079.05	0.39	0.32	0.22
5,899.00	88.75	90.16	4,832.62	-369.17	1,203.27	1,202.04	1.83	-1.57	0.93
6,025.00	89.32	90.24	4,834.74	-369.61	1,329.25	1,328.02	0.46	0.45	0.06
6,151.00	88.84	90.24	4,836.76	-370.14	1,455.23	1,454.00	0.38	-0.38	0.00
6,278.00	88.70	89.98	4,839.49	-370.38	1,582.20	1,580.97	0.23	-0.11	-0.20
6,404.00	88.40	90.33	4,842.68	-370.72	1,708.16	1,706.92	0.37	-0.24	0.28
6,530.00	90.64	91.12	4,843.73	-372.32	1,834.14	1,832.89	1.89	1.78	0.63
6,656.00	90.11	91.04	4,842.91	-374.69	1,960.11	1,958.86	0.43	-0.42	-0.06
6,780.00	90.42	90.86	4,842.33	-376.75	2,084.09	2,082.83	0.29	0.25	-0.15
6,906.00	90.07	90.68	4,841.80	-378.44	2,210.08	2,208.81	0.31	-0.28	-0.14
7,031.00	90.02	90.77	4,841.70	-380.02	2,335.07	2,333.80	0.08	-0.04	0.07
7,157.00	89.49	90.77	4,842.24	-381.72	2,461.06	2,459.78	0.42	-0.42	0.00
7,283.00	90.46	88.22	4,842.29	-380.61	2,587.04	2,585.76	2.17	0.77	-2.02
7,409.00	90.33	88.75	4,841.42	-377.28	2,712.99	2,711.73	0.43	-0.10	0.42
7,536.00	89.71	89.19	4,841.38	-374.99	2,839.97	2,838.71	0.60	-0.49	0.35
7,660.00	89.05	89.10	4,842.72	-373.14	2,963.95	2,962.70	0.54	-0.53	-0.07
7,787.00	91.25	89.01	4,842.39	-371.05	3,090.92	3,089.68	1.73	1.73	-0.07
7,913.00	90.64	89.45	4,840.31	-369.36	3,216.90	3,215.65	0.60	-0.48	0.35
8,038.00	89.54	89.72	4,840.11	-368.45	3,341.89	3,340.65	0.91	-0.88	0.22
8,164.00	89.58	90.51	4,841.08	-368.70	3,467.88	3,466.64	0.63	0.03	0.63
8,290.00	89.23	90.42	4,842.39	-369.73	3,593.87	3,592.63	0.29	-0.28	-0.07
8,417.00	88.31	89.98	4,845.12	-370.17	3,720.84	3,719.59	0.80	-0.72	-0.35
8,543.00	91.34	90.16	4,845.50	-370.32	3,846.83	3,845.58	2.41	2.40	0.14



Survey Report



Company:	Spur Energy Partners, LLC	Local Co-ordinate Reference:	Well #20H
Project:	Eddy County, NM (NAD 83 - NME)	TVD Reference:	RKB = 20' @ 3772.00usft
Site:	SHORTY 2 STATE COM (10-20-70)	MD Reference:	RKB = 20' @ 3772.00usft
Well:	#20H	North Reference:	Grid
Wellbore:	Wellbore #1	Survey Calculation Method:	Minimum Curvature
Design:	Wellbore #1	Database:	WBDS_SQL_2

Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
8,669.00	90.73	90.24	4,843.22	-370.76	3,972.80	3,971.55	0.49	-0.48	0.06
8,795.00	90.02	90.51	4,842.40	-371.59	4,098.80	4,097.54	0.60	-0.56	0.21
8,921.00	89.45	90.60	4,842.98	-372.81	4,224.79	4,223.53	0.46	-0.45	0.07
9,048.00	90.64	91.30	4,842.88	-374.91	4,351.77	4,350.50	1.09	0.94	0.55
9,174.00	90.33	91.30	4,841.82	-377.77	4,477.73	4,476.46	0.25	-0.25	0.00
9,301.00	89.36	91.21	4,842.16	-380.55	4,604.70	4,603.41	0.77	-0.76	-0.07
9,454.00	89.93	88.84	4,843.11	-380.62	4,757.69	4,756.40	1.59	0.37	-1.55
9,528.00	89.93	88.84	4,843.20	-379.12	4,831.67	4,830.39	0.00	0.00	0.00


Design Targets									
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
- hit/miss target									
- Shape									
FINAL #20H 100' FWL	0.00	0.00	4,843.14	-380.13	4,782.01	678,333.07	663,861.01	32.8641233	-103.9342946
- actual wellpath misses target center by 24.33usft at 9454.00usft MD (4843.11 TVD, -380.62 N, 4757.69 E)									
- Point									
FINAL #20H 50' FWL/	0.00	0.00	4,843.20	-379.12	4,831.67	678,334.07	663,910.68	32.8641256	-103.9341328
- actual wellpath hits target center									
- Point									

Design Annotations				
Measured Depth (usft)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Comment
468.00	467.97	-1.68	-3.82	1st MWD SVY: 468.00' MD/ 467.97' TVD
4,874.00	4,663.30	-423.80	219.72	START TANGENT: 4874.00' MD/ 4663.30' TVD
5,083.00	4,766.27	-406.27	400.74	END TANGENT: 5083.00' MD/ 4766.27' TVD
9,528.00	4,843.20	-379.12	4,831.67	TD: Y= 678334.08 / X= 663910.67
9,528.00	4,843.20	-379.12	4,831.67	Final Station Closure Distance= 4846.52 /Direction= 94.49
9,528.00	4,843.20	-379.12	4,831.67	Projection to Bit: 9528.00' MD/ 4843.20' TVD
9,528.00	4,843.20	-379.12	4,831.67	TD: Latitude= 32.8641256 / Longitude= -103.9341328

Checked By: _____	Approved By: _____	Date: _____
-------------------	--------------------	-------------



Company: Spur Energy Partners, LLC
Project: Eddy County, NM (NAD 83 - NME)
Site: SHORTY 2 STATE COM (10-20-70)
Well: #20H
Wellbore: Wellbore #1
Rig:
Design: Plan #4 / 7:18, June 18 2021

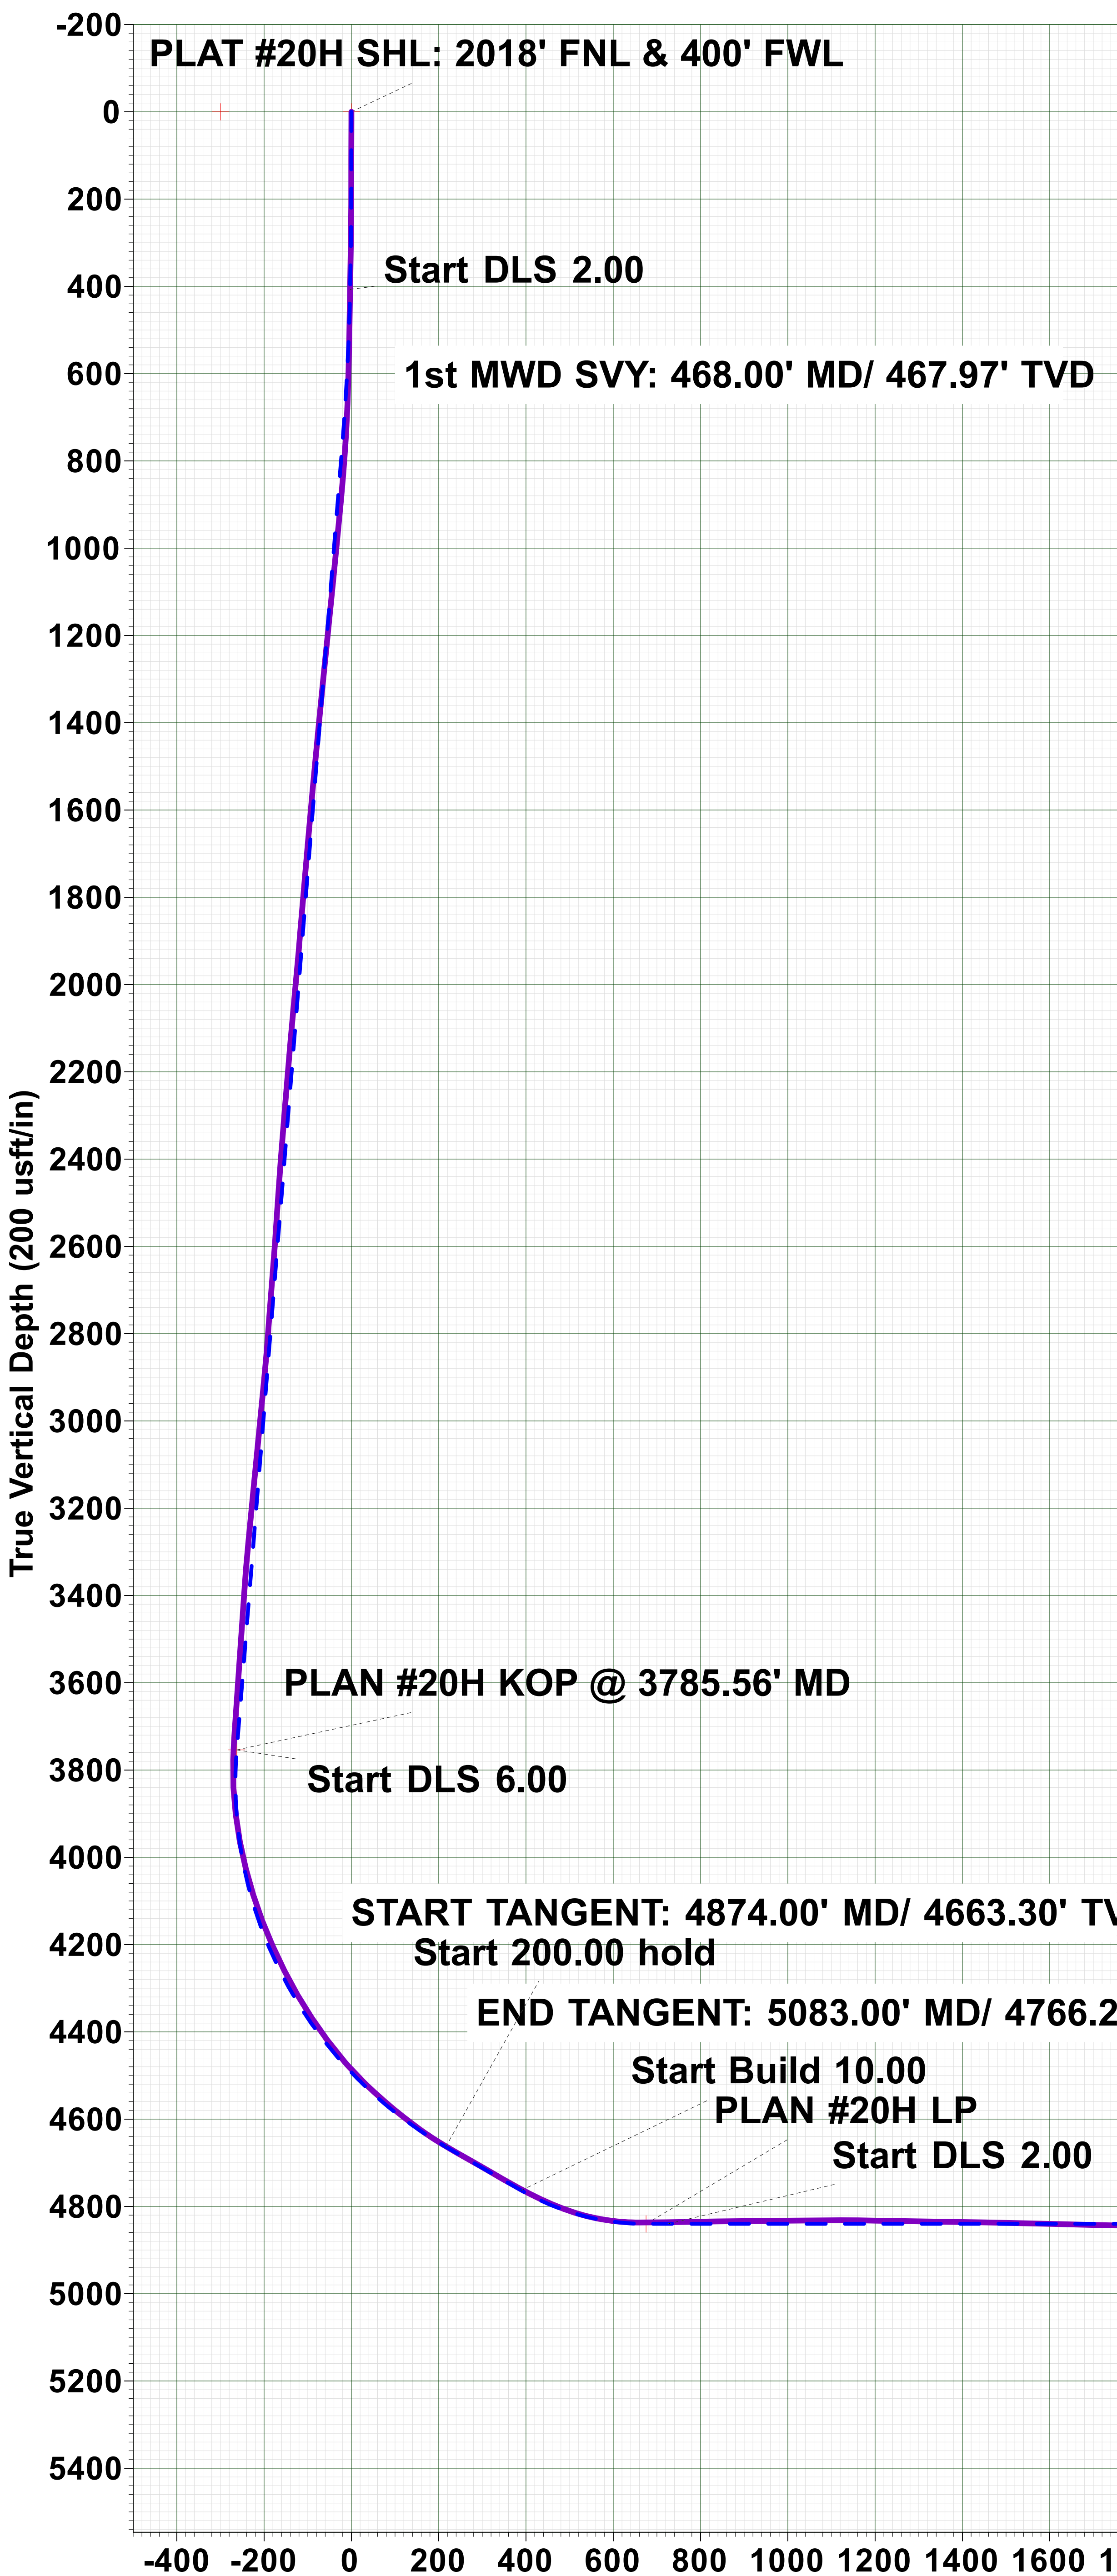


WELL DETAILS: #20H					
RKB = 20' @ 3772.00usft 3752.00					
+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
0.00	0.00	678713.20	659079.00	32.8652168	-103.9498640

SECTION DETAILS								
Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	VSect
1	407.00	1.20	249.59	406.98	-1.16	-2.83	0.00	-2.83
2	766.04	8.13	214.31	764.64	-23.47	-20.68	2.00	-20.76
3	3785.56	8.13	214.31	3753.84	-376.06	-261.28	0.00	-262.53
4	4871.73	60.00	86.50	4663.24	-415.06	217.67	6.00	216.30
5	5071.73	60.00	86.50	4763.24	-404.49	390.56	0.00	389.21
6	5371.73	90.00	86.50	4840.00	-387.00	676.50	10.00	675.21
7	5421.73	90.00	86.50	4840.00	-383.95	726.41	0.00	725.13
8	5587.04	90.00	89.81	4840.00	-378.62	891.61	2.00	890.35
9	9527.45	90.00	89.81	4840.00	-365.30	4832.00	0.00	4830.76

CORRECTION REFERENCE DATA:

To convert a Magnetic Direction to a Grid Direction, Add 6.573°
To convert a True Direction to a Grid Direction, Subtract 0.208°
To convert a Magnetic Direction to a True Direction, Add 6.781° East
Magnetic Declination: 6.781°
Grid Convergence: 0.208° West
Magnetic Dip Angle: 60.428°
Magnetic Field Strength: 47838.75268647nT



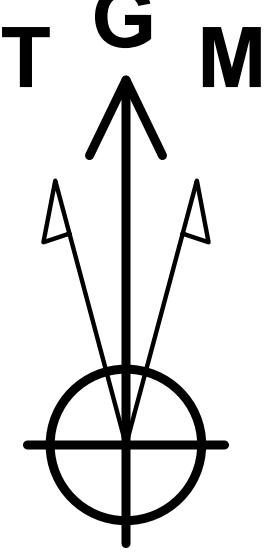


Azimuths to Grid North
True North: -0.21°
Magnetic North: 6.57°

Magnetic Field
Strength: 47838.8snT
Dip Angle: 60.43°
Date: 5/19/2021
Model: IGRF2020

PROJECT DETAILS: Eddy County, NM (NAD 83 - NME)

Geodetic System: US State Plane 1983
Datum: North American Datum 1983
Ellipsoid: GRS 1980
Zone: New Mexico Eastern Zone
System Datum: Mean Sea Level

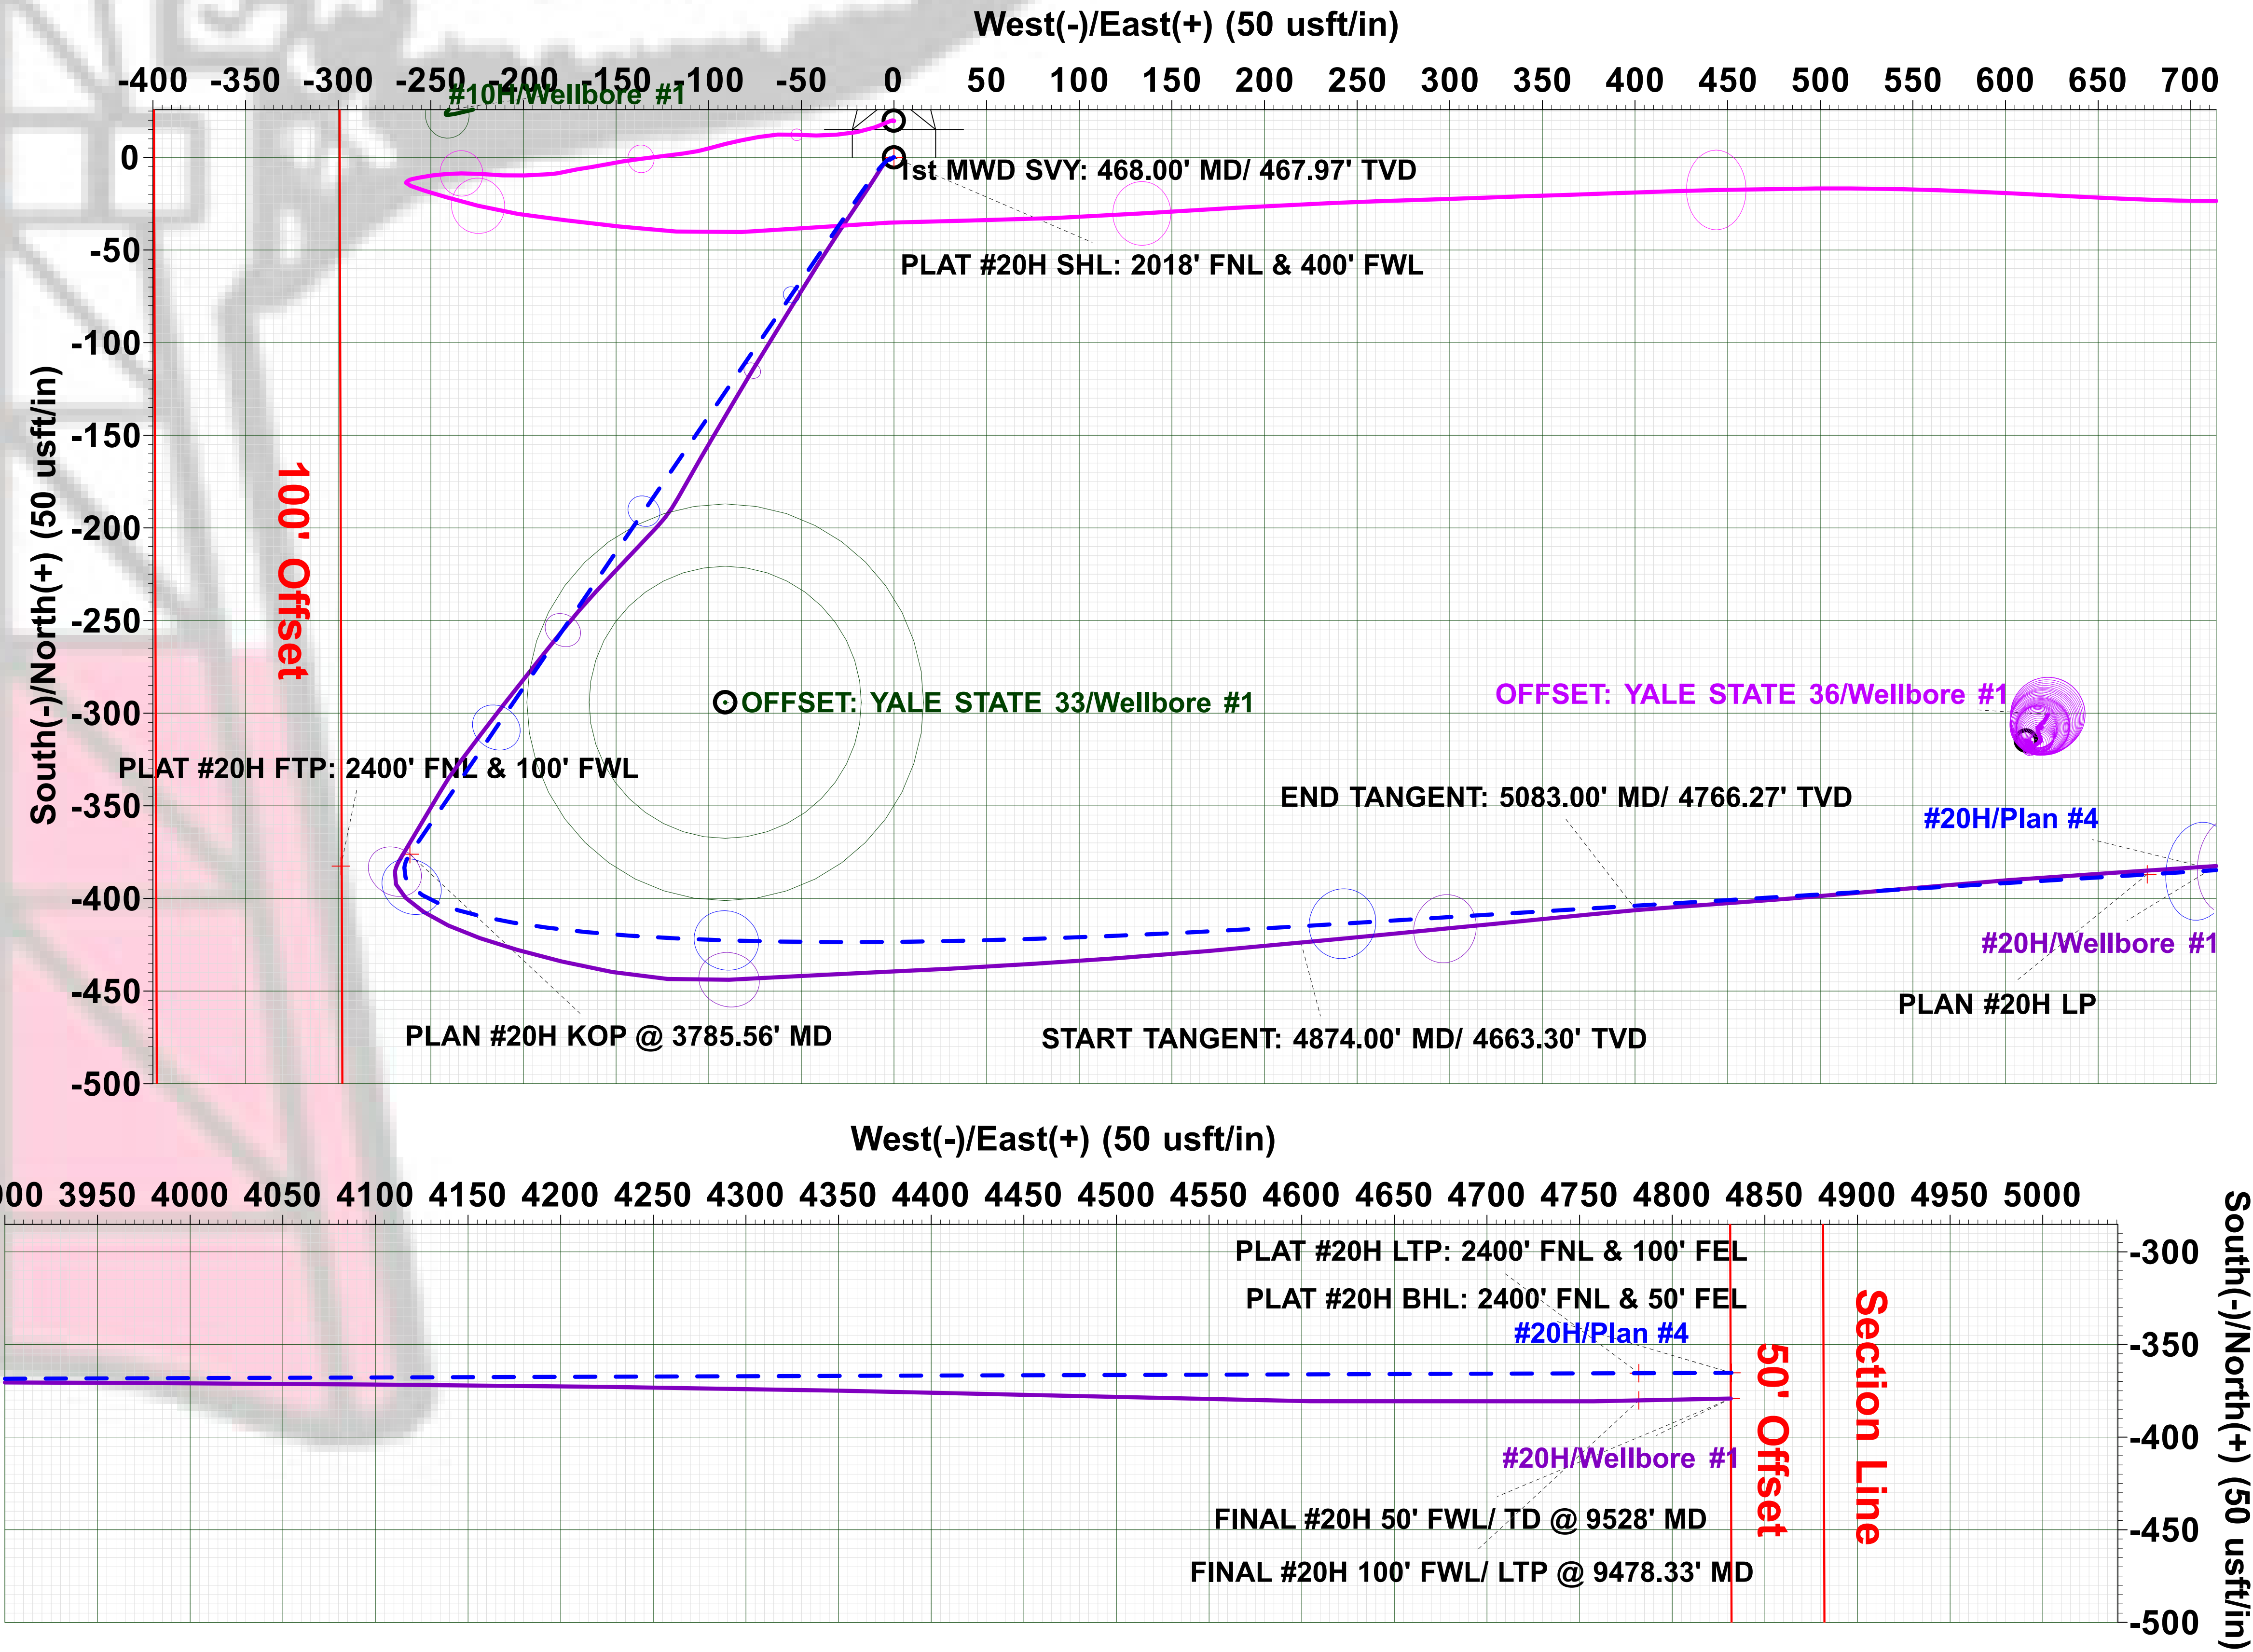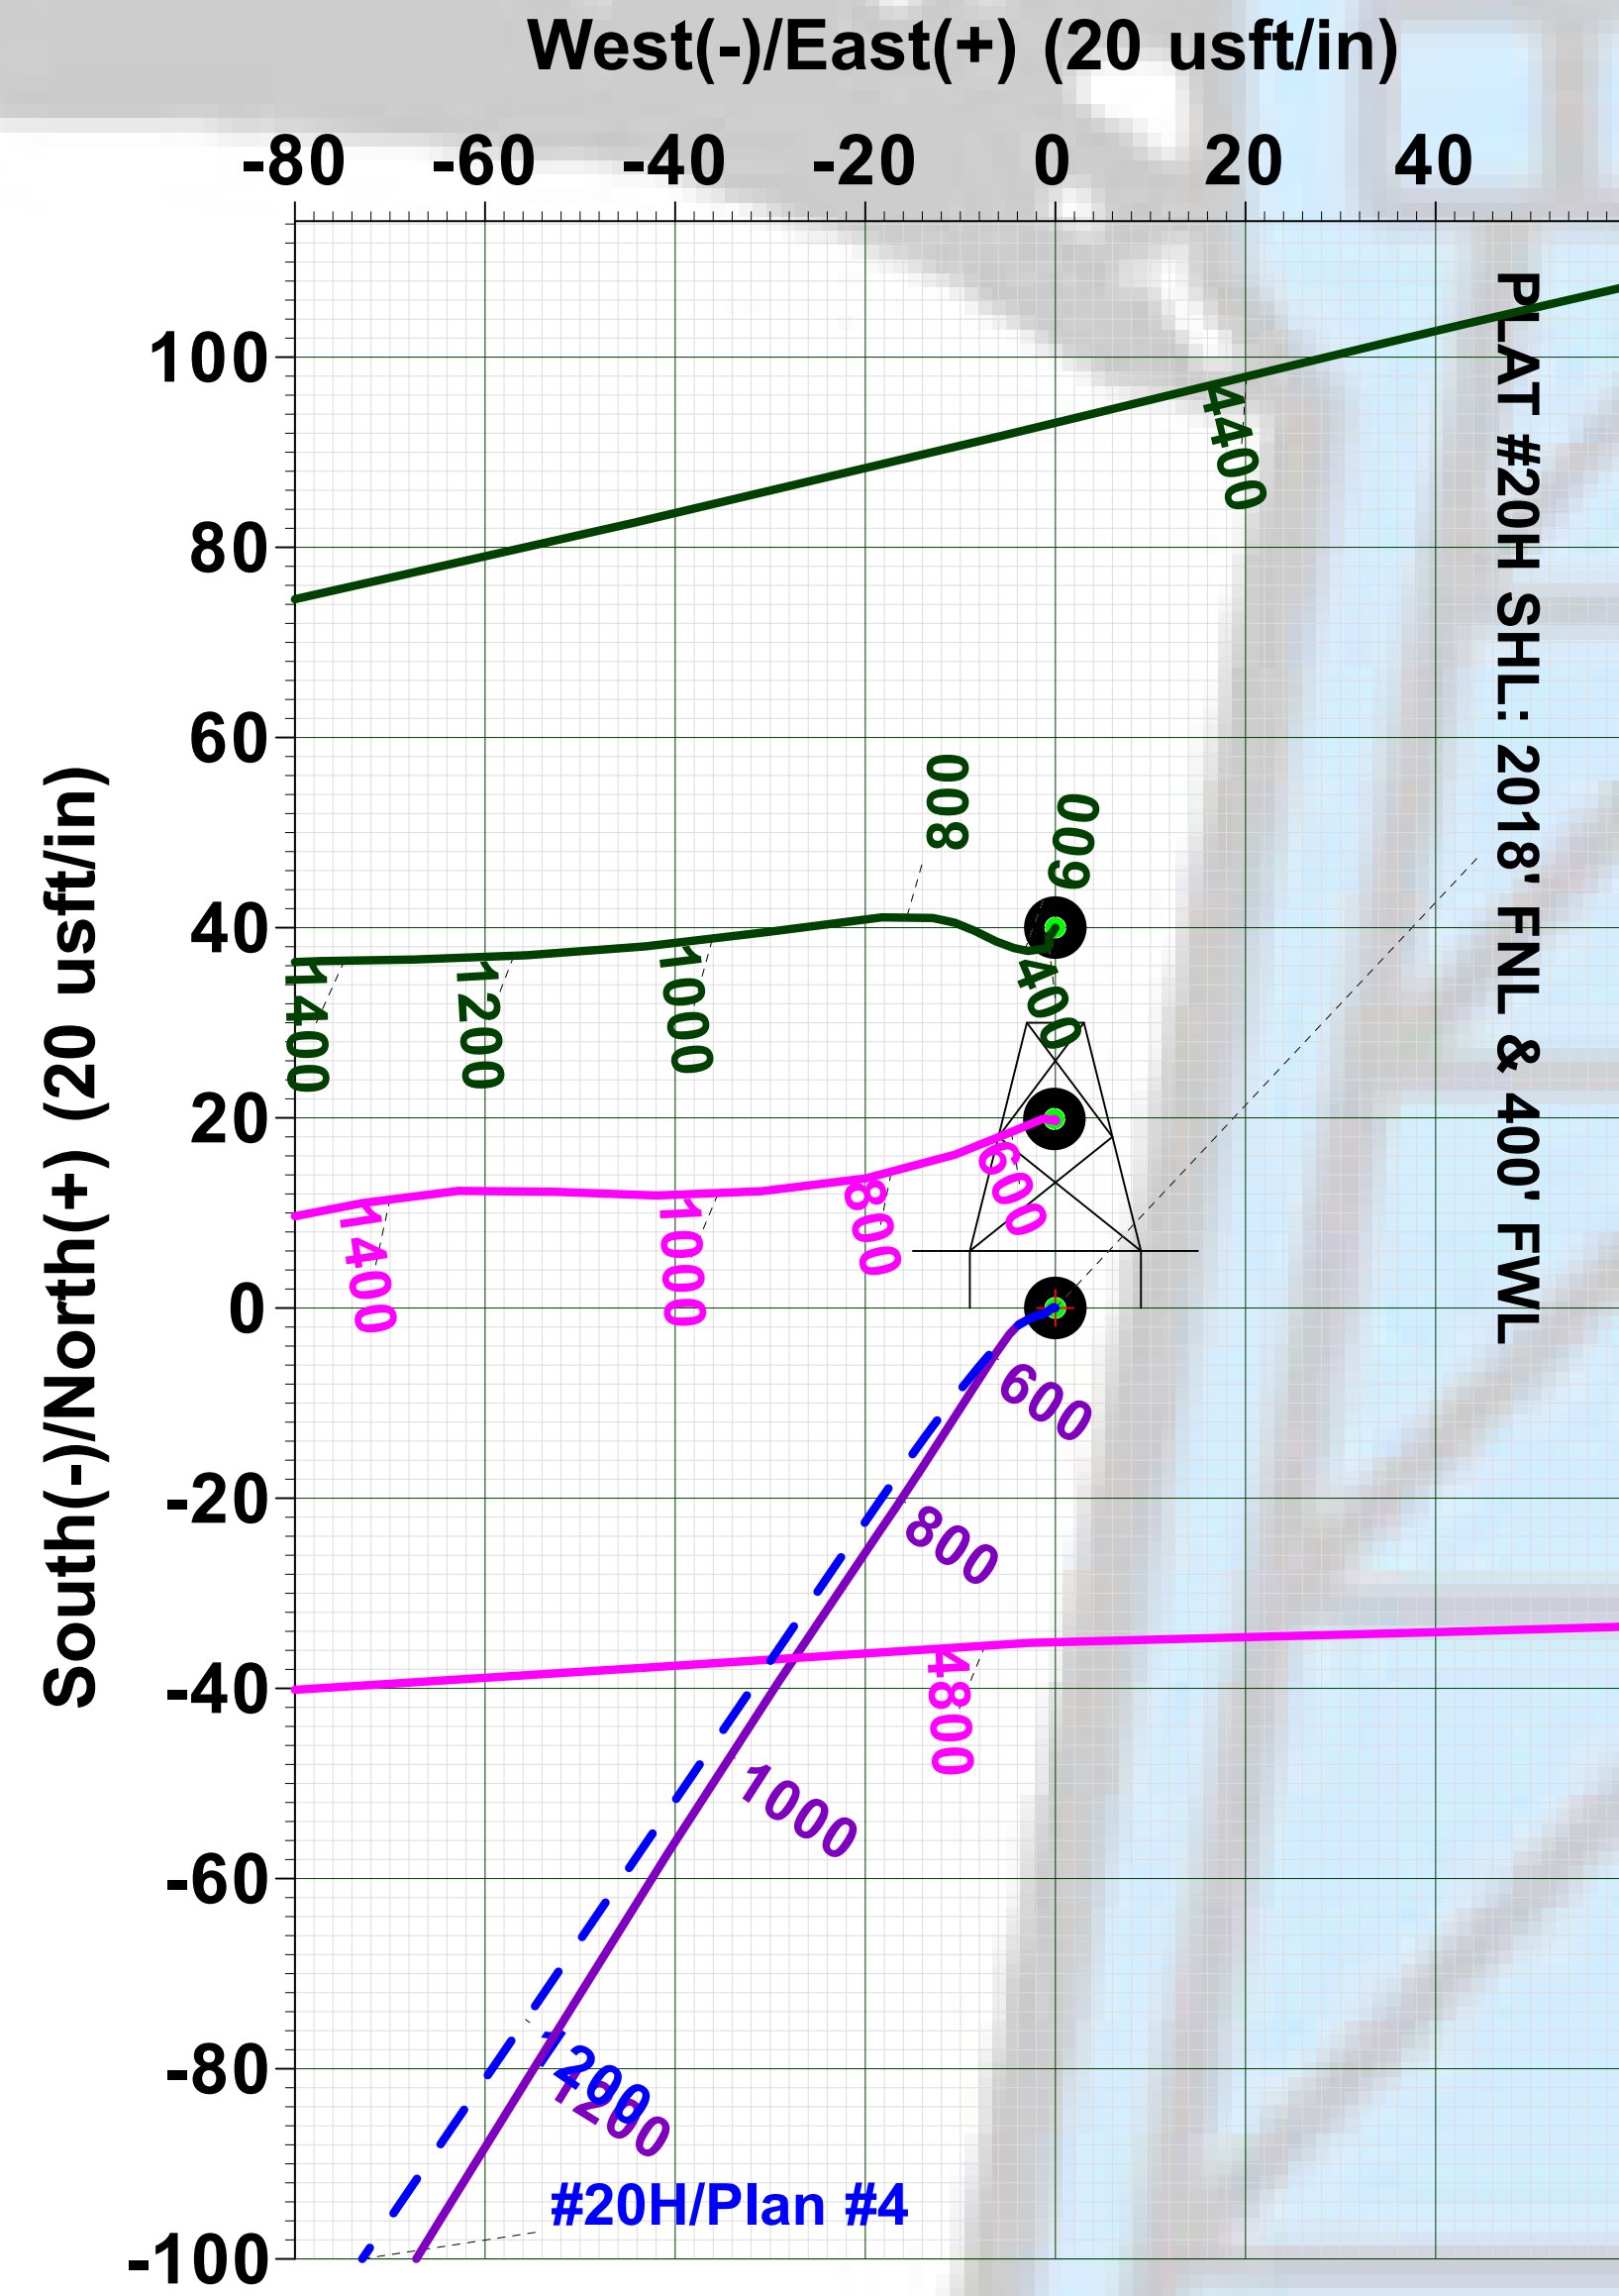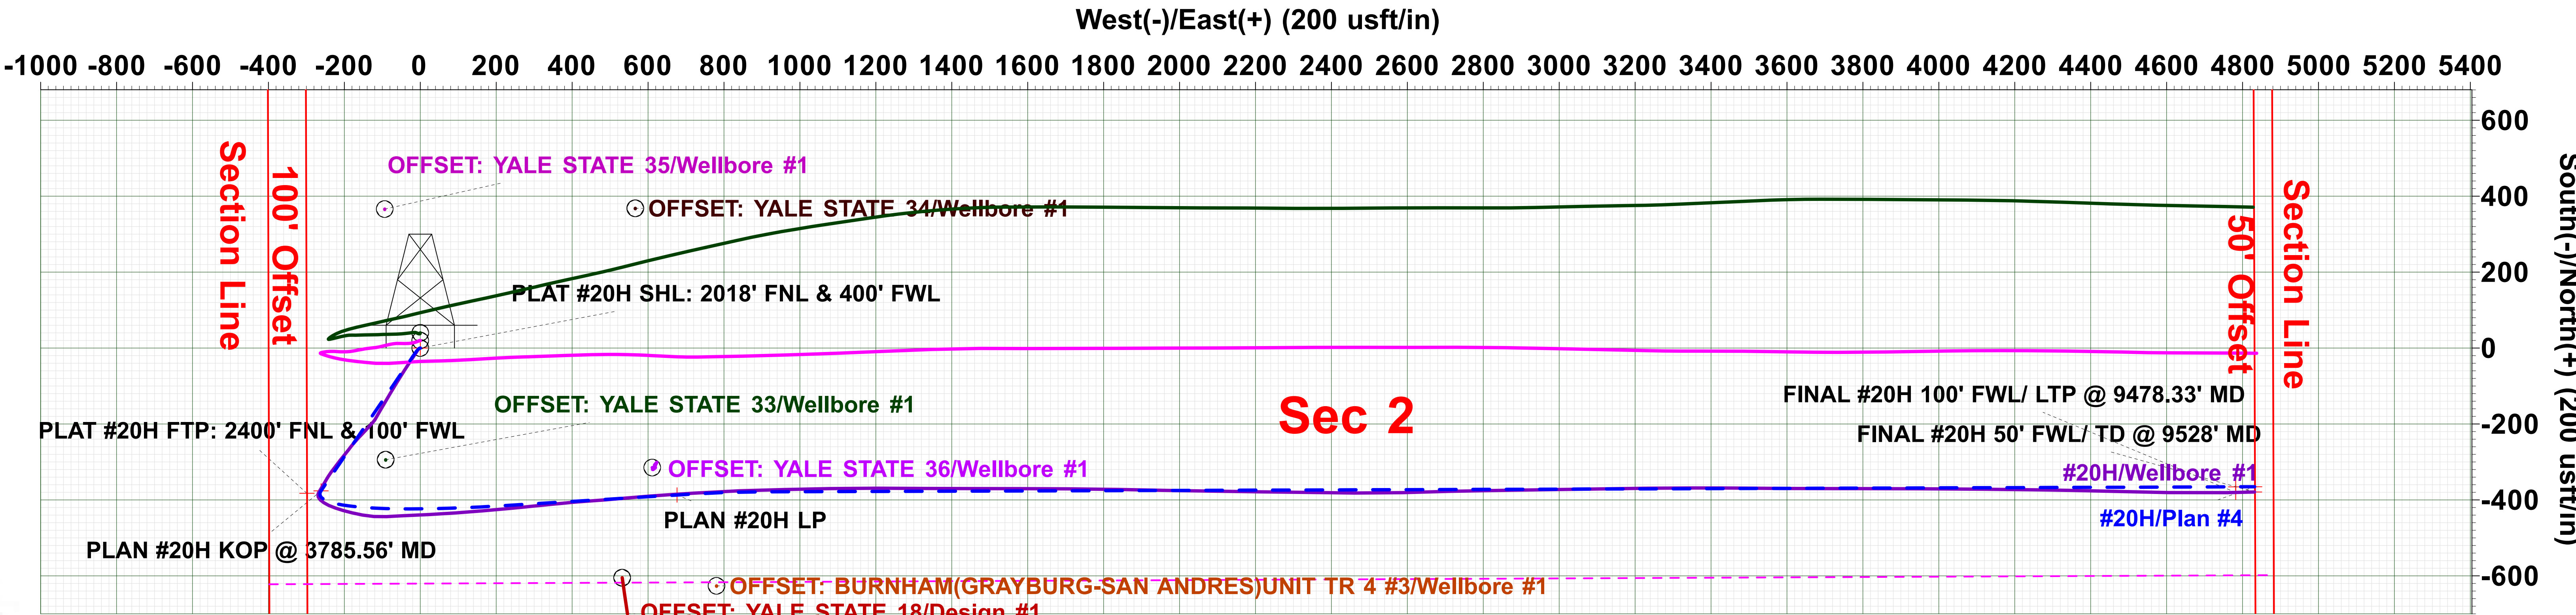

DESIGN TARGET DETAILS							
Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
PLAT #20H FTP: 2400' FNL & 100' FWL	0.00	-382.50	-298.50	678330.70	658780.50	32.8641685	-103.9508406
PLAT #20H SHL: 2018' FNL & 400' FWL	0.00	0.00	0.00	678713.20	659079.00	32.8652168	-103.9498640
PLAN #20H KOP @ 3785.56' MD	3753.84	-376.06	-261.28	678337.14	658817.72	32.8641858	-103.9507194
PLAN #20H LP	4840.00	-387.00	676.50	678326.20	659755.50	32.8641464	-103.9476653
PLAT #20H BHL: 2400' FNL & 50' FEL	4840.00	-365.30	4832.00	678347.90	663911.00	32.8641636	-103.9341316
PLAT #20H LTP: 2400' FNL & 100' FEL	4840.00	-365.50	4782.00	678347.70	663861.00	32.8641635	-103.9342944
FINAL #20H 100' FWL/ LTP @ 9478.33' MD	4843.14	-380.13	4782.01	678333.07	663861.01	32.8641233	-103.9342946
FINAL #20H 50' FWL/ TD @ 9528' MD	4843.20	-379.12	4831.67	678334.08	663910.67	32.8641256	-103.9341328



Disclaimer:
All Plan Details, boundary
lines and offset well
location/ survey data is
provided by customer and
subject to customer
approval.

Intent ☐ As Drilled ☐

API #		
Operator Name:	Property Name:	Well Number

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

First Take Point (FTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

Last Take Point (LTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

Is this well the defining well for the Horizontal Spacing Unit? ☐Is this well an infill well? ☐

If infill is yes please provide API if available, Operator Name and well number for Defining well for Horizontal Spacing Unit.

API #		
Operator Name:	Property Name:	Well Number

KZ 06/29/2018

Submit To Appropriate District Office Two Copies <u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 <u>District II</u> 811 S. First St., Artesia, NM 88210 <u>District III</u> 1000 Rio Brazos Rd., Aztec, NM 87410 <u>District IV</u> 1220 S. St. Francis Dr., Santa Fe, NM 87505		State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505			Form C-105 Revised April 3, 2017					
WELL COMPLETION OR RECOMPLETION REPORT AND LOG										
4. Reason for filing: ☒ COMPLETION REPORT (Fill in boxes #1 through #31 for State and Fee wells only) ☐ C-144 CLOSURE ATTACHMENT (Fill in boxes #1 through #9, #15 Date Rig Released and #32 and/or #33; attach this and the plat to the C-144 closure report in accordance with 19.15.17.13.K NMAC)								5. Lease Name or Unit Agreement Name SHORTY 2 STATE COM		
								6. Well Number: 20H		
7. Type of Completion: ☒ NEW WELL ☐ WORKOVER ☐ DEEPENING ☐ PLUGBACK ☐ DIFFERENT RESERVOIR ☐ OTHER _____										
8. Name of Operator SPUR ENERGY PARTNERS LLC							9. OGRID 328947			
10. Address of Operator 9655 KATY FREEWAY, SUITE 500, HOUSTON, TX 77024							11. Pool name or Wildcat LOCO HILLS; GLORIETA-YESO			
12. Location	Unit Ltr	Section	Township	Range	Lot	Feet from the	N/S Line	Feet from the	E/W Line	County
Surface:	E	02	17S	30E		2081	NORTH	205	WEST	EDDY
BH:	H	02	17S	30E		2413	NORTH	245	EAST	EDDY
13. Date Spudded 05/13/2021	14. Date T.D. Reached 06/17/2021		15. Date Rig Released 06/19/2021		16. Date Completed (Ready to Produce) 08/16/2021			17. Elevations (DF and RKB, RT, GR, etc.) 3752' GR		
18. Total Measured Depth of Well 4843'V/9528'M			19. Plug Back Measured Depth 4843'V/9528'M		20. Was Directional Survey Made? YES			21. Type Electric and Other Logs Run GAMMA RAY		
22. Producing Interval(s), of this completion - Top, Bottom, Name 5355'-9370' YESO										
23. CASING RECORD (Report all strings set in well)										
CASING SIZE		WEIGHT LB./FT.		DEPTH SET		HOLE SIZE		CEMENTING RECORD		AMOUNT PULLED
13-3/8"		54.5		415'		17-1/2"		395 SXS (CIRC TO SURFACE)		0
9-5/8"		36		1815'		12-1/4"		565 SXS (CIRC TO SURFACE)		0
7"		32		5121'		8-3/4"		1435 SXS (CIRC TO SURFACE)		0
7"		20		9528'		8-3/4"		1435 SXS (CIRC TO SURFACE)		0
24. LINER RECORD										
SIZE	TOP	BOTTOM	SACKS CEMENT	SCREEN		25. TUBING RECORD				
						SIZE	DEPTH SET	PACKER SET		
						3-1/2"	4998'			
26. Perforation record (interval, size, and number) 900 SHOTS/FOOT @ 0.42 SIZE						27. ACID, SHOT, FRACTURE, CEMENT, SQUEEZE, ETC.				
						DEPTH INTERVAL		AMOUNT AND KIND MATERIAL USED		
						5355'-9370'		10764642 GAL SLICKWATER & 4246657# SAND		
28. PRODUCTION										
Date First Production 08/23/2021		Production Method (Flowing, gas lift, pumping - Size and type pump) PUMPING ON ESP				Well Status (Prod. or Shut-in) PRODUCING				
Date of Test 09/05/2021	Hours Tested 24	Choke Size NA	Prod'n For Test Period	Oil - Bbl 943	Gas - MCF 781	Water - Bbl. 3508	Gas - Oil Ratio			
Flow Tubing Press. 191	Casing Pressure 134	Calculated 24-Hour Rate	Oil - Bbl. 943	Gas - MCF 781	Water - Bbl. 3508	Oil Gravity - API - (Corr.)				
29. Disposition of Gas (Sold, used for fuel, vented, etc.) SOLD								30. Test Witnessed By JERRY MATHEWS		
31. List Attachments AS-DRILLED, DIRECTIONAL INFO AND WBD										
32. If a temporary pit was used at the well, attach a plat with the location of the temporary pit.								33. Rig Release Date:		
34. If an on-site burial was used at the well, report the exact location of the on-site burial: Latitude _____ Longitude _____ NAD83										
I hereby certify that the information shown on both sides of this form is true and complete to the best of my knowledge and belief Signature <i>Sarah Chapman</i> Printed SARAH CHAPMAN E-mail Address SCHAPMAN@SPURENERGY.COM Name SARAH CHAPMAN Title REGULATORY DIRECTOR Date 01/25/2022										

INSTRUCTIONS

This form is to be filed with the appropriate District Office of the Division not later than 20 days after the completion of any newly-drilled or deepened well and not later than 60 days after completion of closure. When submitted as a completion report, this shall be accompanied by one copy of all electrical and radio-activity logs run on the well and a summary of all special tests conducted, including drill stem tests. All depths reported shall be measured depths. In the case of directionally drilled wells, true vertical depths shall also be reported. For multiple completions, items 11, 12 and 26-31 shall be reported for each zone.

INDICATE FORMATION TOPS IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE

Southeastern New Mexico		Northwestern New Mexico	
T. Anhy	T. Canyon	T. Ojo Alamo	T. Penn A"
T. Salt 525	T. Strawn	T. Kirtland	T. Penn. "B"
B. Salt 1245	T. Atoka	T. Fruitland	T. Penn. "C"
T. Yates	T. Miss	T. Pictured Cliffs	T. Penn. "D"
T. 7 Rivers 1435	T. Devonian	T. Cliff House	T. Leadville
T. Queen 2340	T. Silurian	T. Menefee	T. Madison
T. Grayburg 2755	T. Montoya	T. Point Lookout	T. Elbert
T. San Andres 3055	T. Simpson	T. Mancos	T. McCracken
T. Glorieta 4515	T. McKee	T. Gallup	T. Ignacio Otzte
T. Paddock	T. Ellenburger	Base Greenhorn	T. Granite
T. Blinebry	T. Gr. Wash	T. Dakota	
T. Tubb	T. Delaware Sand	T. Morrison	
T. Drinkard	T. Bone Springs	T. Todilto	
T. Abo	T. YESO 4580	T. Entrada	
T. Wolfcamp	T.	T. Wingate	
T. Penn	T.	T. Chinle	
T. Cisco (Bough C)	T.	T. Permian	

OIL OR GAS SANDS OR ZONES

No. 1, from.....to.....

No. 3, from.....to.....

No. 2, from.....to.....

No. 4, from.....to.....

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from.....to.....feet.....

No. 2, from.....to.....feet.....

No. 3, from.....to.....feet.....

LITHOLOGY RECORD (Attach additional sheet if necessary)

From	To	Thickness In Feet	Lithology	From	To	Thickness In Feet	Lithology
525	1245	720	SALT				
1245	1435	190	DOLOMITE				
1435	2340	905	DOLOMITE				
2340	2755	415	DOLOMITE				
2755	3055	300	DOLOMITE				
3055	4515	1460	DOLOMITE				
4515	4580	65	DOLOMITE				
4580	9528	4948	DOLOMITE				

Eddy County, NM
API# 30-015-48121

SPUD DATE: 6/12/2021
ELEV: 3754' GL, 20' KB

CMT W/ 395 SX TAIL CEMENT
CLASS C
CIRC TO SURF, TOC @ SURF

152 JTS 3-1/2" 10.2# J-55 MODIFIED POLY TUBING
ESP ASSEMBLY
INTAKE @ 4998'
PIP SENSOR @ 5041'
EOT @ +/- 5,071'

CMT W/ 450 SX LEAD & 115 SX TAIL
CLASS C PREMIUM PLUS
CIRC TO SURFACE, TOC @ SURF

CMT W/ 340 SX LEAD & 1095 SX TAIL
CLASS C
CIRC TO SURF, TOC @ SURF

CROSS OVER FROM 7" TO
5-1/2" CSG @ 5,121'

KOP @ 3783'

TOP PERF @ 5,355'

PERF & FRAC IN 21 STAGES F/ 5355-9310',
3-1/8" GUNS, 60 DEG PHASING, 6 SPF/STAGE,
24,200 GALS ACID 15% HCL, 4,246,657#
PROPPANT (100 MESH + 40/70), 256,302 BBLS
SLICKWATER

BOTTOM PERF @ 9,310'

Bridge Plug @ 9,379 and 9428

TD (MD) @ 9,528'
TD (TVD) @ 4,843'

District I

1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

ACKNOWLEDGMENTS

Action 82171

ACKNOWLEDGMENTS

Operator: Spur Energy Partners LLC 9655 Katy Freeway Houston, TX 77024	OGRID: 328947
	Action Number: 82171
	Action Type: [C-104] Completion Packet (C-104C)

ACKNOWLEDGMENTS

☒	I hereby certify that the required Water Use Report has been, or will be, submitted for this wells completion.
☒	I hereby certify that the required FracFocus disclosure has been, or will be, submitted for this wells completion.

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 82171

CONDITIONS

Operator: Spur Energy Partners LLC 9655 Katy Freeway Houston, TX 77024	OGRID: 328947
	Action Number: 82171
	Action Type: [C-104] Completion Packet (C-104C)

CONDITIONS

Created By	Condition	Condition Date
plmartinez	None	4/14/2022