

Well Name: DODD FEDERAL UNIT	Well Location: T17S / R29E / SEC 15 / NENE /	County or Parish/State: EDDY / NM
Well Number: 22	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMLC028731B	Unit or CA Name:	Unit or CA Number: NMNM111789X
US Well Number: 3001525341	Well Status: Abandoned	Operator: SPUR ENERGY PARTNERS LLC

Accepted for record – NMOCD gc 5/9/2022

Subsequent Report

Sundry ID: 2669289

Type of Submission: Subsequent Report

Type of Action: Plug and Abandonment

Date Sundry Submitted: 05/02/2022

Time Sundry Submitted: 07:48

Date Operation Actually Began: 04/19/2022

Actual Procedure: Please find end of well procedure and final WBD attached for your use. Thank you!

SR Attachments

Actual Procedure

Dodd_Federal_22_As_Plugged_WBD_20220502074750.pdf

Dodd_Fed_22_WV_Summary_20220502074742.pdf

Well Name: DODD FEDERAL UNIT

Well Location: T17S / R29E / SEC 15 / NENE /

County or Parish/State: EDDY / NM

Well Number: 22

Type of Well: OIL WELL

Allottee or Tribe Name:

Lease Number: NMLC028731B

Unit or CA Name:

Unit or CA Number:
NMNM111789X

US Well Number: 3001525341

Well Status: Abandoned

Operator: SPUR ENERGY PARTNERS LLC

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: SARAH CHAPMAN

Signed on: MAY 02, 2022 07:48 AM

Name: SPUR ENERGY PARTNERS LLC

Title: Regulatory Directory

Street Address: 9655 KATY FREEWAY, SUITE 500

City: Houston

State: TX

Phone: (832) 930-8613

Email address: SCHAPMAN@SPUREPLLC.COM

Field

Representative Name:

Street Address:

City:

State:

Zip:

Phone:

Email address:

BLM Point of Contact

BLM POC Name: JAMES A AMOS

BLM POC Title: Acting Assistant Field Manager

BLM POC Phone: 5752345927

BLM POC Email Address: jamos@blm.gov

Disposition: Accepted

Disposition Date: 05/03/2022

Signature: James A. Amos

Start Date	End Date	Summary
4/19/2022	4/19/2022	Move rig and equipment in, PJSM, RU derrick, ND WH, NU BOP, RU tubing equipment, unset packer, POOH w/ tubing, dig out surface valves, set tubing trailer, pump unit, centrifugal pump, frac tank and open top, RU WL, Noticed casing was 4-1/2" not 5-1/2", Called BLM and they approved to set 4-1/2" CIBP @ 4000', RIH w/ gauge ring with no issue, POOH, RIH w/ CIBP and set @ 4000', POOH w/ WL, RD WL, secure well, SDFN
4/20/2022	4/20/2022	Drove to location, PJSM, RIH 124 jts plus 8' sub, load hole with 9.5 ppg brine gel, pressure test casing, good test, mix and pump plug #1 25 sx of class C Cement, displace with 14 bbls, POOH 31 stands, WOC, RIH w/ 25 stands, tag plug 1 @ 3638', POOH LD 7 jts, mix and pump plug #2 110 sx of class C Cement, displace w/ 6.27 bbls of 9.5 brine, POOH LD 49 jts, WOC will tag in the morning, SDFN
4/21/2022	4/21/2022	Drove to location, PJSM, RIH and tag plug #2 @ 1877', POOH LD 26 jts, mix and pump plug #3 25 sx of class C cement, displace w/2.63 bbls, POOH LD 10 jts, WOC, RIH and tag plug #3 @ 699', POOH LD 7 jts, Mix and pump plug #4 40 sx of class C cement, POOH LD tubing, RD all equipment, ND BOP, verify cement to surface, dig out and cutoff wellhead. SDFN


API #	30-015-25341	Dodd Federal Unit #22	County, ST	Eddy County, NM
Operator	Spur Energy Partners		Sec-Twn-Rng	15-17S-29E
Field	Dodd; Glorieta-Upper Yeso		Footage	1225 FNL 225 FEL
Spud Date			Survey	32.8385429, -104.0547867

Formation (MD)	
San Andres	
Glorieta	
Yeso	
Bone Spring	
Wolfcamp	
Canyon	
Strawn	
Atoka	
Morrow	

RKB	
GL	3612

Hole Size	12-1/4"
TOC	Surface
Method	circ 35 sx

Csg Depth	337'
Size	8-5/8"
Weight	24
Grade	
Connections	
Cement	250 sx

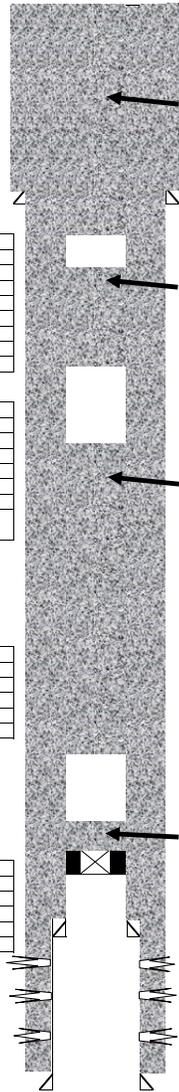

Plug #4 - 40 sx of Class C Cement from 475' - surface

Plug #3 - 25 sx of Class C Cement from 1048' - 699'

Plug #2 - 110 sx of Class C Cement from 3458' - 1877'

Perforations
 2448'-2684' Sqtd on 1/16/08.
 2773'-3408' Sqtd on 1/16/08.
 4092'-4315'

Hole Size	7-7/8"
TOC	Surface
Method	Circ 335 sx

Csg Depth	4560'
Size	5-1/2"
Weight	15.5
Grade	
Connections	
Cement	2450 sx

Tubing Detail				
Jts	Size	Depth	Length	Detail

Rod Detail				
Rods	Size	Depth	Length	Detail

Last Update	4/22/2022
By	RCB

PBTD	4333'
TD MD	4580'
TD TVD	4580'

Liner Depth	4030'
Size	4-1/2"
Weight	10.5
Grade	
Connections	UFJ
Cement	125 sx

CIBP @ 4000'

Plug #1 - 25 sx of Class C Cement from 4000' - 3638'

District I
 1625 N. French Dr., Hobbs, NM 88240
 Phone:(575) 393-6161 Fax:(575) 393-0720

District II
 811 S. First St., Artesia, NM 88210
 Phone:(575) 748-1283 Fax:(575) 748-9720

District III
 1000 Rio Brazos Rd., Aztec, NM 87410
 Phone:(505) 334-6178 Fax:(505) 334-6170

District IV
 1220 S. St Francis Dr., Santa Fe, NM 87505
 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 103885

CONDITIONS

Operator: Spur Energy Partners LLC 9655 Katy Freeway Houston, TX 77024	OGRID: 328947
	Action Number: 103885
	Action Type: [C-103] Sub. Plugging (C-103P)

CONDITIONS

Created By	Condition	Condition Date
gcordero	None	5/9/2022