

Well Name: DODD FEDERAL UNIT	Well Location: T17S / R29E / SEC 14 / NWNW /	County or Parish/State: EDDY / NM
Well Number: 25	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMLC028731B	Unit or CA Name:	Unit or CA Number: NMNM111789X
US Well Number: 3001525456	Well Status: Abandoned	Operator: SPUR ENERGY PARTNERS LLC

Accepted for record – NMOCD gc 5/9/2022

Subsequent Report

Sundry ID: 2670310

Type of Submission: Subsequent Report	Type of Action: Plug and Abandonment
Date Sundry Submitted: 05/05/2022	Time Sundry Submitted: 09:45
Date Operation Actually Began: 04/28/2022	

Actual Procedure: Please find final post job report and plugged WBD attached for your use.

SR Attachments

- Actual Procedure
- Dodd\_Federal\_25\_As\_Plugged\_WBD\_20220505094456.pdf
  - Dodd\_Fed\_25\_Final\_PA\_Reports\_20220505094456.pdf

Well Name: DODD FEDERAL UNIT	Well Location: T17S / R29E / SEC 14 / NWNW /	County or Parish/State: EDDY / NM
Well Number: 25	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMLC028731B	Unit or CA Name:	Unit or CA Number: NMNM111789X
US Well Number: 3001525456	Well Status: Abandoned	Operator: SPUR ENERGY PARTNERS LLC

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: SARAH CHAPMAN	Signed on: MAY 05, 2022 09:44 AM
Name: SPUR ENERGY PARTNERS LLC	
Title: Regulatory Directory	
Street Address: 9655 KATY FREEWAY, SUITE 500	
City: Houston	State: TX
Phone: (832) 930-8613	
Email address: SCHAPMAN@SPUREPLLC.COM	

Field

Representative Name:		
Street Address:		
City:	State:	Zip:
Phone:		
Email address:		

BLM Point of Contact

BLM POC Name: JAMES A AMOS	BLM POC Title: Acting Assistant Field Manager
BLM POC Phone: 5752345927	BLM POC Email Address: jamos@blm.gov
Disposition: Accepted	Disposition Date: 05/05/2022
Signature: James A. Amos	

Start Date	End Date	Summary
4/28/2022	4/28/2022	Drove to location, PJSM, Move in all equipment, RU derrick, ND WH, NU BOP, RU tubing equipment, unset packer and POOH, RU WL, RIH w/ 5-1/2" CIBP and set @ 4035', POOH and RD WL, RIH w/ 125 jts + 10' sub to 4035', circulate 9.5 ppg gelled brine, pressure test casing to 500 psi, good test, mix and pump plug #1 25 sx of class C cement, displace w/22 bbls of 9.5 ppg gelled brine, POOH 60 jts, LD 7 jts, WOC to tag, SDFN
4/29/2022	4/29/2022	Drove to location, PJSM, RIH and tag plug #1 @ 3736', POOH and LD 34 jts, RU WL, RIH w/ 5-1/2" CIBP and set at 2700', POOH w/ WL, RD WL, RIH w/ 84 jts to 2700', pressure up to 500 psi to test CIBP, held good, Mix and pump plug #2 25 sx of class C cement, displace w/ 14.22 bbls of 9.5 ppg gelled brine, POOH 76 jts and LD 8 jts, WOC to tag, secure well and SDFW.
5/2/2022	5/2/2022	Drove to location, PJSM, RIH and tag plug #2 @ 2439', POOH to 1325', Mix and pump plug #3 60 sx of class C cement, displace with 4.25 bbls of 9.5 ppg gelled brine, POOH 22 jts, WOC to tag, RIH and tag plug #3 @ 707', POOH to 500', mix and pump plug #4 65 sx of class C cement, POOH and LD tbg, cement came to surface, RD tubing equipment, ND BOP, Rig down all equipment, cut off wellhead and weld on dryhole marker.


API #	30-015-25456	<b>Dodd Federal Unit #25</b>	County, ST	Eddy County, NM
Operator	Spur Energy Partners		Sec-Twn-Rng	14-17S-29E
Field	Dodd; Glorieta-Upper Yeso		Footage	75 FNL 1295 FWL
Spud Date			Survey	32.8416977, -104.0498428

Formation (MD)	
San Andres	
Glorieta	
Yeso	
Bone Spring	
Wolfcamp	
Canyon	
Strawn	
Atoka	
Morrow	

RKB	3628
GL	3616

Hole Size	12-1/4"
TOC	Surface
Method	circ 50 sx

Csg Depth	342'
Size	8-5/8"
Weight	24
Grade	
Connections	
Cement	250 sx



Plug #4 65 sx of class C cement from 500' - surface

Tubing Detail				
Jts	Size	Depth	Length	Detail

Plug #3 60 sx of class C cement from 1325' - 707'

Plug #2 25 sx of class C cement from 2700' - 2439'  
CIBP @ 2700'

Rod Detail				
Rods	Size	Depth	Length	Detail

Hole Size	7-7/8"
TOC	Surface
Method	Circ 430 sx


Csg Depth	4530'
Size	5-1/2"
Weight	15.5
Grade	
Connections	
Cement	2450 sx

Perforations  
2755'-3402' Sqrd 3/13/08

4084'-4301'

Last Update	5/5/2022
By	RCB

PBTD	4488
TD MD	4560
TD TVD	4560

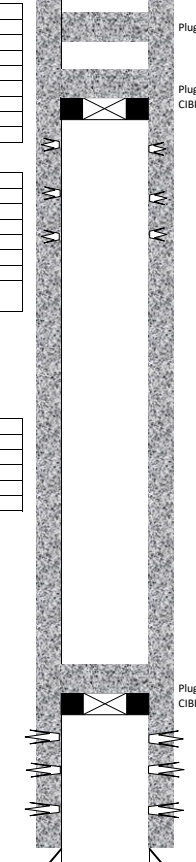

Plug #1 25 sx of class C cement from 4035' - 3736'  
CIBP @ 4035'

**District I**  
1625 N. French Dr., Hobbs, NM 88240  
Phone:(575) 393-6161 Fax:(575) 393-0720  
**District II**  
811 S. First St., Artesia, NM 88210  
Phone:(575) 748-1283 Fax:(575) 748-9720  
**District III**  
1000 Rio Brazos Rd., Aztec, NM 87410  
Phone:(505) 334-6178 Fax:(505) 334-6170  
**District IV**  
1220 S. St Francis Dr., Santa Fe, NM 87505  
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico  
Energy, Minerals and Natural Resources  
Oil Conservation Division  
1220 S. St Francis Dr.  
Santa Fe, NM 87505

CONDITIONS

Action 104766

CONDITIONS

Operator: Spur Energy Partners LLC 9655 Katy Freeway Houston, TX 77024	OGRID: 328947
	Action Number: 104766
	Action Type: [C-103] Sub. Plugging (C-103P)

CONDITIONS

Created By	Condition	Condition Date
gcordero	None	5/9/2022