1625 N. French Dr., Hobbs, NM 88240 1301 W. Grand Avenue, Artesia, NM 88210 1000 Rio Brazos Road, Aztec, NM 87410 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico **Energy Minerals and Natural Resources** Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Pence For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD 2008 Repropries AM 11 28

Pit, Closed-Loop System, Below-Grade Tank, or Proposed Alternative Method Permit or Closure Plan Application
Type of action:  Existing BGT  Legacy BGT2    Modification to an existing permit   Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system, below-grade tank, or proposed alternative method   Incomplete the content of the c
Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request
Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances
1. Operator: XTO Energy, Inc. OGRID #: 5380
Address: #382 County Road 3100, Aztec, NM 87410
Facility or well name: Apache Federal #11E
API Number: 30-039-22673 OCD Permit Number:
U/L or Qtr/Qtr L Section 8 Township 24N Range 05W County: Rio Arriba
Center of Proposed Design: Latitude 36.32501 Longitude 107.39039 NAD: ☐1927 ☑ 1983
Surface Owner:  Federal State Private Tribal Trust or Indian Allotment
2.
Pit: Subsection F or G of 19.15.17.11 NMAC
Temporary:  Drilling  Workover
Permanent Emergency Cavitation P&A
Lined Unlined Liner type: Thicknessmil LLDPE HDPE PVC Other
☐ String-Reinforced
Liner Seams:
3.
Closed-loop System: Subsection H of 19.15.17.11 NMAC
Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent)
☐ Drying Pad ☐ Above Ground Steel Tanks ☐ Haul-off Bins ☐ Other
Lined Unlined Liner type: Thicknessmil LLDPE HDPE PVC Other
Liner Seams:  Welded Factory Other
4.
Below-grade tank: Subsection I of 19.15.17.11 NMAC
Volume: 120 bbl Type of fluid: Produced Water
Tank Construction material: Steel  Secondary containment with leak detection  Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off

Alternative Method:

Liner type: Thickness

5.

Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

☐ Visible sidewalls and liner ☐ Visible sidewalls only ☒ Other Visible sidewalls, vaulted, automatic high-level shut off, no liner mil HDPE PVC Other

Form C-144

Oil Conservation Division

Page 1 of 5

Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks)  Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school institution or church)  Four foot height, four strands of barbed wire evenly spaced between one and four feet  Alternate. Please specify Four foot height, steel mesh field fence (hogwire) with pipe top railing	, hospital,
Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)  Screen Netting Other Expanded metal or solid vaulted top  Monthly inspections (If netting or screening is not physically feasible)	
8.  Signs: Subsection C of 19.15.17.11 NMAC  ☐ 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers  ☑ Signed in compliance with 19.15.3.103 NMAC	
Administrative Approvals and Exceptions:  Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.  Please check a box if one or more of the following is requested, if not leave blank:  Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau consideration of approval.  Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	office for
Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of accematerial are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the approffice or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to dry above-grade tanks associated with a closed-loop system.	opriate district approval.
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank.  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	⊠ Yes □ 1
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).  - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes 🖾 1
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  (Applies to temporary, emergency, or cavitation pits and below-grade tanks)  - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☒ ☐ NA
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to permanent pits)	☐ Yes ☐ ☐ NA
<ul> <li>Visual inspection (certification) of the proposed site; Aerial photo; Satellite image</li> <li>Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.</li> <li>NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site</li> </ul>	☐ Yes 🗵
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended.  - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes 🖾
Within 500 feet of a wetland.  - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ⊠
Within the area overlying a subsurface mine.  - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes 🏻
Within an unstable area.  - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	☐ Yes 🖾 1
Within a 100-year floodplain FEMA map	☐ Yes 🖾 1
	5
Form C-144 Oil Conservation Division Page 2 of	5

67					
Instructions: Each of the following items must attached.    Hydrogeologic Report (Below-grade Tanl   Hydrogeologic Data (Temporary and Emc   Siting Criteria Compliance Demonstration   Design Plan - based upon the appropriate   Operating and Maintenance Plan - based   Closure Plan (Please complete Boxes 14 tand 19.15.17.13 NMAC	ks) - based usergency Pits ns - based up requirement upon the app through 18, i	pon the requirements of Figure 2 and the requirements of Figure 2 and the requirement on the appropriate requirements of 19.15.17.11 NMAC propriate requirements of figure 2 applicable) - based upon	Paragraph (4) of Sulments of Paragraph ements of 19.15.17 19.15.17.12 NMAC on the appropriate res	heck mark in the box, that the docume bsection B of 19.15.17.9 NMAC (2) of Subsection B of 19.15.17.9 NM .10 NMAC quirements of Subsection C of 19.15.17	ents are
Previously Approved Design (attach copy o	of design)	API Number:		or Permit Number:	
Closed-loop Systems Permit Application Atta Instructions: Each of the following items mus attached.  Geologic and Hydrogeologic Data (only Siting Criteria Compliance Demonstratio Design Plan - based upon the appropriate Operating and Maintenance Plan - based Closure Plan (Please complete Boxes 14 and 19.15.17.13 NMAC Previously Approved Design (attach copy of the previously Approved Operating and Maintenabove ground steel tanks or haul-off bins and present the province of t	for on-site cons (only for exequirement upon the appthrough 18, of design)	d to the application. Pleatonsure) - based upon the ron-site closure) - based uts of 19.15.17.11 NMAC propriate requirements of if applicable) - based upo  API Number:  API Number:	equirements of Para pon the appropriate 19.15.17.12 NMA6 in the appropriate re	heck mark in the box, that the docume agraph (3) of Subsection B of 19.15.17 requirements of 19.15.17.10 NMAC Cequirements of Subsection C of 19.15.	9 17.9 NMAC
13.	opose to im	prement waste removal jo			
attached.  Hydrogeologic Report - based upon the r Siting Criteria Compliance Demonstratio Climatological Factors Assessment Certified Engineering Design Plans - base Dike Protection and Structural Integrity I Leak Detection Design - based upon the cliner Specifications and Compatibility A Quality Control/Quality Assurance Const Operating and Maintenance Plan - based Freeboard and Overtopping Prevention P Nuisance or Hazardous Odors, including Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate	ed upon the Design - base appropriate a sessment - truction and upon the applan - based a H <sub>2</sub> S, Preven	pon the appropriate requirements appropriate requirements of 19.15.17. based upon the appropriate requirements of 19.15.17. based upon the appropriation Plan propriate requirements of upon the appropriate requirements of upon the upon	rements of 19.15.17 of 19.15.17.11 NM equirements of 19.1 11 NMAC te requirements of 19.15.17.12 NMAC rements of 19.15.1	7.10 NMAC IAC 5.17.11 NMAC 19.15.17.11 NMAC C 7.11 NMAC	
Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable b	oxes, Boxes	i 14 through 18, in regard	is to the proposed (	ciosure plan.	
☐ In-p	on and Rem I (Closed-lo Method (O place Burial	oval op systems only) nly for temporary pits and On-site Trench Buri	i closed-loop syster ai		
Waste Excavation and Removal Closure Plan closure plan. Please indicate, by a check mark Protocols and Procedures - based upon the Confirmation Sampling Plan (if applicable Disposal Facility Name and Permit Numl Soil Backfill and Cover Design Specifica Re-vegetation Plan - based upon the appr Site Reclamation Plan - based upon the a	k in the box, ne appropriatile) - based uber (for liquitions - based opriate requi	that the documents are a te requirements of 19.15.1 pon the appropriate requi ids, drilling fluids and dri d upon the appropriate rec- tirements of Subsection I	attached. 7.13 NMAC rements of Subsecti I cuttings) ruirements of Subsecti of 19.15.17.13 NM.	ion F of 19.15.17.13 NMAC ection H of 19.15.17.13 NMAC AC	d to the
Form C-144		Oil Conservation D	vision	Page 3 of 5	
Year					Dolog


nstructions: Please indentify the facility or fac	ems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: (19.15.17.13.1 cilities for the disposal of liquids, drilling fluids and drill cuttings. Use attachment if t	
ncilities are required.	Disnaral English Parmit Number	
Disposal Facility Name:		
Yes (If yes, please provide the information	100	vice and operati
Re-vegetation Plan - based upon the appro	ions based upon the appropriate requirements of Subsection H of 19.15.17.13 NMA( opriate requirements of Subsection I of 19.15.17.13 NMAC opropriate requirements of Subsection G of 19.15.17.13 NMAC	c
rovided below. Requests regarding changes to onsidered an exception which must be submitt	hods only): 19.15.17.10 NMAC monstration of compliance in the closure plan. Recommendations of acceptable soun o certain siting criteria may require administrative approval from the appropriate dist wed to the Santa Fe Environmental Bureau office for consideration of approval. Justi lease refer to 19.15.17.10 NMAC for guidance.	rict office or m
iround water is less than 50 feet below the botto NM Office of the State Engineer - iWAT	om of the buried waste. FERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ N
iround water is between 50 and 100 feet below to NM Office of the State Engineer - iWAT	the bottom of the buried waste TERS database search; USGS; Data obtained from nearby wells	Yes NA
round water is more than 100 feet below the bo NM Office of the State Engineer - iWAT	ottom of the buried waste. TERS database search; USGS; Data obtained from nearby wells	Yes 1
Vithin 300 feet of a continuously flowing water take (measured from the ordinary high-water mater)  Topographic map; Visual inspection (cer)		Yes 1
	ool, hospital, institution, or church in existence at the time of initial application. roposed site; Aerial photo; Satellite image	Yes 1
atering purposes, or within 1000 horizontal fee	fresh water well or spring that less than five households use for domestic or stock at of any other fresh water well or spring, in existence at the time of initial application. TERS database; Visual inspection (certification) of the proposed site	☐ Yes ☐ 1
dopted pursuant to NMSA 1978, Section 3-27-3	thin a defined municipal fresh water well field covered under a municipal ordinance 3, as amended.  In the municipality; Written approval obtained from the municipality	☐ Yes ☐ 1
Vithin 500 feet of a wetland.  - US Fish and Wildlife Wetland Identifica	tion map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ 1
Vithin the area overlying a subsurface mine.  - Written confirmation or verification or n	nap from the NM EMNRD-Mining and Mineral Division	Yes 1
Vithin an unstable area.  - Engineering measures incorporated into Society; Topographic map	the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological	Yes 🗍 1
Vithin a 100-year floodplain FEMA map		☐ Yes ☐ 1
y a check mark in the box, that the documents  Siting Criteria Compliance Demonstration Proof of Surface Owner Notice - based up Construction/Design Plan of Burial Trenc Construction/Design Plan of Temporary P Protocols and Procedures - based upon the Confirmation Sampling Plan (if applicable Waste Material Sampling Plan - based upo Disposal Facility Name and Permit Numb Soil Cover Design - based upon the appro Re-vegetation Plan - based upon the appro	NMAC) Instructions: Each of the following items must be attached to the closure pleare attached.  In a based upon the appropriate requirements of 19.15.17.10 NMAC con the appropriate requirements of Subsection F of 19.15.17.13 NMAC con the appropriate of a drying pad) - based upon the appropriate requirements of 19.15.17.11 NMAC con the appropriate requirements of 19.15.17.13 NMAC con the appropriate requirements of Subsection F of 19.15.17.13 NMAC con the appropriate requirements of Subsection F of 19.15.17.13 NMAC con the appropriate requirements of Subsection F of 19.15.17.13 NMAC con the appropriate requirements of Subsection F of 19.15.17.13 NMAC contact the first plants of Subsection H of 19.15.17.13 NMAC contact the first plants of Subsection H of 19.15.17.13 NMAC contact the first plants of Subsection I of 19.15.17.13 NMAC contact the first plants of Subsection I of 19.15.17.13 NMAC contact the first plants of Subsection I of 19.15.17.13 NMAC contact the first plants of Subsection I of 19.15.17.13 NMAC contact the first plants of Subsection I of 19.15.17.13 NMAC contact the first plants of Subsection I of 19.15.17.13 NMAC contact the first plants of Subsection I of 19.15.17.13 NMAC contact the first plants of Subsection I of 19.15.17.13 NMAC contact pla	15.17.11 NMA
Form C-144	Oil Conservation Division Page 4 o	15

Chamber and Carlos to the Committee of t	data data annulla sidan faranna aranna an Irana da annulla sida da annulla sida da annulla sida da annulla sida	11-11-0
hereby certify that the information submitted wi	ith this application is true, accurate and complete to the best of my knowledge	and belief.
Name (Print): Kim Champlin	Title: Environmental Repres	sentative
Signature: Kim yandir	Date: 11/18/2008	
-mail address: <u>kim_champlin@xtoenergy.co</u>		
o. OCD Approval: X Permit Application (includi	ling closure plan)	ent)
OCD Representative Signature: <u>Shelly</u> I	Wells Approval Date: 0	8/08/2022
Fitle: Environmental Specialist-A		
nstructions: Operators are required to obtain a The closure report is required to be submitted to	osure completion): Subsection K of 19.15.17.13 NMAC an approved closure plan prior to implementing any closure activities and subset the division within 60 days of the completion of the closure activities. Please an has been obtained and the closure activities have been completed.  Closure Completion Date:	omitting the closure re e do not complete this
	Closure Completion Date:	
☐ If different from approved plan, please explain	te Closure Method	losed-loop systems onl
i. <u>Closure Report Regarding Waste Removal Closure Report Regarding Waste Removal Closure Regarding Waste Removal Closure Regarding Or Facility or Facility or Facility or Facility or Facility or Facilities were utilized.</u>	osure For Closed-loop Systems That Utilize Above Ground Steel Tanks or illities for where the liquids, drilling fluids and drill cuttings were disposed.	Haul-off Bins Only: Use attachment if more
Disposal Facility Name:	Disposal Facility Permit Number:	
Disposal Facility Name:	Disposal Facility Permit Number:	
Required for impacted areas which will not be use  Site Reclamation (Photo Documentation)  Soil Backfilling and Cover Installation		
Re-vegetation Application Rates and Seedin	ing Technique	
4.	ctions: Each of the following items must be attached to the closure report. P dd. d division) closure) ury pits) (if applicable) lts (required for on-site closure) er	
Closure Report Attachment Checklist: Instructionark in the box, that the documents are attached.  Proof of Closure Notice (surface owner and Proof of Deed Notice (required for on-site confirmation Sampling Analytical Results (Waste Material Sampling Analytical Result Disposal Facility Name and Permit Number Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seedin Site Reclamation (Photo Documentation) On-site Closure Location: Latitude	ctions: Each of the following items must be attached to the closure report. P dd. d division) closure) ury pits) (if applicable) lts (required for on-site closure) er	
Closure Report Attachment Checklist: Instructionark in the box, that the documents are attached.  Proof of Closure Notice (surface owner and Proof of Deed Notice (required for on-site of Plot Plan (for on-site closures and temporar Confirmation Sampling Analytical Results waste Material Sampling Analytical Result Disposal Facility Name and Permit Number Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seedin Site Reclamation (Photo Documentation) On-site Closure Location: Latitude  5.  Departor Closure Certification:  hereby certify that the information and attachment elief. I also certify that the closure complies with	ctions: Each of the following items must be attached to the closure report. P  d. d division) closure) ary pits) it (if applicable) lts (required for on-site closure) er  ing Technique  Longitude  NAD:  ents submitted with this closure report is true, accurate and complete to the best th all applicable closure requirements and conditions specified in the approved	□ 1927 □ 1983  of my knowledge and closure plan.
Closure Report Attachment Checklist: Instructionark in the box, that the documents are attached.  Proof of Closure Notice (surface owner and Proof of Deed Notice (required for on-site closures and temporar Confirmation Sampling Analytical Results Waste Material Sampling Analytical Results Disposal Facility Name and Permit Number Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seedin Site Reclamation (Photo Documentation) On-site Closure Location: Latitude  5.  Derator Closure Certification:  hereby certify that the information and attachment elief. I also certify that the closure complies with Itame (Print):	ctions: Each of the following items must be attached to the closure report. P and division) closure) ury pits) is (if applicable) lts (required for on-site closure) er ing Technique  Longitude  NAD:  ents submitted with this closure report is true, accurate and complete to the best the all applicable closure requirements and conditions specified in the approved  Title:	☐1927 ☐ 1983  of my knowledge and closure plan.
Closure Report Attachment Checklist: Instructionark in the box, that the documents are attached.  Proof of Closure Notice (surface owner and Proof of Deed Notice (required for on-site of Plot Plan (for on-site closures and temporar Confirmation Sampling Analytical Results Waste Material Sampling Analytical Results Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seedin Site Reclamation (Photo Documentation) On-site Closure Location: Latitude  5.  Deerator Closure Certification: hereby certify that the information and attachmenelief. I also certify that the closure complies with the Closure Certification:	ctions: Each of the following items must be attached to the closure report. P and division) closure) ury pits) is (if applicable) lts (required for on-site closure) er ing Technique  Longitude  NAD:  ents submitted with this closure report is true, accurate and complete to the best the all applicable closure requirements and conditions specified in the approved  Title:  Date:	☐1927 ☐ 1983  of my knowledge and closure plan.
Closure Report Attachment Checklist: Instructionark in the box, that the documents are attached.  Proof of Closure Notice (surface owner and Proof of Deed Notice (required for on-site of Plot Plan (for on-site closures and temporar Confirmation Sampling Analytical Results Waste Material Sampling Analytical Results Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seedin Site Reclamation (Photo Documentation) On-site Closure Location: Latitude  5.  Deerator Closure Certification: hereby certify that the information and attachmenelief. I also certify that the closure complies with the Closure Certification:	ctions: Each of the following items must be attached to the closure report. P and division) closure) ury pits) is (if applicable) lts (required for on-site closure) er ing Technique  Longitude  NAD:  ents submitted with this closure report is true, accurate and complete to the best the all applicable closure requirements and conditions specified in the approved  Title:  Date:	□1927 □ 1983  of my knowledge and closure plan.
Closure Report Attachment Checklist: Instructionark in the box, that the documents are attached.  Proof of Closure Notice (surface owner and Proof of Deed Notice (required for on-site closures and temporar Confirmation Sampling Analytical Results Waste Material Sampling Analytical Results Disposal Facility Name and Permit Number Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seedin Site Reclamation (Photo Documentation) On-site Closure Location: Latitude  5.  Derator Closure Certification:  hereby certify that the information and attachment elief. I also certify that the closure complies with Itame (Print):	ctions: Each of the following items must be attached to the closure report. P and division) closure) ury pits) is (if applicable) lts (required for on-site closure) er ing Technique  Longitude  NAD:  ents submitted with this closure report is true, accurate and complete to the best the all applicable closure requirements and conditions specified in the approved  Title:  Date:	□1927 □ 1983  of my knowledge and closure plan.

All distances must be four the outer houndaries of the Section. Well No. #11 E APACHE FEDERAL GULF OIL CORPORATION County To-nahip Section Unit Letter RIO ARRIBA 5 WEST 24 NORTH Actual Festinge Lorotion of Fell WEST 790 SOUTH line 1850 Itne and fret from the feet from the Dedicated Acresses Preducing Formation Greand Level Elev. 320 BASIN DAKOTA BASIN DAKOTA 6484 Acres 1. Outline the acreage dedicated to the subject well by colored pencil or hachure marks on the plat below. 2. If more than one lease is dedicated to the well, outline each and identify the ownership thereof (both as to working interest and royalty). 3. If more than one lease of different ownership is dedicated to the well, have the interests of all owners been consolidated by communitization, unitization, force-pooling.etc? No Il answer is "yes," type of consolidation \_\_\_\_ If answer is "no," list the owners and tract descriptions which have actually been consolidated. (Use reverse side of this form if necessary.). No allowable will be assigned to the well until all interests have been consolidated (by communitization, unitization, forced-pooling, or otherwise) or until a non-standard unit, climinating such interests, has been approved by the Commission. CERTIFICATION I hereby certify that the Information comtoined herein is true and complete to the best of my knowledge and belief. GLYN STONE Position AREA GAS ENGINEER OIL CORPORATION FEBRUARY 26, 1981. Date Surveyed 18, 1981 February Registered Professional Engineer on 1/or Lund Surveyor James P

1300

<b>Lodestar Services</b>	. Inc	Pit Permit		Project:	ATO Energy
	-	Siting Criteria			Pit Permits
PO Box 4465, Durango,	, CO 81302	_		Revised:	8/20/2008
V		Information She	et	Prepared by:	Ashley Ager
ABAU					
API#:		3003922673		USPLSS:	T24N, R5W, S8L
Name:	Α	b- 5-41445	1	Lat/Long:	00.00504 407.00000
Maine.	Ap	pache Federal 11E		LauLong.	36.32501, -107.39039
			1	Geologic	
Depth to groundwater:		<50'		formation:	San Jose Formation
				MINERAL CO.	
Distance to closest continuously flowing watercourse:		es to the San Juan river			
Distance to closest significant watercourse, lakebed, playa lake, or sinkhole:		ft S to Canada Larga			
	AC DE TOURS			Soil Type:	Entisol
Permanent residence, school, hospital, institution or church within 300'		No			
				Annual	10.88
Domestic fresh water				Precipitation:	
well or spring within 500'		No		Precipitation Notes:	No significant precip event on record
Any other fresh water well or spring within 1000'		No			
					e kilomenami in alimin in a
Within incorporated municipal boundaries		No		Attached Documents:	
Within defined municipal fresh water well field		No		_	
Wetland within 500'		No		Mining Activity:	None
Within unstable area		AL-			
within unstable area		No			
Within 100 year flood plain		EMA data available			
	II——U SS			PROSE	
Additional Notes:					1
		hrubs between well site nd Canada Larga			
	70 - 70 M				9
		Pag	ge 1	of 1	Released to Imaging:
					Ze lease

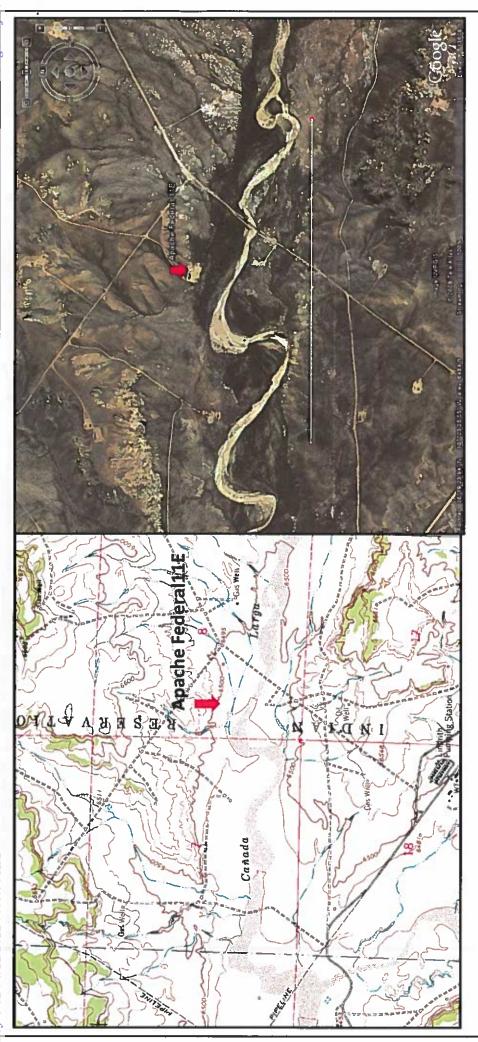


Rio Arriba county, NM Apache Federal 11E T24N, R5W, S8D Lodestar Services, Inc Durango, CO 81302 PO Box 4465

**TOPOGRAPHIC MAP** AND

**AERIAL PHOTOGRAPH** 

Released to Imaging: 8/8/202

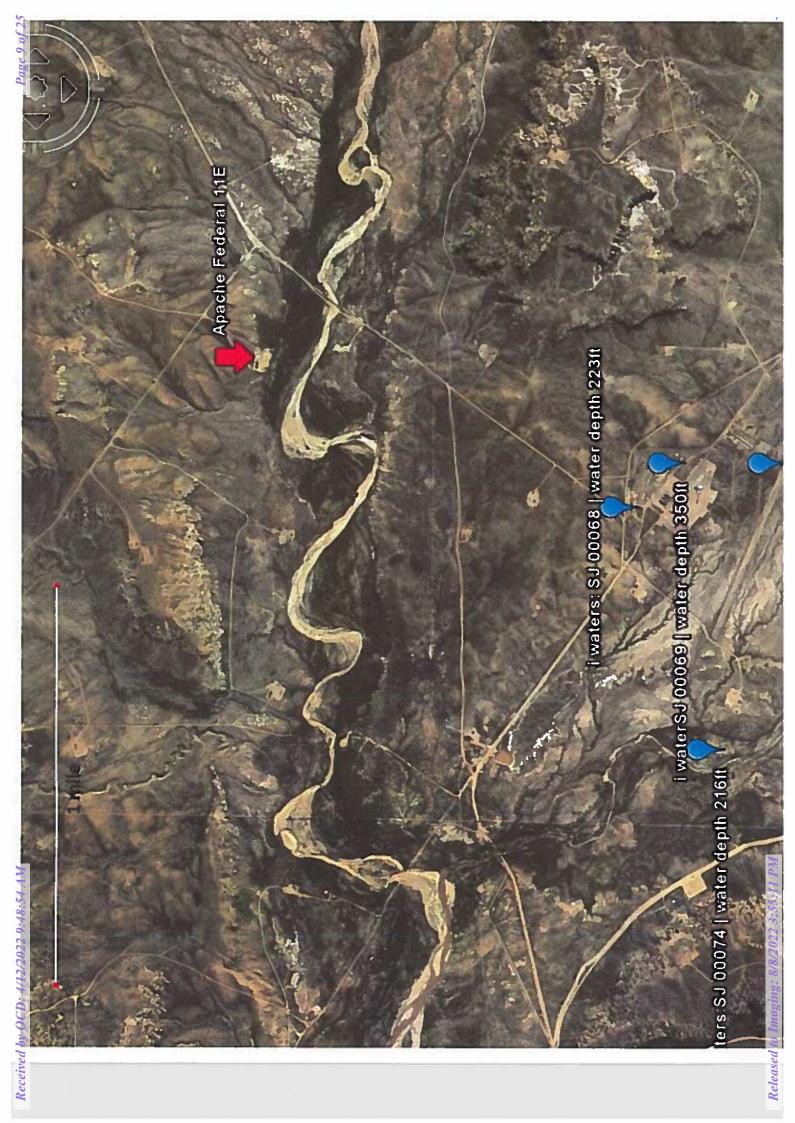


# New Mexico Office of the State Engineer POD Reports and Downloads

POD / Surface Data ReportAvg Depth to Water ReportWater Column Report

## WATER COLUMN REPORT 08/19/2008

	(quarter	s are	1	<u> </u>	ZI I	Н	SW 4=SE)							
	(quarter	s are	big	ger	ŭ	to s	biggest to smallest)				Depth	Water	(in	feet)
POD Number	Tws Rng Sec q q q Zo	Rng	Sec	ָּט	Ъ	N	one	×	×	Well	Water	Column		
	24N	05W	18	ω,	2						216	788		
	24N	05W	18	4.	2						223	566		
SJ 00069	24N	05W	18	4.	H 0						350	445		
SJ 00211	24N	05W	18	7	4						240	260		

Record Count:

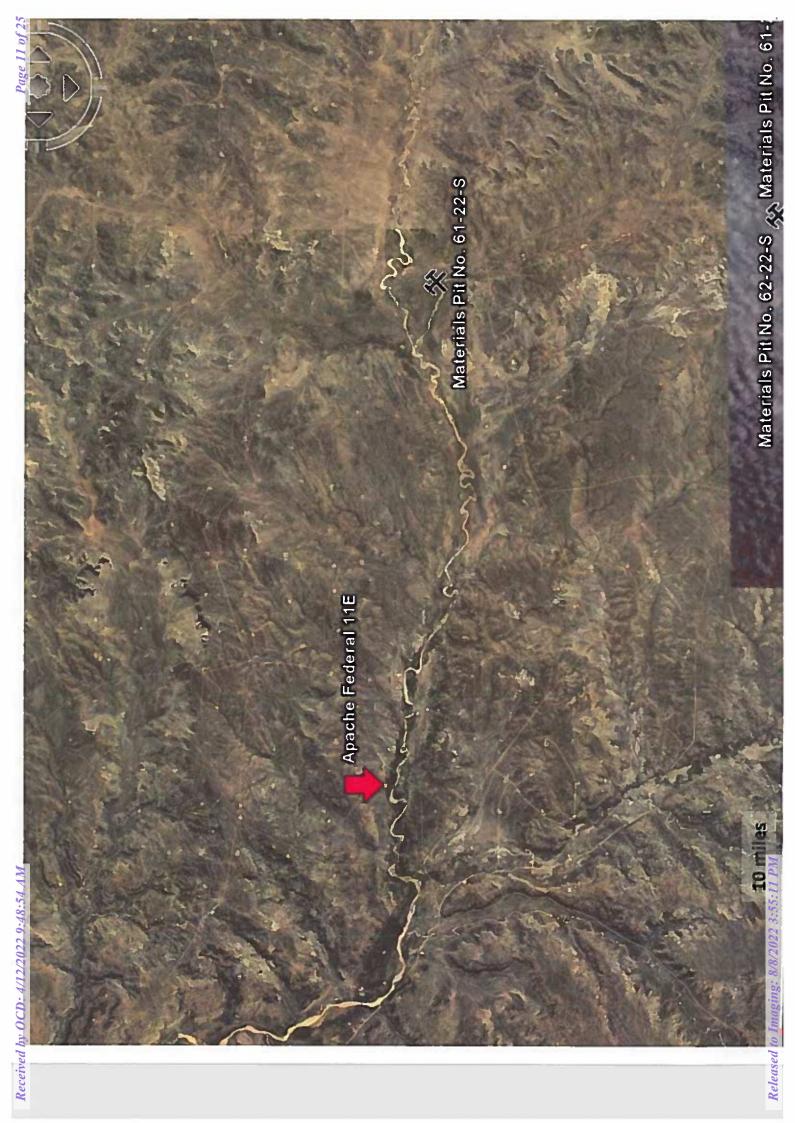

## XTO Energy Inc. San Juan Basin (Northwest New Mexico) General Design and Construction Plan For Below-Grade Tanks

In accordance with Rule 19.15.17.11 NMAC the following information describes the design and construction of below-grade tanks on XTO Energy Inc. (XTO) locations. This is XTO's standard procedure for all below-grade tanks. A separate plan will be submitted for any below-grade tank which does not conform to this plan.


### General Plan

- XTO will design and construct below-grade tanks to contain liquids and solids and prevent contamination of fresh water and protect public health and environment.
- XTO will post a well sign, in compliance with 19.15.3.103 NMAC, on the existing well site
  operated by XTO where the existing below-grade tank is located. The sign will list the Operator
  on record as the operator, the location of the well site by unit letter, section, township, range, and
  emergency telephone numbers.
- 3. XTO is requesting approval of an alternative fencing to be used on below-grade tank locations. Below-grade tank locations will be fenced utilizing 48" steel mesh field-fence (hogwire) with pipe railing along the top. A 6' chain link fence will be utilized around the well pad if the well site is within a city limits or ¼ mile of a permanent residence, school, hospital, institution or church. Below-grade tanks located within 1000' of a permanent residence, school, hospital, institution or church will be fenced by 6' chain link fence with at least two strands of barbed wire at the top. All gates associated with below-grade tanks will remain closed and locked when responsible individuals are not on site.
- 4. XTO shall construct below-grade tanks with an expanded metal covering or solid vaulted top on the top of the below-grade tank.
- 5. XTO will ensure that below-grade tanks are constructed of materials resistant to the below-grade tank's particular contents and resistant to damage from sunlight. Tanks will be constructed of A36 carbon steel with 3/16" sides and ¼" bottom. (See attached drawing).
- 6. The below-grade tank system will have a properly constructed foundation consisting of a level base free of rocks, debris, sharp edges or irregularities to prevent punctures, cracks or indentations of the liner or tank bottom. Sand bedding (4") will be placed on top of a level foundation to ensure prevention of punctures, cracks or indentations of the liner or tank bottom.
- 7. XTO will construct a berm and/or diversion ditch in a manner that prevents the collection of surface water run-on. Below-grade tanks will be equipped with automatic high level shut-off devices as well as manually operated shut-off valves. (See attached drawing).
- 8. XTO will construct and use below-grade tanks that do not have double walls. The below-grade tank sidewalls will be open for visual inspection for leaks. The sidewalls of the cellar will be constructed with 2" X 12" pine sidewalls and 4" X 4" pine brace posts. The below-grade tank

XTO Energy Inc.
San Juan Basin (Northwest New Mexico)
General Design and Construction Plan
For Below-Grade Tanks
Page 2

bottom will be elevated a minimum of 6" above the underlying ground surface and the below-grade tank will be underlain with a geomembrane liner to divert leaked liquid to a location that can be visually inspected. (See attached drawing).

- XTO will equip below-grade tanks designed in this manner with a properly functioning automatic high-level shut-off control device and manual controls to prevent overflows. (See attached drawing).
- 10. XTO will demonstrate to the OCD that the geomembrane liner complies with the specifications of Subparagraph (a) of Paragraph (4) of Subsection I of 19.15.17.11 NMAC and obtain approval from OCD prior to the installation of the design. The geomembrane liner shall have a hydraulic conductivity no greater than 1 x 10-9 cm/sec. The geomembrane liner shall be composed of an impervious, synthetic material that is resistant to petroleum hydrocarbons, salts and acidics and alkaline solutions. The liner material shall be resistant to ultraviolet light. Liner compatibility shall comply with EPA SW-846 method 9090A. (See attached drawing).
- 11. The general specifications for design and construction are attached.

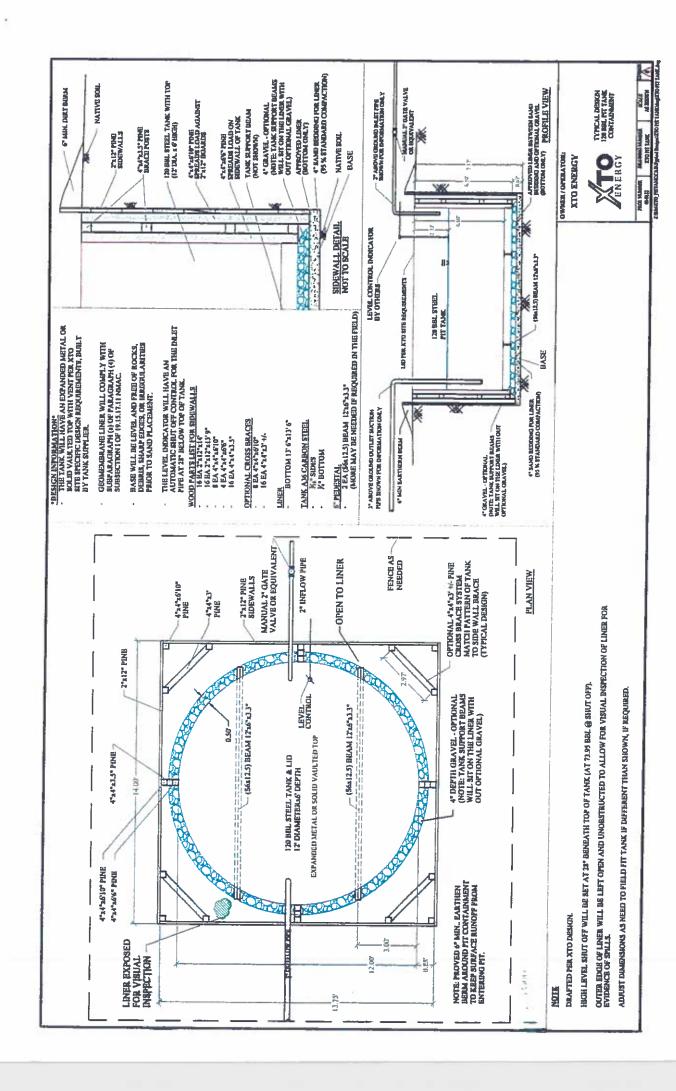

## XTO Energy Inc. San Juan Basin (Northwest New Mexico) General Maintenance and Operating Plan For Below-Grade Tanks

In accordance with Rule 19.15.17.12 NMAC the following information describes the operation and maintenance of below-grade tanks on XTO Energy Inc. (XTO) locations. This is XTO's standard procedure for all below-grade tanks. A separate plan will be submitted for any below-grade tank which does not conform to this plan.

### General Plan

- XTO will operate and maintain below-grade tanks to contain liquids and solids, maintain the
  integrity of the liner and secondary containment system, prevent contamination of fresh water and
  protect public health and the environment. Fluid levels will be monitored weekly and high levels
  will be removed as necessary. Monthly inspections will be conducted to monitor integrity of
  below-grade tank systems and below-grade tanks will be equipped with automatic high-level
  shut-off devices.
- 2. XTO will not allow below-grade tanks to overflow and will use berms and/or diversion ditch to prevent surface run on to enter the below-grade tank. Below-grade tanks will be equipped with automatic high-level shut-off control devices as well as manually operated shut-off valves. See attached drawing for vault design and placement of diversion berms and shut-off devices.
- XTO will continuously remove any visible or measurable layer of oil from the fluid surface of below-grade tanks in order to prevent significant accumulation of oil.
  - 4. XTO will inspect the below-grade tank monthly and maintain written records for five years. Monthly inspections will consist of documenting the following: (see attached template),

Well Name

API#

Sec., Twn., Rng.

XTO Inspector's name

Inspection date and time

Visible tears in liner

Visible signs of tank overflow

Collection of surface run on

Visible layer of oil

Visible signs of tank leak

Estimated freeboard

- 5. XTO will maintain adequate freeboard to prevent over topping of the below-grade tank. High level shut-off devices control the freeboard at an average of 28" beneath the top of the tank.
- 6. XTO will not discharge into or store any hazardous waste in any below-grade tank.
- If a below-grade tank develops a leak, or if any penetration of a below-grade tank occurs below the liquids surface, XTO will remove all liquids above the damage or leak line within 48 hours,

Received by OCD: 4/12/2022 9:48:54 AM

XTO Energy Inc. San Juan Basin (Northwest New Mexico) General Maintenance and Operating Plan For Below-Grade Tanks Page 2

notify the appropriate division district office within 48 hours of the discovery and repair the damage or replace the below-grade tank. If an existing below-grade tank does not meet current requirements of Paragraphs 1-4 of Subsection 1 of 19.15.17.11 NMAC the tank will be modified or retrofitted to comply. If compliance can not be achieved XTO will implement the approved closure plan.

Well Name:		MONT	1LY BELO	MONTHLY BELOW GRADE TANK INSPECTION FORM	INSPECTIO API No.:	IN FORM		
Legals	Sec:		Township:		Range:			
XTO	Inspection	Inspection	Any visible liner	Any visible signs of	Collection of surface	Visible layer	Any visible signs	Freeboard
Name	Date	Ime	tears (Y/N)	tank overflows (Y/N)	run on (Y/N)	of oil (Y/N)	of a tank leak (Y/N)	Est. (ft)
						i		
				;				
Notes:	Provide De	Provide Defailed Description:	otion:					
933					į			
Misc.				:				

## XTO Energy Inc. San Juan Basin (Northwest New Mexico) General Closure Plan For Below-Grade Tanks

In accordance with Rule 19.15.17.13 NMAC the following information describes the closure requirements of below-grade tanks on XTO Energy Inc. (XTO) locations. This is XTO's standard procedure for all below-grade tanks. A separate plan will be submitted for any below-grade tank which does not conform to this plan.

### General Plan

- XTO will close below-grade tanks within the time periods provided in 19.15.17.13 NMAC, or by an earlier date that the division requires because of imminent danger to fresh water, public health or the environment.
- XTO will close a below-grade tank that does not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC or is not included in Paragraph (5) of Subsection I of 19.15.17.11 NMAC within five years after June 16, 2008, if not retrofitted to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC.
- 3. XTO will close a permitted below-grade tank within 60 days of cessation of the below-grade tank's operation or as required by the transitional provisions of Subsection B of 19.15.17.17 NMAC in accordance with a closure plan that the appropriate division district office approves. The closure report will be filed on form C-144.
- 4. XTO will remove liquids and sludge from below-grade tanks prior to implementing a closure method and will dispose of the liquids and sludge in a division-approved facility. Approved facilities and waste streams include:

Envirotech Permit No. NM01-0011 and IEI Permit No. NM 01-0010B

Soil contaminated by exempt petroleum hydrocarbons

Produced sand, pit sludge and contaminated bottoms from storage of exempt wastes

Basin Disposal Permit No. NM01-005 Produced water

- 5. XTO will remove the below-grade tank and dispose of it in a division approved facility or recycle, reuse, or reclaim it in a manner that the appropriate division district office has approved prior to removal. Any associated liners will be removed, properly cleaned and disposed of per 19.15.9.712 NMAC at San Juan County Landfill. Documentation of the final disposition will be included in the closure report.
- 6. XTO will remove any on-site equipment associated with a below-grade tank unless the equipment is required for some other purpose.
- 7. XTO will test the soils beneath the below-grade tank to determine whether a release has occurred. At a minimum 5 point composite sample will be collected along with individual grab samples from any area that is wet, discolored or showing other evidence of a release. Samples will be

XTO Energy Inc.
San Juan Basin (Northwest New Mexico)
General Closure Plan
For Below-Grade Tanks
Page 2

analyzed for BTEX, TPH and chlorides to demonstrate that the benzene concentration, as determined by EPA SW-846 methods 8021B or 8260B or EPA method that the division approves, does not exceed 0.2 mg/kg; total BTEX concentration, as determined by EPA SW-846 methods 8021B or 8260B or other EPA method that the division approves, does not exceed 50 mg/kg; the TPH concentration, as determined by EPA method 418.1 or other EPA method that the division approves, does not exceed 100mg/kg, and the chloride concentration, as determined by EPA method 300.1 or other EPA method that the division approves, does not exceed 250 mg/kg, or the background concentration, whichever is greater. XTO will notify the division of its results on form C-141.

- 8. If XTO or the division determines that a release has occurred, XTO will comply with 19.15.3.116 NMAC and 19.15.1.19NMAC as appropriate.
- 9. If the sampling program demonstrates that a release has not occurred or that any release does not exceed the concentrations specified in Paragraph (4) of Subsection E of 19.15.17.13 NMAC, XTO will backfill the excavation with compacted, non-waste containing, earthen material; construct a division prescribed soil cover; recontour and re-vegetate the site.
- 10. Notice of Closure operations will be given to the Aztec Division District III office between 72 hours and one week prior to the start of closure activities via email or verbally. The notification will include the following:
  - i. Operator's name
  - ii. Well Name and API Number
  - iii. Location by Unit Letter, Section, Township, and Range

The surface owner shall also be notified prior to the implementation of any closure operations of below-grade tanks as per the approved closure plan using certified mail, return receipt requested.

- 11. Re-contouring of location will match fit, shape, line, form and texture of the surrounding area. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be placed in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.
- 12. A minimum of 4 feet of cover shall be achieved and the cover shall include 1 foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater. Soil cover will be constructed to the site's existing grade and ponding of water and erosion of the cover material will be prevented with drainage control, natural drainages and silt traps where needed.
- 13. XTO will seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM or Forest Service stipulated seed mixes will be used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

Received by OCD: 4/12/2022 9:48:54 AM

XTO Energy Inc. San Juan Basin (Northwest New Mexico) General Closure Plan For Below-Grade Tanks Page 3

- 14. All closure activities will include proper documentation and be available for review upon request and will be submitted in closure report form to OCD within 60 days of closure of the below-grade tank. Closure report will be filed on form C-144 and incorporate the following:
  - Proof of closure notice to division and surface owner;
  - ii. Details on capping and covering, where applicable;
  - III. Inspection reports;
  - iv. Confirmation sampling analytical results;
  - V. Disposal facility name(s) and permit number(s);
  - VI. Soil backfilling and cover installation,
  - VII. Re-vegetation application rates and seeding techniques, (or approved alternative to re-vegetation requirements if applicable),

Released to Imaging: 8/8/2022 3:55:11 PM

viii. Photo documentation of the site reclamation.

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720 District II

811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720 District III

1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170 1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

**State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division** 1220 S. St Francis Dr. **Santa Fe, NM 87505** 

QUESTIONS

Action 97774

### **QUESTIONS**

Operator:	OGRID:
HILCORP ENERGY COMPANY	372171
1111 Travis Street	Action Number:
Houston, TX 77002	97774
	Action Type:
	[C-144] Legacy Below Grade Tank Plan (C-144LB)

### QUESTIONS

Facility and Ground Water	
Please answer as many of these questions as possible in this group. More information will help us id	lentify the appropriate associations in the system.
Facility or Site Name	APACHE FEDERAL 11E
Facility ID (f#), if known	Not answered.
Facility Type	Below Grade Tank - (BGT)
Well Name, include well number	APACHE FEDERAL 11E
Well API, if associated with a well	30-039-22673
Pit / Tank Type	Not answered.
Pit / Tank Name or Identifier	Not answered.
Pit / Tank Opened Date, if known	Not answered.
Pit / Tank Dimensions, Length (ft)	Not answered.
Pit / Tank Dimensions, Width or Diameter (ft)	Not answered.
Pit / Tank Dimensions, Depth (ft)	Not answered.
Ground Water Depth (ft)	Not answered.
Ground Water Impact	Not answered.
Ground Water Quality (TDS)	Not answered.

Below-Grade Tank	
Subsection I of 19.15.17.11 NMAC	
Volume / Capacity (bbls)	120
Type of Fluid	Produced Water
Pit / Tank Construction Material	Steel
Secondary containment with leak detection	Not answered.
Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off	Not answered.
Visible sidewalls and liner	Not answered.
Visible sidewalls only	Not answered.
Tank installed prior to June 18. 2008	True
Other, Visible Notation. Please specify	Not answered.
Liner Thickness (mil)	Not answered.
HDPE (Liner Type)	Not answered.
PVC (Liner Type)	Not answered.
Other, Liner Type. Please specify (Variance Required)	Not answered.

District I 1625 N. French Dr., Hobbs, NM 88240 Phone: (575) 393-6161 Fax: (575) 393-0720 District II

811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720 District III

1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

### **State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division** 1220 S. St Francis Dr. **Santa Fe, NM 87505**

QUESTIONS, Page 2

Action 97774

QUEST	ONS (continued)
Operator: HILCORP ENERGY COMPANY 1111 Travis Street Houston, TX 77002	OGRID: 372171 Action Number: 97774 Action Type: [C-144] Legacy Below Grade Tank Plan (C-144LB)
QUESTIONS	, , , , , , , , , , , , , , , , , , , ,
Fencing	
Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tank	(s)
Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church)	Not answered.
Four foot height, four strands of barbed wire evenly spaced between one and four feet	Not answered.
Alternate, Fencing. Please specify (Variance Required)	4' steel mesh
Fr	
Netting Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)	
Screen	Not answered.
Netting	Not answered.
Other, Netting. Please specify (Variance May Be Needed)	expanded metal or solid vaulted top
Signs	
Subsection C of 19.15.17.11 NMAC (If there are multiple operators at a site, each operator must have	e their own sign in compliance with Subsection C of 19.15.17.11 NMAC.)
12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers	Not answered.
Signed in compliance with 19.15.16.8 NMAC	True
Variances and Exceptions  Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for	guidance.
Please check a box if one or more of the following is requested, if not leave blank:  Variance(s):	

Not answered.

Not answered.

of approval. Exception(s):

consideration of approval

Requests must be submitted to the appropriate division district for consideration

Requests must be submitted to the Santa Fe Environmental Bureau office for

District I 1625 N. French Dr., Hobbs, NM 88240 Phone: (575) 393-6161 Fax: (575) 393-0720 District II

811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV

### **State of New Mexico Energy, Minerals and Natural Resources** Oil 1220 S. St Francis Dr. Santa Ea NIM 97505

QUESTIONS, Page 3

Action 97774

ilei ais ailu Naturai Nesources	Action 97
Conservation Division	

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone: (505) 476-3470 Fax: (505) 476-3462	a re, NIVI 6/505
QUESTI	IONS (continued)
Operator: HILCORP ENERGY COMPANY 1111 Travis Street Houston, TX 77002	OGRID: 372171 Action Number: 97774 Action Type: [C-144] Legacy Below Grade Tank Plan (C-144LB)
QUESTIONS	[OTH] Legacy Below Grade Park Film (OTH-LD)
Siting Criteria (regarding permitting)  19.15.17.10 NMAC  Instructions: The applicant must demonstrate compliance for each siting criteria	a below in the application. Recommendations of acceptable source material are provided
below. Siting criteria does not apply to drying pads or above-grade tanks.	perow in the application. Necommendations of acceptable source material are provided
Siting Criteria, General Siting	
Ground water is less than 25 feet below the bottom of a low chloride temporary pit or below-grade tank	Not answered.
NM Office of the State Engineer - iWATERS database search	Not answered.
USGS	Not answered.
Data obtained from nearby wells	Not answered.
Siting Criteria, Below Grade Tanks	
Within 100 feet of a continuously flowing watercourse, significant watercourse, lakebed, sinkhole, wetland or playa lake (measured from the ordinary high-water mark)	No
Within 200 horizontal feet of a spring or a fresh water well used for public or livestock consumption	No
Proposed Closure Method	
	1
Below-grade Tank	Below Grade Tank - (BGT)
Waste Excavation and Removal	Not answered.
Alternate Closure Method. Please specify (Variance Required)	Not answered.

11/18/2008

Operator Application Certification Registered / Signature Date

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

District II 811 S. First St., Artesia, NM 88210 Phone: (575) 748-1283 Fax: (575) 748-9720

District III 1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

**State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division** 1220 S. St Francis Dr. **Santa Fe, NM 87505** 

ACKNOWLEDGMENTS

Action 97774

### **ACKNOWLEDGMENTS**

Operator:	OGRID:
HILCORP ENERGY COMPANY	372171
1111 Travis Street	Action Number:
Houston, TX 77002	97774
	Action Type:
	[C-144] Legacy Below Grade Tank Plan (C-144LB)

### **ACKNOWLEDGMENTS**

V	I acknowledge that I have received prior approval from the OCD to submit documentation of a legacy below-grade tank on behalf of my operator.	
V	I hereby certify that the information submitted with this documentation is true, accurate and complete to the best of my knowledge and belief.	

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

District II 811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720

District III 1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

**State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division** 1220 S. St Francis Dr. **Santa Fe, NM 87505** 

CONDITIONS

Action 97774

### **CONDITIONS**

Operator:	OGRID:
HILCORP ENERGY COMPANY	372171
1111 Travis Street	Action Number:
Houston, TX 77002	97774
	Action Type:
	[C-144] Legacy Below Grade Tank Plan (C-144LB)

### CONDITIONS

Created By	Condition	Condition Date
swells	None	8/8/2022