

Form 3160-3
(June 2015)FORM APPROVED
OMB No. 1004-0137
Expires: January 31, 2018

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
APPLICATION FOR PERMIT TO DRILL OR REENTER

| | | |
|--|---------------------------------------|---|
| 1a. Type of work: <input type="checkbox"/> DRILL <input type="checkbox"/> REENTER 1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other 1c. Type of Completion: <input type="checkbox"/> Hydraulic Fracturing <input type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone | | 5. Lease Serial No. 6. If Indian, Allottee or Tribe Name 7. If Unit or CA Agreement, Name and No. 8. Lease Name and Well No. |
| 2. Name of Operator | | 9. API Well No. 30-015-49835 |
| 3a. Address | 3b. Phone No. (include area code) | 10. Field and Pool, or Exploratory |
| 4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface At proposed prod. zone | | 11. Sec., T. R. M. or Blk. and Survey or Area |
| 14. Distance in miles and direction from nearest town or post office* | | 12. County or Parish |
| 13. State | | |
| 15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) | 16. No of acres in lease | 17. Spacing Unit dedicated to this well |
| 18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. | 19. Proposed Depth | 20. BLM/BIA Bond No. in file |
| 21. Elevations (Show whether DF, KDB, RT, GL, etc.) | 22. Approximate date work will start* | 23. Estimated duration |
| 24. Attachments | | |

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

- | | |
|---|---|
| 1. Well plat certified by a registered surveyor. 2. A Drilling Plan. 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). 5. Operator certification. 6. Such other site specific information and/or plans as may be requested by the BLM. |
|---|---|

| | | |
|-------------------------|----------------------|------|
| 25. Signature | Name (Printed/Typed) | Date |
| Title | | |
| Approved by (Signature) | Name (Printed/Typed) | Date |
| Title | | |
| Office | | |

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
 Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

*(Instructions on page 2)



Additional Operator Remarks**Location of Well**

0. SHL: SESE / 1038 FSL / 1194 FEL / TWSP: 26S / RANGE: 29E / SECTION: 15 / LAT: 32.037654 / LONG: -103.9669553 (TVD: 0 feet, MD: 0 feet)
PPP: NWNE / 0 FNL / 1840 FEL / TWSP: 26S / RANGE: 29E / SECTION: 34 / LAT: 32.0025419 / LONG: -103.9698965 (TVD: 10298 feet, MD: 21900 feet)
PPP: NWSE / 2653 FNL / 1858 FEL / TWSP: 26S / RANGE: 29E / SECTION: 22 / LAT: 32.0275848 / LONG: -103.9691079 (TVD: 10289 feet, MD: 12783 feet)
PPP: SWSE / 1322 FSL / 1861 FEL / TWSP: 26S / RANGE: 29E / SECTION: 27 / LAT: 32.0093561 / LONG: -103.9697206 (TVD: 10298 feet, MD: 19419 feet)
PPP: NWSE / 2644 FSL / 1858 FEL / TWSP: 26S / RANGE: 29E / SECTION: 27 / LAT: 32.0129907 / LONG: -103.9695117 (TVD: 10289 feet, MD: 18095 feet)
PPP: NWNE / 1322 FNL / 1860 FEL / TWSP: 26S / RANGE: 29E / SECTION: 27 / LAT: 32.0168228 / LONG: -103.9692915 (TVD: 10289 feet, MD: 16700 feet)
PPP: NWNE / 0 FSL / 1860 FEL / TWSP: 26S / RANGE: 29E / SECTION: 27 / LAT: 32.0202669 / LONG: -103.9691048 (TVD: 10289 feet, MD: 15446 feet)
PPP: NWNE / 100 FNL / 1860 FEL / TWSP: 26S / RANGE: 29E / SECTION: 22 / LAT: 32.0347426 / LONG: -103.969111 (TVD: 9765 feet, MD: 9900 feet)
BHL: LOT 11 / 50 FSL / 1830 FEL / TWSP: 26S / RANGE: 29E / SECTION: 34 / LAT: 32.0002381 / LONG: -103.9698551 (TVD: 10289 feet, MD: 22738 feet)

BLM Point of Contact

Name: Candy Vigil
Title: LIE
Phone: (575) 234-5982
Email: cvigil@blm.gov

DISTRICT I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

DISTRICT II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170

DISTRICT IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, New Mexico 87505

Form C-102

Revised August 1, 2011

Submit one copy to appropriate
District Office☐ AMENDED REPORT**WELL LOCATION AND ACREAGE DEDICATION PLAT**

| | | |
|-----------------------------------|---|---|
| API Number 30-015-49835 | Pool Code 98220 | Pool Name PURPLE SAGE WOLFCAMP GAS POOL |
| Property Code 333166 | Property Name HORN 22-27-34 FED COM | Well Number 421H |
| OGRID No. 246289 | Operator Name WPX ENERGY PERMIAN, LLC | Elevation 2926.2' |


Surface Location

| UL or lot no. | Section | Township | Range | Lot Idn | Feet from the | North/South line | Feet from the | East/West line | County |
|---------------|-----------|-------------|-------------|---------|---------------|------------------|---------------|----------------|-------------|
| P | 15 | 26-S | 29-E | | 1038 | SOUTH | 1194 | EAST | EDDY |

Bottom Hole Location If Different From Surface

| UL or lot no. | Section | Township | Range | Lot Idn | Feet from the | North/South line | Feet from the | East/West line | County |
|----------------------------------|-----------------|-------------------|-------------|---------|---------------|------------------|---------------|----------------|-------------|
| 11 | 34 | 26-S | 29-E | | 50 | SOUTH | 1830 | EAST | EDDY |
| Dedicated Acres 761.71 | Joint or Infill | Consolidated Code | Order No. | | | | | | |

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.
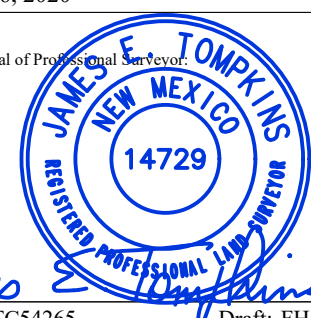
| | |
|---|---|
| <p>SHL: 1038' FSL, 1194' FEL, SECTION 15 NAD 83, NMSP-E, N.(Y): = 377630.2', E.(X): = 654865.5' LAT.: = 32.0376540° N, LON.: = 103.9669553° W NAD 27, NMSP-E, N.(Y): = 377572.6', E.(X): = 613679.8' LAT.: = 32.0375311° N, LON.: = 103.9664695° W</p> <p>POP: 50' FNL, 1860' FEL, SECTION 22 NAD 83, NMSP-E, N.(Y): = 376570.2', E.(X): = 654199.8' LAT.: = 32.0347463° N, LON.: = 103.9691154° W NAD 27, NMSP-E, N.(Y): = 376512.7', E.(X): = 613014.1' LAT.: = 32.0346234° N, LON.: = 103.9686295° W</p> <p>FTP: 100' FNL, 1860' FEL, SECTION 22 NAD 83, NMSP-E, N.(Y): = 376520.2', E.(X): = 654199.9' LAT.: = 32.0346087° N, LON.: = 103.9691154° W NAD 27, NMSP-E, N.(Y): = 376462.6', E.(X): = 613014.2' LAT.: = 32.0344858° N, LON.: = 103.9686296° W</p> <p>TP 1: 0' FSL, 1860' FEL, SECTION 22: NAD 83, NMSP-E, N.(Y): = 371302.2', E.(X): = 654219.5' LAT.: = 32.0202649° N, LON.: = 103.9691089° W NAD 27, NMSP-E, N.(Y): = 371244.8', E.(X): = 613033.7' LAT.: = 32.0201417° N, LON.: = 103.9686235° W</p> <p>TP 2: 22' FSL, 1860' FEL, SECTION 27 NAD 83, NMSP-E, N.(Y): = 366032.5', E.(X): = 653982.7' LAT.: = 32.0057809° N, LON.: = 103.9699303° W NAD 27, NMSP-E, N.(Y): = 365975.2', E.(X): = 612796.7' LAT.: = 32.0056576° N, LON.: = 103.9694455° W</p> <p>TP 3: 0' FNL, 1830' FEL, SECTION 34 NAD 83, NMSP-E, N.(Y): = 366008.0', E.(X): = 654005.1' LAT.: = 32.0057132° N, LON.: = 103.9698583° W NAD 27, NMSP-E, N.(Y): = 365950.7', E.(X): = 612819.1' LAT.: = 32.0055899° N, LON.: = 103.9693735° W</p> <p>LTP: 100' FSL, 1830' FEL, SECTION 34 NAD 83, NMSP-E, N.(Y): = 364065.5', E.(X): = 654010.6' LAT.: = 32.0003734° N, LON.: = 103.9698615° W NAD 27, NMSP-E, N.(Y): = 364008.2', E.(X): = 612824.6' LAT.: = 32.0002500° N, LON.: = 103.9693768° W</p> <p>BHL: 50' FSL, 1830' FEL, SECTION 34 NAD 83, NMSP-E, N.(Y): = 364015.5', E.(X): = 654010.8' LAT.: = 32.0002360° N, LON.: = 103.9698616° W NAD 27, NMSP-E, N.(Y): = 363958.2', E.(X): = 612824.7' LAT.: = 32.0001126° N, LON.: = 103.9693769° W</p> | <p style="text-align: center;">OPERATOR CERTIFICATION</p> <p><i>I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.</i></p> <p style="text-align: right;">10/21/20</p> <p>Signature _____ Date _____</p> <p>Larry E. Rader Print Name _____</p> <p>larry.rader@wpxenergy.com E-mail Address _____</p> <p style="text-align: center;">SURVEYORS CERTIFICATION</p> <p><i>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</i></p> <p style="text-align: center;">AUGUST 26, 2020</p> <p>Date of Survey _____</p> <p>Signature and Seal of Professional Surveyor: _____</p> <div style="text-align: center;">  </div> <p>Job No.: WTC54265 Draft: FH!</p> <p>JAMES E. TOMPKINS 14729</p> <p>Certificate Number _____</p> |
|---|---|

State of New Mexico
Energy, Minerals and Natural Resources Department

Submit Electronically
Via E-permitting

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description

Effective May 25, 2021

I. Operator: WPX Energy Permian, LLC **OGRID:** 246289 **Date:** 06 / 10 / 2022

II. Type: ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe: _____

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

| Well Name | API | ULSTR | Footages | Anticipated Oil BBL/D | Anticipated Gas MCF/D | Anticipated Produced Water BBL/D |
|----------------|-----|-------|----------|--------------------------|--------------------------|--|
| See attachment | | | | | | |
| | | | | | | |

IV. Central Delivery Point Name: See attachment [See 19.15.27.9(D)(1) NMAC]

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

| Well Name | API | Spud Date | TD Reached Date | Completion Commencement Date | Initial Flow Back Date | First Production Date |
|----------------|-----|-----------|--------------------|---------------------------------|---------------------------|--------------------------|
| See attachment | | | | | | |
| | | | | | | |

VI. Separation Equipment: ☒ Attach a complete description of how Operator will size separation equipment to optimize gas capture.

VII. Operational Practices: ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices: ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

Section 2 – Enhanced Plan**EFFECTIVE APRIL 1, 2022**

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☒ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

| Well | API | Anticipated Average Natural Gas Rate MCF/D | Anticipated Volume of Natural Gas for the First Year MCF |
|------|-----|--|--|
| | | | |
| | | | |

X. Natural Gas Gathering System (NGGS):

| Operator | System | ULSTR of Tie-in | Anticipated Gathering Start Date | Available Maximum Daily Capacity of System Segment Tie-in |
|----------|--------|-----------------|----------------------------------|---|
| | | | | |
| | | | | |

XI. Map. ☐ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system ☐ will ☐ will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

XIII. Line Pressure. Operator ☐ does ☐ does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

XIV. Confidentiality: ☐ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

NATURAL GAS MANAGEMENT PLAN
Section 1 - Plan Description

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

| Well Name | Central Delivery Point Name: | API | ULSTR | SHL FOOTAGES | | | | Anticipated Oil BBL/D | Anticipated Gas MCF/D | Anticipated Produced Water BBL/D |
|----------------------------|--|-----|------------|--------------|----------|--|--|--------------------------|---|--|
| HORN 22-27-34 FED COM 413H | HORN 22-27-34 FED COM FACILITY SITE(4.4766 AC) | | 15-265-29E | 1038 FSL | 794 FEL | | | PURPLE SAGE WOLFCAMP | (+/-) 8464 mcf/d/(+/-) 1840 bopd/(+/-) 10120 bwpd | |
| HORN 22-27-34 FED COM 421H | HORN 22-27-34 FED COM FACILITY SITE(4.4766 AC) | | 15-265-29E | 1038 FSL | 1194 FEL | | | PURPLE SAGE WOLFCAMP | (+/-) 8464 mcf/d/(+/-) 1840 bopd/(+/-) 10120 bwpd | |
| HORN 22-27-34 FED COM 422H | HORN 22-27-34 FED COM FACILITY SITE(4.4766 AC) | | 15-265-29E | 1058 FSL | 794 FEL | | | PURPLE SAGE WOLFCAMP | (+/-) 8464 mcf/d/(+/-) 1840 bopd/(+/-) 10120 bwpd | |
| HORN 22-27-34 FED COM 412H | HORN 22-27-34 FED COM FACILITY SITE(4.4766 AC) | | 15-265-29E | 1008 FSL | 1194 FEL | | | PURPLE SAGE WOLFCAMP | (+/-) 8464 mcf/d/(+/-) 1840 bopd/(+/-) 10120 bwpd | |
| | | | | | | | | | | |

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

| Well Name | API | Spud Date | TD Reached Date | Completion Commencem ent Date | Initial Flow back Date | First Production Date |
|----------------------------|-----|-----------|--------------------|-------------------------------------|---------------------------|-----------------------------|
| HORN 22-27-34 FED COM 413H | | 9/1/2023 | 10/1/2023 | 1/29/2024 | 1/29/2024 | 1/29/2024 |
| HORN 22-27-34 FED COM 421H | | 9/1/2023 | 10/1/2023 | 1/29/2024 | 1/29/2024 | 1/29/2024 |
| HORN 22-27-34 FED COM 422H | | 9/1/2023 | 10/1/2023 | 1/29/2024 | 1/29/2024 | 1/29/2024 |
| HORN 22-27-34 FED COM 412H | | 9/1/2023 | 10/1/2023 | 1/29/2024 | 1/29/2024 | 1/29/2024 |
| | | | | | | |

Dates above are subject to change

Section 3 - Certifications

Effective May 25, 2021

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☒ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

D Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

If Operator checks this box, Operator will select one of the following:

Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

Venting and Flaring Plan. ☐ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

Section 4 - Notices


1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

| |
|--|
| Signature:  |
| Printed Name: Jeff Walla |
| Title: Surface Land and Regulatory Manager |
| E-mail Address: |
| Date: |
| Phone: |
| OIL CONSERVATION DIVISION (Only applicable when submitted as a standalone form) |
| Approved By: |
| Title: |
| Approval Date: |
| Conditions of Approval: |



VI. Separation Equipment

WPX Energy Permian, LLC (WPX) utilizes a "stage separation" process in which oil and gas separation is carried out through a series of separators operating at successively reduced pressures. Hydrocarbon liquids are produced into a high-pressure inlet separator, then carried through one or more lower pressure separation vessels before entering the storage tanks. The purpose of this separation process is to attain maximum recovery of liquid hydrocarbons from the fluids and allow maximum capture of produced gas into the sales pipeline. WPX utilizes a series of Low-Pressure Compression units to capture gas off the staged separation and send it to the sales pipeline. This process minimizes the amount of flash gas that enters the end-stage storage tanks that is subsequently vented or flared.



VII. Operational Practices

WPX Energy Permian, LLC will employ best management practices and control technologies to maximize the recovery and minimize waste of natural gas through venting and flaring.

- During drilling operations, WPX will utilize flares and/or combustors to capture and control natural gas, where technically feasible. If flaring is deemed technically in-feasible, WPX will employ best management practices to minimize or reduce venting to the extent possible.
- During completions operations, WPX will utilize Green Completion methods to capture gas produced during well completions that is otherwise vented or flared. If capture is technically in-feasible, flares and/or combustors will be used to capture and control flow back fluids entering into frac tanks during initial flowback. Upon indication of first measurable hydrocarbon volumes, WPX will turn operations to onsite separation vessels and flow to the gathering pipeline.
- During production operations, WPX will take every practical effort to minimize waste of natural gas through venting and flaring by:
 - Designing and constructing facilities in a manner consistent to achieve maximum capture and control of hydrocarbon liquids & produced gas
 - Utilizing a closed-loop capture system to collect and route produced gas to sales line via low pressure compression, or to a flare/combustor
 - Flaring in lieu of venting, where technically feasible
 - Utilizing auto-ignitors or continuous pilots, with thermocouples connected to Scada, to quickly detect and resolve issues related to malfunctioning flares/combustors
 - Employ the use of automatic tank gauging to minimize storage tank venting during loading events
 - Installing air-driven or electric-driven pneumatics & combustion engines, where technically feasible to minimize venting to the atmosphere
 - Confirm equipment is properly maintained and repaired through a preventative maintenance and repair program to ensure equipment meets all manufacturer specifications
 - Conduct and document AVO inspections on the frequency set forth in Part 27 to detect and repair any onsite leaks as quickly and efficiently as is feasible



VIII. Best Management Practices during Maintenance

WPX Energy Permian, LLC will utilize best management practices to minimize venting during active and planned maintenance activities. WPX is operating under guidance that production facilities permitted under NOI permits have no provisions to allow high pressure flaring and high pressure flaring is only allowed in disruption scenarios so long as the duration is less than eight hours. When technically feasible, flaring during maintenance activities will be utilized in lieu of venting to the atmosphere. WPX will work with third-party operators during scheduled maintenance of downstream pipeline or processing plants to address those events ahead of time to minimize venting. Actions considered include identifying alternative capture approaches or planning to temporarily reduce production or shut in the well to address these circumstances.

WPX Energy Permian, LLC



Drilling Plan

Well Horn 22-27-34 Fed Com 421H
 Location Surface: 1038FSL, 1194'FEL (S15) T26S R29E Sec15
 Bottom Hole: 50 FSL 1830FEL (S34) T26S R29E Sec 34
 County/State Eddy, NM

The elevation of the unprepared ground is 2,926 feet above sea level.

The geologic name of the surface formation is Quaternary

A rotary rig will be utilized to drill the well to 22738' MD, then will be cased and cemented. This equipment will then be rigged down and the well will be completed with a workover rig.

Proposed depth is 22,738 feet MD.

1) Estimated Tops:

| Formation Name | MD | TVD | Bearing | BHP (psi) | MASP (psi) |
|--------------------------|-------|-------|---------|-----------|------------|
| Quaternary | 0 | 0 | Water | | |
| Bell Canyon | 2987 | 2985 | Oil/Gas | | |
| Cherry Canyon | 4053 | 4025 | Oil/Gas | | |
| Brushy Canyon | 5169 | 5114 | Oil/Gas | | |
| Bone Spring 1st | 7764 | 7645 | Oil/Gas | | |
| Bone Spring 2nd | 8401 | 8268 | Oil/Gas | | |
| Bone Spring 3rd | 9680 | 9545 | Oil/Gas | | |
| KOP | 9851 | 9716 | Oil/Gas | | |
| Wolfcamp | 10020 | 9883 | Oil/Gas | | |
| Landing Point (Wolfcamp) | 10751 | 10289 | Oil/Gas | | |
| TD | 22738 | 10289 | Oil/Gas | 6,955 | 4,692 |

2) Notable Formations:

Any usable fresh water zones encountered will be adequately protected and reported. All usable water zones, potential hydrocarbon zones, and valuable mineral zones will be isolated.

Useable water will be protected by surface casing set and cemented to surface.

3) Pressure Control Equipment:

The blowout preventer equipment (BOPE) will consist of 3 rams (10,000 psi WP) with 2 pipe rams (one of which may be variable), 1 blind ram and 1 annular preventer (5,000 psi WP) will be installed. The BOPE will be used below surface casing to TD. See attachments for BOP and choke manifold diagrams. A rotating head will be installed as needed. Units will be hydraulically operated.

An accumulator that meets the requirements of Onshore Order 2 for the pressure rating of the BOP stack will be present.

BOPE will be inspected and operated as recommended in Onshore Order 2. A third party company will test the BOPE. After surface casing is set and the BOPE is nipped up, pressure tests will be conducted to 250 psi low and 5000 psi high (50% of WP) with the annular tested to 250 psi low and 2500 psi high (50% of WP).

A 20" x 13-3/8" x 9-5/8" x 7" 10M multi-bowl wellhead w/ 9-5/8" and 7" mandrel hangers will be install after setting surface casing and utilized until total depth is reached. The 9-5/8" and 7" casings will be set using a mandrel in the casing head and the stack will not be retested at these casing points.

The following BOPE will be installed, tested and operational:

- Drilling spool or blowout preventer with two (2) side outlets;
 - Choke line side shall be 3" minimum diameter;
 - Two (2) adjustable chokes with one (1) remotely controlled from the rig floor and pressure gauge.
 - Kill side shall be at least 2" diameter;
 - Two (2) manual valves and one (1) check valve.

Auxiliary equipment is as follows:

- Upper kelly cock valve with a handle available;
- Lower kelly cock valve with a handle available;
- A float valve will be used in the drill string, either in a float sub or in the mud motor;

- Safety valves and subs with a full opening sized to fit all drill strings and collars will be available on the rig floor in the open position.

WPX Energy Permian, LLC requests a variance to drill this well using a co-flex line between the BOP and the choke manifold. Certification for proposed co-flex hose is attached. The hose is required by the manufacturer to be anchored. In the event the specific hose is not available, one of equal or higher rating will be used.

4) Casing Program:

| Section | Hole Size | Top (MD) | Bottom (MD) | Bottom (TVD) | Casing OD | Weight (ppf) | Grade | Threads |
|---------|-----------|----------|-------------|--------------|-----------|--------------|------------|---------|
| Surf | 17-1/2" | 0 | 375 | 375 | 13-3/8" | 54.5 | J-55 | BT&C |
| Int_1 | 12-1/4" | 0 | 3,295 | 3,285 | 9-5/8" | 40.0 | J-55 | BT&C |
| Int_2 | 8-3/4" | 0 | 10,751 | 10,289 | 7" | 29.0 | VAXP P-110 | BT&C |
| Liner | 6-1/8" | 9,701 | 22,738 | 10,289 | 4-1/2" | 13.5 | VA-EP-P110 | VARN |

| Safety Factors | |
|----------------|-------|
| Collapse | 1.125 |
| Burst | 1.000 |
| Tension | 1.600 |

| Design Factors | | | |
|----------------|----------|-------|---------|
| Section | Collapse | Burst | Tension |
| Surf | 6.85 | 33.09 | 25.15 |
| Int_1 | 1.78 | 5.47 | 3.95 |
| Int_2 | 2.49 | 6.11 | 3.38 |
| Liner | 2.36 | 5.48 | 2.52 |

Centralizers will be run as follows:

- One (1) centralizer on each of the bottom three jts of casing beginning with the shoe jt;
- One (1) centralizer every third jt from above bottom three jts to planned top of cement (TOC).

5) Cement Program:

| Section | Hole Size | Casing OD | Cap _{Ann} (cuft/ft) | | | | | |
|---------|-----------|-----------|------------------------------|-------|--------|-------|--------|---|
| Surf | 17.50 | 13.375 | 0.6946 | | | | | |
| Type | Cmt Btm | Cmt Top | Cubic Feet | Yield | Excess | Sacks | Weight | Blend & Additives |
| Lead | 135 | 0 | 94 | 1.94 | 50% | 73 | 12.8 | Class C + 0.50 BWOB Accelerator + 2.00 BWOB Sodium Metasilicate |
| Tail | 375 | 135 | 125 | 1.34 | 50% | 187 | 14.8 | Class C |

| Section | Hole Size | Casing OD | Cap _{Ann} (cuft/ft) | Prev Csg ID | Cap _{Csg-Csg} (cuft/ft) | | | |
|---------|-----------|-----------|------------------------------|-------------|----------------------------------|-------|--------|--|
| Int_1 | 12.25 | 9.625 | 0.3132 | 12.615 | 0.3627 | | | |
| Type | Cmt Btm | Cmt Top | Cubic Feet | Yield | Excess | Sacks | Weight | Blend & Additives |
| Lead | 375 | 0 | 136 | 2.49 | 30% | 458 | 11.9 | Class C/Poz 35/65 + 3.00 BWOW Salt + 6.00 BWOB Bentonite |
| | 2744 | 375 | 742 | | 30% | | | |
| Tail | 3295 | 2744 | 173 | 1.34 | 30% | 184 | 14.8 | Class C + 0.15 BWOB Retarder |

| Section | Hole Size | Casing OD | Cap _{Ann} (cuft/ft) | Prev Csg ID | Cap _{Csg-Csg} (cuft/ft) | | | |
|---------|-----------|-----------|------------------------------|-------------|----------------------------------|-------|--------|---|
| Int_2 | 8.75 | 7.00 | 0.1503 | 8.835 | 0.1585 | | | |
| Type | Cmt Btm | Cmt Top | Cubic Feet | Yield | Excess | Sacks | Weight | Blend & Additives |
| Lead | 3295 | 2795 | 79 | 2.09 | 30% | 648 | 11.8 | Class C + 50% Poz + 2.75 lb/sk LCM + 0.10 BWOB Sodium Metasilicate + 0.25 BWOB Retarder + 10.0 BWOB Bentonite |
| | 9701 | 3295 | 963 | | 30% | | | |
| Tail | 10751 | 9701 | 158 | 1.19 | 30% | 172 | 15.6 | Class H + 50% Poz + 0.15 BWOB Sodium Metasilicate + 0.15 BWOB Retarder + 0.30 BWOB Dispersant + 0.40 BWOB Fluid Loss + 2.0 BWOB Bentonite |

| Section | Hole Size | Casing OD | Cap _{Ann} (cuft/ft) | Prev Csg ID | Cap _{Csg-Csg} (cuft/ft) | | | |
|---------|-----------|-----------|---------------------------------|-------------|-------------------------------------|-------|--------|---|
| Liner | 6.125 | 4.50 | 0.0942 | 6.184 | 0.0981 | | | |
| Type | Cmt Btm | Cmt Top | Cubic Feet | Yield | Excess | Sacks | Weight | Blend & Additives |
| Tail | 10751 | 9701 | 103 | 1.22 | 20% | 1212 | 14.5 | Class H + 50% Poz + 0.15 BWOB Sodium Metasilicate + 0.15 BWOB Retarder + 0.30 BWOB Retarder + 0.40 BWOB Fluid Loss + 2.0 BWOB Bentonite |
| | 22738 | 10751 | 1129 | | 20% | | | |

6) Drilling Fluids Program:

An electronic mud monitoring system satisfying the requirements of Onshore Order 1 will be used. All necessary mud products for weight addition and fluid loss control will be on location at all times. Mud program is subject to change due to hole conditions.

| Section | Hole Size | TMD | Mud Wt. | Vis | PV | YP | Fluid Loss | Type |
|---------|-----------|--------|--------------|----------|-------|--------|------------|-----------|
| Surf | 17-1/2" | 375 | 8.5 to 8.9 | 32 to 36 | 1 - 6 | 1 - 6 | NC | Fresh Wtr |
| Int_1 | 12-1/4" | 3,295 | 9.8 to 10.0 | 28 to 30 | 1 - 3 | 1 - 3 | NC | Brine |
| Int_2 | 8-3/4" | 10,751 | 8.9 to 9.4 | 28 to 36 | 1 - 3 | 1 - 3 | NC | Cut Brine |
| Liner | 6-1/8" | 22,738 | 11.5 to 12.5 | 50 to 55 | 20-22 | 8 - 10 | 8 - 10 | OBM |

Mud checks will be performed every 24 hours.

The following mud system monitoring equipment will be in place during drilling:

- Visual pit markers
- Pit volume totalizer (PVT)
- Stroke counter
- Gas detection
- Mud-gas separator (gas buster)
- Flow sensor

A closed-loop system will be in place during all phases of drilling. Cuttings disposal will be at an off-site disposal facility.

7) Formation Evaluation Program:

No core or drill stem test is planned.

A 2-person mud-logging program will be used from Int_1 9-5/8" casing point to TD.

No electronic logs are planned.

8) Abnormal Conditions:

No abnormal pressure or temperature is expected.

Maximum expected bottom hole pressure is 6955 psi at 10289' TVD. Expected bottom hole temperature is <200°F.

In accordance with Onshore Order 6, WPX Energy Permian, LLC does not anticipate that there will be enough H2S to meet the BLM's minimum requirements for the submission of an "H2S Drilling Operation Plan" or "Public Protection Plan" for the drilling and completion of this well. However, since WPX Energy Permian, LLC has an H2S safety package on all wells, an "H2S Drilling Operations Plan" is attached.

Adequate flare lines will be installed off the mud/gas separator where gas may be flared safely.

All personnel will be familiar with all aspects of safe operation of equipment being used.

9) Other Information

The anticipated spud date is upon approval. Expected duration is 30 days to drill the well.



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Drilling Plan Data Report

03/28/2022

APD ID: 10400063814

Submission Date: 10/29/2020

Highlighted data
reflects the most
recent changes

Operator Name: WPX ENERGY PERMIAN LLC

Well Name: HORN 22-27-34 FED COM

Well Number: 421H

[Show Final Text](#)

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - Geologic Formations

| Formation ID | Formation Name | Elevation | True Vertical Depth | Measured Depth | Lithologies | Mineral Resources | Producing Formation |
|--------------|-----------------|-----------|---------------------|----------------|-----------------------------|-------------------|---------------------|
| 1109943 | QUATERNARY | 0 | 0 | 0 | ALLUVIUM | USEABLE WATER | N |
| 1109944 | BELL CANYON | -2985 | 2985 | 2987 | SANDSTONE, SHALE | NATURAL GAS, OIL | N |
| 1109945 | CHERRY CANYON | -4025 | 4025 | 4053 | SANDSTONE, SHALE | NATURAL GAS, OIL | N |
| 1109946 | BRUSHY CANYON | -5114 | 5114 | 5169 | SANDSTONE, SHALE | NATURAL GAS, OIL | N |
| 1109947 | BONE SPRING 1ST | -7645 | 7645 | 7764 | LIMESTONE, SANDSTONE, SHALE | NATURAL GAS, OIL | N |
| 1109948 | BONE SPRING 2ND | -8268 | 8268 | 8401 | LIMESTONE, SANDSTONE, SHALE | NATURAL GAS, OIL | N |
| 1109949 | BONE SPRING 3RD | -9527 | 9527 | 9656 | LIMESTONE, SANDSTONE, SHALE | NATURAL GAS, OIL | N |
| 1109950 | WOLFCAMP | -10289 | 10289 | 22738 | LIMESTONE, SANDSTONE, SHALE | NATURAL GAS, OIL | Y |

Section 2 - Blowout Prevention

Pressure Rating (PSI): 10M

Rating Depth: 10289

Equipment: 10M - BOP/BOPE will be installed per Onshore Oil & Gas Order #2 requirements prior to drilling below intermediate casing, a BOP/BOPE system with the above minimum rating will be installed on the wellhead system. BOP/BOPE will be tested by an independent service company per Onshore Oil & Gas Order #2 requirements and MASP (Maximum Anticipated Surface Pressure) calculations. If the system is upgraded, all the components installed will be functional and tested. 5M - BOP/BOPE will be installed per Onshore Oil & Gas Order #2 requirements prior to drilling below surface casing, a BOP/BOPE system with the above minimum rating will be installed on the wellhead system. BOP/BOPE will be tested by an independent service company per Onshore Oil & Gas Order #2 requirements and MASP (Maximum Anticipated Surface Pressure) calculations. If the system is upgraded, all the components installed will be functional and tested.

Requesting Variance? YES

Variance request: A variance is requested for the use of a flexible choke line from the BOP stack to the choke manifold. See attached for specs for hydrostatic test chart. Devon requests a variance to run a 5M annular on a 10M BOP system. See separately attached variance request and support documents in AFMSS.

Testing Procedure: 10M - A multibowl wellhead may be used. The BOP will be tested per Onshore Order #2 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested. 5M annular on 10M system will be tested to 100% of rated working pressure. 5M - A multibowl wellhead may be used. The BOP will be tested per Onshore Order #2 after installation on the surface casing



Commitment Runs Deep



Design Plan
Operation and Maintenance Plan
Closure Plan

SENM - Closed Loop Systems
June 2010

I. Design Plan

Devon uses MI SWACO closed loop system (CLS). The MI SWACO CLS is designed to maintain drill solids at or below 5%. The equipment is arranged to progressively remove solids from the largest to the smallest size. Drilling fluids can thus be reused and savings is realized on mud and disposal costs. Dewatering may be required with the centrifuges to insure removal of ultra fine solids.

The drilling location is constructed to allow storm water to flow to a central sump normally the cellar. This insures no contamination leaves the drilling pad in the event of a spill. Storm water is reused in the mud system or stored in a reserve fluid tank farm until it can be reused. All lubricants, oils, or chemicals are removed immediately from the ground to prevent the contamination of storm water. An oil trap is normally installed on the sump if an oil spill occurs during a storm.

A tank farm is utilized to store drilling fluids including fresh water and brine fluids. The tank farm is constructed on a 20 ml plastic lined, bermed pad to prevent the contamination of the drilling site during a spill. Fluids from other sites may be stored in these tanks for processing by the solids control equipment and reused in the mud system. At the end of the well the fluids are transported from the tank farm to an adjoining well or to the next well for the rig.

Prior to installing a closed-loop system on site, the topsoil, if present, will be stripped and stockpiled for use as the final cover or fill at the time of closure.

Signs will be posted on the fence surrounding the closed-loop system unless the closed-loop system is located on a site where there is an existing well, that is operated by Devon.

II. Operations and Maintenance Plan

Primary Shakers: The primary shakers make the first removal of drill solids from the drilling mud as it leaves the well bore. The shakers are sized to handle maximum drilling rate at optimal screen size. The shakers normally remove solids down to 74 microns.

Mud Cleaner: The Mud Cleaner cleans the fluid after it leaves the shakers. A set of hydrocyclones are sized to handle 1.25 to 1.5 times the maximum circulating rate. This ensures all the fluid is being processed to an average cut point of 25 microns. The wet discharged is dewatered on a shaker equipped with ultra fine mesh screens and generally cut at 40 microns.



Closed Loop Schematic



Centrifuges: The centrifuges can be one or two in number depending on the well geometry or depth of well. The centrifuges are sized to maintain low gravity solids at 5% or below. They may or may not need a dewatering system to enhance the removal rates. The centrifuges can make a cut point of 8-10 microns depending on bowl speed, feed rate, solids loading and other factors.

The centrifuge system is designed to work on the active system and be flexible to process incoming fluids from other locations. This set-up is also dependant on well factors.

Dewatering System: The dewatering system is a chemical mixing and dosing system designed to enhance the solids removal of the centrifuge. Not commonly used in shallow wells. It may contain pH adjustment, coagulant mixing and dosing, and polymer mixing and dosing. Chemical flocculation binds ultra fine solids into a mass that is within the centrifuge operating design. The

dewatering system improves the centrifuge cut point to infinity or allows for the return of clear water or brine fluid. This ability allows for the ultimate control of low gravity solids.

Cuttings Boxes: Cuttings boxes are utilized to capture drill solids that are discarded from the solids control equipment. These boxes are set upon a rail system that allows for the removal and replacement of a full box of cuttings with an empty one. They are equipped with a cover that insures no product is spilled into the environment during the transportation phase.

Process Tank: (Optional) The process tank allows for the holding and process of fluids that are being transferred into the mud system. Additionally, during times of lost circulation the process tank may hold active fluids that are removed for additional treatment. It can further be used as a mixing tank during well control conditions.

Sump and Sump Pump: The sump is used to collect storm water and the pump is used to transfer this fluid to the active system or to the tank for to hold in reserve. It can also be used to collect fluids that may escape during spills. The location contains drainage ditches that allow the location fluids to drain to the sump.

Reserve Fluids (Tank Farm): A series of frac tanks are used to replace the reserve pit. These are steel tanks that are equipped with a manifold system and a transfer pump. These tanks can contain any number of fluids used during the drilling process. These can include fresh water, cut brine, and saturated salt fluid. The fluid can be from the active well or reclaimed fluid from other locations. A 20 ml liner and berm system is employed to ensure the fluids do not migrate to the environment during a spill.

If a leak develops, the appropriate division district office will be notified within 48 hours of the discovery and the leak will be addressed. Spill prevention is accomplished by maintaining pump packing, hoses, and pipe fittings to insure no leaks are occurring. During an upset condition the source of the spill is isolated and repaired as soon as it is discovered. Free liquid is removed by a diaphragm pump and returned to the mud system. Loose topsoil may be used to stabilize the spill and the contaminated soil is excavated and placed in the cuttings boxes. After the well is finished and the rig has moved, the entire location is scrapped and testing will be performed to determine if a release has occurred.

All trash is kept in a wire mesh enclosure and removed to an approved landfill when full. All spent motor oils are kept in separate containers and they are removed and sent to an approved recycling center. Any spilled lubricants, pipe

dope, or regulated chemicals are removed from soil and sent to landfills approved for these products.

These operations are monitored by Mi Swaco service technicians. Daily logs are maintained to ensure optimal equipment operation and maintenance. Screen and chemical use is logged to maintain inventory control. Fluid properties are monitored and recorded and drilling mud volumes are accounted for in the mud storage farm. This data is kept for end of well review to insure performance goals are met. Lessons learned are logged and used to help with continuous improvement.

A MI SWACO field supervisor manages from 3-5 wells. They are responsible for training personnel, supervising installations, and inspecting sites for compliance of MI SWACO safety and operational policy.

III. Closure Plan

A maximum 340' X 340' caliche pad is built per well. All of the trucks and steel tanks fit on this pad. All fluid cuttings go to the steel tanks to be hauled by various trucking companies to an agency approved disposal.

Horn 22-27-34 Fed Com No. 421H

Eddy NM

Northing: 377630.20

Easting: 654865.50


Lat: 32.037656

Long: -103.966951

Plan 1 (1860'FEL) WC A Lwr

SECTION DETAILS Horn 22-27-34 Fed Com No. 421H

| MD | Inc | Azi | TVD | +N/-S | +E/-W | Dleg | Vsect |
|----------|-------|--------|----------|-----------|---------|-------|----------|
| 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 2500.00 | 0.00 | 0.00 | 2500.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 3137.73 | 12.75 | 212.13 | 3132.48 | -59.86 | -37.60 | 2.00 | 60.43 |
| 8166.87 | 12.75 | 212.13 | 8037.52 | -1000.14 | -628.10 | 0.00 | 1009.56 |
| 8804.61 | 0.00 | 0.00 | 8670.00 | -1060.00 | -665.70 | 2.00 | 1069.99 |
| 9850.65 | 0.00 | 0.00 | 9716.04 | -1060.00 | -665.70 | 0.00 | 1069.99 |
| 10750.65 | 90.00 | 179.79 | 10289.00 | -1632.95 | -663.56 | 10.00 | 1642.84 |
| 15445.73 | 90.00 | 179.79 | 10289.00 | -6328.00 | -646.00 | 0.00 | 6337.08 |
| 15586.98 | 90.00 | 182.61 | 10289.00 | -6469.20 | -648.95 | 2.00 | 6478.31 |
| 20720.80 | 90.00 | 182.61 | 10289.00 | -11597.70 | -882.80 | 0.00 | 11609.77 |
| 20900.14 | 90.00 | 179.02 | 10289.00 | -11776.99 | -885.36 | 2.00 | 11789.08 |
| 22688.11 | 90.00 | 179.02 | 10289.00 | -13564.70 | -854.90 | 0.00 | 13576.12 |
| 22738.11 | 90.00 | 179.02 | 10289.00 | -13614.69 | -854.05 | 0.00 | 13626.09 |

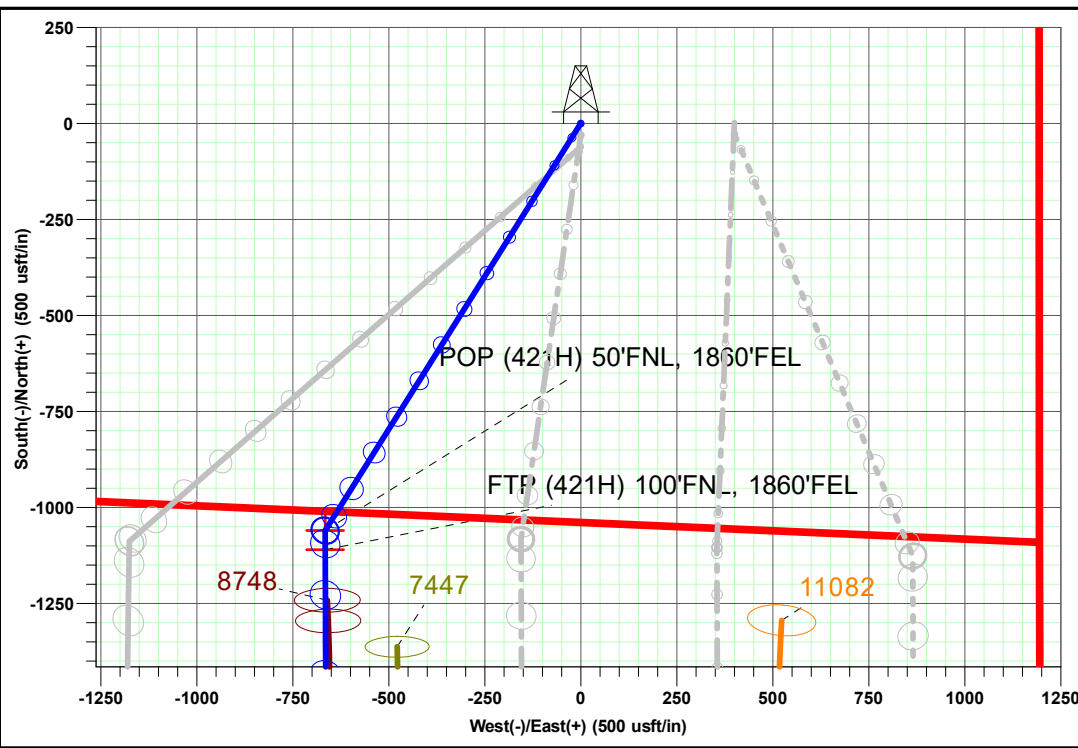

Horn 22-27-34 Fed Com No. 421H/Plan 1 (1860'FEL) WC A Lwr

LTP (421H) 100'FSL, 1830'FEL BHL (421H) 50'FSL, 1830'FEL


Vertical Section at 180.87bearing (2500 usft/in)

Sec. 15

Sec. 22

Sec. 27

Sec. 34

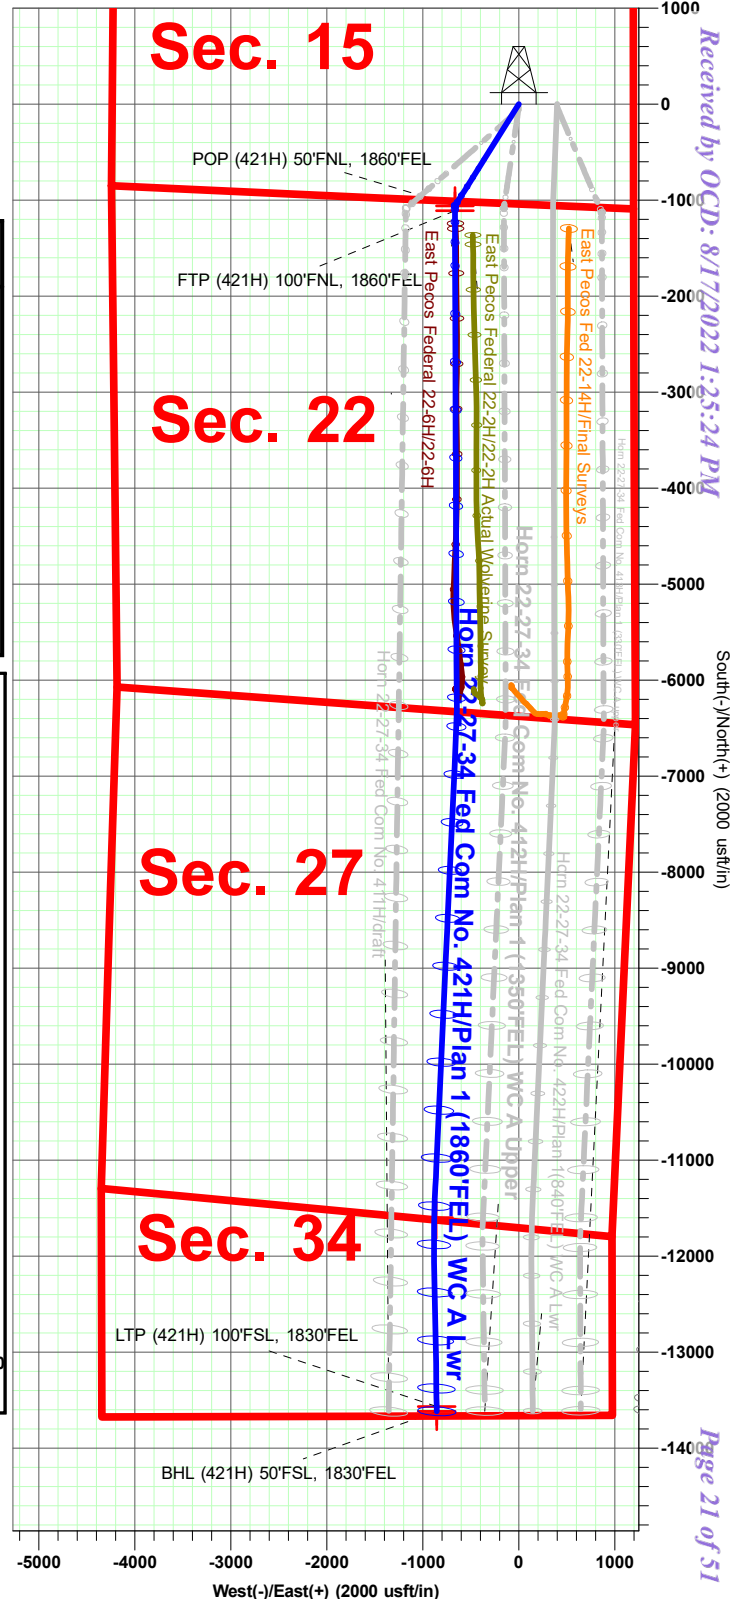

LTP (421H) 100'FSL, 1830'FEL

BHL (421H) 50'FSL, 1830'FEL

West(-)/East(+) (2000 usft/in)

WPX Energy

Planning Report - Geographic

| | | | |
|------------------|--------------------------------|-------------------------------------|--------------------------------------|
| Database: | Compass | Local Co-ordinate Reference: | Well Horn 22-27-34 Fed Com No. 421H |
| Company: | WPX Energy Permian, LLC | TVD Reference: | GL:2926+28ft @ 2954.00usft (Pat 803) |
| Project: | Eddy NM | MD Reference: | GL:2926+28ft @ 2954.00usft (Pat 803) |
| Site: | Horn 22-27-34 Fed Com Pad | North Reference: | Grid |
| Well: | Horn 22-27-34 Fed Com No. 421H | Survey Calculation Method: | Minimum Curvature |
| Wellbore: | Wellbore #1 | | |
| Design: | Plan 1 (1860'FEL) WC A Lwr | | |

| | | | |
|--------------------|---------------------------|----------------------|----------------|
| Project | Eddy NM | | |
| Map System: | US State Plane 1983 | System Datum: | Mean Sea Level |
| Geo Datum: | North American Datum 1983 | | |
| Map Zone: | New Mexico Eastern Zone | | |

| | | | | | | |
|-----------------------|---------------------------|-----------|-----------------|------------|-------------------|--------|
| Site | Horn 22-27-34 Fed Com Pad | | | | | |
| Site Position: | | Northing: | 377,630.20 usft | Latitude: | 32.037656 | |
| From: | Map | Easting: | 654,865.50 usft | Longitude: | -103.966951 | |
| Position Uncertainty: | | 0.00 usft | Slot Radius: | 13.200 in | Grid Convergence: | 0.19 ° |

| Well | Horn 22-27-34 Fed Com No. 421H | | | | | |
|----------------------|--------------------------------|-----------|---------------------|-----------------|---------------|---------------|
| Well Position | +N/-S | 0.00 usft | Northing: | 377,630.20 usft | Latitude: | 32.037656 |
| | +E/-W | 0.00 usft | Easting: | 654,865.50 usft | Longitude: | -103.966951 |
| Position Uncertainty | | 0.00 usft | Wellhead Elevation: | | Ground Level: | 2,926.00 usft |

| | | | | | |
|------------------|-------------------|--------------------|----------------------------|--------------------------|--------------------------------|
| Wellbore | Wellbore #1 | | | | |
| Magnetics | Model Name | Sample Date | Declination (°) | Dip Angle (°) | Field Strength (nT) |
| | IGRF200510 | 12/31/2009 | 7.91 | 60.00 | 48,638.76630850 |

| | | | | |
|--------------------------|------------------------------------|-------------------------|-------------------------|--------------------------------|
| Design | Plan 1 (1860'FEL) WC A Lwr | | | |
| Audit Notes: | | | | |
| Version: | Phase: | PLAN | Tie On Depth: | 0.00 |
| Vertical Section: | Depth From (TVD) (usft) | +N/-S (usft) | +E/-W (usft) | Direction (bearing) |
| | 0.00 | 0.00 | 0.00 | 180.87 |

| Plan Sections | | | | | | | | | | |
|-----------------------------|--------------------|----------------------|-----------------------------|-----------------|-----------------|-------------------------------|------------------------------|-----------------------------|------------|---------------------|
| Measured Depth (usft) | Inclination (°) | Azimuth (bearing) | Vertical Depth (usft) | +N/-S (usft) | +E/-W (usft) | Dogleg Rate (°/100usft) | Build Rate (°/100usft) | Turn Rate (°/100usft) | TFO (°) | Target |
| 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | |
| 2,500.00 | 0.00 | 0.00 | 2,500.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | |
| 3,137.73 | 12.75 | 212.13 | 3,132.48 | -59.86 | -37.60 | 2.00 | 2.00 | 0.00 | 212.13 | |
| 8,166.87 | 12.75 | 212.13 | 8,037.52 | -1,000.14 | -628.10 | 0.00 | 0.00 | 0.00 | 0.00 | |
| 8,804.61 | 0.00 | 0.01 | 8,670.00 | -1,060.00 | -665.70 | 2.00 | -2.00 | 0.00 | 180.00 | |
| 9,850.65 | 0.00 | 0.00 | 9,716.04 | -1,060.00 | -665.70 | 0.00 | 0.00 | 0.00 | 0.00 | |
| 10,750.65 | 90.00 | 179.79 | 10,289.00 | -1,632.95 | -663.56 | 10.00 | 10.00 | 0.00 | 179.79 | |
| 15,445.73 | 90.00 | 179.79 | 10,289.00 | -6,328.00 | -646.00 | 0.00 | 0.00 | 0.00 | 0.00 | T1 (421H) |
| 15,586.98 | 90.00 | 182.61 | 10,289.00 | -6,469.20 | -648.95 | 2.00 | 0.00 | 2.00 | 90.00 | |
| 20,720.80 | 90.00 | 182.61 | 10,289.00 | -11,597.70 | -882.80 | 0.00 | 0.00 | 0.00 | 0.00 | T2 (421H) |
| 20,900.14 | 90.00 | 179.02 | 10,289.00 | -11,776.99 | -885.36 | 2.00 | 0.00 | -2.00 | -90.00 | |
| 22,688.11 | 90.00 | 179.02 | 10,289.00 | -13,564.70 | -854.90 | 0.00 | 0.00 | 0.00 | 0.00 | LTP (421H) 100'FSL, |
| 22,738.11 | 90.00 | 179.02 | 10,289.00 | -13,614.69 | -854.05 | 0.00 | 0.00 | 0.00 | 0.00 | |

WPX Energy

Planning Report - Geographic

| | | | |
|------------------|--------------------------------|-------------------------------------|--------------------------------------|
| Database: | Compass | Local Co-ordinate Reference: | Well Horn 22-27-34 Fed Com No. 421H |
| Company: | WPX Energy Permian, LLC | TVD Reference: | GL:2926+28ft @ 2954.00usft (Pat 803) |
| Project: | Eddy NM | MD Reference: | GL:2926+28ft @ 2954.00usft (Pat 803) |
| Site: | Horn 22-27-34 Fed Com Pad | North Reference: | Grid |
| Well: | Horn 22-27-34 Fed Com No. 421H | Survey Calculation Method: | Minimum Curvature |
| Wellbore: | Wellbore #1 | | |
| Design: | Plan 1 (1860'FEL) WC A Lwr | | |

| Planned Survey | | | | | | | | | |
|-------------------------------------|-----------------|-------------------|-----------------------|--------------|--------------|---------------------|--------------------|-----------|-------------|
| Measured Depth (usft) | Inclination (°) | Azimuth (bearing) | Vertical Depth (usft) | +N/-S (usft) | +E/-W (usft) | Map Northing (usft) | Map Easting (usft) | Latitude | Longitude |
| 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 377,630.20 | 654,865.50 | 32.037656 | -103.966951 |
| 100.00 | 0.00 | 0.00 | 100.00 | 0.00 | 0.00 | 377,630.20 | 654,865.50 | 32.037656 | -103.966951 |
| 200.00 | 0.00 | 0.00 | 200.00 | 0.00 | 0.00 | 377,630.20 | 654,865.50 | 32.037656 | -103.966951 |
| 300.00 | 0.00 | 0.00 | 300.00 | 0.00 | 0.00 | 377,630.20 | 654,865.50 | 32.037656 | -103.966951 |
| 400.00 | 0.00 | 0.00 | 400.00 | 0.00 | 0.00 | 377,630.20 | 654,865.50 | 32.037656 | -103.966951 |
| 436.00 | 0.00 | 0.00 | 436.00 | 0.00 | 0.00 | 377,630.20 | 654,865.50 | 32.037656 | -103.966951 |
| Rustler | | | | | | | | | |
| 500.00 | 0.00 | 0.00 | 500.00 | 0.00 | 0.00 | 377,630.20 | 654,865.50 | 32.037656 | -103.966951 |
| 600.00 | 0.00 | 0.00 | 600.00 | 0.00 | 0.00 | 377,630.20 | 654,865.50 | 32.037656 | -103.966951 |
| 700.00 | 0.00 | 0.00 | 700.00 | 0.00 | 0.00 | 377,630.20 | 654,865.50 | 32.037656 | -103.966951 |
| 800.00 | 0.00 | 0.00 | 800.00 | 0.00 | 0.00 | 377,630.20 | 654,865.50 | 32.037656 | -103.966951 |
| 836.00 | 0.00 | 0.00 | 836.00 | 0.00 | 0.00 | 377,630.20 | 654,865.50 | 32.037656 | -103.966951 |
| Salado | | | | | | | | | |
| 900.00 | 0.00 | 0.00 | 900.00 | 0.00 | 0.00 | 377,630.20 | 654,865.50 | 32.037656 | -103.966951 |
| 1,000.00 | 0.00 | 0.00 | 1,000.00 | 0.00 | 0.00 | 377,630.20 | 654,865.50 | 32.037656 | -103.966951 |
| 1,100.00 | 0.00 | 0.00 | 1,100.00 | 0.00 | 0.00 | 377,630.20 | 654,865.50 | 32.037656 | -103.966951 |
| 1,195.00 | 0.00 | 0.00 | 1,195.00 | 0.00 | 0.00 | 377,630.20 | 654,865.50 | 32.037656 | -103.966951 |
| Castile (Top of Salt) (Est.) | | | | | | | | | |
| 1,200.00 | 0.00 | 0.00 | 1,200.00 | 0.00 | 0.00 | 377,630.20 | 654,865.50 | 32.037656 | -103.966951 |
| 1,300.00 | 0.00 | 0.00 | 1,300.00 | 0.00 | 0.00 | 377,630.20 | 654,865.50 | 32.037656 | -103.966951 |
| 1,400.00 | 0.00 | 0.00 | 1,400.00 | 0.00 | 0.00 | 377,630.20 | 654,865.50 | 32.037656 | -103.966951 |
| 1,500.00 | 0.00 | 0.00 | 1,500.00 | 0.00 | 0.00 | 377,630.20 | 654,865.50 | 32.037656 | -103.966951 |
| 1,600.00 | 0.00 | 0.00 | 1,600.00 | 0.00 | 0.00 | 377,630.20 | 654,865.50 | 32.037656 | -103.966951 |
| 1,700.00 | 0.00 | 0.00 | 1,700.00 | 0.00 | 0.00 | 377,630.20 | 654,865.50 | 32.037656 | -103.966951 |
| 1,800.00 | 0.00 | 0.00 | 1,800.00 | 0.00 | 0.00 | 377,630.20 | 654,865.50 | 32.037656 | -103.966951 |
| 1,900.00 | 0.00 | 0.00 | 1,900.00 | 0.00 | 0.00 | 377,630.20 | 654,865.50 | 32.037656 | -103.966951 |
| 2,000.00 | 0.00 | 0.00 | 2,000.00 | 0.00 | 0.00 | 377,630.20 | 654,865.50 | 32.037656 | -103.966951 |
| 2,100.00 | 0.00 | 0.00 | 2,100.00 | 0.00 | 0.00 | 377,630.20 | 654,865.50 | 32.037656 | -103.966951 |
| 2,200.00 | 0.00 | 0.00 | 2,200.00 | 0.00 | 0.00 | 377,630.20 | 654,865.50 | 32.037656 | -103.966951 |
| 2,300.00 | 0.00 | 0.00 | 2,300.00 | 0.00 | 0.00 | 377,630.20 | 654,865.50 | 32.037656 | -103.966951 |
| 2,400.00 | 0.00 | 0.00 | 2,400.00 | 0.00 | 0.00 | 377,630.20 | 654,865.50 | 32.037656 | -103.966951 |
| 2,500.00 | 0.00 | 0.00 | 2,500.00 | 0.00 | 0.00 | 377,630.20 | 654,865.50 | 32.037656 | -103.966951 |
| Start Nudge | | | | | | | | | |
| 2,600.00 | 2.00 | 212.13 | 2,599.98 | -1.48 | -0.93 | 377,628.72 | 654,864.58 | 32.037652 | -103.966954 |
| 2,700.00 | 4.00 | 212.13 | 2,699.84 | -5.91 | -3.71 | 377,624.29 | 654,861.79 | 32.037640 | -103.966963 |
| 2,800.00 | 6.00 | 212.13 | 2,799.45 | -13.29 | -8.35 | 377,616.91 | 654,857.16 | 32.037620 | -103.966979 |
| 2,900.00 | 8.00 | 212.13 | 2,898.70 | -23.61 | -14.83 | 377,606.59 | 654,850.68 | 32.037591 | -103.967000 |
| 2,987.35 | 9.75 | 212.13 | 2,985.00 | -35.02 | -21.99 | 377,595.18 | 654,843.51 | 32.037560 | -103.967023 |
| Bell Canyon (Base of Salt) | | | | | | | | | |
| 3,000.00 | 10.00 | 212.13 | 2,997.47 | -36.86 | -23.15 | 377,593.34 | 654,842.36 | 32.037555 | -103.967027 |
| 3,100.00 | 12.00 | 212.13 | 3,095.62 | -53.01 | -33.29 | 377,577.18 | 654,832.21 | 32.037511 | -103.967059 |
| 3,137.73 | 12.75 | 212.13 | 3,132.48 | -59.86 | -37.60 | 377,570.33 | 654,827.91 | 32.037492 | -103.967073 |
| Hold 12.75° | | | | | | | | | |
| 3,200.00 | 12.75 | 212.13 | 3,193.21 | -71.51 | -44.91 | 377,558.69 | 654,820.60 | 32.037460 | -103.967097 |
| 3,300.00 | 12.75 | 212.13 | 3,290.74 | -90.20 | -56.65 | 377,540.00 | 654,808.86 | 32.037409 | -103.967135 |
| 3,400.00 | 12.75 | 212.13 | 3,388.27 | -108.90 | -68.39 | 377,521.30 | 654,797.11 | 32.037357 | -103.967173 |
| 3,500.00 | 12.75 | 212.13 | 3,485.81 | -127.60 | -80.13 | 377,502.60 | 654,785.37 | 32.037306 | -103.967211 |
| 3,600.00 | 12.75 | 212.13 | 3,583.34 | -146.29 | -91.87 | 377,483.91 | 654,773.63 | 32.037255 | -103.967250 |
| 3,700.00 | 12.75 | 212.13 | 3,680.87 | -164.99 | -103.62 | 377,465.21 | 654,761.89 | 32.037204 | -103.967288 |
| 3,800.00 | 12.75 | 212.13 | 3,778.40 | -183.68 | -115.36 | 377,446.51 | 654,750.15 | 32.037152 | -103.967326 |
| 3,900.00 | 12.75 | 212.13 | 3,875.94 | -202.38 | -127.10 | 377,427.82 | 654,738.41 | 32.037101 | -103.967364 |
| 4,000.00 | 12.75 | 212.13 | 3,973.47 | -221.08 | -138.84 | 377,409.12 | 654,726.66 | 32.037050 | -103.967402 |
| 4,052.84 | 12.75 | 212.13 | 4,025.00 | -230.96 | -145.04 | 377,399.24 | 654,720.46 | 32.037023 | -103.967422 |
| Cherry Canyon | | | | | | | | | |

WPX Energy

Planning Report - Geographic

| | | | |
|------------------|--------------------------------|-------------------------------------|--------------------------------------|
| Database: | Compass | Local Co-ordinate Reference: | Well Horn 22-27-34 Fed Com No. 421H |
| Company: | WPX Energy Permian, LLC | TVD Reference: | GL:2926+28ft @ 2954.00usft (Pat 803) |
| Project: | Eddy NM | MD Reference: | GL:2926+28ft @ 2954.00usft (Pat 803) |
| Site: | Horn 22-27-34 Fed Com Pad | North Reference: | Grid |
| Well: | Horn 22-27-34 Fed Com No. 421H | Survey Calculation Method: | Minimum Curvature |
| Wellbore: | Wellbore #1 | | |
| Design: | Plan 1 (1860'FEL) WC A Lwr | | |

| Planned Survey | | | | | | | | | |
|-----------------------------|-----------------|-------------------|-----------------------|--------------|--------------|---------------------|--------------------|-----------|-------------|
| Measured Depth (usft) | Inclination (°) | Azimuth (bearing) | Vertical Depth (usft) | +N/-S (usft) | +E/-W (usft) | Map Northing (usft) | Map Easting (usft) | Latitude | Longitude |
| 4,100.00 | 12.75 | 212.13 | 4,071.00 | -239.77 | -150.58 | 377,390.42 | 654,714.92 | 32.036998 | -103.967440 |
| 4,200.00 | 12.75 | 212.13 | 4,168.53 | -258.47 | -162.32 | 377,371.73 | 654,703.18 | 32.036947 | -103.967478 |
| 4,300.00 | 12.75 | 212.13 | 4,266.07 | -277.17 | -174.07 | 377,353.03 | 654,691.44 | 32.036896 | -103.967516 |
| 4,400.00 | 12.75 | 212.13 | 4,363.60 | -295.86 | -185.81 | 377,334.33 | 654,679.70 | 32.036845 | -103.967554 |
| 4,500.00 | 12.75 | 212.13 | 4,461.13 | -314.56 | -197.55 | 377,315.64 | 654,667.96 | 32.036793 | -103.967592 |
| 4,600.00 | 12.75 | 212.13 | 4,558.66 | -333.26 | -209.29 | 377,296.94 | 654,656.21 | 32.036742 | -103.967630 |
| 4,700.00 | 12.75 | 212.13 | 4,656.20 | -351.95 | -221.03 | 377,278.25 | 654,644.47 | 32.036691 | -103.967669 |
| 4,800.00 | 12.75 | 212.13 | 4,753.73 | -370.65 | -232.77 | 377,259.55 | 654,632.73 | 32.036639 | -103.967707 |
| 4,900.00 | 12.75 | 212.13 | 4,851.26 | -389.35 | -244.52 | 377,240.85 | 654,620.99 | 32.036588 | -103.967745 |
| 5,000.00 | 12.75 | 212.13 | 4,948.79 | -408.04 | -256.26 | 377,222.16 | 654,609.25 | 32.036537 | -103.967783 |
| 5,100.00 | 12.75 | 212.13 | 5,046.33 | -426.74 | -268.00 | 377,203.46 | 654,597.50 | 32.036486 | -103.967821 |
| 5,169.39 | 12.75 | 212.13 | 5,114.00 | -439.71 | -276.15 | 377,190.49 | 654,589.36 | 32.036450 | -103.967847 |
| Brushy Canyon | | | | | | | | | |
| 5,200.00 | 12.75 | 212.13 | 5,143.86 | -445.44 | -279.74 | 377,184.76 | 654,585.76 | 32.036434 | -103.967859 |
| 5,300.00 | 12.75 | 212.13 | 5,241.39 | -464.13 | -291.48 | 377,166.07 | 654,574.02 | 32.036383 | -103.967897 |
| 5,400.00 | 12.75 | 212.13 | 5,338.92 | -482.83 | -303.23 | 377,147.37 | 654,562.28 | 32.036332 | -103.967935 |
| 5,500.00 | 12.75 | 212.13 | 5,436.46 | -501.52 | -314.97 | 377,128.67 | 654,550.54 | 32.036280 | -103.967973 |
| 5,600.00 | 12.75 | 212.13 | 5,533.99 | -520.22 | -326.71 | 377,109.98 | 654,538.80 | 32.036229 | -103.968011 |
| 5,700.00 | 12.75 | 212.13 | 5,631.52 | -538.92 | -338.45 | 377,091.28 | 654,527.05 | 32.036178 | -103.968050 |
| 5,800.00 | 12.75 | 212.13 | 5,729.05 | -557.61 | -350.19 | 377,072.58 | 654,515.31 | 32.036127 | -103.968088 |
| 5,900.00 | 12.75 | 212.13 | 5,826.58 | -576.31 | -361.93 | 377,053.89 | 654,503.57 | 32.036075 | -103.968126 |
| 6,000.00 | 12.75 | 212.13 | 5,924.12 | -595.01 | -373.68 | 377,035.19 | 654,491.83 | 32.036024 | -103.968164 |
| 6,100.00 | 12.75 | 212.13 | 6,021.65 | -613.70 | -385.42 | 377,016.49 | 654,480.09 | 32.035973 | -103.968202 |
| 6,200.00 | 12.75 | 212.13 | 6,119.18 | -632.40 | -397.16 | 376,997.80 | 654,468.35 | 32.035921 | -103.968240 |
| 6,300.00 | 12.75 | 212.13 | 6,216.71 | -651.10 | -408.90 | 376,979.10 | 654,456.60 | 32.035870 | -103.968278 |
| 6,400.00 | 12.75 | 212.13 | 6,314.25 | -669.79 | -420.64 | 376,960.41 | 654,444.86 | 32.035819 | -103.968316 |
| 6,500.00 | 12.75 | 212.13 | 6,411.78 | -688.49 | -432.38 | 376,941.71 | 654,433.12 | 32.035768 | -103.968354 |
| 6,600.00 | 12.75 | 212.13 | 6,509.31 | -707.19 | -444.13 | 376,923.01 | 654,421.38 | 32.035716 | -103.968392 |
| 6,700.00 | 12.75 | 212.13 | 6,606.84 | -725.88 | -455.87 | 376,904.32 | 654,409.64 | 32.035665 | -103.968431 |
| 6,800.00 | 12.75 | 212.13 | 6,704.38 | -744.58 | -467.61 | 376,885.62 | 654,397.90 | 32.035614 | -103.968469 |
| 6,814.99 | 12.75 | 212.13 | 6,719.00 | -747.38 | -469.37 | 376,882.82 | 654,396.13 | 32.035606 | -103.968474 |
| Bone Spring | | | | | | | | | |
| 6,900.00 | 12.75 | 212.13 | 6,801.91 | -763.28 | -479.35 | 376,866.92 | 654,386.15 | 32.035562 | -103.968507 |
| 6,913.42 | 12.75 | 212.13 | 6,815.00 | -765.78 | -480.93 | 376,864.41 | 654,384.58 | 32.035556 | -103.968512 |
| Avalon Upper | | | | | | | | | |
| 7,000.00 | 12.75 | 212.13 | 6,899.44 | -781.97 | -491.09 | 376,848.23 | 654,374.41 | 32.035511 | -103.968545 |
| 7,100.00 | 12.75 | 212.13 | 6,996.97 | -800.67 | -502.83 | 376,829.53 | 654,362.67 | 32.035460 | -103.968583 |
| 7,200.00 | 12.75 | 212.13 | 7,094.51 | -819.36 | -514.58 | 376,810.83 | 654,350.93 | 32.035409 | -103.968621 |
| 7,300.00 | 12.75 | 212.13 | 7,192.04 | -838.06 | -526.32 | 376,792.14 | 654,339.19 | 32.035357 | -103.968659 |
| 7,400.00 | 12.75 | 212.13 | 7,289.57 | -856.76 | -538.06 | 376,773.44 | 654,327.44 | 32.035306 | -103.968697 |
| 7,415.82 | 12.75 | 212.13 | 7,305.00 | -859.72 | -539.92 | 376,770.48 | 654,325.59 | 32.035298 | -103.968703 |
| Avalon Lower | | | | | | | | | |
| 7,500.00 | 12.75 | 212.13 | 7,387.10 | -875.45 | -549.80 | 376,754.74 | 654,315.70 | 32.035255 | -103.968735 |
| 7,600.00 | 12.75 | 212.13 | 7,484.64 | -894.15 | -561.54 | 376,736.05 | 654,303.96 | 32.035203 | -103.968773 |
| 7,700.00 | 12.75 | 212.13 | 7,582.17 | -912.85 | -573.29 | 376,717.35 | 654,292.22 | 32.035152 | -103.968811 |
| 7,764.42 | 12.75 | 212.13 | 7,645.00 | -924.89 | -580.85 | 376,705.31 | 654,284.66 | 32.035119 | -103.968836 |
| 1st Bone Spring Sand | | | | | | | | | |
| 7,800.00 | 12.75 | 212.13 | 7,679.70 | -931.54 | -585.03 | 376,698.65 | 654,280.48 | 32.035101 | -103.968850 |
| 7,900.00 | 12.75 | 212.13 | 7,777.23 | -950.24 | -596.77 | 376,679.96 | 654,268.74 | 32.035050 | -103.968888 |
| 8,000.00 | 12.75 | 212.13 | 7,874.77 | -968.94 | -608.51 | 376,661.26 | 654,256.99 | 32.034998 | -103.968926 |
| 8,078.16 | 12.75 | 212.13 | 7,951.00 | -983.55 | -617.69 | 376,646.65 | 654,247.82 | 32.034958 | -103.968956 |
| 2nd Bone Spring Lime | | | | | | | | | |
| 8,100.00 | 12.75 | 212.13 | 7,972.30 | -987.63 | -620.25 | 376,642.57 | 654,245.25 | 32.034947 | -103.968964 |

WPX Energy
Planning Report - Geographic

| | | | |
|------------------|--------------------------------|-------------------------------------|--------------------------------------|
| Database: | Compass | Local Co-ordinate Reference: | Well Horn 22-27-34 Fed Com No. 421H |
| Company: | WPX Energy Permian, LLC | TVD Reference: | GL:2926+28ft @ 2954.00usft (Pat 803) |
| Project: | Eddy NM | MD Reference: | GL:2926+28ft @ 2954.00usft (Pat 803) |
| Site: | Horn 22-27-34 Fed Com Pad | North Reference: | Grid |
| Well: | Horn 22-27-34 Fed Com No. 421H | Survey Calculation Method: | Minimum Curvature |
| Wellbore: | Wellbore #1 | | |
| Design: | Plan 1 (1860'FEL) WC A Lwr | | |

| Planned Survey | | | | | | | | | | |
|-----------------------------|--------------------|----------------------|-----------------------------|-----------------|-----------------|---------------------------|--------------------------|-----------|-------------|--|
| Measured Depth (usft) | Inclination (°) | Azimuth (bearing) | Vertical Depth (usft) | +N/-S (usft) | +E/-W (usft) | Map Northing (usft) | Map Easting (usft) | Latitude | Longitude | |
| 8,166.87 | 12.75 | 212.13 | 8,037.52 | -1,000.14 | -628.10 | 376,630.06 | 654,237.40 | 32.034913 | -103.968989 | |
| EOH | | | | | | | | | | |
| 8,200.00 | 12.09 | 212.13 | 8,069.87 | -1,006.17 | -631.89 | 376,624.03 | 654,233.61 | 32.034896 | -103.969002 | |
| 8,300.00 | 10.09 | 212.13 | 8,168.00 | -1,022.46 | -642.13 | 376,607.74 | 654,223.38 | 32.034851 | -103.969035 | |
| 8,400.00 | 8.09 | 212.13 | 8,266.74 | -1,035.84 | -650.53 | 376,594.35 | 654,214.98 | 32.034815 | -103.969062 | |
| 8,401.28 | 8.07 | 212.13 | 8,268.00 | -1,036.00 | -650.62 | 376,594.20 | 654,214.88 | 32.034814 | -103.969062 | |
| 2nd Bone Spring Sand | | | | | | | | | | |
| 8,500.00 | 6.09 | 212.13 | 8,365.97 | -1,046.30 | -657.10 | 376,583.90 | 654,208.41 | 32.034786 | -103.969083 | |
| 8,600.00 | 4.09 | 212.13 | 8,465.57 | -1,053.82 | -661.82 | 376,576.38 | 654,203.69 | 32.034765 | -103.969099 | |
| 8,700.00 | 2.09 | 212.13 | 8,565.42 | -1,058.38 | -664.68 | 376,571.82 | 654,200.82 | 32.034753 | -103.969108 | |
| 8,804.61 | 0.00 | 0.01 | 8,670.00 | -1,060.00 | -665.70 | 376,570.20 | 654,199.80 | 32.034748 | -103.969111 | |
| Vertical | | | | | | | | | | |
| 8,865.61 | 0.00 | 0.00 | 8,731.00 | -1,060.00 | -665.70 | 376,570.20 | 654,199.80 | 32.034748 | -103.969111 | |
| 3rd Bone Spring Lime | | | | | | | | | | |
| 8,900.00 | 0.00 | 0.00 | 8,765.39 | -1,060.00 | -665.70 | 376,570.20 | 654,199.80 | 32.034748 | -103.969111 | |
| 9,000.00 | 0.00 | 0.00 | 8,865.39 | -1,060.00 | -665.70 | 376,570.20 | 654,199.80 | 32.034748 | -103.969111 | |
| 9,100.00 | 0.00 | 0.00 | 8,965.39 | -1,060.00 | -665.70 | 376,570.20 | 654,199.80 | 32.034748 | -103.969111 | |
| 9,200.00 | 0.00 | 0.00 | 9,065.39 | -1,060.00 | -665.70 | 376,570.20 | 654,199.80 | 32.034748 | -103.969111 | |
| 9,211.61 | 0.00 | 0.00 | 9,077.00 | -1,060.00 | -665.70 | 376,570.20 | 654,199.80 | 32.034748 | -103.969111 | |
| Harkey Sandstone | | | | | | | | | | |
| 9,300.00 | 0.00 | 0.00 | 9,165.39 | -1,060.00 | -665.70 | 376,570.20 | 654,199.80 | 32.034748 | -103.969111 | |
| 9,400.00 | 0.00 | 0.00 | 9,265.39 | -1,060.00 | -665.70 | 376,570.20 | 654,199.80 | 32.034748 | -103.969111 | |
| 9,500.00 | 0.00 | 0.00 | 9,365.39 | -1,060.00 | -665.70 | 376,570.20 | 654,199.80 | 32.034748 | -103.969111 | |
| 9,600.00 | 0.00 | 0.00 | 9,465.39 | -1,060.00 | -665.70 | 376,570.20 | 654,199.80 | 32.034748 | -103.969111 | |
| 9,679.61 | 0.00 | 0.00 | 9,545.00 | -1,060.00 | -665.70 | 376,570.20 | 654,199.80 | 32.034748 | -103.969111 | |
| 3rd Bone Spring Sand | | | | | | | | | | |
| 9,700.00 | 0.00 | 0.00 | 9,565.39 | -1,060.00 | -665.70 | 376,570.20 | 654,199.80 | 32.034748 | -103.969111 | |
| 9,800.00 | 0.00 | 0.00 | 9,665.39 | -1,060.00 | -665.70 | 376,570.20 | 654,199.80 | 32.034748 | -103.969111 | |
| 9,850.65 | 0.00 | 0.00 | 9,716.04 | -1,060.00 | -665.70 | 376,570.20 | 654,199.80 | 32.034748 | -103.969111 | |
| KOP @9850.65'MD | | | | | | | | | | |
| 9,900.00 | 4.94 | 179.79 | 9,765.33 | -1,062.12 | -665.69 | 376,568.07 | 654,199.81 | 32.034743 | -103.969111 | |
| 9,950.00 | 9.94 | 179.79 | 9,814.90 | -1,068.59 | -665.67 | 376,561.61 | 654,199.84 | 32.034725 | -103.969111 | |
| 10,000.00 | 14.94 | 179.79 | 9,863.71 | -1,079.36 | -665.63 | 376,550.84 | 654,199.88 | 32.034695 | -103.969111 | |
| 10,020.06 | 16.94 | 179.79 | 9,883.00 | -1,084.86 | -665.61 | 376,545.33 | 654,199.90 | 32.034680 | -103.969111 | |
| Wolfcamp Top | | | | | | | | | | |
| 10,047.45 | 19.68 | 179.79 | 9,909.00 | -1,093.47 | -665.57 | 376,536.73 | 654,199.93 | 32.034656 | -103.969111 | |
| Wolfcamp X | | | | | | | | | | |
| 10,050.00 | 19.94 | 179.79 | 9,911.40 | -1,094.33 | -665.57 | 376,535.87 | 654,199.93 | 32.034654 | -103.969111 | |
| 10,100.00 | 24.94 | 179.79 | 9,957.60 | -1,113.41 | -665.50 | 376,516.79 | 654,200.00 | 32.034602 | -103.969111 | |
| 10,132.88 | 28.22 | 179.79 | 9,987.00 | -1,128.12 | -665.45 | 376,502.08 | 654,200.06 | 32.034561 | -103.969111 | |
| Wolfcamp Y | | | | | | | | | | |
| 10,150.00 | 29.94 | 179.79 | 10,001.96 | -1,136.44 | -665.41 | 376,493.76 | 654,200.09 | 32.034538 | -103.969111 | |
| 10,165.17 | 31.45 | 179.79 | 10,015.00 | -1,144.18 | -665.39 | 376,486.02 | 654,200.12 | 32.034517 | -103.969111 | |
| Wolfcamp A | | | | | | | | | | |
| 10,200.00 | 34.94 | 179.79 | 10,044.15 | -1,163.25 | -665.31 | 376,466.95 | 654,200.19 | 32.034465 | -103.969111 | |
| 10,250.00 | 39.94 | 179.79 | 10,083.84 | -1,193.63 | -665.20 | 376,436.57 | 654,200.30 | 32.034381 | -103.969111 | |
| 10,300.00 | 44.94 | 179.79 | 10,120.73 | -1,227.36 | -665.07 | 376,402.84 | 654,200.43 | 32.034288 | -103.969111 | |
| 10,335.40 | 48.48 | 179.79 | 10,145.00 | -1,253.12 | -664.98 | 376,377.08 | 654,200.53 | 32.034218 | -103.969111 | |
| Wolfcamp A2 | | | | | | | | | | |
| 10,350.00 | 49.94 | 179.79 | 10,154.54 | -1,264.17 | -664.94 | 376,366.03 | 654,200.57 | 32.034187 | -103.969111 | |
| 10,400.00 | 54.94 | 179.79 | 10,185.01 | -1,303.79 | -664.79 | 376,326.41 | 654,200.72 | 32.034078 | -103.969111 | |
| 10,450.00 | 59.94 | 179.79 | 10,211.91 | -1,345.92 | -664.63 | 376,284.28 | 654,200.87 | 32.033962 | -103.969111 | |

WPX Energy
Planning Report - Geographic

| | | | |
|------------------|--------------------------------|-------------------------------------|--------------------------------------|
| Database: | Compass | Local Co-ordinate Reference: | Well Horn 22-27-34 Fed Com No. 421H |
| Company: | WPX Energy Permian, LLC | TVD Reference: | GL:2926+28ft @ 2954.00usft (Pat 803) |
| Project: | Eddy NM | MD Reference: | GL:2926+28ft @ 2954.00usft (Pat 803) |
| Site: | Horn 22-27-34 Fed Com Pad | North Reference: | Grid |
| Well: | Horn 22-27-34 Fed Com No. 421H | Survey Calculation Method: | Minimum Curvature |
| Wellbore: | Wellbore #1 | | |
| Design: | Plan 1 (1860'FEL) WC A Lwr | | |

| Planned Survey | | | | | | | | | | |
|--|--------------------|----------------------|-----------------|-----------------|-----------------|--------------------|-------------------|-----------|-------------|--|
| Measured | | | Vertical | | | Map | | Map | | |
| Depth (usft) | Inclination (°) | Azimuth (bearing) | Depth (usft) | +N/-S (usft) | +E/-W (usft) | Northing (usft) | Easting (usft) | Latitude | Longitude | |
| 10,464.46 | 61.38 | 179.79 | 10,219.00 | -1,358.52 | -664.58 | 376,271.68 | 654,200.92 | 32.033928 | -103.969111 | |
| Wolfcamp A3 | | | | | | | | | | |
| 10,500.00 | 64.94 | 179.79 | 10,235.04 | -1,390.23 | -664.47 | 376,239.97 | 654,201.04 | 32.033841 | -103.969111 | |
| 10,550.00 | 69.94 | 179.79 | 10,254.22 | -1,436.38 | -664.29 | 376,193.82 | 654,201.21 | 32.033714 | -103.969111 | |
| 10,574.05 | 72.34 | 179.79 | 10,262.00 | -1,459.14 | -664.21 | 376,171.06 | 654,201.30 | 32.033651 | -103.969111 | |
| Wolfcamp A4 | | | | | | | | | | |
| 10,595.04 | 74.44 | 179.79 | 10,268.00 | -1,479.26 | -664.13 | 376,150.94 | 654,201.37 | 32.033596 | -103.969111 | |
| Top Target | | | | | | | | | | |
| 10,600.00 | 74.94 | 179.79 | 10,269.31 | -1,484.04 | -664.11 | 376,146.16 | 654,201.39 | 32.033583 | -103.969111 | |
| 10,650.00 | 79.94 | 179.79 | 10,280.18 | -1,532.82 | -663.93 | 376,097.38 | 654,201.57 | 32.033449 | -103.969111 | |
| 10,700.00 | 84.94 | 179.79 | 10,286.76 | -1,582.37 | -663.75 | 376,047.83 | 654,201.76 | 32.033312 | -103.969111 | |
| 10,750.65 | 90.00 | 179.79 | 10,289.00 | -1,632.95 | -663.56 | 375,997.24 | 654,201.95 | 32.033173 | -103.969111 | |
| Landing Point @10750.65'MD - Landing Point | | | | | | | | | | |
| 10,800.00 | 90.00 | 179.79 | 10,289.00 | -1,682.30 | -663.37 | 375,947.89 | 654,202.13 | 32.033038 | -103.969111 | |
| 10,900.00 | 90.00 | 179.79 | 10,289.00 | -1,782.30 | -663.00 | 375,847.89 | 654,202.51 | 32.032763 | -103.969110 | |
| 11,000.00 | 90.00 | 179.79 | 10,289.00 | -1,882.30 | -662.62 | 375,747.89 | 654,202.88 | 32.032488 | -103.969110 | |
| 11,100.00 | 90.00 | 179.79 | 10,289.00 | -1,982.30 | -662.25 | 375,647.90 | 654,203.25 | 32.032213 | -103.969110 | |
| 11,200.00 | 90.00 | 179.79 | 10,289.00 | -2,082.30 | -661.88 | 375,547.90 | 654,203.63 | 32.031938 | -103.969110 | |
| 11,300.00 | 90.00 | 179.79 | 10,289.00 | -2,182.30 | -661.50 | 375,447.90 | 654,204.00 | 32.031663 | -103.969110 | |
| 11,400.00 | 90.00 | 179.79 | 10,289.00 | -2,282.30 | -661.13 | 375,347.90 | 654,204.38 | 32.031388 | -103.969110 | |
| 11,500.00 | 90.00 | 179.79 | 10,289.00 | -2,382.30 | -660.76 | 375,247.90 | 654,204.75 | 32.031114 | -103.969110 | |
| 11,600.00 | 90.00 | 179.79 | 10,289.00 | -2,482.30 | -660.38 | 375,147.90 | 654,205.12 | 32.030839 | -103.969110 | |
| 11,700.00 | 90.00 | 179.79 | 10,289.00 | -2,582.30 | -660.01 | 375,047.90 | 654,205.50 | 32.030564 | -103.969109 | |
| 11,800.00 | 90.00 | 179.79 | 10,289.00 | -2,682.30 | -659.63 | 374,947.90 | 654,205.87 | 32.030289 | -103.969109 | |
| 11,900.00 | 90.00 | 179.79 | 10,289.00 | -2,782.30 | -659.26 | 374,847.90 | 654,206.25 | 32.030014 | -103.969109 | |
| 12,000.00 | 90.00 | 179.79 | 10,289.00 | -2,882.30 | -658.89 | 374,747.90 | 654,206.62 | 32.029739 | -103.969109 | |
| 12,100.00 | 90.00 | 179.79 | 10,289.00 | -2,982.30 | -658.51 | 374,647.90 | 654,206.99 | 32.029464 | -103.969109 | |
| 12,200.00 | 90.00 | 179.79 | 10,289.00 | -3,082.30 | -658.14 | 374,547.90 | 654,207.37 | 32.029189 | -103.969109 | |
| 12,300.00 | 90.00 | 179.79 | 10,289.00 | -3,182.29 | -657.76 | 374,447.90 | 654,207.74 | 32.028914 | -103.969109 | |
| 12,400.00 | 90.00 | 179.79 | 10,289.00 | -3,282.29 | -657.39 | 374,347.90 | 654,208.12 | 32.028639 | -103.969109 | |
| 12,500.00 | 90.00 | 179.79 | 10,289.00 | -3,382.29 | -657.02 | 374,247.91 | 654,208.49 | 32.028365 | -103.969109 | |
| 12,600.00 | 90.00 | 179.79 | 10,289.00 | -3,482.29 | -656.64 | 374,147.91 | 654,208.86 | 32.028090 | -103.969108 | |
| 12,700.00 | 90.00 | 179.79 | 10,289.00 | -3,582.29 | -656.27 | 374,047.91 | 654,209.24 | 32.027815 | -103.969108 | |
| 12,800.00 | 90.00 | 179.79 | 10,289.00 | -3,682.29 | -655.89 | 373,947.91 | 654,209.61 | 32.027540 | -103.969108 | |
| 12,900.00 | 90.00 | 179.79 | 10,289.00 | -3,782.29 | -655.52 | 373,847.91 | 654,209.98 | 32.027265 | -103.969108 | |
| 13,000.00 | 90.00 | 179.79 | 10,289.00 | -3,882.29 | -655.15 | 373,747.91 | 654,210.36 | 32.026990 | -103.969108 | |
| 13,100.00 | 90.00 | 179.79 | 10,289.00 | -3,982.29 | -654.77 | 373,647.91 | 654,210.73 | 32.026715 | -103.969108 | |
| 13,200.00 | 90.00 | 179.79 | 10,289.00 | -4,082.29 | -654.40 | 373,547.91 | 654,211.11 | 32.026440 | -103.969108 | |
| 13,300.00 | 90.00 | 179.79 | 10,289.00 | -4,182.29 | -654.02 | 373,447.91 | 654,211.48 | 32.026165 | -103.969108 | |
| 13,400.00 | 90.00 | 179.79 | 10,289.00 | -4,282.29 | -653.65 | 373,347.91 | 654,211.85 | 32.025890 | -103.969107 | |
| 13,500.00 | 90.00 | 179.79 | 10,289.00 | -4,382.29 | -653.28 | 373,247.91 | 654,212.23 | 32.025616 | -103.969107 | |
| 13,600.00 | 90.00 | 179.79 | 10,289.00 | -4,482.29 | -652.90 | 373,147.91 | 654,212.60 | 32.025341 | -103.969107 | |
| 13,700.00 | 90.00 | 179.79 | 10,289.00 | -4,582.28 | -652.53 | 373,047.91 | 654,212.98 | 32.025066 | -103.969107 | |
| 13,800.00 | 90.00 | 179.79 | 10,289.00 | -4,682.28 | -652.15 | 372,947.91 | 654,213.35 | 32.024791 | -103.969107 | |
| 13,900.00 | 90.00 | 179.79 | 10,289.00 | -4,782.28 | -651.78 | 372,847.92 | 654,213.72 | 32.024516 | -103.969107 | |
| 14,000.00 | 90.00 | 179.79 | 10,289.00 | -4,882.28 | -651.41 | 372,747.92 | 654,214.10 | 32.024241 | -103.969107 | |
| 14,100.00 | 90.00 | 179.79 | 10,289.00 | -4,982.28 | -651.03 | 372,647.92 | 654,214.47 | 32.023966 | -103.969107 | |
| 14,200.00 | 90.00 | 179.79 | 10,289.00 | -5,082.28 | -650.66 | 372,547.92 | 654,214.85 | 32.023691 | -103.969107 | |
| 14,300.00 | 90.00 | 179.79 | 10,289.00 | -5,182.28 | -650.28 | 372,447.92 | 654,215.22 | 32.023416 | -103.969106 | |
| 14,400.00 | 90.00 | 179.79 | 10,289.00 | -5,282.28 | -649.91 | 372,347.92 | 654,215.59 | 32.023142 | -103.969106 | |
| 14,500.00 | 90.00 | 179.79 | 10,289.00 | -5,382.28 | -649.54 | 372,247.92 | 654,215.97 | 32.022867 | -103.969106 | |
| 14,600.00 | 90.00 | 179.79 | 10,289.00 | -5,482.28 | -649.16 | 372,147.92 | 654,216.34 | 32.022592 | -103.969106 | |
| 14,700.00 | 90.00 | 179.79 | 10,289.00 | -5,582.28 | -648.79 | 372,047.92 | 654,216.72 | 32.022317 | -103.969106 | |
| 14,800.00 | 90.00 | 179.79 | 10,289.00 | -5,682.28 | -648.41 | 371,947.92 | 654,217.09 | 32.022042 | -103.969106 | |

WPX Energy

Planning Report - Geographic

| | | | |
|------------------|--------------------------------|-------------------------------------|--------------------------------------|
| Database: | Compass | Local Co-ordinate Reference: | Well Horn 22-27-34 Fed Com No. 421H |
| Company: | WPX Energy Permian, LLC | TVD Reference: | GL:2926+28ft @ 2954.00usft (Pat 803) |
| Project: | Eddy NM | MD Reference: | GL:2926+28ft @ 2954.00usft (Pat 803) |
| Site: | Horn 22-27-34 Fed Com Pad | North Reference: | Grid |
| Well: | Horn 22-27-34 Fed Com No. 421H | Survey Calculation Method: | Minimum Curvature |
| Wellbore: | Wellbore #1 | | |
| Design: | Plan 1 (1860'FEL) WC A Lwr | | |

| Planned Survey | | | | | | | | | | |
|-----------------------|-----------------|-------------------|-----------------------|--------------|--------------|---------------------|--------------------|-----------|-------------|--|
| Measured Depth (usft) | Inclination (°) | Azimuth (bearing) | Vertical Depth (usft) | +N/-S (usft) | +E/-W (usft) | Map Northing (usft) | Map Easting (usft) | Latitude | Longitude | |
| 14,900.00 | 90.00 | 179.79 | 10,289.00 | -5,782.28 | -648.04 | 371,847.92 | 654,217.46 | 32.021767 | -103.969106 | |
| 15,000.00 | 90.00 | 179.79 | 10,289.00 | -5,882.28 | -647.67 | 371,747.92 | 654,217.84 | 32.021492 | -103.969106 | |
| 15,100.00 | 90.00 | 179.79 | 10,289.00 | -5,982.28 | -647.29 | 371,647.92 | 654,218.21 | 32.021217 | -103.969105 | |
| 15,200.00 | 90.00 | 179.79 | 10,289.00 | -6,082.27 | -646.92 | 371,547.92 | 654,218.59 | 32.020942 | -103.969105 | |
| 15,300.00 | 90.00 | 179.79 | 10,289.00 | -6,182.27 | -646.54 | 371,447.92 | 654,218.96 | 32.020667 | -103.969105 | |
| 15,400.00 | 90.00 | 179.79 | 10,289.00 | -6,282.27 | -646.17 | 371,347.93 | 654,219.33 | 32.020393 | -103.969105 | |
| 15,445.73 | 90.00 | 179.79 | 10,289.00 | -6,328.00 | -646.00 | 371,302.20 | 654,219.50 | 32.020267 | -103.969105 | |
| 15,500.00 | 90.00 | 180.87 | 10,289.00 | -6,382.27 | -646.31 | 371,247.93 | 654,219.19 | 32.020118 | -103.969107 | |
| 15,586.98 | 90.00 | 182.61 | 10,289.00 | -6,469.20 | -648.95 | 371,160.99 | 654,216.55 | 32.019879 | -103.969116 | |
| 15,600.00 | 90.00 | 182.61 | 10,289.00 | -6,482.21 | -649.55 | 371,147.98 | 654,215.96 | 32.019843 | -103.969118 | |
| 15,700.00 | 90.00 | 182.61 | 10,289.00 | -6,582.11 | -654.10 | 371,048.09 | 654,211.40 | 32.019568 | -103.969134 | |
| 15,800.00 | 90.00 | 182.61 | 10,289.00 | -6,682.01 | -658.66 | 370,948.19 | 654,206.85 | 32.019294 | -103.969150 | |
| 15,900.00 | 90.00 | 182.61 | 10,289.00 | -6,781.90 | -663.21 | 370,848.30 | 654,202.29 | 32.019019 | -103.969166 | |
| 16,000.00 | 90.00 | 182.61 | 10,289.00 | -6,881.80 | -667.77 | 370,748.40 | 654,197.74 | 32.018745 | -103.969181 | |
| 16,100.00 | 90.00 | 182.61 | 10,289.00 | -6,981.69 | -672.32 | 370,648.50 | 654,193.18 | 32.018470 | -103.969197 | |
| 16,200.00 | 90.00 | 182.61 | 10,289.00 | -7,081.59 | -676.88 | 370,548.61 | 654,188.63 | 32.018196 | -103.969213 | |
| 16,300.00 | 90.00 | 182.61 | 10,289.00 | -7,181.49 | -681.43 | 370,448.71 | 654,184.07 | 32.017921 | -103.969229 | |
| 16,400.00 | 90.00 | 182.61 | 10,289.00 | -7,281.38 | -685.99 | 370,348.81 | 654,179.52 | 32.017646 | -103.969244 | |
| 16,500.00 | 90.00 | 182.61 | 10,289.00 | -7,381.28 | -690.54 | 370,248.92 | 654,174.96 | 32.017372 | -103.969260 | |
| 16,600.00 | 90.00 | 182.61 | 10,289.00 | -7,481.18 | -695.10 | 370,149.02 | 654,170.41 | 32.017097 | -103.969276 | |
| 16,700.00 | 90.00 | 182.61 | 10,289.00 | -7,581.07 | -699.65 | 370,049.13 | 654,165.85 | 32.016823 | -103.969292 | |
| 16,800.00 | 90.00 | 182.61 | 10,289.00 | -7,680.97 | -704.21 | 369,949.23 | 654,161.30 | 32.016548 | -103.969308 | |
| 16,900.00 | 90.00 | 182.61 | 10,289.00 | -7,780.86 | -708.76 | 369,849.33 | 654,156.74 | 32.016274 | -103.969323 | |
| 17,000.00 | 90.00 | 182.61 | 10,289.00 | -7,880.76 | -713.32 | 369,749.44 | 654,152.19 | 32.015999 | -103.969339 | |
| 17,100.00 | 90.00 | 182.61 | 10,289.00 | -7,980.66 | -717.87 | 369,649.54 | 654,147.63 | 32.015724 | -103.969355 | |
| 17,200.00 | 90.00 | 182.61 | 10,289.00 | -8,080.55 | -722.43 | 369,549.65 | 654,143.08 | 32.015450 | -103.969371 | |
| 17,300.00 | 90.00 | 182.61 | 10,289.00 | -8,180.45 | -726.98 | 369,449.75 | 654,138.52 | 32.015175 | -103.969386 | |
| 17,400.00 | 90.00 | 182.61 | 10,289.00 | -8,280.35 | -731.54 | 369,349.85 | 654,133.97 | 32.014901 | -103.969402 | |
| 17,500.00 | 90.00 | 182.61 | 10,289.00 | -8,380.24 | -736.09 | 369,249.96 | 654,129.41 | 32.014626 | -103.969418 | |
| 17,600.00 | 90.00 | 182.61 | 10,289.00 | -8,480.14 | -740.65 | 369,150.06 | 654,124.86 | 32.014352 | -103.969434 | |
| 17,700.00 | 90.00 | 182.61 | 10,289.00 | -8,580.03 | -745.20 | 369,050.16 | 654,120.30 | 32.014077 | -103.969450 | |
| 17,800.00 | 90.00 | 182.61 | 10,289.00 | -8,679.93 | -749.76 | 368,950.27 | 654,115.75 | 32.013803 | -103.969465 | |
| 17,900.00 | 90.00 | 182.61 | 10,289.00 | -8,779.83 | -754.31 | 368,850.37 | 654,111.19 | 32.013528 | -103.969481 | |
| 18,000.00 | 90.00 | 182.61 | 10,289.00 | -8,879.72 | -758.87 | 368,750.48 | 654,106.64 | 32.013253 | -103.969497 | |
| 18,100.00 | 90.00 | 182.61 | 10,289.00 | -8,979.62 | -763.42 | 368,650.58 | 654,102.08 | 32.012979 | -103.969513 | |
| 18,200.00 | 90.00 | 182.61 | 10,289.00 | -9,079.52 | -767.98 | 368,550.68 | 654,097.53 | 32.012704 | -103.969528 | |
| 18,300.00 | 90.00 | 182.61 | 10,289.00 | -9,179.41 | -772.53 | 368,450.79 | 654,092.97 | 32.012430 | -103.969544 | |
| 18,400.00 | 90.00 | 182.61 | 10,289.00 | -9,279.31 | -777.09 | 368,350.89 | 654,088.42 | 32.012155 | -103.969560 | |
| 18,500.00 | 90.00 | 182.61 | 10,289.00 | -9,379.20 | -781.64 | 368,250.99 | 654,083.86 | 32.011881 | -103.969576 | |
| 18,600.00 | 90.00 | 182.61 | 10,289.00 | -9,479.10 | -786.20 | 368,151.10 | 654,079.31 | 32.011606 | -103.969592 | |
| 18,700.00 | 90.00 | 182.61 | 10,289.00 | -9,579.00 | -790.75 | 368,051.20 | 654,074.75 | 32.011331 | -103.969607 | |
| 18,800.00 | 90.00 | 182.61 | 10,289.00 | -9,678.89 | -795.31 | 367,951.31 | 654,070.20 | 32.011057 | -103.969623 | |
| 18,900.00 | 90.00 | 182.61 | 10,289.00 | -9,778.79 | -799.86 | 367,851.41 | 654,065.64 | 32.010782 | -103.969639 | |
| 19,000.00 | 90.00 | 182.61 | 10,289.00 | -9,878.68 | -804.42 | 367,751.51 | 654,061.09 | 32.010508 | -103.969655 | |
| 19,100.00 | 90.00 | 182.61 | 10,289.00 | -9,978.58 | -808.97 | 367,651.62 | 654,056.53 | 32.010233 | -103.969671 | |
| 19,200.00 | 90.00 | 182.61 | 10,289.00 | -10,078.48 | -813.53 | 367,551.72 | 654,051.98 | 32.009959 | -103.969686 | |
| 19,300.00 | 90.00 | 182.61 | 10,289.00 | -10,178.37 | -818.08 | 367,451.82 | 654,047.42 | 32.009684 | -103.969702 | |
| 19,400.00 | 90.00 | 182.61 | 10,289.00 | -10,278.27 | -822.64 | 367,351.93 | 654,042.87 | 32.009409 | -103.969718 | |
| 19,500.00 | 90.00 | 182.61 | 10,289.00 | -10,378.17 | -827.19 | 367,252.03 | 654,038.31 | 32.009135 | -103.969734 | |
| 19,600.00 | 90.00 | 182.61 | 10,289.00 | -10,478.06 | -831.75 | 367,152.14 | 654,033.76 | 32.008860 | -103.969749 | |
| 19,700.00 | 90.00 | 182.61 | 10,289.00 | -10,577.96 | -836.30 | 367,052.24 | 654,029.20 | 32.008586 | -103.969765 | |
| 19,800.00 | 90.00 | 182.61 | 10,289.00 | -10,677.85 | -840.86 | 366,952.34 | 654,024.65 | 32.008311 | -103.969781 | |
| 19,900.00 | 90.00 | 182.61 | 10,289.00 | -10,777.75 | -845.41 | 366,852.45 | 654,020.09 | 32.008037 | -103.969797 | |
| 20,000.00 | 90.00 | 182.61 | 10,289.00 | -10,877.65 | -849.97 | 366,752.55 | 654,015.54 | 32.007762 | -103.969813 | |
| 20,100.00 | 90.00 | 182.61 | 10,289.00 | -10,977.54 | -854.52 | 366,652.66 | 654,010.98 | 32.007487 | -103.969828 | |

WPX Energy

Planning Report - Geographic

| | | | |
|------------------|--------------------------------|-------------------------------------|--------------------------------------|
| Database: | Compass | Local Co-ordinate Reference: | Well Horn 22-27-34 Fed Com No. 421H |
| Company: | WPX Energy Permian, LLC | TVD Reference: | GL:2926+28ft @ 2954.00usft (Pat 803) |
| Project: | Eddy NM | MD Reference: | GL:2926+28ft @ 2954.00usft (Pat 803) |
| Site: | Horn 22-27-34 Fed Com Pad | North Reference: | Grid |
| Well: | Horn 22-27-34 Fed Com No. 421H | Survey Calculation Method: | Minimum Curvature |
| Wellbore: | Wellbore #1 | | |
| Design: | Plan 1 (1860'FEL) WC A Lwr | | |

| Planned Survey | | | | | | | | | |
|-----------------------------------|-----------------|-------------------|-----------------------|--------------|--------------|---------------------|--------------------|-----------|-------------|
| Measured Depth (usft) | Inclination (°) | Azimuth (bearing) | Vertical Depth (usft) | +N/-S (usft) | +E/-W (usft) | Map Northing (usft) | Map Easting (usft) | Latitude | Longitude |
| 20,200.00 | 90.00 | 182.61 | 10,289.00 | -11,077.44 | -859.08 | 366,552.76 | 654,006.43 | 32.007213 | -103.969844 |
| 20,300.00 | 90.00 | 182.61 | 10,289.00 | -11,177.34 | -863.63 | 366,452.86 | 654,001.87 | 32.006938 | -103.969860 |
| 20,400.00 | 90.00 | 182.61 | 10,289.00 | -11,277.23 | -868.19 | 366,352.97 | 653,997.32 | 32.006664 | -103.969876 |
| 20,500.00 | 90.00 | 182.61 | 10,289.00 | -11,377.13 | -872.74 | 366,253.07 | 653,992.76 | 32.006389 | -103.969891 |
| 20,600.00 | 90.00 | 182.61 | 10,289.00 | -11,477.02 | -877.30 | 366,153.17 | 653,988.21 | 32.006115 | -103.969907 |
| 20,700.00 | 90.00 | 182.61 | 10,289.00 | -11,576.92 | -881.85 | 366,053.28 | 653,983.65 | 32.005840 | -103.969923 |
| 20,720.80 | 90.00 | 182.61 | 10,289.00 | -11,597.70 | -882.80 | 366,032.50 | 653,982.70 | 32.005783 | -103.969926 |
| 20,800.00 | 90.00 | 181.03 | 10,289.00 | -11,676.86 | -885.31 | 365,953.34 | 653,980.19 | 32.005565 | -103.969935 |
| 20,900.14 | 90.00 | 179.02 | 10,289.00 | -11,776.99 | -885.36 | 365,853.21 | 653,980.15 | 32.005290 | -103.969936 |
| 21,000.00 | 90.00 | 179.02 | 10,289.00 | -11,876.84 | -883.66 | 365,753.36 | 653,981.85 | 32.005016 | -103.969932 |
| 21,100.00 | 90.00 | 179.02 | 10,289.00 | -11,976.82 | -881.95 | 365,653.38 | 653,983.55 | 32.004741 | -103.969928 |
| 21,200.00 | 90.00 | 179.02 | 10,289.00 | -12,076.81 | -880.25 | 365,553.39 | 653,985.25 | 32.004466 | -103.969923 |
| 21,300.00 | 90.00 | 179.02 | 10,289.00 | -12,176.79 | -878.55 | 365,453.41 | 653,986.96 | 32.004191 | -103.969919 |
| 21,400.00 | 90.00 | 179.02 | 10,289.00 | -12,276.78 | -876.84 | 365,353.42 | 653,988.66 | 32.003916 | -103.969914 |
| 21,500.00 | 90.00 | 179.02 | 10,289.00 | -12,376.76 | -875.14 | 365,253.43 | 653,990.37 | 32.003641 | -103.969910 |
| 21,600.00 | 90.00 | 179.02 | 10,289.00 | -12,476.75 | -873.44 | 365,153.45 | 653,992.07 | 32.003366 | -103.969906 |
| 21,700.00 | 90.00 | 179.02 | 10,289.00 | -12,576.74 | -871.73 | 365,053.46 | 653,993.77 | 32.003092 | -103.969901 |
| 21,800.00 | 90.00 | 179.02 | 10,289.00 | -12,676.72 | -870.03 | 364,953.48 | 653,995.48 | 32.002817 | -103.969897 |
| 21,900.00 | 90.00 | 179.02 | 10,289.00 | -12,776.71 | -868.33 | 364,853.49 | 653,997.18 | 32.002542 | -103.969892 |
| 22,000.00 | 90.00 | 179.02 | 10,289.00 | -12,876.69 | -866.62 | 364,753.51 | 653,998.88 | 32.002267 | -103.969888 |
| 22,100.00 | 90.00 | 179.02 | 10,289.00 | -12,976.68 | -864.92 | 364,653.52 | 654,000.59 | 32.001992 | -103.969884 |
| 22,200.00 | 90.00 | 179.02 | 10,289.00 | -13,076.66 | -863.21 | 364,553.54 | 654,002.29 | 32.001717 | -103.969879 |
| 22,300.00 | 90.00 | 179.02 | 10,289.00 | -13,176.65 | -861.51 | 364,453.55 | 654,003.99 | 32.001442 | -103.969875 |
| 22,400.00 | 90.00 | 179.02 | 10,289.00 | -13,276.63 | -859.81 | 364,353.56 | 654,005.70 | 32.001167 | -103.969870 |
| 22,500.00 | 90.00 | 179.02 | 10,289.00 | -13,376.62 | -858.10 | 364,253.58 | 654,007.40 | 32.000893 | -103.969866 |
| 22,600.00 | 90.00 | 179.02 | 10,289.00 | -13,476.60 | -856.40 | 364,153.59 | 654,009.10 | 32.000618 | -103.969861 |
| 22,688.11 | 90.00 | 179.02 | 10,289.00 | -13,564.70 | -854.90 | 364,065.50 | 654,010.60 | 32.000376 | -103.969858 |
| LTP (100'FSL) @22688.11'MD | | | | | | | | | |
| 22,700.00 | 90.00 | 179.02 | 10,289.00 | -13,576.59 | -854.70 | 364,053.61 | 654,010.81 | 32.000343 | -103.969857 |
| 22,738.11 | 90.00 | 179.02 | 10,289.00 | -13,614.69 | -854.05 | 364,015.51 | 654,011.46 | 32.000238 | -103.969855 |
| BHL @22738.11'MD | | | | | | | | | |

WPX Energy
Planning Report - Geographic

| | | | |
|------------------|--------------------------------|-------------------------------------|--------------------------------------|
| Database: | Compass | Local Co-ordinate Reference: | Well Horn 22-27-34 Fed Com No. 421H |
| Company: | WPX Energy Permian, LLC | TVD Reference: | GL:2926+28ft @ 2954.00usft (Pat 803) |
| Project: | Eddy NM | MD Reference: | GL:2926+28ft @ 2954.00usft (Pat 803) |
| Site: | Horn 22-27-34 Fed Com Pad | North Reference: | Grid |
| Well: | Horn 22-27-34 Fed Com No. 421H | Survey Calculation Method: | Minimum Curvature |
| Wellbore: | Wellbore #1 | | |
| Design: | Plan 1 (1860'FEL) WC A Lwr | | |

| Design Targets | | | | | | | | | | |
|--|-----------|-----------|-----------|------------|---------|------------|------------|-----------|-------------|--|
| Target Name | | | | | | | | | | |
| - hit/miss target | Dip Angle | Dip Dir. | TVD | +N/-S | +E/-W | Northing | Easting | Latitude | Longitude | |
| - Shape | (°) | (bearing) | (usft) | (usft) | (usft) | (usft) | (usft) | | | |
| POP (421H) 50'FNL, 18ft - plan misses target center by 1251.70usft at 0.00usft MD (0.00 TVD, 0.00 N, 0.00 E) - Point | 0.00 | 0.01 | 0.00 | -1,060.00 | -665.70 | 376,570.20 | 654,199.80 | 32.034748 | -103.969111 | |
| FTP (421H) 100'FNL, 18ft - plan misses target center by 1294.27usft at 0.00usft MD (0.00 TVD, 0.00 N, 0.00 E) - Point | 0.00 | 0.01 | 0.00 | -1,110.00 | -665.60 | 376,520.20 | 654,199.90 | 32.034611 | -103.969112 | |
| T2 (421H) - plan hits target center - Point | 0.00 | 0.00 | 10,289.00 | -11,597.70 | -882.80 | 366,032.50 | 653,982.70 | 32.005783 | -103.969926 | |
| LTP (421H) 100'FSL, 18ft - plan hits target center - Point | 0.00 | 0.01 | 10,289.00 | -13,564.70 | -854.90 | 364,065.50 | 654,010.60 | 32.000376 | -103.969858 | |
| BHL (421H) 50'FSL, 183ft - plan misses target center by 0.65usft at 22738.10usft MD (10289.00 TVD, -13614.69 N, -854.05 E) - Point | 0.00 | 0.01 | 10,289.00 | -13,614.70 | -854.70 | 364,015.50 | 654,010.80 | 32.000238 | -103.969857 | |
| T3 (421H) - plan misses target center by 23.40usft at 20744.58usft MD (10289.00 TVD, -11621.46 N, -883.78 E) - Point | 0.00 | 0.00 | 10,289.00 | -11,622.20 | -860.40 | 366,008.00 | 654,005.10 | 32.005715 | -103.969854 | |
| T1 (421H) - plan hits target center - Point | 0.00 | 0.00 | 10,289.00 | -6,328.00 | -646.00 | 371,302.20 | 654,219.50 | 32.020267 | -103.969105 | |


WPX Energy
Planning Report - Geographic

| | | | |
|------------------|--------------------------------|-------------------------------------|--------------------------------------|
| Database: | Compass | Local Co-ordinate Reference: | Well Horn 22-27-34 Fed Com No. 421H |
| Company: | WPX Energy Permian, LLC | TVD Reference: | GL:2926+28ft @ 2954.00usft (Pat 803) |
| Project: | Eddy NM | MD Reference: | GL:2926+28ft @ 2954.00usft (Pat 803) |
| Site: | Horn 22-27-34 Fed Com Pad | North Reference: | Grid |
| Well: | Horn 22-27-34 Fed Com No. 421H | Survey Calculation Method: | Minimum Curvature |
| Wellbore: | Wellbore #1 | | |
| Design: | Plan 1 (1860'FEL) WC A Lwr | | |

| Formations | | | | | | |
|-----------------------|-----------------------|------------------------------|-----------|---------|-------------------------|--|
| Measured Depth (usft) | Vertical Depth (usft) | Name | Lithology | Dip (°) | Dip Direction (bearing) | |
| 436.00 | 436.00 | Rustler | | | | |
| 836.00 | 836.00 | Salado | | | | |
| 1,195.00 | 1,195.00 | Castile (Top of Salt) (Est.) | | | | |
| 2,987.35 | 2,985.00 | Bell Canyon (Base of Salt) | | | | |
| 4,052.84 | 4,025.00 | Cherry Canyon | | | | |
| 5,169.39 | 5,114.00 | Brushy Canyon | | | | |
| 6,814.99 | 6,719.00 | Bone Spring | | | | |
| 6,913.42 | 6,815.00 | Avalon Upper | | | | |
| 7,415.82 | 7,305.00 | Avalon Lower | | | | |
| 7,764.42 | 7,645.00 | 1st Bone Spring Sand | | | | |
| 8,078.16 | 7,951.00 | 2nd Bone Spring Lime | | | | |
| 8,401.28 | 8,268.00 | 2nd Bone Spring Sand | | | | |
| 8,865.61 | 8,731.00 | 3rd Bone Spring Lime | | | | |
| 9,211.61 | 9,077.00 | Harkey Sandstone | | | | |
| 9,679.61 | 9,545.00 | 3rd Bone Spring Sand | | | | |
| 10,020.06 | 9,883.00 | Wolfcamp Top | | | | |
| 10,047.45 | 9,909.00 | Wolfcamp X | | | | |
| 10,132.88 | 9,987.00 | Wolfcamp Y | | | | |
| 10,165.17 | 10,015.00 | Wolfcamp A | | | | |
| 10,335.40 | 10,145.00 | Wolfcamp A2 | | | | |
| 10,464.46 | 10,219.00 | Wolfcamp A3 | | | | |
| 10,574.05 | 10,262.00 | Wolfcamp A4 | | | | |
| 10,595.04 | 10,268.00 | Top Target | | | | |
| 10,750.65 | 10,289.00 | Landing Point | | | | |


| Plan Annotations | | | | |
|-----------------------|-----------------------|-------------------|--------------|----------------------------|
| Measured Depth (usft) | Vertical Depth (usft) | Local Coordinates | | Comment |
| | | +N/-S (usft) | +E/-W (usft) | |
| 2,500.00 | 2,500.00 | 0.00 | 0.00 | Start Nudge |
| 3,137.73 | 3,132.48 | -59.86 | -37.60 | Hold 12.75° |
| 8,166.87 | 8,037.52 | -1,000.14 | -628.10 | EOH |
| 8,804.61 | 8,670.00 | -1,060.00 | -665.70 | Vertical |
| 9,850.65 | 9,716.04 | -1,060.00 | -665.70 | KOP @9850.65'MD |
| 10,750.65 | 10,289.00 | -1,632.95 | -663.56 | Landing Point @10750.65'MD |
| 22,688.11 | 10,289.00 | -13,564.70 | -854.90 | LTP (100'FSL) @22688.11'MD |
| 22,738.11 | 10,289.00 | -13,614.69 | -854.05 | BHL @22738.11'MD |


5M Choke Manifold

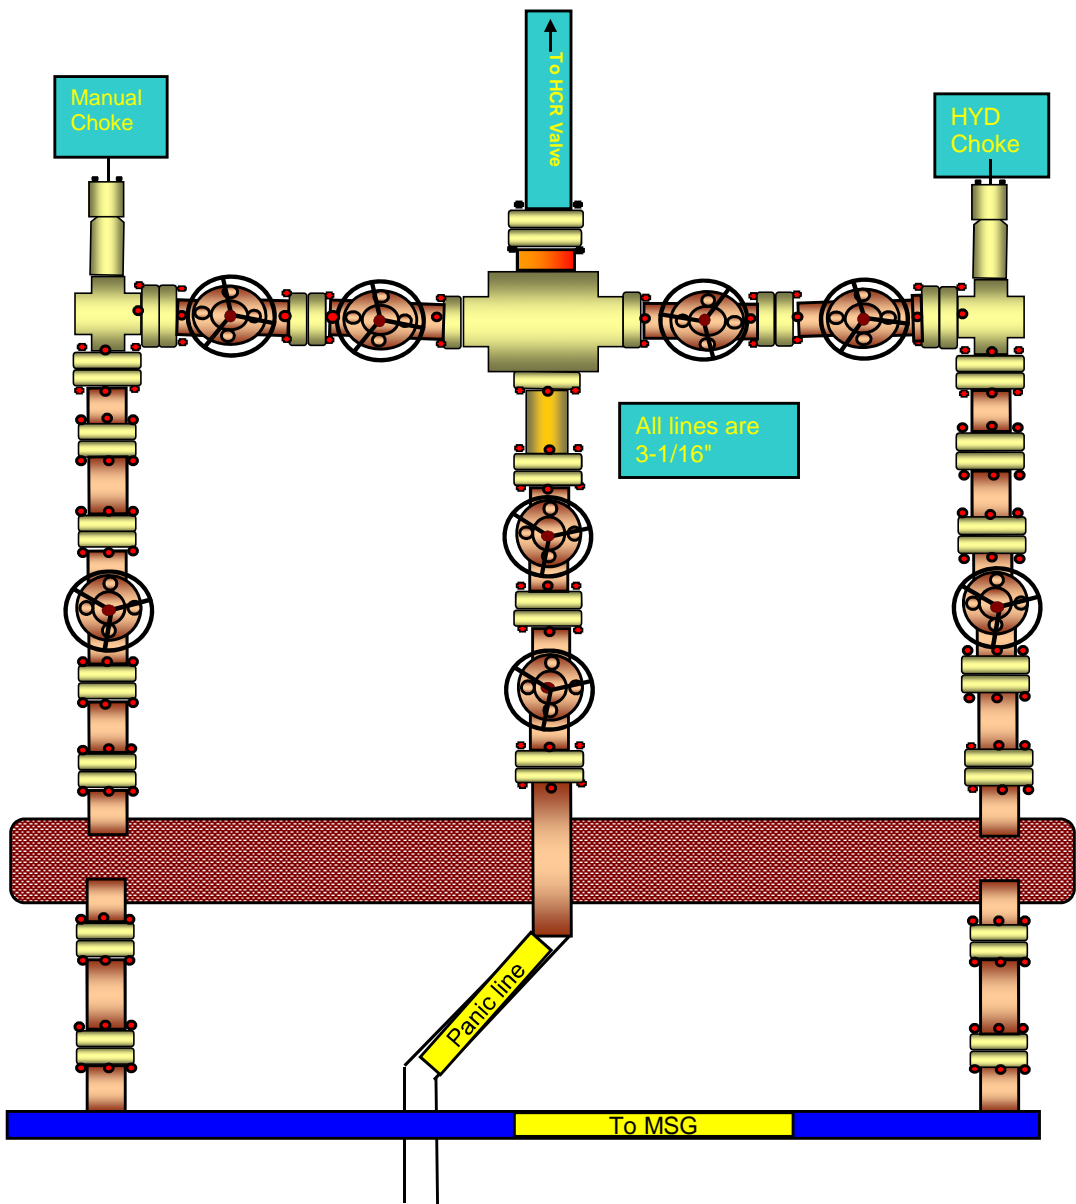

10M Remote Kill Line Schematic

Outside
Remote Kill
Line Valve

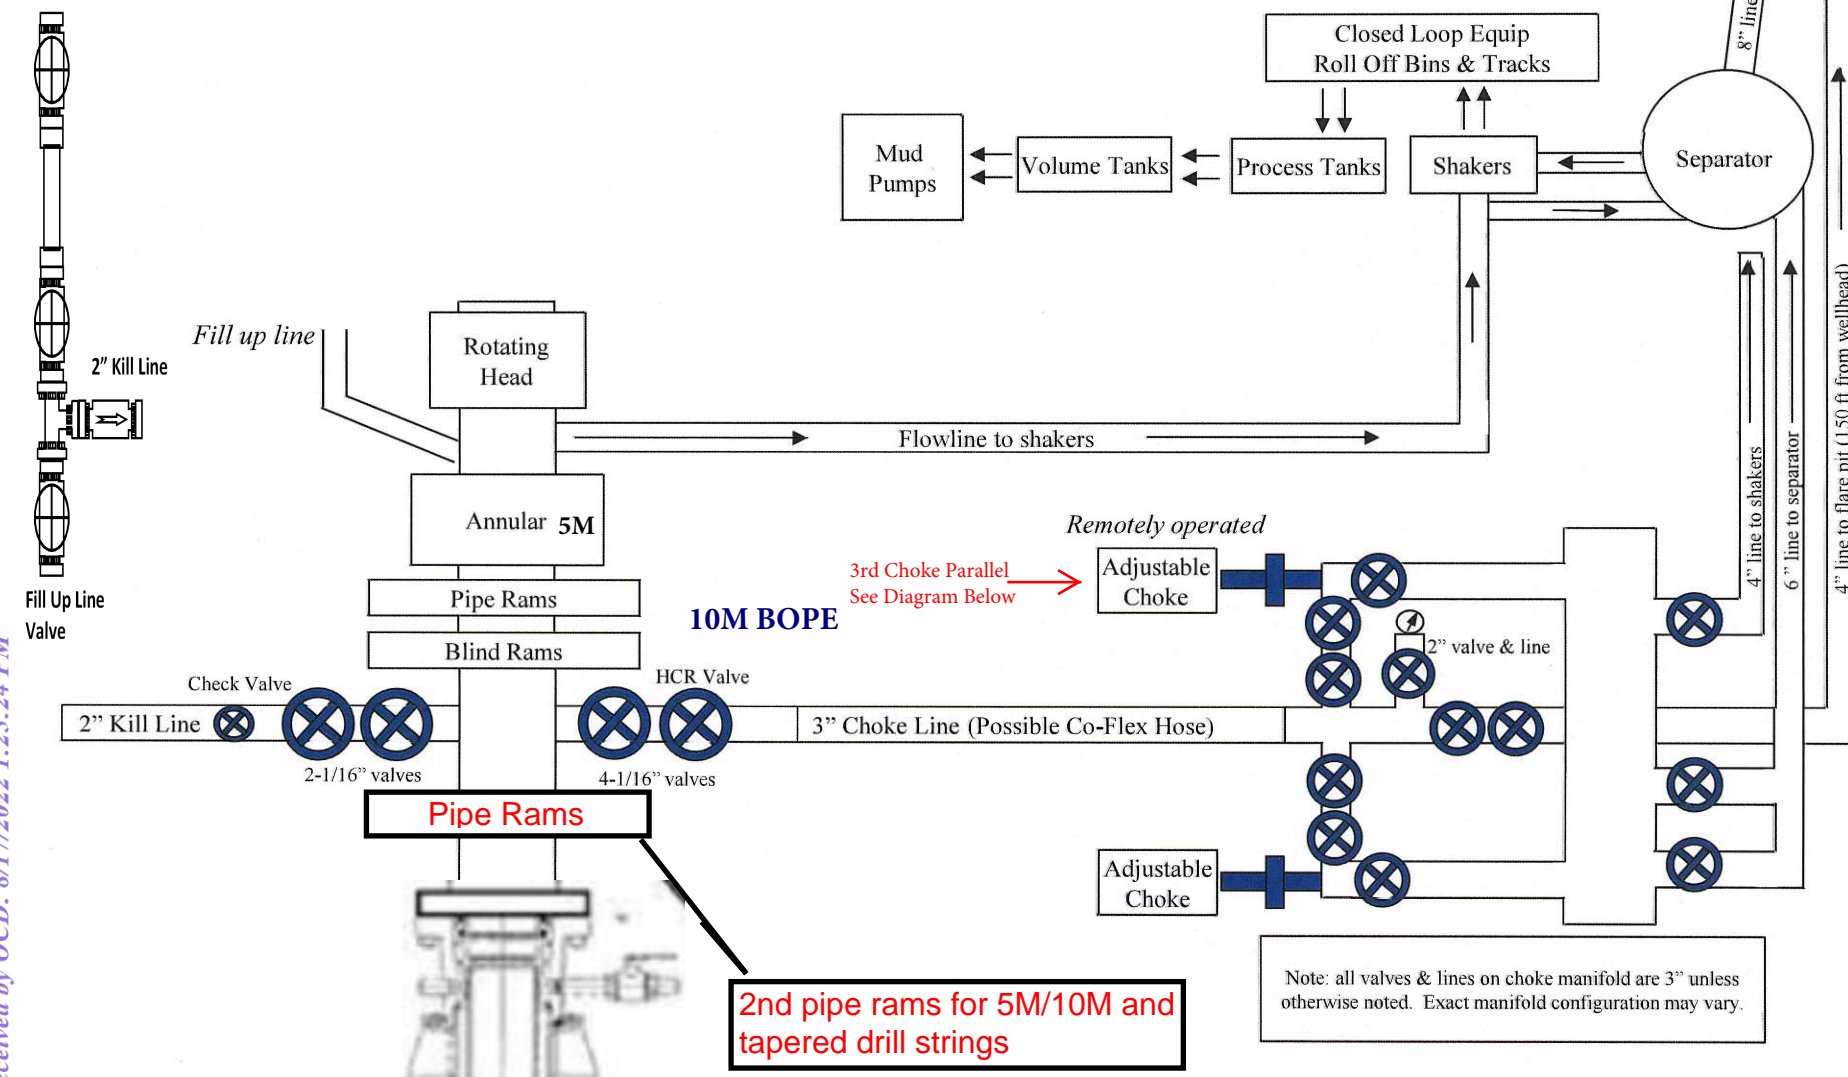

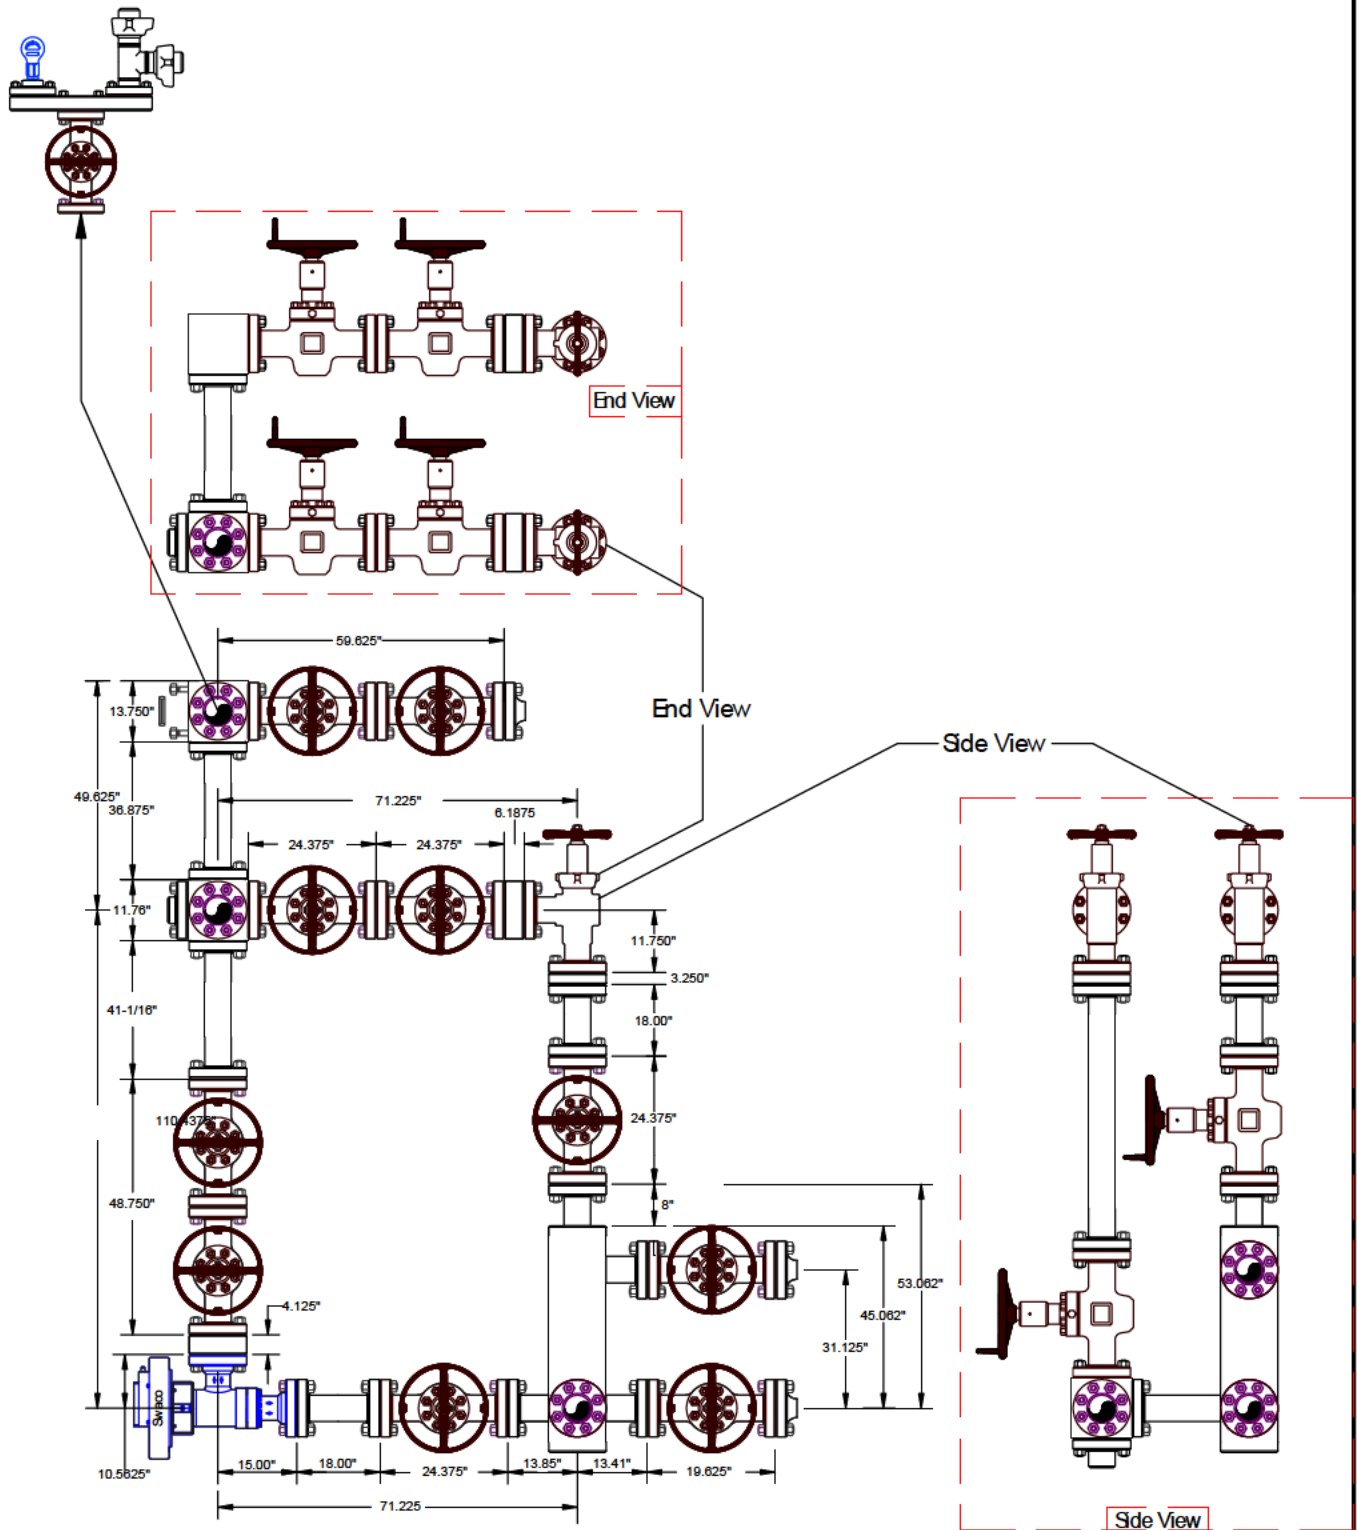

| | | | | | | |
|------|----------|------|---------|------------------|---|----------|
| Name | Jeanette | Date | 7-19-06 | Working Pressure | # | J-5132-E |
|------|----------|------|---------|------------------|---|----------|

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

| | |
|------------------------------|------------------------------------|
| OPERATOR'S NAME: | WPX Energy Permian LLC |
| LEASE NO.: | NMNM21767 |
| WELL NAME & NO.: | Horn 22-27-34 Federal Com 421H |
| SURFACE HOLE FOOTAGE: | 1038'/S & 1194'/E |
| BOTTOM HOLE FOOTAGE: | 50'/S & 1830'/E |
| LOCATION: | Section 15, T.26 S., R.29 E., NMPM |
| COUNTY: | Eddy County, New Mexico |

COA

| | | | |
|----------------------|---|--|-------------------------------------|
| H2S | <input type="radio"/> Yes | <input checked="" type="radio"/> No | |
| Potash | <input checked="" type="radio"/> None | <input type="radio"/> Secretary | <input type="radio"/> R-111-P |
| Cave/Karst Potential | <input type="radio"/> Low | <input checked="" type="radio"/> Medium | <input type="radio"/> High |
| Cave/Karst Potential | <input type="radio"/> Critical | | |
| Variance | <input type="radio"/> None | <input checked="" type="radio"/> Flex Hose | <input type="radio"/> Other |
| Wellhead | <input type="radio"/> Conventional | <input checked="" type="radio"/> Multibowl | <input type="radio"/> Both |
| Other | <input type="checkbox"/> 4 String Area | <input type="checkbox"/> Capitan Reef | <input type="checkbox"/> WIPP |
| Other | <input type="checkbox"/> Fluid Filled | <input type="checkbox"/> Cement Squeeze | <input type="checkbox"/> Pilot Hole |
| Special Requirements | <input type="checkbox"/> Water Disposal | <input checked="" type="checkbox"/> COM | <input type="checkbox"/> Unit |

A. HYDROGEN SULFIDE

Hydrogen Sulfide (H2S) monitors shall be installed prior to drilling out the surface shoe. If H2S is detected in concentrations greater than 100 ppm, the Hydrogen Sulfide area shall meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, provide measured values and formations to the BLM.

B. CASING

1. The **13-3/8 inch** surface casing shall be set at approximately **375 feet** (a minimum of **70 feet (Eddy County)** into the Rustler Anhydrite and above the salt) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.

- b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.
2. The minimum required fill of cement behind the **9-5/8 inch** intermediate 1 casing and shall be set at approximately **3,285 feet** is:

- Cement to surface. If cement does not circulate see B.1.a, c-d above.

Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.

- ❖ In Medium Cave/Karst Areas if cement does not circulate to surface on the first two casing strings, the cement on the 3rd casing string must come to surface.

3. The minimum required fill of cement behind the **7 inch** intermediate 2 casing with a tie-back into the previous casing at **2,795 feet** is:

- Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.

Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.

4. The minimum required fill of cement behind the **4-1/2 inch** production liner with a tie-back into the previous casing at **9,701 feet** is:

- Cement should tie-back **100 feet** into the previous casing. Operator shall provide method of verification.

C. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).'

2. Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface, intermediate 1, and intermediate 2 casing shoe shall be **10,000 (10M) psi. Variance is approved to use a 5000 (5M) Annular which shall be tested to 5000 (5M) psi.**
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
 - e. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.

D. SPECIAL REQUIREMENT (S)

Communitization Agreement

- The operator will submit a Communitization Agreement to the Santa Fe Office, 301 Dinosaur Trail Santa Fe, New Mexico 87508, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ Eddy County

Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220, (575) 361-2822

☒ Lea County

Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (575) 689-5981

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per Onshore Oil and Gas Order No. 2 as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including

lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).

- b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the plug. However, **no tests** shall commence until the cement has had a minimum of 24 hours setup time, except the casing pressure test can be initiated immediately after bumping the plug (only applies to single stage cement jobs).
- c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
- d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.



WPX Energy Permian, LLC

**3500 One Williams Center
Tulsa, Oklahoma 74172**

Hydrogen Sulfide (H₂S) Contingency Plan

For



Horn 22-27-34 Fed Com 421H

**Sec-15 T-26S R-29E
1038' FSL & 1194' FEL
LAT. = 32.0376540' N (NAD83)
LONG = 103.9669553' W**

Eddy County NM

Horn 22-27-34 Fed Com 421H

This is an open drilling site. H₂S monitoring equipment and emergency response equipment will be used within 500' of zones known to contain H₂S, including warning signs, wind indicators and H₂S monitor.

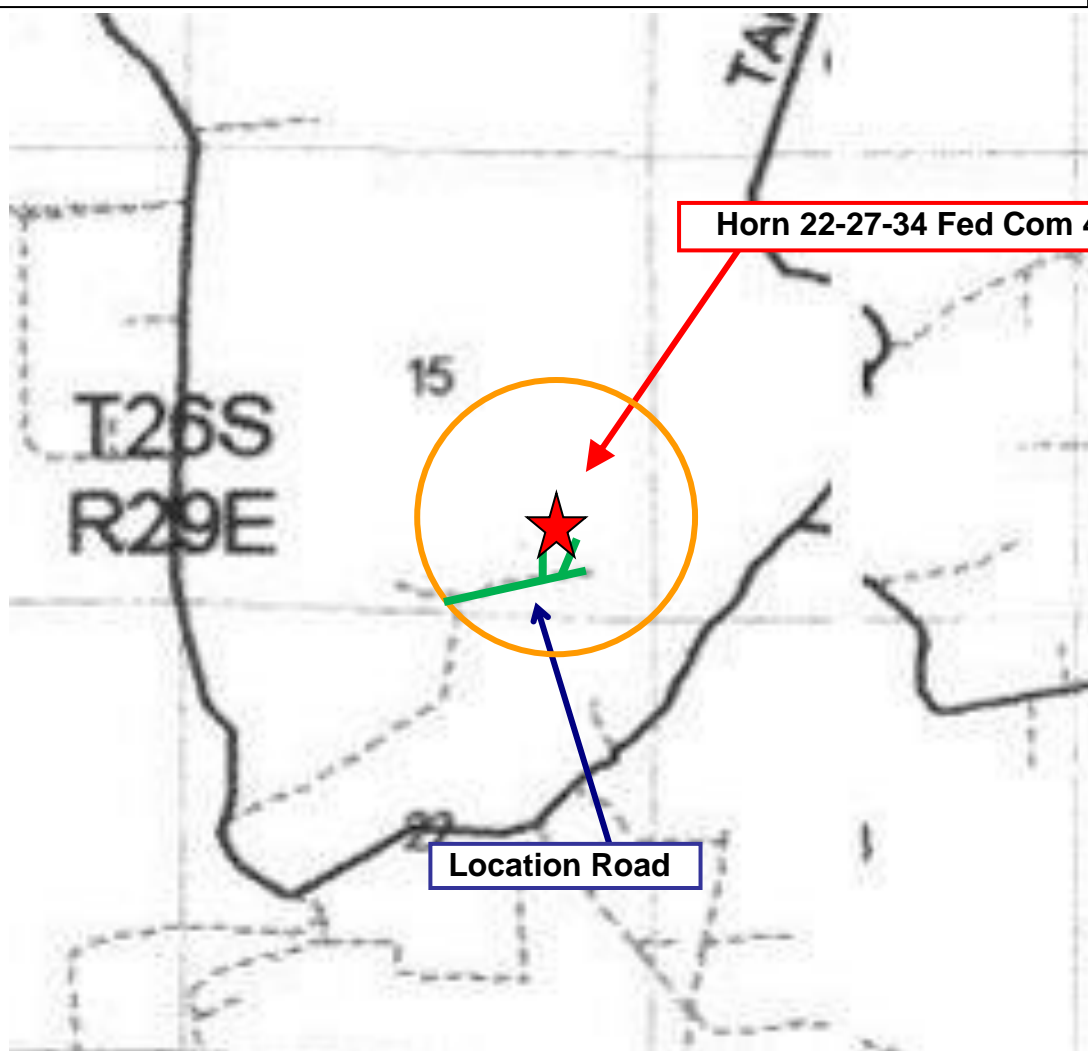

Assumed 100 ppm ROE = 3000' (Radius of Exposure)
100 ppm H₂S concentration shall trigger activation of this plan.

Escape

Crews shall escape upwind of escaping gas in the event of an emergency release of gas. Escape can be facilitated from the location entrance road. Crews should then block the entrance to the location from the lease road so as not to allow anyone traversing into a hazardous area. The blockade should be at a safe distance outside of the ROE. There are no homes or buildings in or near the ROE.

Assumed 100 ppm ROE = 3000'

100 ppm H₂S concentration shall trigger activation of this plan.

Emergency Procedures

In the event of a release of gas containing H₂S, the first responder(s) must

- Isolate the area and prevent entry by other persons into the 100 ppm ROE.
- Evacuate any public places encompassed by the 100 ppm ROE.
- Be equipped with H₂S monitors and air packs in order to control the release.
- Use the "buddy system" to ensure no injuries occur during the response
- Take precautions to avoid personal injury during this operation.
- Contact operator and/or local officials to aid in operation. See list of phone numbers attached.
- Have received training in the
 - Detection of H₂S, and
 - Measures for protection against the gas,
 - Equipment used for protection and emergency response.

Ignition of Gas Source

Should control of the well be considered lost and ignition considered, take care to protect against exposure to Sulfur Dioxide (SO₂). Intentional ignition must be coordinated with the NMOCD and local officials. Additionally the NM State Police may become involved. NM State Police shall be the Incident Command on scene of any major release. Take care to protect downwind whenever there is an ignition of the gas

Characteristics of H₂S and SO₂

| Common Name | Chemical Formula | Specific Gravity | Threshold Limit | Hazardous Limit | Lethal Concentration |
|-------------------------|-------------------------|-------------------------|------------------------|------------------------|-----------------------------|
| Hydrogen Sulfide | H ₂ S | 1.189 Air = 1 | 10 ppm | 100 ppm/hr | 600 ppm |
| Sulfur Dioxide | SO ₂ | 2.21 Air = 1 | 2 ppm | N/A | 1000 ppm |

Contacting Authorities

WPX Energy Permian personnel must liaison with local and state agencies to ensure a proper response to a major release. Additionally, the OCD must be notified of the release as soon as possible but no later than 4 hours. Agencies will ask for information such as type and volume of release, wind direction, location of release, etc. Be prepared with all information available. The following call list of essential and potential responders has been prepared for use during a release. WPX Energy Permian Company response must be in coordination with

the State of New Mexico's 'Hazardous Materials Emergency Response Plan' (HMER)

Hydrogen Sulfide Drilling Operation Plan

I. HYDROGEN SULFIDE (H₂S) TRAINING

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will receive training from a qualified instructor in the following areas prior to commencing drilling operations on this well:

1. The hazards and characteristics of hydrogen sulfide (H₂S)
2. The proper use and maintenance of personal protective equipment and life support systems.
3. The proper use of H₂S detectors, alarms, warning systems, briefing areas, evacuation procedures, and prevailing winds.
4. The proper techniques for first aid and rescue procedures.

In addition, supervisory personnel will be trained in the following areas:

1. The effects of H₂S metal components. If high tensile tubulars are to be used, personnel will be trained in their special maintenance requirements.
2. Corrective action and shut-in procedures when drilling or reworking a well and blowout prevention and well control procedures.
3. The contents and requirements of the H₂S Drilling Operations Plan and Public Protection Plan.

There will be an initial training session just prior to encountering a known or probable H₂S zone (within 3 days or 500 feet) and weekly H₂S and well control drills for all personnel in each crew. The initial training session shall include a review of the site specific H₂S Drilling Operations Plan and the Public Protection Plan.

II. HYDROGEN SULFIDE TRAINING

Note: All H₂S safety equipment and systems will be installed, tested, and operational when drilling reaches a depth of 500 feet above, or three days prior to penetrating the first zone containing or reasonably expected to contain H₂S.

1. Well Control Equipment

- A. Flare line
- B. Choke manifold – Remotely Operated
- C. Blind rams and pipe rams to accommodate all pipe sizes with properly sized closing unit
- D. Auxiliary equipment may include if applicable: annular preventer and rotating head.
- E. Mud/Gas Separator

2. Protective equipment for essential personnel:

30-minute SCBA units located at briefing areas, as indicated on well site diagram, with escape units available in the top doghouse. As it may be difficult to communicate audibly while wearing these units, hand signals shall be utilized.

3. H₂S detection and monitoring equipment:

Portable H₂S monitors positioned on location for best coverage and response. These units have warning lights which activate when H₂S levels reach 10 ppm and audible sirens which activate at 15 ppm. Sensor locations:

- Bell nipple
- Possum Belly/Shale shaker
- Rig floor
- Choke manifold
- Cellar

Visual warning systems:

- A. Wind direction indicators as shown on well site diagram
- B. Caution/ Danger signs shall be posted on roads providing direct access to locations. Signs will be painted a high visibility yellow with black lettering of sufficient size to be reasonable distance from the immediate location. Bilingual signs will be used when appropriate.

4. Mud program:

The mud program has been designed to minimize the volume of H₂S circulated to surface. Proper mud weight, safe drilling practices and the use of H₂S scavengers will minimize hazards when penetrating H₂S bearing zones.

5. Metallurgy:

- A. All drill strings, casings, tubing, wellhead, blowout preventer, drilling spool, kill lines, choke manifold lines, and valves shall be H₂S trim.
- B. All elastomers used for packing and seals shall be H₂S trim.

6. Communication:


- A. Company personnel have/use cellular telephones in the field.
- B. Land line (telephone) communications at Office

7. Well testing:

- A. Drill stem testing will be performed with a minimum number of personnel in the immediate vicinity, which are necessary to safety and adequately conduct the test. The drill stem testing will be conducted during daylight hours and formation fluids will not be flowed to the surface. All drill-stem-testing operations conducted in an H₂S environment will use the closed chamber method of testing.
- B. There will be no drill stem testing.

| <u>WPX Energy Permian. Company Call List</u> | | |
|---|--|-------------------------------|
| Drilling Supervisor – Keith Jordan | | 601-431-3739 |
| Ian Ensell | | 719-761-2440 |
| EHS Professional – Laura Wright | | 405-439-8129 |
| <u>Agency Call List</u> | | |
| <u>Lea County (575)</u> | Hobbs | |
| | Lea County Communication Authority | 393-3981 |
| | State Police | 392-5588 |
| | City Police | 397-9265 |
| | Sheriff's Office | 393-2515 |
| | Ambulance | 911 |
| | Fire Department | 397-9308 |
| | LEPC (Local Emergency Planning Committee) | 393-2870 |
| | NMOCD | 393-6161 |
| | BLM – PET Petroleum Engineering Tech. ON CALL – Cement Notifications or Emergency issues. | (575) 689-5981 |
| <u>Eddy County (575)</u> | Carlsbad | |
| | State Police | 885-3137 |
| | City Police | 885-2111 |
| | Sheriff's Office | 887-7551 |
| | Ambulance | 911 |
| | Fire Department | 885-3125 |
| | LEPC (Local Emergency Planning Committee) | 887-3798 |
| | US Bureau of Land Management (Carlsbad) | (575)-706-1920 |
| | | (575)-234-5909 |
| | BLM – CFO | (575) 234-5972 |
| | BLM – PET Petroleum Engineering Tech. ON CALL – Cement Notifications or Emergency issues. | (575) 361-2822 |
| | NM Emergency Response Commission (Santa Fe) | (505) 476-9600 |
| | 24 HR | (505) 827-9126 |
| | National Emergency Response Center | (800) 424-8802 |
| | National Pollution Control Center: Direct | (703) 872-6000 |
| | For Oil Spills | (800) 280-7118 |
| | Emergency Services | |
| | Wild Well Control | (281) 784-4700 |
| | Cudd Pressure Control | (915) 699-0139 (915) 563-3356 |
| | Halliburton | (575) 746-2757 |
| | B. J. Services | (575) 746-3569 |
| <u>Give GPS position:</u> | Native Air – Emergency Helicopter – Hobbs (TX & NM) | (800) 642-7828 |
| | Flight For Life - Lubbock, TX | (806) 743-9911 |
| | Aerocare - Lubbock, TX | (806) 747-8923 |
| | Med Flight Air Amb - Albuquerque, NM | (575) 842-4433 |
| | Lifeguard Air Med Svc. Albuquerque, NM | (800) 222-1222 |
| | Poison Control (24/7) | (575) 272-3115 |
| | Oil & Gas Pipeline 24 Hour Service | (800) 364-4366 |
| | NOAA – Website - www.nhc.noaa.gov | |

WPX Energy Permian- Well Pad Rig Location Layout Safety Equipment Location

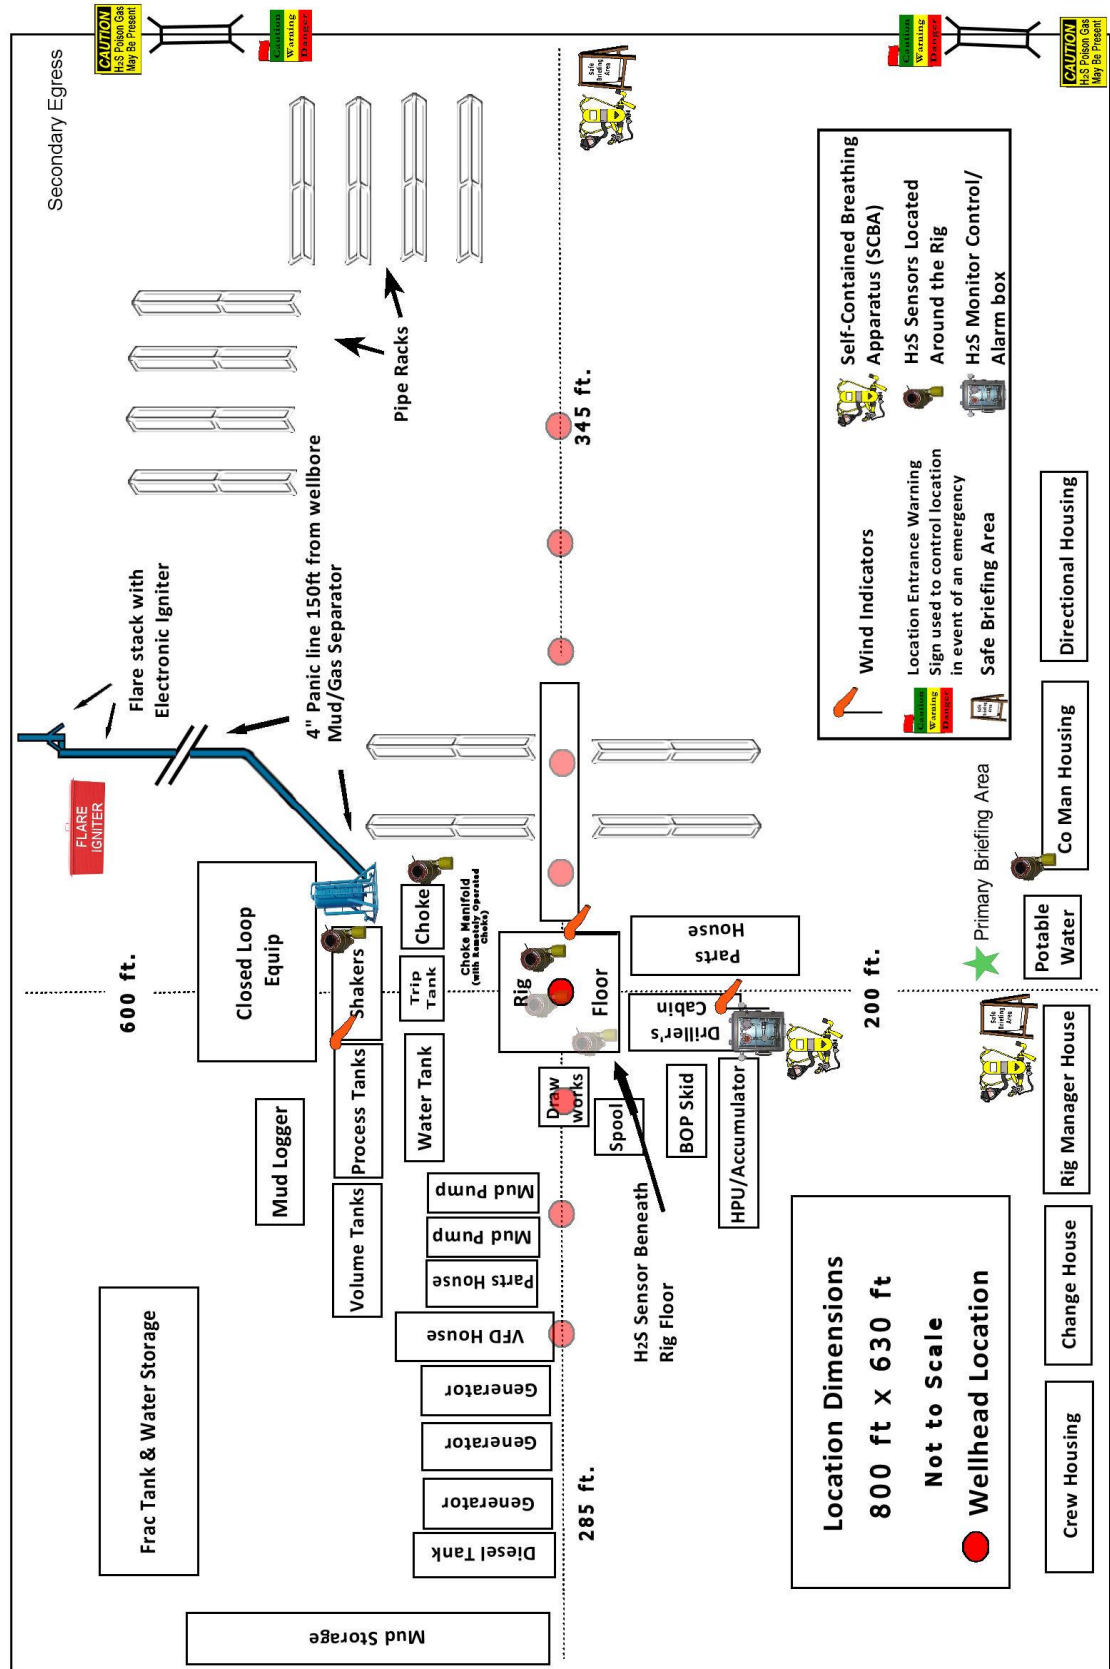

District I

1625 N. French Dr., Hobbs, NM 88240
 Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
 Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
 Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 134899

CONDITIONS

| | |
|--|---|
| Operator: WPX Energy Permian, LLC Devon Energy - Regulatory Oklahoma City, OK 73102 | OGRID: 246289 |
| | Action Number: 134899 |
| | Action Type: [C-101] BLM - Federal/Indian Land Lease (Form 3160-3) |

CONDITIONS

| Created By | Condition | Condition Date |
|------------|--|----------------|
| kpickford | Will require a administrative order for non-standard location prior to placing the well on production | 8/18/2022 |
| kpickford | Notify OCD 24 hours prior to casing & cement | 8/18/2022 |
| kpickford | Will require a File As Drilled C-102 and a Directional Survey with the C-104 | 8/18/2022 |
| kpickford | Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string | 8/18/2022 |
| kpickford | Cement is required to circulate on both surface and intermediate1 strings of casing | 8/18/2022 |
| kpickford | Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system | 8/18/2022 |