

District I

1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

Form C-101
August 1, 2011

Permit 323849

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE

1. Operator Name and Address ADVANCE ENERGY PARTNERS HAT MESA, LLC 11490 Westheimer Rd., Ste 950 Houston, TX 77077		2. OGRID Number 372417
		3. API Number 30-025-50551
4. Property Code 333273	5. Property Name BECKNELL 21 33 17 STATE COM	6. Well No. 071H

7. Surface Location

UL - Lot E	Section 17	Township 21S	Range 33E	Lot Idn E	Feet From 2437	N/S Line N	Feet From 700	E/W Line W	County Lea
---------------	---------------	-----------------	--------------	--------------	-------------------	---------------	------------------	---------------	---------------

8. Proposed Bottom Hole Location

UL - Lot L	Section 5	Township 21S	Range 33E	Lot Idn L	Feet From 2589	N/S Line S	Feet From 330	E/W Line W	County Lea
---------------	--------------	-----------------	--------------	--------------	-------------------	---------------	------------------	---------------	---------------

9. Pool Information

WC-025 G-08 S213304D;BONE SPRING	97895
----------------------------------	-------

Additional Well Information

11. Work Type New Well	12. Well Type OIL	13. Cable/Rotary	14. Lease Type State	15. Ground Level Elevation 3808
16. Multiple N	17. Proposed Depth 20785	18. Formation 1st Bone Spring Sand	19. Contractor	20. Spud Date 8/15/2023
Depth to Ground water		Distance from nearest fresh water well		Distance to nearest surface water

☒ We will be using a closed-loop system in lieu of lined pits

21. Proposed Casing and Cement Program

Type	Hole Size	Casing Size	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC
Surf	17.5	13.375	54.5	1827	1401	0
Int1	12.25	10.75	40.5	3726	422	0
Int2	9.875	7.625	29.7	5505	813	0
Prod	6.75	5.5	20	20785	665	0

Casing/Cement Program: Additional Comments

--

22. Proposed Blowout Prevention Program

Type	Working Pressure	Test Pressure	Manufacturer
Double Ram	5000	5000	TBD

23. I hereby certify that the information given above is true and complete to the best of my knowledge and belief. I further certify I have complied with 19.15.14.9 (A) NMAC ☒ and/or 19.15.14.9 (B) NMAC ☒ if applicable.		OIL CONSERVATION DIVISION	
Signature:			
Printed Name: Electronically filed by Eileen M Kosakowski	Approved By: Paul F Kautz		
Title:	Title: Geologist		
Email Address: ekosakowski@advanceenergypartners.com	Approved Date: 9/14/2022	Expiration Date: 9/14/2024	
Date: 8/24/2022	Phone: 832-672-4604	Conditions of Approval Attached	

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-025- 50551	² Pool Code 97895	³ Pool Name WC-025 G-08 S213304D;BONE SPRING
⁴ Property Code 333273	⁵ Property Name Becknell 21-33-17 State Com	⁶ Well Number #071H
⁷ OGRID No. 372417	⁸ Operator Name ADVANCE ENERGY PARTNERS HAT MESA LLC	⁹ Elevation 3,808.86'

¹⁰ Surface Location


UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
E	17	21-S	33-E	--	2,437'	NORTH	700'	WEST	LEA

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
L	5	21-S	33-E	--	2,589'	SOUTH	330'	WEST	LEA

¹² Dedicated Acres 640	¹³ Joint or Infill	¹⁴ Consolidation Code C	¹⁵ Order No.
--------------------------------------	-------------------------------	---------------------------------------	-------------------------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

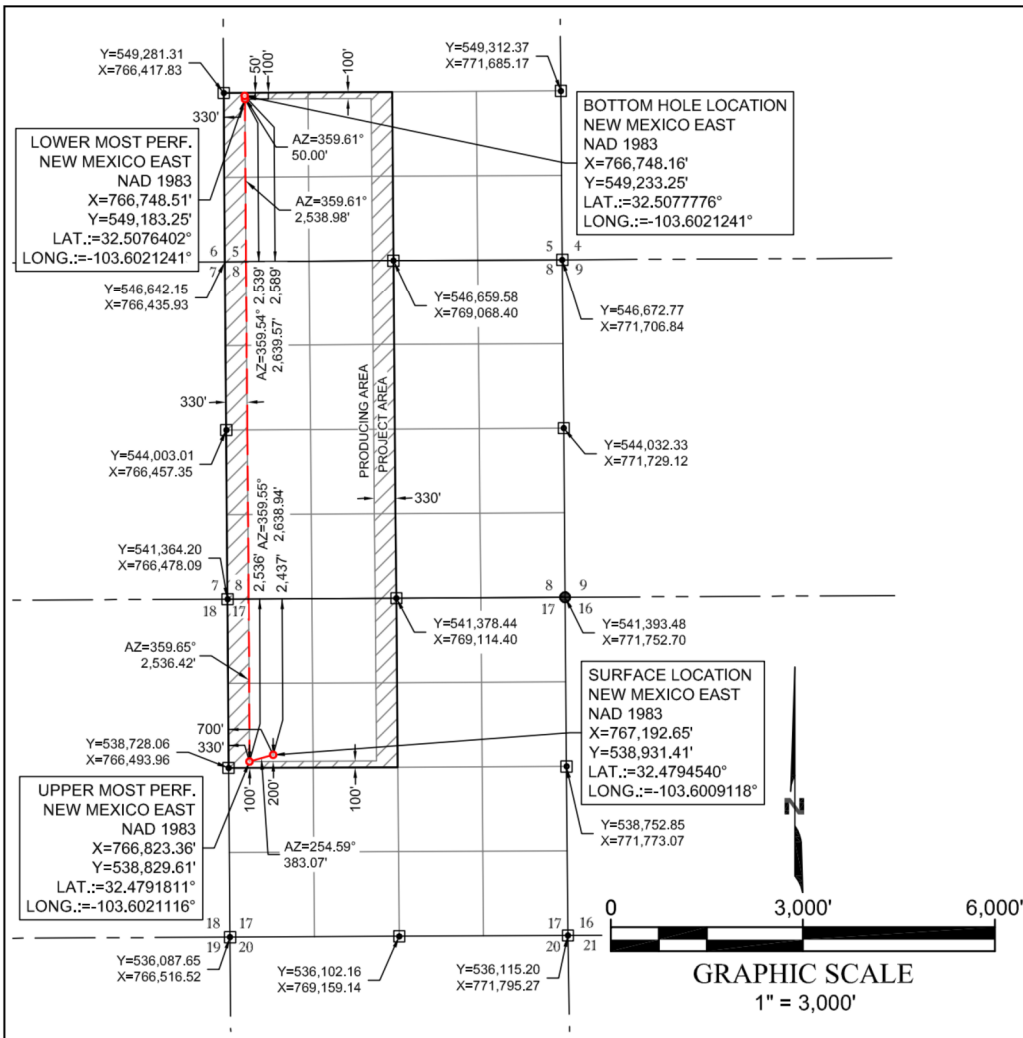

¹⁷ OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Floyd Hammond 8/23/2022
Signature Date

Floyd Hammond

Printed Name

fhammond@ameredev.com

E-mail Address

¹⁸ SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

08/18/2022

Date of Survey

Signature and Seal of Professional Surveyor

24873
Certificate Number



District I

1625 N. French Dr., Hobbs, NM 88240
 Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
 Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
 Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form APD Conditions

Permit 323849

PERMIT CONDITIONS OF APPROVAL

Operator Name and Address: ADVANCE ENERGY PARTNERS HAT MESA, LLC [372417] 11490 Westheimer Rd., Ste 950 Houston, TX 77077	API Number: 30-025-50551
	Well: BECKNELL 21 33 17 STATE COM #071H

OCD Reviewer	Condition
pkautz	Notify OCD 24 hours prior to casing & cement
pkautz	Will require a File As Drilled C-102 and a Directional Survey with the C-104
pkautz	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string
pkautz	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system
pkautz	CEMENT MUST COME TO THE SURFACE ON ALL STRINGS
pkautz	The Operator is to notify NMOCD by sundry (Form C-103) within ten (10) days of the well being spud

State of New Mexico
Energy, Minerals and Natural Resources Department

Michelle Lujan Grisham
Governor

Sarah Cottrell Propst
Cabinet Secretary Designate

Todd E. Leahy, JD, PhD
Deputy Secretary

Adrienne Sandoval, Division Director
Oil Conservation Division



September 12, 2022,

BUREAU OF LAND MANAGEMENT
ATT: James S. Rutley
620 E Greene Street
Carlsbad, NM 88220

STATE LAND OFFICE
ATT: Paige Czoski
PO BOX 1148
Santa Fe, NM 87505

RE: APPLICATION FOR PERMIT TO DRILL IN POTASH AREA

OPERATOR: Advance Energy Partners Hat Mesa, LLC

LEASE NAME: Becknell 21 33 17 State Com # 071H

PROPOSED LOCATION: U/L E Sec 17 T21S R33E 2437 FNL 700 FWL

Lat. 32.4794540 Long. -103.6009118 NAD83

PROPOSED DEPTH: 20785' MD 10078' TVD

Gentleman:

The application for permit to drill identified above has been filed with this office of the New Mexico Oil Conservation Division. Pursuant to the provisions of Oil Conservation Division Order R – 111 - P, please advise this office whether the location is within an established Life-of-Mine-Reserve that are filed with and approved by your office. If not, please advise whether it is within the buffer zone established by the order.

Thank you for your assistance. Please Return as soon as possible.

Very truly yours,

OIL CONSERVATION DIVISION

P. Kautz
Paul Kautz

Hobbs Office Geologist, District I

RESONSE:

The above referenced location is in LMR (2022 year) -----Yes _____ No X

The above referenced location is within the Buffer Zone-----Yes _____ No X

Signed *Paige Czoski*

Printed Signature Paige Czoski

Representing NM SLO

State of New Mexico
Energy, Minerals and Natural Resources Department

Michelle Lujan Grisham
Governor

Sarah Cottrell Propst
Cabinet Secretary Designate

Todd E. Leahy, JD, PhD
Deputy Secretary

Adrienne Sandoval, Division Director
Oil Conservation Division



September 12, 2022,

BUREAU OF LAND MANAGEMENT
ATT: James S. Rutley
620 E Greene Street
Carlsbad, NM 88220

STATE LAND OFFICE
ATT: Paige Czoski
PO BOX 1148
Santa Fe, NM 87505

RE: APPLICATION FOR PERMIT TO DRILL IN POTASH AREA

OPERATOR: Advance Energy Partners Hat Mesa, LLC

LEASE NAME: Becknell 21 33 17 State Com # 071H

PROPOSED LOCATION: U/L E Sec 17 T21S R33E 2437 FNL 700 FWL

Lat. 32.4794540 Long. -103.6009118 NAD83

PROPOSED DEPTH: 20785' MD 10078' TVD

Gentleman:

The application for permit to drill identified above has been filed with this office of the New Mexico Oil Conservation Division. Pursuant to the provisions of Oil Conservation Division Order R – 111 - P, please advise this office whether the location is within an established Life-of-Mine-Reserve that are filed with and approved by your office. If not, please advise whether it is within the buffer zone established by the order.

Thank you for your assistance. Please Return as soon as possible.

Very truly yours,

OIL CONSERVATION DIVISION

P. Kautz
Paul Kautz

Hobbs Office Geologist, District I

RESONSE:

The above referenced location is in LMR (2012 year) -----Yes _____ No ☒

The above referenced location is within the Buffer Zone -----Yes _____ No ☒

Signed _____

Printed Signature

JAMES S. RUTLEY

Representing

BLM



2901 Via Fortuna, Suite 600, Austin, Texas 78746 • Phone 832-672-4700 • Fax 832-672-4609

September 9, 2022

Mr. Paul Kautz, Hobbs District Geologist
Energy Minerals Natural Resources Dept.
Oil Conservation Division
1625 N. French Dr.
Hobbs, New Mexico 88240

Re: Advance Energy Partners Hat Mesa, LLC (OGRID No. 372417)
Proposed Well APDs- Becknell Wells
State Land in Section 17, T21S-R33E
Lea County, New Mexico

Dear Mr. Kautz,

This letter is to confirm that there are no active potash leases within a 1-mile radius of the SHLs of the Becknell 21-33-17 State Com wells in Section 17, Township 21 South, Range 33 East, Lea County, New Mexico.

Becknell 21-33-17 State Com Wells:

Becknell 21-33-17 State Com #71H

- The surface location is located 2,437 feet from the north line and 700 feet from the west line (Unit E) of Section 17
- The bottom hole location is located 2,589 feet from the south line and 330 feet from the west line (Unit L) of Section 5.

Becknell 21-33-17 State Com #72H

- The surface location is located 2,437 feet from the north line and 1,700 feet from the west line (Unit F) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 1,973 feet from the west line (Unit K) of Section 5.

Becknell 21-33-17 State Com #73H

- The surface location is located 2,439 feet from the north line and 2,033 feet from the east line (Unit G) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 1,430 feet from the east line (Unit J) of Section 5.

Becknell 21-33-17 State Com #91H

- The surface location is located 2,437 feet from the north line and 760 feet from the west line (Unit E) of Section 17

- The bottom hole location is located 2,589 feet from the south line and 330 feet from the west line (Unit L) of Section 5.

Becknell 21-33-17 State Com #92H

- The surface location is located 2,437 feet from the north line and 1,640 feet from the west line (Unit F) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 2,090 feet from the west line (Unit K) of Section 5.

Becknell 21-33-17 State Com #93H

- The surface location is located 2,440 feet from the north line and 810 feet from the east line (Unit H) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 1,430 feet from the east line (Unit J) of Section 5.

Becknell 21-33-17 State Com #111H

- The surface location is located 2,437 feet from the north line and 1,620 feet from the west line (Unit F) of Section 17
- The bottom hole location is located 2,588 feet from the south line and 1,210 feet from the west line (Unit L) of Section 5.

Becknell 21-33-17 State Com #113H

- The surface location is located 2,439 feet from the north line and 2,073 feet from the east line (Unit G) of Section 17
- The bottom hole location is located 2,588 feet from the south line and 2,304 feet from the east line (Unit J) of Section 5.

Becknell 21-33-17 State Com #114H

- The surface location is located 2,440 feet from the north line and 790 feet from the east line (Unit H) of Section 17
- The bottom hole location is located 2,589 feet from the south line and 550 feet from the east line (Unit I) of Section 5.

Becknell 21-33-17 State Com #811H

- The surface location is located 2,437 feet from the north line and 800 feet from the west line (Unit E) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 1,210 feet from the west line (Unit L) of Section 5.

Becknell 21-33-17 State Com #813H

- The surface location is located 2,439 feet from the north line and 2,133 feet from the east line (Unit G) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 2,304 feet from the east line (Unit J) of Section 5.

Becknell 21-33-17 State Com #814H

- The surface location is located 2,440 feet from the north line and 730 feet from the east line (Unit H) of Section 17
- The bottom hole location is located 2,589 feet from the south line and 550 feet from the east line (Unit I) of Section 5.

Becknell 21-33-17 State Com #821H

- The surface location is located 2,437 feet from the north line and 720 feet from the west line (Unit E) of Section 17.
- The bottom hole location is located 2,589 feet from the south line and 330 feet from the west line (Unit L) of Section 5.

Becknell 21-33-17 State Com #822H

- The surface location is located 2,437 feet from the north line and 1,680 feet from the west line (Unit F) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 2,090 feet from the west line (Unit K) of Section 5.

Becknell 21-33-17 State Com #823H

- The surface location is located 2,439 feet from the north line and 2,053 feet from the east line (Unit G) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 1,430 feet from the east line (Unit J) of Section 5.

Becknell 21-33-17 State Com #831H

- The surface location is located 2,437 feet from the north line and 780 feet from the west line (Unit E) of Section 17
- The bottom hole location is located 2,588 feet from the south line and 1,210 feet from the west line (Unit L) of Section 5.

Becknell 21-33-17 State Com #833H

- The surface location is located 2,439 feet from the north line and 2,113 feet from the east line (Unit G) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 2,304 feet from the east line (Unit J) of Section 5.

Becknell 21-33-17 State Com #834H

- The surface location is located 2,440 feet from the north line and 750 feet from the east line (Unit H) of Section 17
- The bottom hole location is located 2,589 feet from the south line and 550 feet from the east line (Unit I) of Section 5.

Becknell 21-33-17 State Com #911H

- The surface location is located 2,437 feet from the north line and 740 feet from the west line (Unit E) of Section 17

- The bottom hole location is located 2,589 feet from the south line and 430 feet from the west line (Unit L) of Section 5.

Becknell 21-33-17 State Com #912H

- The surface location is located 2,437 feet from the north line and 1,660 feet from the west line (Unit F) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 2,190 feet from the west line (Unit K) of Section 5.

Becknell 21-33-17 State Com #913H

- The surface location is located 2,440 feet from the north line and 830 feet from the east line (Unit H) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 1,330 feet from the east line (Unit J) of Section 5.

Becknell 21-33-17 State Com #921H

- The surface location is located 2,437 feet from the north line and 1,600 feet from the west line (Unit F) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 1,310 feet from the west line (Unit L) of Section 5.

Becknell 21-33-17 State Com #923H

- The surface location is located 2,439 feet from the north line and 2,093 feet from the east line (Unit G) of Section 17
- The bottom hole location is located 2,588 feet from the south line and 2,204 feet from the east line (Unit J) of Section 5.

Boone 21-33-16 State Com #924H

- The surface location is located 2,440 feet from the north line and 770 feet from the east line (Unit H) of Section 17
- The bottom hole location is located 2,589 feet from the south line and 450 feet from the east line (Unit I) of Section 5.

If you have any questions about this letter, please contact me by phone at 737-444-2997 or email at LLaufer@ameredev.com.

Sincerely,



Lizzy Laufer

Landman

Advance Energy Partners Hat Mesa, LLC

Email: LLaufer@ameredev.com



2901 Via Fortuna, Suite 600, Austin, Texas 78746 • Phone 832-672-4700 • Fax 832-672-4609

September 9, 2022

Mr. Paul Kautz, Hobbs District Geologist
Energy Minerals Natural Resources Dept.
Oil Conservation Division
1625 N. French Dr.
Hobbs, New Mexico 88240

Re: Advance Energy Partners Hat Mesa, LLC (OGRID No. 372417)
Proposed Well APDs- Becknell Wells
State Land in Section 17, T21S-R33E
Lea County, New Mexico

Dear Mr. Kautz,

This letter is to confirm that there are no active potash leases within a 1-mile radius of the SHLs of the Becknell 21-33-17 State Com wells in Section 17, Township 21 South, Range 33 East, Lea County, New Mexico.

Becknell 21-33-17 State Com Wells:

Becknell 21-33-17 State Com #71H

- The surface location is located 2,437 feet from the north line and 700 feet from the west line (Unit E) of Section 17
- The bottom hole location is located 2,589 feet from the south line and 330 feet from the west line (Unit L) of Section 5.

Becknell 21-33-17 State Com #72H

- The surface location is located 2,437 feet from the north line and 1,700 feet from the west line (Unit F) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 1,973 feet from the west line (Unit K) of Section 5.

Becknell 21-33-17 State Com #73H

- The surface location is located 2,439 feet from the north line and 2,033 feet from the east line (Unit G) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 1,430 feet from the east line (Unit J) of Section 5.

Becknell 21-33-17 State Com #91H

- The surface location is located 2,437 feet from the north line and 760 feet from the west line (Unit E) of Section 17

- The bottom hole location is located 2,589 feet from the south line and 330 feet from the west line (Unit L) of Section 5.

Becknell 21-33-17 State Com #92H

- The surface location is located 2,437 feet from the north line and 1,640 feet from the west line (Unit F) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 2,090 feet from the west line (Unit K) of Section 5.

Becknell 21-33-17 State Com #93H

- The surface location is located 2,440 feet from the north line and 810 feet from the east line (Unit H) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 1,430 feet from the east line (Unit J) of Section 5.

Becknell 21-33-17 State Com #111H

- The surface location is located 2,437 feet from the north line and 1,620 feet from the west line (Unit F) of Section 17
- The bottom hole location is located 2,588 feet from the south line and 1,210 feet from the west line (Unit L) of Section 5.

Becknell 21-33-17 State Com #113H

- The surface location is located 2,439 feet from the north line and 2,073 feet from the east line (Unit G) of Section 17
- The bottom hole location is located 2,588 feet from the south line and 2,304 feet from the east line (Unit J) of Section 5.

Becknell 21-33-17 State Com #114H

- The surface location is located 2,440 feet from the north line and 790 feet from the east line (Unit H) of Section 17
- The bottom hole location is located 2,589 feet from the south line and 550 feet from the east line (Unit I) of Section 5.

Becknell 21-33-17 State Com #811H

- The surface location is located 2,437 feet from the north line and 800 feet from the west line (Unit E) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 1,210 feet from the west line (Unit L) of Section 5.

Becknell 21-33-17 State Com #813H

- The surface location is located 2,439 feet from the north line and 2,133 feet from the east line (Unit G) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 2,304 feet from the east line (Unit J) of Section 5.

Becknell 21-33-17 State Com #814H

- The surface location is located 2,440 feet from the north line and 730 feet from the east line (Unit H) of Section 17
- The bottom hole location is located 2,589 feet from the south line and 550 feet from the east line (Unit I) of Section 5.

Becknell 21-33-17 State Com #821H

- The surface location is located 2,437 feet from the north line and 720 feet from the west line (Unit E) of Section 17.
- The bottom hole location is located 2,589 feet from the south line and 330 feet from the west line (Unit L) of Section 5.

Becknell 21-33-17 State Com #822H

- The surface location is located 2,437 feet from the north line and 1,680 feet from the west line (Unit F) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 2,090 feet from the west line (Unit K) of Section 5.

Becknell 21-33-17 State Com #823H

- The surface location is located 2,439 feet from the north line and 2,053 feet from the east line (Unit G) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 1,430 feet from the east line (Unit J) of Section 5.

Becknell 21-33-17 State Com #831H

- The surface location is located 2,437 feet from the north line and 780 feet from the west line (Unit E) of Section 17
- The bottom hole location is located 2,588 feet from the south line and 1,210 feet from the west line (Unit L) of Section 5.

Becknell 21-33-17 State Com #833H

- The surface location is located 2,439 feet from the north line and 2,113 feet from the east line (Unit G) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 2,304 feet from the east line (Unit J) of Section 5.

Becknell 21-33-17 State Com #834H

- The surface location is located 2,440 feet from the north line and 750 feet from the east line (Unit H) of Section 17
- The bottom hole location is located 2,589 feet from the south line and 550 feet from the east line (Unit I) of Section 5.

Becknell 21-33-17 State Com #911H

- The surface location is located 2,437 feet from the north line and 740 feet from the west line (Unit E) of Section 17

- The bottom hole location is located 2,589 feet from the south line and 430 feet from the west line (Unit L) of Section 5.

Becknell 21-33-17 State Com #912H

- The surface location is located 2,437 feet from the north line and 1,660 feet from the west line (Unit F) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 2,190 feet from the west line (Unit K) of Section 5.

Becknell 21-33-17 State Com #913H

- The surface location is located 2,440 feet from the north line and 830 feet from the east line (Unit H) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 1,330 feet from the east line (Unit J) of Section 5.

Becknell 21-33-17 State Com #921H

- The surface location is located 2,437 feet from the north line and 1,600 feet from the west line (Unit F) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 1,310 feet from the west line (Unit L) of Section 5.

Becknell 21-33-17 State Com #923H

- The surface location is located 2,439 feet from the north line and 2,093 feet from the east line (Unit G) of Section 17
- The bottom hole location is located 2,588 feet from the south line and 2,204 feet from the east line (Unit J) of Section 5.

Boone 21-33-16 State Com #924H

- The surface location is located 2,440 feet from the north line and 770 feet from the east line (Unit H) of Section 17
- The bottom hole location is located 2,589 feet from the south line and 450 feet from the east line (Unit I) of Section 5.

If you have any questions about this letter, please contact me by phone at 737-444-2997 or email at LLaufer@ameredev.com.

Sincerely,



Lizzy Laufer

Landman

Advance Energy Partners Hat Mesa, LLC

Email: LLaufer@ameredev.com



American Resource Development LLC.

Ameredev Operating

Hat Mesa

Becknell State Com - D Pad

BECKNELL 21-31-17 STATE COM 071H

OWB

Plan: PRELIM1

Standard Planning Report - Geographic

23 August, 2022



American Resource Development LLC

Planning Report - Geographic

Database:	AUS-COMPASS - EDM_15 - 32bit	Local Co-ordinate Reference:	Well BECKNELL 21-31-17 STATE COM071H
Company:	Ameredev Operating	TVD Reference:	KB=27' @ 3836.0usft
Project:	Hat Mesa	MD Reference:	KB=27' @ 3836.0usft
Site:	Becknell State Com - D Pad	North Reference:	Grid
Well:	BECKNELL 21-31-17 STATE COM 071H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PRELIM1		

Project	Hat Mesa, Lea County, NM		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	Becknell State Com - D Pad		
Site Position:	Northing:	538,931.41 usft	Latitude: 32.479454
From: Map	Easting:	767,192.65 usft	Longitude: -103.600912
Position Uncertainty: 0.0 usft	Slot Radius:	13-3/16 "	

Well	BECKNELL 21-31-17 STATE COM 071H		
Well Position	+N/-S	0.0 usft	Northing: 538,931.41 usft
	+E/-W	0.0 usft	Easting: 767,192.65 usft
Position Uncertainty	0.0 usft	Wellhead Elevation:	usft
Grid Convergence:	0.39 °	Ground Level:	3,809.0 usft

Wellbore	OWB				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2020	8/22/2022	6.44	60.09	47,515.62584030

Design	PRELIM1			
Audit Notes:				
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.0	0.0	0.0	357.53

Plan Survey Tool Program	Date 8/23/2022			
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks
1	0.0	20,785.1 PRELIM1 (OWB)	MWD	
			OWSG MWD - Standard	

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
2,000.0	0.00	0.00	2,000.0	0.0	0.0	0.00	0.00	0.00	0.00	
2,257.9	5.16	210.62	2,257.6	-10.0	-5.9	2.00	2.00	0.00	210.62	
9,594.4	5.16	210.62	9,564.3	-577.7	-341.9	0.00	0.00	0.00	0.00	
10,381.2	90.00	359.59	10,078.0	-101.8	-369.3	12.00	10.78	18.93	148.86	FTP (BS 071H)
10,764.3	90.00	359.59	10,078.0	281.3	-372.1	0.00	0.00	0.00	0.00	LTP (BS 071H)
20,785.1	90.00	359.59	10,078.0	10,301.8	-444.5	0.00	0.00	0.00	0.00	BHL (BS 071H)



American Resource Development LLC

Planning Report - Geographic

Database:	AUS-COMPASS - EDM_15 - 32bit	Local Co-ordinate Reference:	Well BECKNELL 21-31-17 STATE COM071H
Company:	Ameredev Operating	TVD Reference:	KB=27' @ 3836.0usft
Project:	Hat Mesa	MD Reference:	KB=27' @ 3836.0usft
Site:	Becknell State Com - D Pad	North Reference:	Grid
Well:	BECKNELL 21-31-17 STATE COM 071H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PRELIM1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
0.0	0.00	0.00	0.0	0.0	0.0	538,931.41	767,192.65	32.479454	-103.600912
100.0	0.00	0.00	100.0	0.0	0.0	538,931.41	767,192.65	32.479454	-103.600912
200.0	0.00	0.00	200.0	0.0	0.0	538,931.41	767,192.65	32.479454	-103.600912
300.0	0.00	0.00	300.0	0.0	0.0	538,931.41	767,192.65	32.479454	-103.600912
400.0	0.00	0.00	400.0	0.0	0.0	538,931.41	767,192.65	32.479454	-103.600912
500.0	0.00	0.00	500.0	0.0	0.0	538,931.41	767,192.65	32.479454	-103.600912
600.0	0.00	0.00	600.0	0.0	0.0	538,931.41	767,192.65	32.479454	-103.600912
700.0	0.00	0.00	700.0	0.0	0.0	538,931.41	767,192.65	32.479454	-103.600912
800.0	0.00	0.00	800.0	0.0	0.0	538,931.41	767,192.65	32.479454	-103.600912
900.0	0.00	0.00	900.0	0.0	0.0	538,931.41	767,192.65	32.479454	-103.600912
1,000.0	0.00	0.00	1,000.0	0.0	0.0	538,931.41	767,192.65	32.479454	-103.600912
1,100.0	0.00	0.00	1,100.0	0.0	0.0	538,931.41	767,192.65	32.479454	-103.600912
1,200.0	0.00	0.00	1,200.0	0.0	0.0	538,931.41	767,192.65	32.479454	-103.600912
1,300.0	0.00	0.00	1,300.0	0.0	0.0	538,931.41	767,192.65	32.479454	-103.600912
1,400.0	0.00	0.00	1,400.0	0.0	0.0	538,931.41	767,192.65	32.479454	-103.600912
1,500.0	0.00	0.00	1,500.0	0.0	0.0	538,931.41	767,192.65	32.479454	-103.600912
1,600.0	0.00	0.00	1,600.0	0.0	0.0	538,931.41	767,192.65	32.479454	-103.600912
1,700.0	0.00	0.00	1,700.0	0.0	0.0	538,931.41	767,192.65	32.479454	-103.600912
1,701.9	0.00	0.00	1,701.9	0.0	0.0	538,931.41	767,192.65	32.479454	-103.600912
RSLR_GRID									
1,800.0	0.00	0.00	1,800.0	0.0	0.0	538,931.41	767,192.65	32.479454	-103.600912
1,900.0	0.00	0.00	1,900.0	0.0	0.0	538,931.41	767,192.65	32.479454	-103.600912
2,000.0	0.00	0.00	2,000.0	0.0	0.0	538,931.41	767,192.65	32.479454	-103.600912
Start Build 2.00									
2,100.0	2.00	210.62	2,100.0	-1.5	-0.9	538,929.91	767,191.76	32.479450	-103.600915
2,112.9	2.26	210.62	2,112.9	-1.9	-1.1	538,929.50	767,191.51	32.479449	-103.600916
SLDO_GRID									
2,200.0	4.00	210.62	2,199.8	-6.0	-3.6	538,925.41	767,189.09	32.479438	-103.600924
2,257.9	5.16	210.62	2,257.6	-10.0	-5.9	538,921.43	767,186.74	32.479427	-103.600931
Start 7336.4 hold at 2257.9 MD									
2,300.0	5.16	210.62	2,299.5	-13.2	-7.8	538,918.17	767,184.81	32.479418	-103.600938
2,400.0	5.16	210.62	2,399.1	-21.0	-12.4	538,910.43	767,180.23	32.479397	-103.600953
2,500.0	5.16	210.62	2,498.7	-28.7	-17.0	538,902.70	767,175.65	32.479375	-103.600968
2,600.0	5.16	210.62	2,598.3	-36.5	-21.6	538,894.96	767,171.07	32.479354	-103.600983
2,700.0	5.16	210.62	2,697.9	-44.2	-26.2	538,887.22	767,166.49	32.479333	-103.600998
2,800.0	5.16	210.62	2,797.5	-51.9	-30.7	538,879.48	767,161.91	32.479312	-103.601013
2,900.0	5.16	210.62	2,897.1	-59.7	-35.3	538,871.75	767,157.33	32.479291	-103.601028
3,000.0	5.16	210.62	2,996.6	-67.4	-39.9	538,864.01	767,152.75	32.479270	-103.601043
3,100.0	5.16	210.62	3,096.2	-75.1	-44.5	538,856.27	767,148.17	32.479248	-103.601058
3,200.0	5.16	210.62	3,195.8	-82.9	-49.1	538,848.53	767,143.59	32.479227	-103.601073
3,300.0	5.16	210.62	3,295.4	-90.6	-53.6	538,840.79	767,139.01	32.479206	-103.601088
3,400.0	5.16	210.62	3,395.0	-98.4	-58.2	538,833.06	767,134.43	32.479185	-103.601103
3,500.0	5.16	210.62	3,494.6	-106.1	-62.8	538,825.32	767,129.85	32.479164	-103.601118
3,600.0	5.16	210.62	3,594.2	-113.8	-67.4	538,817.58	767,125.27	32.479142	-103.601133
3,606.8	5.16	210.62	3,601.0	-114.4	-67.7	538,817.05	767,124.95	32.479141	-103.601134
TNSL_GRID									
3,700.0	5.16	210.62	3,693.8	-121.6	-72.0	538,809.84	767,120.69	32.479121	-103.601148
3,800.0	5.16	210.62	3,793.4	-129.3	-76.5	538,802.11	767,116.11	32.479100	-103.601163
3,900.0	5.16	210.62	3,893.0	-137.0	-81.1	538,794.37	767,111.53	32.479079	-103.601178
4,000.0	5.16	210.62	3,992.6	-144.8	-85.7	538,786.63	767,106.95	32.479058	-103.601193
4,043.0	5.16	210.62	4,035.5	-148.1	-87.7	538,783.30	767,104.97	32.479049	-103.601200
CPTN_GRID									
4,100.0	5.16	210.62	4,092.2	-152.5	-90.3	538,778.89	767,102.37	32.479037	-103.601208
4,200.0	5.16	210.62	4,191.8	-160.3	-94.9	538,771.15	767,097.78	32.479015	-103.601223



American Resource Development LLC

Planning Report - Geographic

Database:	AUS-COMPASS - EDM_15 - 32bit	Local Co-ordinate Reference:	Well BECKNELL 21-31-17 STATE COM071H
Company:	Ameredev Operating	TVD Reference:	KB=27' @ 3836.0usft
Project:	Hat Mesa	MD Reference:	KB=27' @ 3836.0usft
Site:	Becknell State Com - D Pad	North Reference:	Grid
Well:	BECKNELL 21-31-17 STATE COM 071H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PRELIM1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
4,300.0	5.16	210.62	4,291.4	-168.0	-99.4	538,763.42	767,093.20	32.478994	-103.601238
4,400.0	5.16	210.62	4,391.0	-175.7	-104.0	538,755.68	767,088.62	32.478973	-103.601253
4,500.0	5.16	210.62	4,490.6	-183.5	-108.6	538,747.94	767,084.04	32.478952	-103.601268
4,600.0	5.16	210.62	4,590.2	-191.2	-113.2	538,740.20	767,079.46	32.478931	-103.601283
4,700.0	5.16	210.62	4,689.8	-198.9	-117.8	538,732.47	767,074.88	32.478909	-103.601298
4,800.0	5.16	210.62	4,789.4	-206.7	-122.3	538,724.73	767,070.30	32.478888	-103.601313
4,900.0	5.16	210.62	4,888.9	-214.4	-126.9	538,716.99	767,065.72	32.478867	-103.601328
5,000.0	5.16	210.62	4,988.5	-222.2	-131.5	538,709.25	767,061.14	32.478846	-103.601343
5,100.0	5.16	210.62	5,088.1	-229.9	-136.1	538,701.51	767,056.56	32.478825	-103.601358
5,200.0	5.16	210.62	5,187.7	-237.6	-140.7	538,693.78	767,051.98	32.478804	-103.601373
5,300.0	5.16	210.62	5,287.3	-245.4	-145.2	538,686.04	767,047.40	32.478782	-103.601389
5,400.0	5.16	210.62	5,386.9	-253.1	-149.8	538,678.30	767,042.82	32.478761	-103.601404
5,443.0	5.16	210.62	5,429.8	-256.4	-151.8	538,674.97	767,040.85	32.478752	-103.601410
BLCN_GRID									
5,500.0	5.16	210.62	5,486.5	-260.8	-154.4	538,670.56	767,038.24	32.478740	-103.601419
5,600.0	5.16	210.62	5,586.1	-268.6	-159.0	538,662.83	767,033.66	32.478719	-103.601434
5,700.0	5.16	210.62	5,685.7	-276.3	-163.6	538,655.09	767,029.08	32.478698	-103.601449
5,800.0	5.16	210.62	5,785.3	-284.1	-168.1	538,647.35	767,024.50	32.478676	-103.601464
5,900.0	5.16	210.62	5,884.9	-291.8	-172.7	538,639.61	767,019.92	32.478655	-103.601479
6,000.0	5.16	210.62	5,984.5	-299.5	-177.3	538,631.87	767,015.34	32.478634	-103.601494
6,100.0	5.16	210.62	6,084.1	-307.3	-181.9	538,624.14	767,010.76	32.478613	-103.601509
6,200.0	5.16	210.62	6,183.7	-315.0	-186.5	538,616.40	767,006.18	32.478592	-103.601524
6,300.0	5.16	210.62	6,283.3	-322.8	-191.0	538,608.66	767,001.60	32.478571	-103.601539
6,400.0	5.16	210.62	6,382.9	-330.5	-195.6	538,600.92	766,997.02	32.478549	-103.601554
6,500.0	5.16	210.62	6,482.5	-338.2	-200.2	538,593.19	766,992.44	32.478528	-103.601569
6,600.0	5.16	210.62	6,582.1	-346.0	-204.8	538,585.45	766,987.86	32.478507	-103.601584
6,700.0	5.16	210.62	6,681.7	-353.7	-209.4	538,577.71	766,983.28	32.478486	-103.601599
6,800.0	5.16	210.62	6,781.3	-361.4	-213.9	538,569.97	766,978.70	32.478465	-103.601614
6,900.0	5.16	210.62	6,880.8	-369.2	-218.5	538,562.24	766,974.12	32.478443	-103.601629
7,000.0	5.16	210.62	6,980.4	-376.9	-223.1	538,554.50	766,969.54	32.478422	-103.601644
7,100.0	5.16	210.62	7,080.0	-384.7	-227.7	538,546.76	766,964.96	32.478401	-103.601659
7,200.0	5.16	210.62	7,179.6	-392.4	-232.3	538,539.02	766,960.38	32.478380	-103.601674
7,297.0	5.16	210.62	7,276.2	-399.9	-236.7	538,531.52	766,955.94	32.478359	-103.601689
BYCN_GRID									
7,300.0	5.16	210.62	7,279.2	-400.1	-236.8	538,531.28	766,955.80	32.478359	-103.601689
7,400.0	5.16	210.62	7,378.8	-407.9	-241.4	538,523.55	766,951.22	32.478338	-103.601704
7,500.0	5.16	210.62	7,478.4	-415.6	-246.0	538,515.81	766,946.64	32.478316	-103.601719
7,600.0	5.16	210.62	7,578.0	-423.3	-250.6	538,508.07	766,942.06	32.478295	-103.601734
7,700.0	5.16	210.62	7,677.6	-431.1	-255.2	538,500.33	766,937.48	32.478274	-103.601749
7,800.0	5.16	210.62	7,777.2	-438.8	-259.8	538,492.60	766,932.90	32.478253	-103.601764
7,900.0	5.16	210.62	7,876.8	-446.6	-264.3	538,484.86	766,928.32	32.478232	-103.601779
8,000.0	5.16	210.62	7,976.4	-454.3	-268.9	538,477.12	766,923.74	32.478210	-103.601794
8,100.0	5.16	210.62	8,076.0	-462.0	-273.5	538,469.38	766,919.16	32.478189	-103.601809
8,200.0	5.16	210.62	8,175.6	-469.8	-278.1	538,461.64	766,914.58	32.478168	-103.601824
8,300.0	5.16	210.62	8,275.2	-477.5	-282.7	538,453.91	766,909.99	32.478147	-103.601839
8,400.0	5.16	210.62	8,374.8	-485.2	-287.2	538,446.17	766,905.41	32.478126	-103.601854
8,500.0	5.16	210.62	8,474.4	-493.0	-291.8	538,438.43	766,900.83	32.478105	-103.601869
8,600.0	5.16	210.62	8,574.0	-500.7	-296.4	538,430.69	766,896.25	32.478083	-103.601884
8,700.0	5.16	210.62	8,673.6	-508.5	-301.0	538,422.96	766,891.67	32.478062	-103.601899
8,800.0	5.16	210.62	8,773.2	-516.2	-305.6	538,415.22	766,887.09	32.478041	-103.601914
8,900.0	5.16	210.62	8,872.7	-523.9	-310.1	538,407.48	766,882.51	32.478020	-103.601929
8,920.7	5.16	210.62	8,893.4	-525.5	-311.1	538,405.88	766,881.56	32.478015	-103.601932
BSPG_GRID									
9,000.0	5.16	210.62	8,972.3	-531.7	-314.7	538,399.74	766,877.93	32.477999	-103.601944



American Resource Development LLC

Planning Report - Geographic

Database:	AUS-COMPASS - EDM_15 - 32bit	Local Co-ordinate Reference:	Well BECKNELL 21-31-17 STATE COM071H
Company:	Ameredev Operating	TVD Reference:	KB=27' @ 3836.0usft
Project:	Hat Mesa	MD Reference:	KB=27' @ 3836.0usft
Site:	Becknell State Com - D Pad	North Reference:	Grid
Well:	BECKNELL 21-31-17 STATE COM 071H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PRELIM1		

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
9,100.0	5.16	210.62	9,071.9	-539.4	-319.3	538,392.00	766,873.35	32.477977	-103.601959
9,200.0	5.16	210.62	9,171.5	-547.1	-323.9	538,384.27	766,868.77	32.477956	-103.601974
9,300.0	5.16	210.62	9,271.1	-554.9	-328.5	538,376.53	766,864.19	32.477935	-103.601989
9,400.0	5.16	210.62	9,370.7	-562.6	-333.0	538,368.79	766,859.61	32.477914	-103.602005
9,500.0	5.16	210.62	9,470.3	-570.4	-337.6	538,361.05	766,855.03	32.477893	-103.602020
9,594.4	5.16	210.62	9,564.3	-577.7	-341.9	538,353.75	766,850.71	32.477873	-103.602034
Start DLS 12.00 TFO 148.86									
9,600.0	4.59	214.99	9,569.9	-578.1	-342.2	538,353.35	766,850.45	32.477872	-103.602035
9,625.0	2.77	254.00	9,594.9	-579.0	-343.4	538,352.36	766,849.30	32.477869	-103.602038
9,650.0	3.49	309.87	9,619.8	-578.7	-344.5	538,352.68	766,848.13	32.477870	-103.602042
9,675.0	5.89	332.77	9,644.7	-577.1	-345.7	538,354.31	766,846.96	32.477874	-103.602046
9,700.0	8.67	341.82	9,669.5	-574.2	-346.9	538,357.25	766,845.79	32.477882	-103.602050
9,725.0	11.56	346.44	9,694.2	-569.9	-348.0	538,361.47	766,844.61	32.477894	-103.602053
9,750.0	14.50	349.22	9,718.5	-564.4	-349.2	538,366.99	766,843.44	32.477909	-103.602057
9,775.0	17.46	351.07	9,742.5	-557.6	-350.4	538,373.76	766,842.27	32.477928	-103.602061
9,800.0	20.42	352.40	9,766.2	-549.6	-351.5	538,381.79	766,841.11	32.477950	-103.602064
9,825.0	23.40	353.41	9,789.4	-540.4	-352.7	538,391.05	766,839.96	32.477975	-103.602068
9,850.0	26.38	354.20	9,812.1	-529.9	-353.8	538,401.51	766,838.83	32.478004	-103.602071
9,875.0	29.37	354.84	9,834.1	-518.3	-354.9	538,413.15	766,837.72	32.478036	-103.602075
9,900.0	32.35	355.37	9,855.6	-505.5	-356.0	538,425.92	766,836.63	32.478071	-103.602078
9,925.0	35.34	355.82	9,876.4	-491.6	-357.1	538,439.80	766,835.56	32.478110	-103.602081
9,950.0	38.34	356.21	9,896.4	-476.7	-358.1	538,454.76	766,834.52	32.478151	-103.602084
9,975.0	41.33	356.55	9,915.6	-460.7	-359.1	538,470.74	766,833.51	32.478195	-103.602087
10,000.0	44.32	356.85	9,933.9	-443.7	-360.1	538,487.70	766,832.54	32.478241	-103.602090
10,017.0	46.35	357.04	9,945.8	-431.7	-360.8	538,499.74	766,831.89	32.478274	-103.602091
FBSG_GRID									
10,025.0	47.31	357.13	9,951.3	-425.8	-361.1	538,505.60	766,831.60	32.478290	-103.602092
10,050.0	50.31	357.37	9,967.8	-407.0	-362.0	538,524.39	766,830.69	32.478342	-103.602095
10,075.0	53.30	357.60	9,983.2	-387.4	-362.8	538,544.02	766,829.83	32.478396	-103.602097
10,100.0	56.30	357.81	9,997.7	-367.0	-363.6	538,564.43	766,829.01	32.478452	-103.602099
10,125.0	59.29	358.00	10,011.0	-345.8	-364.4	538,585.56	766,828.24	32.478510	-103.602101
10,150.0	62.29	358.18	10,023.2	-324.0	-365.1	538,607.37	766,827.52	32.478570	-103.602103
10,164.5	64.02	358.29	10,029.7	-311.1	-365.5	538,620.27	766,827.12	32.478606	-103.602104
AEP_TARGET_1BS_GRID									
10,175.0	65.29	358.36	10,034.2	-301.6	-365.8	538,629.79	766,826.84	32.478632	-103.602105
10,200.0	68.28	358.52	10,044.1	-278.7	-366.4	538,652.75	766,826.22	32.478695	-103.602106
10,225.0	71.28	358.68	10,052.7	-255.2	-367.0	538,676.20	766,825.64	32.478759	-103.602108
10,250.0	74.27	358.83	10,060.1	-231.3	-367.5	538,700.07	766,825.13	32.478825	-103.602109
10,275.0	77.27	358.98	10,066.3	-207.1	-368.0	538,724.30	766,824.67	32.478892	-103.602110
10,300.0	80.27	359.13	10,071.1	-182.6	-368.4	538,748.81	766,824.26	32.478959	-103.602111
10,325.0	83.26	359.27	10,074.7	-157.9	-368.7	538,773.55	766,823.92	32.479027	-103.602111
10,350.0	86.26	359.41	10,077.0	-133.0	-369.0	538,798.44	766,823.63	32.479096	-103.602112
10,375.0	89.26	359.55	10,078.0	-108.0	-369.2	538,823.42	766,823.40	32.479164	-103.602112
10,381.2	90.00	359.59	10,078.0	-101.8	-369.3	538,829.61	766,823.36	32.479181	-103.602112
Start 383.1 hold at 10381.2 MD - FTP (BS 071H)									
10,400.0	90.00	359.59	10,078.0	-83.0	-369.4	538,848.42	766,823.22	32.479233	-103.602112
10,500.0	90.00	359.59	10,078.0	17.0	-370.1	538,948.41	766,822.50	32.479508	-103.602112
10,600.0	90.00	359.59	10,078.0	117.0	-370.9	539,048.41	766,821.78	32.479783	-103.602112
10,700.0	90.00	359.59	10,078.0	217.0	-371.6	539,148.41	766,821.05	32.480057	-103.602112
10,764.3	90.00	359.59	10,078.0	281.3	-372.1	539,212.67	766,820.59	32.480234	-103.602112
Start 10020.8 hold at 10764.3 MD									
10,800.0	90.00	359.59	10,078.0	317.0	-372.3	539,248.41	766,820.33	32.480332	-103.602112
10,900.0	90.00	359.59	10,078.0	417.0	-373.0	539,348.40	766,819.61	32.480607	-103.602112
11,000.0	90.00	359.59	10,078.0	517.0	-373.8	539,448.40	766,818.88	32.480882	-103.602113



American Resource Development LLC

Planning Report - Geographic

Database:	AUS-COMPASS - EDM_15 - 32bit	Local Co-ordinate Reference:	Well BECKNELL 21-31-17 STATE COM071H
Company:	Ameredev Operating	TVD Reference:	KB=27' @ 3836.0usft
Project:	Hat Mesa	MD Reference:	KB=27' @ 3836.0usft
Site:	Becknell State Com - D Pad	North Reference:	Grid
Well:	BECKNELL 21-31-17 STATE COM 071H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PRELIM1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
11,100.0	90.00	359.59	10,078.0	617.0	-374.5	539,548.40	766,818.16	32.481157	-103.602113
11,200.0	90.00	359.59	10,078.0	717.0	-375.2	539,648.40	766,817.44	32.481432	-103.602113
11,300.0	90.00	359.59	10,078.0	817.0	-375.9	539,748.39	766,816.72	32.481707	-103.602113
11,400.0	90.00	359.59	10,078.0	917.0	-376.7	539,848.39	766,815.99	32.481982	-103.602113
11,500.0	90.00	359.59	10,078.0	1,017.0	-377.4	539,948.39	766,815.27	32.482256	-103.602113
11,600.0	90.00	359.59	10,078.0	1,117.0	-378.1	540,048.39	766,814.55	32.482531	-103.602113
11,700.0	90.00	359.59	10,078.0	1,217.0	-378.8	540,148.38	766,813.82	32.482806	-103.602113
11,800.0	90.00	359.59	10,078.0	1,317.0	-379.5	540,248.38	766,813.10	32.483081	-103.602114
11,900.0	90.00	359.59	10,078.0	1,417.0	-380.3	540,348.38	766,812.38	32.483356	-103.602114
12,000.0	90.00	359.59	10,078.0	1,517.0	-381.0	540,448.38	766,811.66	32.483631	-103.602114
12,100.0	90.00	359.59	10,078.0	1,617.0	-381.7	540,548.37	766,810.93	32.483906	-103.602114
12,200.0	90.00	359.59	10,078.0	1,717.0	-382.4	540,648.37	766,810.21	32.484180	-103.602114
12,300.0	90.00	359.59	10,078.0	1,817.0	-383.2	540,748.37	766,809.49	32.484455	-103.602114
12,400.0	90.00	359.59	10,078.0	1,917.0	-383.9	540,848.36	766,808.77	32.484730	-103.602114
12,500.0	90.00	359.59	10,078.0	2,017.0	-384.6	540,948.36	766,808.04	32.485005	-103.602114
12,600.0	90.00	359.59	10,078.0	2,116.9	-385.3	541,048.36	766,807.32	32.485280	-103.602115
12,700.0	90.00	359.59	10,078.0	2,216.9	-386.1	541,148.36	766,806.60	32.485555	-103.602115
12,800.0	90.00	359.59	10,078.0	2,316.9	-386.8	541,248.35	766,805.87	32.485830	-103.602115
12,900.0	90.00	359.59	10,078.0	2,416.9	-387.5	541,348.35	766,805.15	32.486104	-103.602115
13,000.0	90.00	359.59	10,078.0	2,516.9	-388.2	541,448.35	766,804.43	32.486379	-103.602115
13,100.0	90.00	359.59	10,078.0	2,616.9	-388.9	541,548.35	766,803.71	32.486654	-103.602115
13,200.0	90.00	359.59	10,078.0	2,716.9	-389.7	541,648.34	766,802.98	32.486929	-103.602115
13,300.0	90.00	359.59	10,078.0	2,816.9	-390.4	541,748.34	766,802.26	32.487204	-103.602115
13,400.0	90.00	359.59	10,078.0	2,916.9	-391.1	541,848.34	766,801.54	32.487479	-103.602115
13,500.0	90.00	359.59	10,078.0	3,016.9	-391.8	541,948.34	766,800.81	32.487754	-103.602116
13,600.0	90.00	359.59	10,078.0	3,116.9	-392.6	542,048.33	766,800.09	32.488029	-103.602116
13,700.0	90.00	359.59	10,078.0	3,216.9	-393.3	542,148.33	766,799.37	32.488303	-103.602116
13,800.0	90.00	359.59	10,078.0	3,316.9	-394.0	542,248.33	766,798.65	32.488578	-103.602116
13,900.0	90.00	359.59	10,078.0	3,416.9	-394.7	542,348.33	766,797.92	32.488853	-103.602116
14,000.0	90.00	359.59	10,078.0	3,516.9	-395.4	542,448.32	766,797.20	32.489128	-103.602116
14,100.0	90.00	359.59	10,078.0	3,616.9	-396.2	542,548.32	766,796.48	32.489403	-103.602116
14,200.0	90.00	359.59	10,078.0	3,716.9	-396.9	542,648.32	766,795.75	32.489678	-103.602116
14,300.0	90.00	359.59	10,078.0	3,816.9	-397.6	542,748.32	766,795.03	32.489953	-103.602117
14,400.0	90.00	359.59	10,078.0	3,916.9	-398.3	542,848.31	766,794.31	32.490227	-103.602117
14,500.0	90.00	359.59	10,078.0	4,016.9	-399.1	542,948.31	766,793.59	32.490502	-103.602117
14,600.0	90.00	359.59	10,078.0	4,116.9	-399.8	543,048.31	766,792.86	32.490777	-103.602117
14,700.0	90.00	359.59	10,078.0	4,216.9	-400.5	543,148.30	766,792.14	32.491052	-103.602117
14,800.0	90.00	359.59	10,078.0	4,316.9	-401.2	543,248.30	766,791.42	32.491327	-103.602117
14,900.0	90.00	359.59	10,078.0	4,416.9	-402.0	543,348.30	766,790.69	32.491602	-103.602117
15,000.0	90.00	359.59	10,078.0	4,516.9	-402.7	543,448.30	766,789.97	32.491877	-103.602117
15,100.0	90.00	359.59	10,078.0	4,616.9	-403.4	543,548.29	766,789.25	32.492151	-103.602118
15,200.0	90.00	359.59	10,078.0	4,716.9	-404.1	543,648.29	766,788.53	32.492426	-103.602118
15,300.0	90.00	359.59	10,078.0	4,816.9	-404.8	543,748.29	766,787.80	32.492701	-103.602118
15,400.0	90.00	359.59	10,078.0	4,916.9	-405.6	543,848.29	766,787.08	32.492976	-103.602118
15,500.0	90.00	359.59	10,078.0	5,016.9	-406.3	543,948.28	766,786.36	32.493251	-103.602118
15,600.0	90.00	359.59	10,078.0	5,116.9	-407.0	544,048.28	766,785.64	32.493526	-103.602118
15,700.0	90.00	359.59	10,078.0	5,216.9	-407.7	544,148.28	766,784.91	32.493801	-103.602118
15,800.0	90.00	359.59	10,078.0	5,316.9	-408.5	544,248.28	766,784.19	32.494076	-103.602118
15,900.0	90.00	359.59	10,078.0	5,416.9	-409.2	544,348.27	766,783.47	32.494350	-103.602119
16,000.0	90.00	359.59	10,078.0	5,516.9	-409.9	544,448.27	766,782.74	32.494625	-103.602119
16,100.0	90.00	359.59	10,078.0	5,616.9	-410.6	544,548.27	766,782.02	32.494900	-103.602119
16,200.0	90.00	359.59	10,078.0	5,716.9	-411.3	544,648.27	766,781.30	32.495175	-103.602119
16,300.0	90.00	359.59	10,078.0	5,816.9	-412.1	544,748.26	766,780.58	32.495450	-103.602119
16,400.0	90.00	359.59	10,078.0	5,916.8	-412.8	544,848.26	766,779.85	32.495725	-103.602119
16,500.0	90.00	359.59	10,078.0	6,016.8	-413.5	544,948.26	766,779.13	32.496000	-103.602119



American Resource Development LLC

Planning Report - Geographic

Database:	AUS-COMPASS - EDM_15 - 32bit	Local Co-ordinate Reference:	Well BECKNELL 21-31-17 STATE COM071H
Company:	Ameredev Operating	TVD Reference:	KB=27' @ 3836.0usft
Project:	Hat Mesa	MD Reference:	KB=27' @ 3836.0usft
Site:	Becknell State Com - D Pad	North Reference:	Grid
Well:	BECKNELL 21-31-17 STATE COM 071H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PRELIM1		

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
16,600.0	90.00	359.59	10,078.0	6,116.8	-414.2	545,048.26	766,778.41	32.496274	-103.602119
16,700.0	90.00	359.59	10,078.0	6,216.8	-415.0	545,148.25	766,777.68	32.496549	-103.602119
16,800.0	90.00	359.59	10,078.0	6,316.8	-415.7	545,248.25	766,776.96	32.496824	-103.602120
16,900.0	90.00	359.59	10,078.0	6,416.8	-416.4	545,348.25	766,776.24	32.497099	-103.602120
17,000.0	90.00	359.59	10,078.0	6,516.8	-417.1	545,448.24	766,775.52	32.497374	-103.602120
17,100.0	90.00	359.59	10,078.0	6,616.8	-417.9	545,548.24	766,774.79	32.497649	-103.602120
17,200.0	90.00	359.59	10,078.0	6,716.8	-418.6	545,648.24	766,774.07	32.497924	-103.602120
17,300.0	90.00	359.59	10,078.0	6,816.8	-419.3	545,748.24	766,773.35	32.498198	-103.602120
17,400.0	90.00	359.59	10,078.0	6,916.8	-420.0	545,848.23	766,772.62	32.498473	-103.602120
17,500.0	90.00	359.59	10,078.0	7,016.8	-420.7	545,948.23	766,771.90	32.498748	-103.602120
17,600.0	90.00	359.59	10,078.0	7,116.8	-421.5	546,048.23	766,771.18	32.499023	-103.602121
17,700.0	90.00	359.59	10,078.0	7,216.8	-422.2	546,148.23	766,770.46	32.499298	-103.602121
17,800.0	90.00	359.59	10,078.0	7,316.8	-422.9	546,248.22	766,769.73	32.499573	-103.602121
17,900.0	90.00	359.59	10,078.0	7,416.8	-423.6	546,348.22	766,769.01	32.499848	-103.602121
18,000.0	90.00	359.59	10,078.0	7,516.8	-424.4	546,448.22	766,768.29	32.500122	-103.602121
18,100.0	90.00	359.59	10,078.0	7,616.8	-425.1	546,548.22	766,767.57	32.500397	-103.602121
18,200.0	90.00	359.59	10,078.0	7,716.8	-425.8	546,648.21	766,766.84	32.500672	-103.602121
18,300.0	90.00	359.59	10,078.0	7,816.8	-426.5	546,748.21	766,766.12	32.500947	-103.602121
18,400.0	90.00	359.59	10,078.0	7,916.8	-427.3	546,848.21	766,765.40	32.501222	-103.602122
18,500.0	90.00	359.59	10,078.0	8,016.8	-428.0	546,948.21	766,764.67	32.501497	-103.602122
18,600.0	90.00	359.59	10,078.0	8,116.8	-428.7	547,048.20	766,763.95	32.501772	-103.602122
18,700.0	90.00	359.59	10,078.0	8,216.8	-429.4	547,148.20	766,763.23	32.502047	-103.602122
18,800.0	90.00	359.59	10,078.0	8,316.8	-430.1	547,248.20	766,762.51	32.502321	-103.602122
18,900.0	90.00	359.59	10,078.0	8,416.8	-430.9	547,348.20	766,761.78	32.502596	-103.602122
19,000.0	90.00	359.59	10,078.0	8,516.8	-431.6	547,448.19	766,761.06	32.502871	-103.602122
19,100.0	90.00	359.59	10,078.0	8,616.8	-432.3	547,548.19	766,760.34	32.503146	-103.602122
19,200.0	90.00	359.59	10,078.0	8,716.8	-433.0	547,648.19	766,759.61	32.503421	-103.602122
19,300.0	90.00	359.59	10,078.0	8,816.8	-433.8	547,748.18	766,758.89	32.503696	-103.602123
19,400.0	90.00	359.59	10,078.0	8,916.8	-434.5	547,848.18	766,758.17	32.503971	-103.602123
19,500.0	90.00	359.59	10,078.0	9,016.8	-435.2	547,948.18	766,757.45	32.504245	-103.602123
19,600.0	90.00	359.59	10,078.0	9,116.8	-435.9	548,048.18	766,756.72	32.504520	-103.602123
19,700.0	90.00	359.59	10,078.0	9,216.8	-436.6	548,148.17	766,756.00	32.504795	-103.602123
19,800.0	90.00	359.59	10,078.0	9,316.8	-437.4	548,248.17	766,755.28	32.505070	-103.602123
19,900.0	90.00	359.59	10,078.0	9,416.8	-438.1	548,348.17	766,754.55	32.505345	-103.602123
20,000.0	90.00	359.59	10,078.0	9,516.8	-438.8	548,448.17	766,753.83	32.505620	-103.602123
20,100.0	90.00	359.59	10,078.0	9,616.8	-439.5	548,548.16	766,753.11	32.505895	-103.602124
20,200.0	90.00	359.59	10,078.0	9,716.7	-440.3	548,648.16	766,752.39	32.506169	-103.602124
20,300.0	90.00	359.59	10,078.0	9,816.7	-441.0	548,748.16	766,751.66	32.506444	-103.602124
20,400.0	90.00	359.59	10,078.0	9,916.7	-441.7	548,848.16	766,750.94	32.506719	-103.602124
20,500.0	90.00	359.59	10,078.0	10,016.7	-442.4	548,948.15	766,750.22	32.506994	-103.602124
20,600.0	90.00	359.59	10,078.0	10,116.7	-443.2	549,048.15	766,749.50	32.507269	-103.602124
20,700.0	90.00	359.59	10,078.0	10,216.7	-443.9	549,148.15	766,748.77	32.507544	-103.602124
LTP (BS 071H)									
20,785.1	90.00	359.59	10,078.0	10,301.8	-444.5	549,233.25	766,748.16	32.507778	-103.602124
TD at 20785.1 - BHL (BS 071H)									



American Resource Development LLC

Planning Report - Geographic

Database:	AUS-COMPASS - EDM_15 - 32bit	Local Co-ordinate Reference:	Well BECKNELL 21-31-17 STATE COM071H
Company:	Ameredev Operating	TVD Reference:	KB=27' @ 3836.0usft
Project:	Hat Mesa	MD Reference:	KB=27' @ 3836.0usft
Site:	Becknell State Com - D Pad	North Reference:	Grid
Well:	BECKNELL 21-31-17 STATE COM 071H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PRELIM1		

Design Targets

Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
LTP (BS 071H) - plan misses target center by 35.1usft at 20700.0usft MD (10078.0 TVD, 10216.7 N, -443.9 E) - Point	0.00	0.00	10,078.0	10,251.8	-444.1	549,183.25	766,748.51	32.507640	-103.602124
FTP (BS 071H) - plan hits target center - Point	0.00	0.00	10,078.0	-101.8	-369.3	538,829.61	766,823.36	32.479181	-103.602112
BHL (BS 071H) - plan hits target center - Point	0.00	0.00	10,078.0	10,301.8	-444.5	549,233.25	766,748.16	32.507778	-103.602124

Formations

Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)
1,701.9	1,701.9	RSLR_GRID		0.00	
2,112.9	2,112.9	SLDO_GRID		0.00	
3,606.8	3,601.0	TNSL_GRID		0.00	
4,043.0	4,035.5	CPTN_GRID			
5,443.0	5,429.8	BLCN_GRID			
7,297.0	7,276.2	BYCN_GRID			
8,920.7	8,893.4	BSPG_GRID			
10,017.0	9,945.8	FBSG_GRID			
10,164.5	10,029.7	AEP_TARGET_1BS_GRID			

Plan Annotations

Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
2,000.0	2,000.0	0.0	0.0	Start Build 2.00
2,257.9	2,257.6	-10.0	-5.9	Start 7336.4 hold at 2257.9 MD
9,594.4	9,564.3	-577.7	-341.9	Start DLS 12.00 TFO 148.86
10,381.2	10,078.0	-101.8	-369.3	Start 383.1 hold at 10381.2 MD
10,764.3	10,078.0	281.3	-372.1	Start 10020.8 hold at 10764.3 MD
20,785.1	10,078.0	10,301.8	-444.5	TD at 20785.1

State of New Mexico
Energy, Minerals and Natural Resources Department

Submit Electronically
Via E-permitting

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description

Effective May 25, 2021

I. Operator: Advance Energy Partners Hat Mesa, LLC **OGRID:** 372417 **Date:** _____

II. Type: ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe: _____

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
BECKNELL 21-33-17 State Com 071H	30-025-	E-17-21S-33E	2437' FNL & 700' FWL	1000	1600	3300
BECKNELL 21-33-17 State Com 091H	30-025-	E-17-21S-33E	2437' FNL & 760' FWL	1000	1600	3300
BECKNELL 21-33-17 State Com 811H	30-025-	E-17-21S-33E	2437' FNL & 800' FWL	1000	1600	3300
BECKNELL 21-33-17 State Com 821H	30-025-	E-17-21S-33E	2437' FNL & 720' FWL	1000	1600	3300
BECKNELL 21-33-17 State Com 831H	30-025-	E-17-21S-33E	2437' FNL & 780' FWL	1000	1600	3300
BECKNELL 21-33-17 State Com 911H	30-025-	E-17-21S-33E	2437' FNL & 740' FWL	1000	1600	3300

IV. Central Delivery Point Name: _____ [See 19.15.27.9(D)(1) NMAC]

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
BECKNELL 21-33-17 State Com 071H	30-025-	8/1/2023	8/21/2023	9/23/2022	11/13/2022	11/16/2022
BECKNELL 21-33-17 State Com 091H	30-025-	5/27/2023	6/16/2023	9/23/2022	11/13/2022	11/16/2022
BECKNELL 21-33-17 State Com 811H	30-025-	4/13/2023	5/3/2023	9/23/2022	11/13/2022	11/16/2022
BECKNELL 21-33-17 State Com 821H	30-025-	7/10/2023	7/30/2023	9/23/2022	11/13/2022	11/16/2022
BECKNELL 21-33-17 State Com 831H	30-025-	5/5/2023	5/25/2023	9/23/2022	11/13/2022	11/16/2022
BECKNELL 21-33-17 State Com 911H	30-025-	6/18/2023	7/8/2023	9/23/2022	11/13/2022	11/16/2022

VI. Separation Equipment: ☒ Attach a complete description of how Operator will size separation equipment to optimize gas capture.

VII. Operational Practices: ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices: ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

Section 2 – Enhanced Plan

EFFECTIVE APRIL 1, 2022

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☒ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF

X. Natural Gas Gathering System (NGGS):

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in

XI. Map. ☐ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system ☐ will ☐ will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

XIII. Line Pressure. Operator ☐ does ☐ does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

XIV. Confidentiality: ☐ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

Section 3 - Certifications

Effective May 25, 2021

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☒ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

If Operator checks this box, Operator will select one of the following:

Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

Venting and Flaring Plan. ☐ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

Section 4 - Notices

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature: <i>Dayeed Khan</i>
Printed Name: Dayeed Khan
Title: Engineer
E-mail Address: dkhan@ameredev.com
Date: 08/23/2022
Phone: 737-300-4735
OIL CONSERVATION DIVISION (Only applicable when submitted as a standalone form)
Approved By:
Title:
Approval Date:
Conditions of Approval:

Natural Gas Management Plan

VI. Separation Equipment: Attach a complete description of how Operator will size separation equipment to optimize gas capture.

- Separation equipment is sized to allow for retention time and velocity to adequately separate oil, gas, and water at anticipated peak rates.
- All central tank battery equipment is designed to efficiently capture the remaining gas from the liquid phase.
- Valves and meters are designed to service without flow interruption or venting of gas.

VII. Operational Practices: Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F 19.15.27.8 NMAC.

19.15.27.8 (A)

Advanced Energy Partners field operations are designed with the goal of minimizing flaring and preventing venting of natural gas. If capturing the gas is not possible then the gas is combusted/flared using properly sized flares or combustors in accordance with state air permit rules.

19.15.27.8 (B) Venting and Flaring during drilling operations

- A properly-sized flare stack will be located at a minimum 100' from the nearest surface hole location on the pad.
- All natural gas produced during drilling operations will be flared. Venting will only occur if there is an equipment malfunction and/or to avoid risk of an immediate and substantial adverse impact on safety, public health, or the environment.

19.15.27.8 (C) Venting and Flaring during completions or recompletions operations.

- During all phases of flowback, wells will flow through a sand separator, or other appropriate flowback separation equipment, and the well stream will be directed to a central tank battery (CTB) through properly sized flowlines
- The CTB will have properly sized separation equipment for maximum anticipated flowrates
- Multiple stages of separation will be used to separate gas from liquids. All gas will be routed to a sales outlet. Fluids will be routed to tanks equipped with a closed loop system that will recover any residual gas from the tanks and route such gas to a sales outlet.

19.15.27.8 (D) Venting and Flaring during production operations.

- During production, the well stream will be routed to the CTB where multiple stages of separation will separate gas from liquids. All gas will be routed to a sales outlet. Fluids will be routed to tanks with a closed

loop system that will recover any residual gas from the tanks and route such gas to a sales outlet, minimizing tank emissions.

- Flares are equipped with auto-ignition systems and continuous pilot operations.
- Automatic gauging equipment is installed on all tanks.

19.15.27.8 (E) Performance Standards

- Production equipment will be designed to handle maximum anticipated rates and pressure.
- Automatic gauging equipment is installed on all tanks to minimize venting
- All flared gas will be combusted in a flare stack that is properly sized and designed to ensure proper combustion.
- Flares are equipped with continuous pilots and auto-ignitors along with remote monitoring of the pilot status
- Weekly AVOs and monthly LDAR inspections will be performed on all wells and facilities that produce more than 60 Mcfd.
- Gas/H₂S detectors will be installed throughout the facilities and wellheads to detect leaks and enable timely repairs.

19.15.27.8 (F) Measurement or estimation of vented and flared natural gas

- All high pressure flared gas is measured by equipment conforming to API 14.10.
- No meter bypasses are installed.
- When metering is not practical due to low pressure/low rate, the vented or flared volume will be estimated through flare flow curves with the assistance of air emissions consultants, as necessary.

VIII. Best Management Practices: Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

- Advanced Energy Partners will use best management practices to vent as minimally as possible during well intervention operations and downhole well maintenance
- All natural gas is routed into the gas gathering system and directed to one of Advanced Energy Partners multiple gas sales outlets.
- All venting events will be recorded and all start-up, shutdown, maintenance logs will be kept for control equipment
- All control equipment will be maintained to provide highest run-time possible
- All procedures are drafted to keep venting and flaring to the absolute minimum