

| | | |
|--|---|--|
| Well Name: DEPTH CC 6-7 FEDERAL COM | Well Location: T24S / R29E / SEC 6 / LOT 4 / 32.2538209 / -104.0283039 | County or Parish/State: EDDY / NM |
| Well Number: 41H | Type of Well: OIL WELL | Allottee or Tribe Name: |
| Lease Number: NMNM13996 | Unit or CA Name: | Unit or CA Number: |
| US Well Number: 3001546777 | Well Status: Approved Application for Permit to Drill | Operator: OXY USA INCORPORATED |

Notice of Intent

Sundry ID: 2692967

Type of Submission: Notice of Intent **Type of Action:** APD Change

Date Sundry Submitted: 09/16/2022 **Time Sundry Submitted:** 09:41

Date proposed operation will begin: 10/03/2022

Procedure Description: Oxy respectfully requests to remove the pilot hole from the drilling plans. A pilot hole will be added to the Radius CC 6-7 Federal Com 51H (30-015-46825). A sundry will be filed for that well with the updated drilling plans.

NOI Attachments

Procedure Description

- DepthCC6_7FederalCom41H_DirectPlot_20220916094128.pdf
- DepthCC6_7FederalCom41H_DirectPlan_20220916094127.pdf
- DepthCC6_7FederalCom41H_DrillPlan_20220916094129.pdf

Received by OCD: 9/21/2022 6:26:56 AM

Page 2 of 26

| | | |
|-------------------------------------|--|-----------------------------------|
| Well Name: DEPTH CC 6-7 FEDERAL COM | Well Location: T24S / R29E / SEC 6 / LOT 4 / 32.2538209 / -104.0283039 | County or Parish/State: EDDY / NM |
| Well Number: 41H | Type of Well: OIL WELL | Allottee or Tribe Name: |
| Lease Number: NMNM13996 | Unit or CA Name: | Unit or CA Number: |
| US Well Number: 3001546777 | Well Status: Approved Application for Permit to Drill | Operator: OXY USA INCORPORATED |

Conditions of Approval

Additional

DEPTH_CC_6_7_FEDERAL_COM_41H___SUNDRY_COA___REMOVE_PILOT_HOLE_20220920163315.pdf

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: STEPHEN JANACEK
Signed on: SEP 16, 2022 09:41 AM
Name: OXY USA INCORPORATED
Title: Regulatory Engineer
Street Address: 5 Greenway Plaza, Suite 110
City: Houston State: TX
Phone: (713) 497-2417
Email address: stephen_janacek@oxy.com

Field

Representative Name:
Street Address:
City: State: Zip:
Phone:
Email address:

BLM Point of Contact

BLM POC Name: KEITH P IMMATTY
BLM POC Title: ENGINEER
BLM POC Phone: 5759884722
BLM POC Email Address: KIMMATTY@BLM.GOV
Disposition: Approved
Disposition Date: 09/20/2022
Signature: Keith Immatty

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

All previous COAs still apply.

| | |
|-----------------------|-----------------------------------|
| OPERATOR'S NAME: | OXY USA INCORPORATED |
| LEASE NO.: | NMNM13996 |
| WELL NAME & NO.: | Depth CC 6-7 Federal COM / 41H |
| SURFACE HOLE FOOTAGE: | 203'/N & 602'/W |
| BOTTOM HOLE FOOTAGE: | 20'/N & 330'/W |
| LOCATION: | Section 6, T.24 S., R.29 E., NMPM |
| COUNTY: | Eddy County, New Mexico |

COA

| | | | |
|----------------------|--|--|-------------------------------------|
| H2S | <input type="radio"/> Yes | <input checked="" type="radio"/> No | |
| Potash | <input checked="" type="radio"/> None | <input type="radio"/> Secretary | <input type="radio"/> R-111-P |
| Cave/Karst Potential | <input checked="" type="radio"/> Low | <input type="radio"/> Medium | <input type="radio"/> High |
| Cave/Karst Potential | <input type="radio"/> Critical | | |
| Variance | <input type="radio"/> None | <input checked="" type="radio"/> Flex Hose | <input type="radio"/> Other |
| Wellhead | <input type="radio"/> Conventional | <input checked="" type="radio"/> Multibowl | <input type="radio"/> Both |
| Other | <input type="checkbox"/> 4 String Area | <input type="checkbox"/> Capitan Reef | <input type="checkbox"/> WIPP |
| Other | <input checked="" type="checkbox"/> Fluid Filled | <input checked="" type="checkbox"/> Cement Squeeze | <input type="checkbox"/> Pilot Hole |
| Special Requirements | <input type="checkbox"/> Water Disposal | <input checked="" type="checkbox"/> COM | <input type="checkbox"/> Unit |

A. CASING

Alternate Casing Design:

1. The **13-3/8** inch surface casing shall be set at approximately **462** feet (a minimum of 70 feet (Eddy County) into the Rustler Anhydrite and above the salt) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)

- c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
- d. If cement falls back, remedial cementing will be done prior to drilling out that string.

Intermediate casing must be kept fluid filled to meet BLM minimum collapse requirement.

2. The 9-5/8 inch intermediate casing shall be set at approximately 9,819 feet The minimum required fill of cement behind the 9-5/8 inch intermediate casing is:

Option 1 (Single Stage):

- Cement to surface. If cement does not circulate see B.1.a, c-d above.
Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.

Option 2:

Operator has proposed a DV tool, the depth may be adjusted as long as the cement is changed proportionally. The DV tool may be cancelled if cement circulates to surface on the first stage.

- a. First stage to DV tool: Cement to circulate. If cement does not circulate off the DV tool, contact the appropriate BLM office before proceeding with second stage cement job.
- b. Second stage above DV tool:
 - Cement to surface. If cement does not circulate, contact the appropriate BLM office.
Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.

Operator has proposed to pump down 9-5/8" X 13-3/8" annulus. Operator must top out and verify cement to surface. If unsure of TOC or quality of cement job run a CBL OR ECHO-METER from TD of the 9-5/8" casing to surface. Submit results to BLM. OVERALL EXCESS IS ONLY 14%. ADJUST BRADENHEAD VOLUME IF NECESSARY TO ACHIVE CEMENT TO SURFACE.

~~The pilot hole plugging procedure is approved as written. Proposed pilot plug top is 9,731'. Note plug tops on subsequent drilling report. The BLM is to be contacted (575-361-2822 Eddy County) when tagging the plugs.~~

Operator submitted sundry to remove pilot hole plans. Modified accordingly.

3. The **5-1/2** inch production casing shall be set at approximately **20,897** feet The minimum required fill of cement behind the **5-1/2** inch production casing is:

Option 1 (Single Stage):

- Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.

Option 2:

Operator has proposed a DV tool, the depth may be adjusted as long as the cement is changed proportionally. The DV tool may be cancelled if cement circulates to surface on the first stage.

- a. First stage to DV tool: Cement to circulate. If cement does not circulate off the DV tool, contact the appropriate BLM office before proceeding with second stage cement job.
- b. Second stage above DV tool:
 - Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ Eddy County

Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220, (575) 361-2822

☒ Lea County

Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (575) 689-5981

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after

- installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
- b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per Onshore Oil and Gas Order No. 2 as soon as 2nd Rig is rigged up on well.
 2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
 3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for

details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.

4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:

- a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
 - b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the plug. However, **no tests** shall commence until the cement has had a minimum of 24 hours setup time, except the casing pressure test can be initiated immediately after bumping the plug (only applies to single stage cement jobs).
 - c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
 - d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE.

If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.

- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

KPI – 08/12/2022

Oxy USA Inc. - Depth CC 6_7 Federal Com 41H

Drill Plan

1. Geologic Formations

| | | | |
|----------------------------|-------|------------------------------------|-----|
| TVD of Target (ft): | 10531 | Pilot Hole Depth (ft): | |
| Total Measured Depth (ft): | 20897 | Deepest Expected Fresh Water (ft): | 102 |

Delaware Basin

| Formation | MD-RKB (ft) | TVD-RKB (ft) | Expected Fluids |
|-----------------|-------------|--------------|-----------------|
| Rustler | 102 | 102 | |
| Salado | 522 | 522 | Salt |
| Castile | 1270 | 1270 | Salt |
| Delaware | 2729 | 2729 | Oil/Gas/Brine |
| Bell Canyon | 2785 | 2785 | Oil/Gas/Brine |
| Cherry Canyon | 3629 | 3629 | Oil/Gas/Brine |
| Brushy Canyon | 4875 | 4875 | Losses |
| Bone Spring | 6450 | 6450 | Oil/Gas |
| Bone Spring 1st | 7427 | 7427 | Oil/Gas |
| Bone Spring 2nd | 8191 | 8191 | Oil/Gas |
| Bone Spring 3rd | 9319 | 9310 | Oil/Gas |
| Wolfcamp | 9681 | 9666 | Oil/Gas |
| Penn | | | Oil/Gas |
| Strawn | | | Oil/Gas |

*H2S, water flows, loss of circulation, abnormal pressures, etc.

2. Casing Program

| Section | Hole Size (in) | MD | | TVD | | Csg. OD (in) | Csg Wt. (ppf) | Grade | Conn. |
|--------------|----------------|-----------|---------|-----------|---------|--------------|---------------|---------|-------|
| | | From (ft) | To (ft) | From (ft) | To (ft) | | | | |
| Surface | 17.5 | 0 | 462 | 0 | 462 | 13.375 | 54.5 | J-55 | BTC |
| Intermediate | 12.25 | 0 | 9819 | 0 | 9801 | 9.625 | 40 | L-80 HC | BTC |
| Production | 8.75 | 0 | 10369 | 0 | 10216 | 7 | 32 | P-110 | DQX |
| Production | 8.5 | 10369 | 20897 | 10216 | 10531 | 5.5 | 20 | P-110 | DQX |

All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

*Oxy requests the option to run production casing with DQX, TORQ DQW, Wedge 425, Wedge 461, and/or Wedge 441 connections to accommodate hole conditions or drilling operations.

| All Casing SF Values will meet or exceed those below | | | |
|--|----------|-----------------|------------------|
| SF Collapse | SF Burst | Body SF Tension | Joint SF Tension |
| 1.125 | 1.2 | 1.4 | 1.4 |

Annular Clearance Variance Request

As per the agreement reached in the Oxy/BLM face-to-face meeting on Feb 22, 2018, Oxy requests permission to allow deviation from the 0.422" annular clearance requirement from Onshore Order #2 under the following conditions:

1. Annular clearance to meet or exceed 0.422" between intermediate casing ID and production casing coupling only on the first 500' overlap between both casings.
2. Annular clearance less than 0.422" is acceptable for the curve and lateral portions of the production open hole section.

| | Y or N |
|---|--------|
| Is casing new? If used, attach certification as required in Onshore Order #1 | Y |
| Does casing meet API specifications? If no, attach casing specification sheet. | Y |
| Is premium or uncommon casing planned? If yes attach casing specification sheet. | Y |
| Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria). | Y |
| Will the intermediate pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing? | Y |
| Is well located within Capitan Reef? | N |
| If yes, does production casing cement tie back a minimum of 50' above the Reef? | |
| Is well within the designated 4 string boundary. | |
| Is well located in SOPA but not in R-111-P? | N |
| If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing? | |
| Is well located in R-111-P and SOPA? | N |
| If yes, are the first three strings cemented to surface? | |
| Is 2 nd string set 100' to 600' below the base of salt? | |
| Is well located in high Cave/Karst? | N |
| If yes, are there two strings cemented to surface? | |
| (For 2 string wells) If yes, is there a contingency casing if lost circulation occurs? | |
| Is well located in critical Cave/Karst? | N |
| If yes, are there three strings cemented to surface? | |

3. Cementing Program

| Section | Stage | Slurry: | Sacks | Yield (ft ³ /ft) | Density (lb/gal) | Excess: | TOC | Placement | Description |
|---------|-------|---------------------------|-------|--------------------------------|---------------------|---------|-------|------------|-------------------------------|
| Surface | 1 | Surface - Tail | 483 | 1.33 | 14.8 | 100% | - | Circulate | Class C+Accel. |
| Int. | 1 | Intermediate 1S - Tail | 936 | 1.65 | 13.2 | 5% | 5,125 | Circulate | Class H+Accel., Disper., Salt |
| Int. | 2 | Intermediate 2S - Tail BH | 1166 | 1.71 | 13.3 | 25% | - | Bradenhead | Class C+Accel. |
| Prod. | 1 | Production - Tail | 2541 | 1.38 | 13.2 | 25% | 9,319 | Circulate | Class H+Ret., Disper., Salt |

Offline Cementing

Oxy requests a variance to cement the 9.625" and/or 7.625" intermediate casing strings offline in accordance to the approved variance, EC Tran 461365.

The summarized operational sequence will be as follows:

Run casing as per normal operations. While running casing, conduct negative pressure test and confirm integrity of the float equipment (float collar and shoe).

Land casing.

Fill pipe with kill weight fluid, and confirm well is static.

If well Oxy requests a variance to cement the 9.625" and/or 7.625" intermediate casing strings offline in accordance to the approved variance, EC Tran 461365.

The summarized operational sequence will be as follows:

1. Run casing as per normal operations. While running casing, conduct negative pressure test and confirm integrity of the float equipment (float collar and shoe).
2. Land casing.
3. Fill pipe with kill weight fluid, and confirm well is static.
 - a. If well is not static notify BLM and kill well.
 - b. Once well is static notify BLM with intent to proceed with nipple down and offline cementing.
4. Set and pressure test annular packoff.
5. After confirmation of both annular barriers and internal barriers, nipple down BOP and install cap flange. If any barrier fails to test, the BOP stack will not be nipped down until after the cement job is completed.
6. Skid rig to next well on pad.
7. Confirm well is static before removing cap flange.
8. If well is not static notify BLM and kill well prior to cementing or nipping up for further remediation.
9. Install offline cement tool.
10. Rig up cement equipment.
 - a. Notify BLM prior to cement job.
11. Perform cement job.
12. Confirm well is static and floats are holding after cement job.
13. Remove cement equipment, offline cement tools and install night cap with pressure gauge for monitoring.

Oxy requests permission to adjust the CBL requirement after bradenhead cement jobs, on 7-5/8" intermediate casings, as per the agreement reached in the OXY/BLM meeting on September 5, 2019.

Three string wells:

- CBL will be required on one well per pad
- If the pumped volume of cement is less than permitted in the APD, BLM will be notified and a CBL may be run
- Echometer will be used after bradenhead cement job to determine TOC before pumping top-out cement

4. Pressure Control Equipment

| BOP installed and tested before drilling which hole? | Size? | Min. Required WP | Type | | ✓ | Tested to: | Deepest TVD Depth (ft) per Section: |
|--|---------|------------------|------------|--|---|--------------------------|-------------------------------------|
| 12.25" Hole | 13-5/8" | 5M | Annular | | ✓ | 70% of working pressure | 9801 |
| | | 5M | Blind Ram | | ✓ | 250 psi / 5000 psi | |
| | | | Pipe Ram | | | | |
| | | | Double Ram | | ✓ | | |
| | | | Other* | | | | |
| 8.75" Hole | 13-5/8" | 5M | Annular | | ✓ | 100% of working pressure | 10531 |
| | | 10M | Blind Ram | | ✓ | 250 psi / 10000 psi | |
| | | | Pipe Ram | | | | |
| | | | Double Ram | | ✓ | | |
| | | | Other* | | | | |

*Specify if additional ram is utilized

Per BLM's Memorandum No. NM-2017-008: *Decision and Rationale for a Variance Allowing the Use of a 5M Annular Preventer with a 10M BOP Stack*, Oxy requests to employ a 5M annular with a 10M BOPE stack in the pilot and lateral sections of the well and will ensure that two barriers to flow are maintained at all times. Please see attached Well Control Plan.

BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested.

Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold.

| | |
|---|--|
| | Formation integrity test will be performed per Onshore Order #2. |
| | On Exploratory wells or on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.i. |
| | |
| | A variance is requested for the use of a flexible choke line from the BOP to Choke Manifold. See attached for specs and hydrostatic test chart. |
| Y | Are anchors required by manufacturer? |
| | A multibowl or a unionized multibowl wellhead system will be employed. The wellhead and connection to the BOPE will meet all API 6A requirements. The BOP will be tested per Onshore Order #2 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested. We will test the flange connection of the wellhead with a test port that is directly in the flange. We are proposing that we will run the wellhead through the rotary prior to cementing surface casing as discussed with the BLM on October 8, 2015. See attached schematics. |

BOP Break Testing Request

Oxy requests permission to adjust the BOP break testing requirements as per the agreement reached in the OXY/BLM meeting on September 5, 2019.

BOP break test under the following conditions:

- After a full BOP test is conducted
- When skidding to drill an intermediate section where ICP is set into the third Bone Spring or shallower.

If the kill line is broken prior to skid, two tests will be performed.

- 1) Wellhead flange, co-flex hose, kill line connections and upper pipe rams
- 2) Wellhead flange, HCR valve, check valve, upper pipe rams

If the kill line is not broken prior to skid, only one test will be performed.

- 1) Wellhead flange, co-flex hose, check valve, upper pipe rams

5. Mud Program

| Section | Depth - MD | | Depth - TVD | | Type | Weight (ppg) | Viscosity | Water Loss |
|--------------|------------|---------|-------------|---------|--|--------------|-----------|------------|
| | From (ft) | To (ft) | From (ft) | To (ft) | | | | |
| Surface | 0 | 462 | 0 | 462 | Water-Based Mud | 8.6 - 8.8 | 40-60 | N/C |
| Intermediate | 462 | 9819 | 462 | 9801 | Saturated Brine-Based or Oil-Based Mud | 8.0 - 10.0 | 35-45 | N/C |
| Production | 9819 | 20897 | 9801 | 10531 | Water-Based or Oil-Based Mud | 9.5 - 13.5 | 38-50 | N/C |

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times. The following is a general list of products: Barite, Bentonite, Gypsum, Lime, Soda Ash, Caustic Soda, Nut Plug, Cedar Fiber, Cotton Seed Hulls, Drilling Paper, Salt Water Clay, CACL2. Oxy will use a closed mud system.

| | |
|---|--------------------------------|
| What will be used to monitor the loss or gain of fluid? | PVT/MD Totco/Visual Monitoring |
|---|--------------------------------|

6. Logging and Testing Procedures

| Logging, Coring and Testing. | |
|------------------------------|--|
| Yes | Will run GR from TD to surface (horizontal well – vertical portion of hole). |
| | Stated logs run will be in the Completion Report and submitted to the BLM. |
| No | Logs are planned based on well control or offset log information. |
| No | Drill stem test? If yes, explain |
| No | Coring? If yes, explain |

| Additional logs planned | | Interval |
|-------------------------|-------------|------------------|
| No | Resistivity | |
| No | Density | |
| No | CBL | |
| Yes | Mud log | Bone Spring – TD |
| No | PEX | |

7. Drilling Conditions

| Condition | Specify what type and where? |
|-------------------------------|------------------------------|
| BH Pressure at deepest TVD | 7393 psi |
| Abnormal Temperature | No |
| BH Temperature at deepest TVD | 165°F |

Pump high viscosity sweeps as needed for hole cleaning. The mud system will be monitored visually/manually as well as with an electronic PVT. The necessary mud products for additional weight and fluid loss control will be on location at all times. Appropriately weighted mud will be used to isolate potential gas, oil, and water zones until such time as casing can be cemented into place for zonal

Hydrogen Sulfide (H2S) monitors will be installed prior to drilling out the surface shoe. If H2S is detected in concentrations greater than 100 ppm, the operator will comply with the provisions of Onshore Oil and Gas Order #6. If Hydrogen Sulfide is encountered, measured values and formations will be provided to the BLM.

| | |
|---|-------------------|
| N | H2S is present |
| Y | H2S Plan attached |

8. Other facets of operation

| | Yes/No |
|---|--------|
| Will the well be drilled with a walking/skidding operation? If yes, describe. We plan to drill the 2 well pad in batch by section: all surface sections, intermediate sections and production sections. The wellhead will be secured with a night cap whenever the rig is not over the well. | Yes |
| Will more than one drilling rig be used for drilling operations? If yes, describe. Oxy requests the option to contract a Surface Rig to drill, set surface casing, and cement for this well. If the timing between rigs is such that Oxy would not be able to preset surface, the Primary Rig will MIRU and drill the well in its entirety per the APD. Please see the attached document for information on the spudder rig. | Yes |

Total Estimated Cuttings Volume: 1515 bbls

Attachments

- ☒ Directional Plan
- ☒ H2S Contingency Plan
- ☒ Flex III Attachments
- ☒ Spudder Rig Attachment
- ☒ Premium Connection Specs

9. Company Personnel

| Name | Title | Office Phone | Mobile Phone |
|-----------------|------------------------------|--------------|--------------|
| Garrett Granier | Drilling Engineer | 713-513-6633 | 832-265-0581 |
| Filip Krneta | Drilling Engineer Supervisor | 713-350-4751 | 832-244-4980 |
| Simon Benavides | Drilling Superintendent | 713-522-8652 | 281-684-6897 |
| Diego Tellez | Drilling Manager | 713-350-4602 | 713-303-4932 |



Project: PRD NM DIRECTIONAL PLANS (NAD 1983)
 Site: Depth CC 6_7
 Well: Depth CC 6_7 Federal Com 41H
 Wellbore: Wellbore #1
 Design: Permitting Plan

PROJECT DETAILS: NM DIRECTIONAL PLANS (NAD 1983)

Geodetic System: US State Plane 1983
 Datum: North American Datum 1983
 Ellipsoid: GRS 1980
 Zone: New Mexico Eastern Zone


System Datum: Mean Sea Level

WELL DETAILS: Depth CC 6_7 Federal Com 41H

| +N/-S | +E/-W | North | Ground Level: | Easting | Latitude | Longitude |
|-------|-------|-----------|---------------|-----------|-----------|-------------|
| 0.00 | 0.00 | 456179.14 | 2967.00 | 634983.44 | 32.253749 | -104.030401 |

SECTION DETAILS

| MD | Inc | Azi | TVD | +N/-S | +E/-W | Dleg | TFace | VSec | Annotation |
|----------|-------|--------|----------|-----------|---------|-------|---------|----------|----------------------------|
| 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | |
| 8049.00 | 0.00 | 0.00 | 8049.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | Build 1°/100' |
| 9048.83 | 10.00 | 308.91 | 9043.76 | 54.65 | -67.71 | 1.00 | 308.91 | -48.89 | Hold 10° Tangent |
| 9925.91 | 10.00 | 308.91 | 9907.52 | 150.30 | -186.20 | 0.00 | 0.00 | -134.44 | KOP, Build & Turn 10°/100' |
| 10689.46 | 90.05 | 179.70 | 10537.50 | -420.18 | -269.36 | 10.00 | -128.77 | 440.95 | Landing Point |
| 20903.46 | 90.05 | 179.70 | 10528.00 | -10434.03 | -217.06 | 0.00 | 0.00 | 10416.41 | TD at 20903.46' MD |

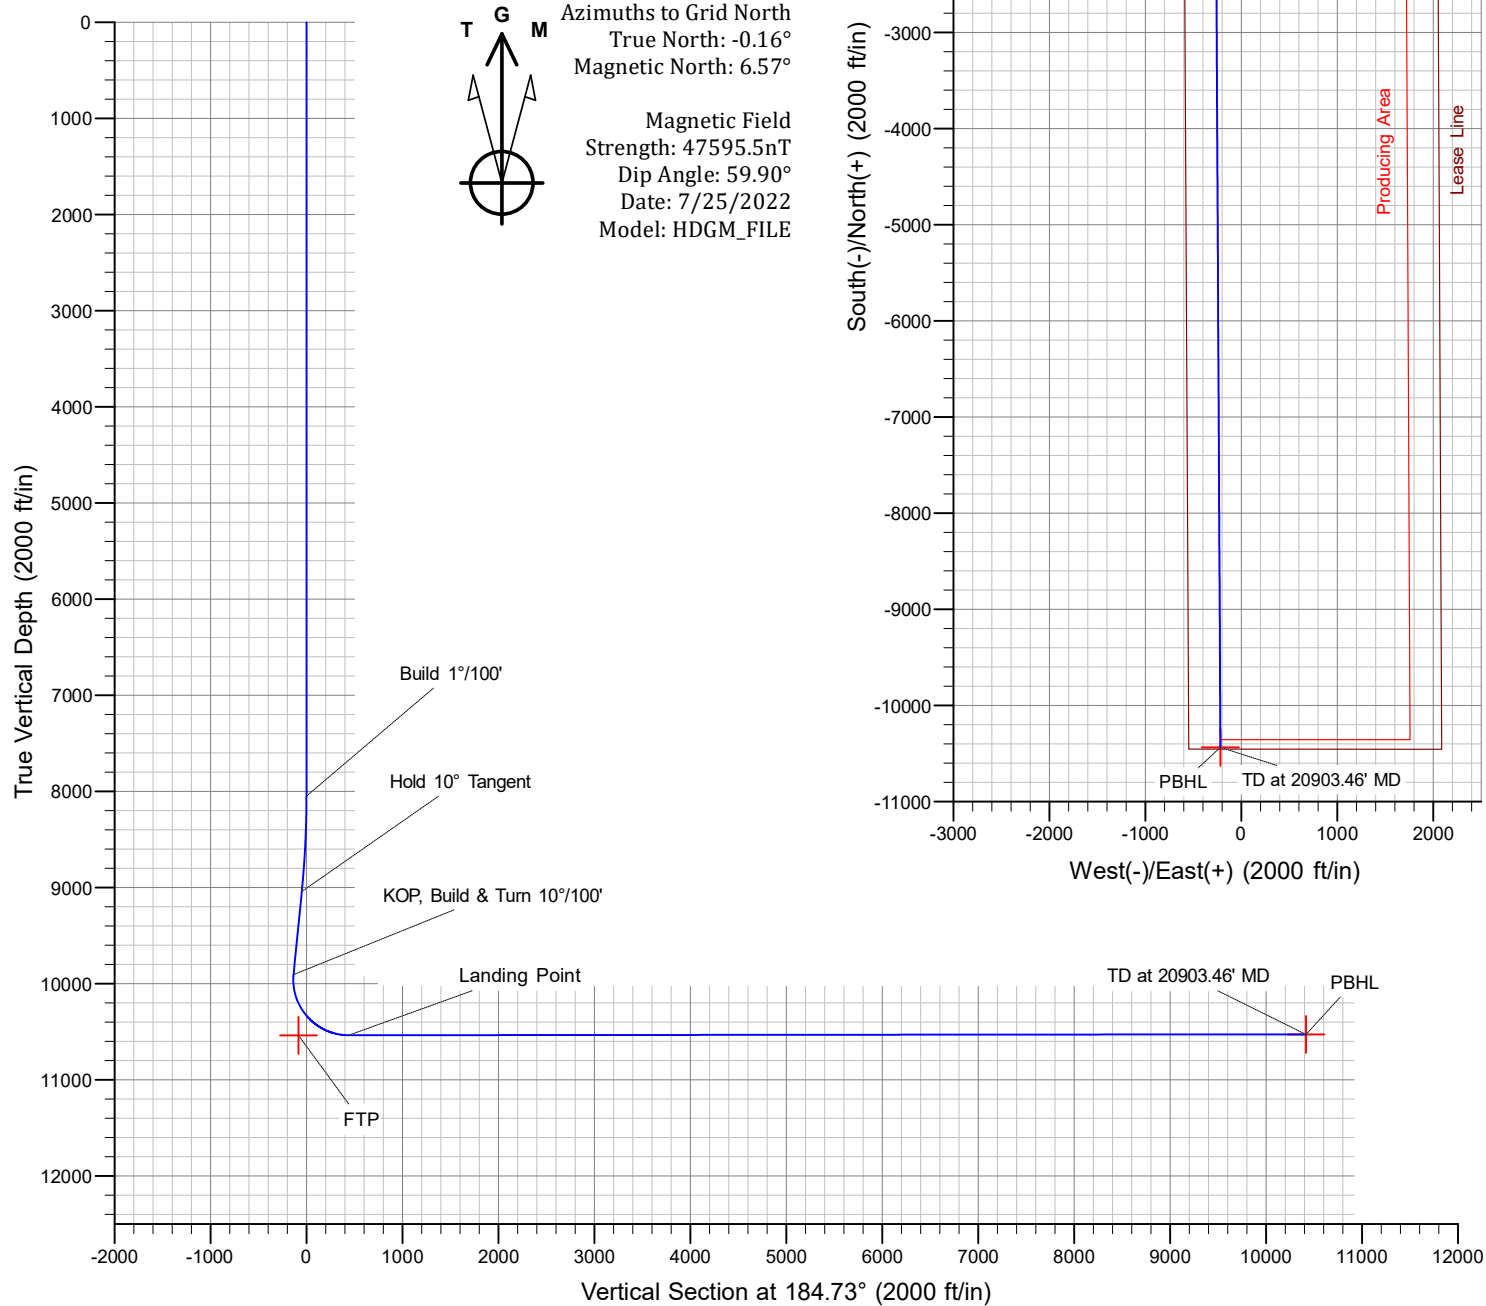

OXY

PRD NM DIRECTIONAL PLANS (NAD 1983)

Depth CC 6_7

Depth CC 6_7 Federal Com 41H

Wellbore #1

Plan: Permitting Plan

Standard Planning Report

15 September, 2022

OXY

Planning Report

| | | | |
|------------------|-------------------------------------|-------------------------------------|-----------------------------------|
| Database: | HOPSPP | Local Co-ordinate Reference: | Well Depth CC 6_7 Federal Com 41H |
| Company: | ENGINEERING DESIGNS | TVD Reference: | RKB=25' @ 2992.00ft |
| Project: | PRD NM DIRECTIONAL PLANS (NAD 1983) | MD Reference: | RKB=25' @ 2992.00ft |
| Site: | Depth CC 6_7 | North Reference: | Grid |
| Well: | Depth CC 6_7 Federal Com 41H | Survey Calculation Method: | Minimum Curvature |
| Wellbore: | Wellbore #1 | | |
| Design: | Permitting Plan | | |

| | | | |
|--------------------|-------------------------------------|----------------------|-----------------------------|
| Project | PRD NM DIRECTIONAL PLANS (NAD 1983) | | |
| Map System: | US State Plane 1983 | System Datum: | Mean Sea Level |
| Geo Datum: | North American Datum 1983 | | |
| Map Zone: | New Mexico Eastern Zone | | Using geodetic scale factor |

| | | | | | | |
|-----------------------|-----|--------------|-----------------|------------|-------------------|--------|
| Site | | Depth CC 6_7 | | | | |
| Site Position: | | Northing: | 456,207.91 usft | Latitude: | 32.253823 | |
| From: | Map | Easting: | 635,546.67 usft | Longitude: | -104.028579 | |
| Position Uncertainty: | | 0.00 ft | Slot Radius: | 13.200 in | Grid Convergence: | 0.16 ° |

| Well | Depth CC 6_7 Federal Com 41H | | | | | |
|----------------------|------------------------------|------------|---------------------|-----------------|---------------|-------------|
| Well Position | +N/-S | -28.77 ft | Northing: | 456,179.14 usft | Latitude: | 32.253749 |
| | +E/-W | -563.28 ft | Easting: | 634,983.44 usft | Longitude: | -104.030402 |
| Position Uncertainty | | 2.00 ft | Wellhead Elevation: | 0.00 ft | Ground Level: | 2,967.00 ft |

| | | | | | | |
|------------------|-------------------|--------------------|------------------------|----------------------|----------------------------|--|
| Wellbore | Wellbore #1 | | | | | |
| Magnetics | Model Name | Sample Date | Declination (°) | Dip Angle (°) | Field Strength (nT) | |
| | HDGM_FILE | 7/8/2019 | 7.02 | 59.98 | 47,907.10000000 | |
| | HDGM_FILE | 7/25/2022 | 6.73 | 59.90 | 47,595.50000000 | |

| | | | | | |
|--------------------------|------------------------------|-------------------|----------------------|----------------------|--|
| Design | Permitting Plan | | | | |
| Audit Notes: | | | | | |
| Version: | Phase: | PROTOTYPE | Tie On Depth: | 0.00 | |
| Vertical Section: | Depth From (TVD) (ft) | +N/-S (ft) | +E/-W (ft) | Direction (°) | |
| | 0.00 | 0.00 | 0.00 | 184.73 | |

| | | | | | |
|---------------------------------|----------------------|--------------------------|-------------------------------|-----------------|--|
| Plan Survey Tool Program | Date | 9/15/2022 | | | |
| Depth From (ft) | Depth To (ft) | Survey (Wellbore) | Tool Name | Remarks | |
| 1 | 0.00 | 20,903.46 | Permitting Plan (Wellbore #1) | B001Mb_MWD+HRGM | |
| | | | | OWSG MWD + HRGM | |

| | | | | | | | | | | |
|----------------------------|------------------------|--------------------|----------------------------|-------------------|-------------------|------------------------------|-----------------------------|----------------------------|----------------|----------------|
| Plan Sections | | | | | | | | | | |
| Measured Depth (ft) | Inclination (°) | Azimuth (°) | Vertical Depth (ft) | +N/-S (ft) | +E/-W (ft) | Dogleg Rate (°/100ft) | Build Rate (°/100ft) | Turn Rate (°/100ft) | TFO (°) | Target |
| 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | |
| 8,049.00 | 0.00 | 0.00 | 8,049.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | |
| 9,048.83 | 10.00 | 308.91 | 9,043.76 | 54.65 | -67.71 | 1.00 | 1.00 | 0.00 | 308.91 | |
| 9,925.91 | 10.00 | 308.91 | 9,907.52 | 150.30 | -186.20 | 0.00 | 0.00 | 0.00 | 0.00 | |
| 10,889.46 | 90.05 | 179.70 | 10,537.50 | -420.18 | -269.36 | 10.00 | 8.31 | -13.41 | -128.77 | |
| 20,903.46 | 90.05 | 179.70 | 10,528.00 | -10,434.03 | -217.06 | 0.00 | 0.00 | 0.00 | 0.00 | PBHL (Depth CC |

OXY

Planning Report

| | | | |
|------------------|-------------------------------------|-------------------------------------|-----------------------------------|
| Database: | HOPSPP | Local Co-ordinate Reference: | Well Depth CC 6_7 Federal Com 41H |
| Company: | ENGINEERING DESIGNS | TVD Reference: | RKB=25' @ 2992.00ft |
| Project: | PRD NM DIRECTIONAL PLANS (NAD 1983) | MD Reference: | RKB=25' @ 2992.00ft |
| Site: | Depth CC 6_7 | North Reference: | Grid |
| Well: | Depth CC 6_7 Federal Com 41H | Survey Calculation Method: | Minimum Curvature |
| Wellbore: | Wellbore #1 | | |
| Design: | Permitting Plan | | |

| Planned Survey | | | | | | | | | |
|---------------------|-----------------|-------------|---------------------|------------|------------|-----------------------|-----------------------|----------------------|---------------------|
| Measured Depth (ft) | Inclination (°) | Azimuth (°) | Vertical Depth (ft) | +N/-S (ft) | +E/-W (ft) | Vertical Section (ft) | Dogleg Rate (°/100ft) | Build Rate (°/100ft) | Turn Rate (°/100ft) |
| 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 100.00 | 0.00 | 0.00 | 100.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 200.00 | 0.00 | 0.00 | 200.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 300.00 | 0.00 | 0.00 | 300.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 400.00 | 0.00 | 0.00 | 400.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 500.00 | 0.00 | 0.00 | 500.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 600.00 | 0.00 | 0.00 | 600.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 700.00 | 0.00 | 0.00 | 700.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 800.00 | 0.00 | 0.00 | 800.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 900.00 | 0.00 | 0.00 | 900.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 1,000.00 | 0.00 | 0.00 | 1,000.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 1,100.00 | 0.00 | 0.00 | 1,100.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 1,200.00 | 0.00 | 0.00 | 1,200.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 1,300.00 | 0.00 | 0.00 | 1,300.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 1,400.00 | 0.00 | 0.00 | 1,400.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 1,500.00 | 0.00 | 0.00 | 1,500.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 1,600.00 | 0.00 | 0.00 | 1,600.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 1,700.00 | 0.00 | 0.00 | 1,700.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 1,800.00 | 0.00 | 0.00 | 1,800.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 1,900.00 | 0.00 | 0.00 | 1,900.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 2,000.00 | 0.00 | 0.00 | 2,000.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 2,100.00 | 0.00 | 0.00 | 2,100.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 2,200.00 | 0.00 | 0.00 | 2,200.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 2,300.00 | 0.00 | 0.00 | 2,300.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 2,400.00 | 0.00 | 0.00 | 2,400.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 2,500.00 | 0.00 | 0.00 | 2,500.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 2,600.00 | 0.00 | 0.00 | 2,600.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 2,700.00 | 0.00 | 0.00 | 2,700.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 2,800.00 | 0.00 | 0.00 | 2,800.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 2,900.00 | 0.00 | 0.00 | 2,900.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 3,000.00 | 0.00 | 0.00 | 3,000.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 3,100.00 | 0.00 | 0.00 | 3,100.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 3,200.00 | 0.00 | 0.00 | 3,200.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 3,300.00 | 0.00 | 0.00 | 3,300.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 3,400.00 | 0.00 | 0.00 | 3,400.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 3,500.00 | 0.00 | 0.00 | 3,500.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 3,600.00 | 0.00 | 0.00 | 3,600.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 3,700.00 | 0.00 | 0.00 | 3,700.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 3,800.00 | 0.00 | 0.00 | 3,800.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 3,900.00 | 0.00 | 0.00 | 3,900.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 4,000.00 | 0.00 | 0.00 | 4,000.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 4,100.00 | 0.00 | 0.00 | 4,100.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 4,200.00 | 0.00 | 0.00 | 4,200.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 4,300.00 | 0.00 | 0.00 | 4,300.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 4,400.00 | 0.00 | 0.00 | 4,400.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 4,500.00 | 0.00 | 0.00 | 4,500.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 4,600.00 | 0.00 | 0.00 | 4,600.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 4,700.00 | 0.00 | 0.00 | 4,700.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 4,800.00 | 0.00 | 0.00 | 4,800.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 4,900.00 | 0.00 | 0.00 | 4,900.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 5,000.00 | 0.00 | 0.00 | 5,000.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 5,100.00 | 0.00 | 0.00 | 5,100.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 5,200.00 | 0.00 | 0.00 | 5,200.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 5,300.00 | 0.00 | 0.00 | 5,300.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 5,400.00 | 0.00 | 0.00 | 5,400.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

OXY

Planning Report

| | | | |
|------------------|-------------------------------------|-------------------------------------|-----------------------------------|
| Database: | HOPSPP | Local Co-ordinate Reference: | Well Depth CC 6_7 Federal Com 41H |
| Company: | ENGINEERING DESIGNS | TVD Reference: | RKB=25' @ 2992.00ft |
| Project: | PRD NM DIRECTIONAL PLANS (NAD 1983) | MD Reference: | RKB=25' @ 2992.00ft |
| Site: | Depth CC 6_7 | North Reference: | Grid |
| Well: | Depth CC 6_7 Federal Com 41H | Survey Calculation Method: | Minimum Curvature |
| Wellbore: | Wellbore #1 | | |
| Design: | Permitting Plan | | |

| Planned Survey | | | | | | | | | |
|---------------------|-----------------|-------------|---------------------|------------|------------|-----------------------|-----------------------|----------------------|---------------------|
| Measured Depth (ft) | Inclination (°) | Azimuth (°) | Vertical Depth (ft) | +N/-S (ft) | +E/-W (ft) | Vertical Section (ft) | Dogleg Rate (°/100ft) | Build Rate (°/100ft) | Turn Rate (°/100ft) |
| 5,500.00 | 0.00 | 0.00 | 5,500.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 5,600.00 | 0.00 | 0.00 | 5,600.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 5,700.00 | 0.00 | 0.00 | 5,700.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 5,800.00 | 0.00 | 0.00 | 5,800.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 5,900.00 | 0.00 | 0.00 | 5,900.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 6,000.00 | 0.00 | 0.00 | 6,000.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 6,100.00 | 0.00 | 0.00 | 6,100.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 6,200.00 | 0.00 | 0.00 | 6,200.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 6,300.00 | 0.00 | 0.00 | 6,300.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 6,400.00 | 0.00 | 0.00 | 6,400.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 6,500.00 | 0.00 | 0.00 | 6,500.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 6,600.00 | 0.00 | 0.00 | 6,600.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 6,700.00 | 0.00 | 0.00 | 6,700.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 6,800.00 | 0.00 | 0.00 | 6,800.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 6,900.00 | 0.00 | 0.00 | 6,900.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 7,000.00 | 0.00 | 0.00 | 7,000.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 7,100.00 | 0.00 | 0.00 | 7,100.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 7,200.00 | 0.00 | 0.00 | 7,200.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 7,300.00 | 0.00 | 0.00 | 7,300.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 7,400.00 | 0.00 | 0.00 | 7,400.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 7,500.00 | 0.00 | 0.00 | 7,500.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 7,600.00 | 0.00 | 0.00 | 7,600.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 7,700.00 | 0.00 | 0.00 | 7,700.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 7,800.00 | 0.00 | 0.00 | 7,800.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 7,900.00 | 0.00 | 0.00 | 7,900.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 8,000.00 | 0.00 | 0.00 | 8,000.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 8,049.00 | 0.00 | 0.00 | 8,049.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 8,100.00 | 0.51 | 308.91 | 8,100.00 | 0.14 | -0.18 | -0.13 | 1.00 | 1.00 | 0.00 |
| 8,200.00 | 1.51 | 308.91 | 8,199.98 | 1.25 | -1.55 | -1.12 | 1.00 | 1.00 | 0.00 |
| 8,300.00 | 2.51 | 308.91 | 8,299.92 | 3.45 | -4.28 | -3.09 | 1.00 | 1.00 | 0.00 |
| 8,400.00 | 3.51 | 308.91 | 8,399.78 | 6.75 | -8.36 | -6.04 | 1.00 | 1.00 | 0.00 |
| 8,500.00 | 4.51 | 308.91 | 8,499.53 | 11.14 | -13.80 | -9.97 | 1.00 | 1.00 | 0.00 |
| 8,600.00 | 5.51 | 308.91 | 8,599.15 | 16.63 | -20.60 | -14.87 | 1.00 | 1.00 | 0.00 |
| 8,700.00 | 6.51 | 308.91 | 8,698.60 | 23.20 | -28.75 | -20.76 | 1.00 | 1.00 | 0.00 |
| 8,800.00 | 7.51 | 308.91 | 8,797.85 | 30.87 | -38.24 | -27.61 | 1.00 | 1.00 | 0.00 |
| 8,900.00 | 8.51 | 308.91 | 8,896.87 | 39.62 | -49.09 | -35.44 | 1.00 | 1.00 | 0.00 |
| 9,000.00 | 9.51 | 308.91 | 8,995.64 | 49.46 | -61.27 | -44.24 | 1.00 | 1.00 | 0.00 |
| 9,048.83 | 10.00 | 308.91 | 9,043.76 | 54.65 | -67.71 | -48.89 | 1.00 | 1.00 | 0.00 |
| 9,100.00 | 10.00 | 308.91 | 9,094.16 | 60.24 | -74.62 | -53.88 | 0.00 | 0.00 | 0.00 |
| 9,200.00 | 10.00 | 308.91 | 9,192.64 | 71.14 | -88.13 | -63.63 | 0.00 | 0.00 | 0.00 |
| 9,300.00 | 10.00 | 308.91 | 9,291.12 | 82.05 | -101.64 | -73.39 | 0.00 | 0.00 | 0.00 |
| 9,400.00 | 10.00 | 308.91 | 9,389.60 | 92.95 | -115.15 | -83.14 | 0.00 | 0.00 | 0.00 |
| 9,500.00 | 10.00 | 308.91 | 9,488.08 | 103.86 | -128.66 | -92.90 | 0.00 | 0.00 | 0.00 |
| 9,600.00 | 10.00 | 308.91 | 9,586.56 | 114.76 | -142.17 | -102.65 | 0.00 | 0.00 | 0.00 |
| 9,700.00 | 10.00 | 308.91 | 9,685.04 | 125.67 | -155.68 | -112.40 | 0.00 | 0.00 | 0.00 |
| 9,800.00 | 10.00 | 308.91 | 9,783.53 | 136.57 | -169.19 | -122.16 | 0.00 | 0.00 | 0.00 |
| 9,900.00 | 10.00 | 308.91 | 9,882.01 | 147.48 | -182.70 | -131.91 | 0.00 | 0.00 | 0.00 |
| 9,925.91 | 10.00 | 308.91 | 9,907.52 | 150.30 | -186.20 | -134.44 | 0.00 | 0.00 | 0.00 |
| 10,000.00 | 7.86 | 261.57 | 9,980.80 | 153.60 | -196.23 | -136.90 | 10.00 | -2.89 | -63.90 |
| 10,100.00 | 13.53 | 214.29 | 10,079.20 | 142.91 | -209.62 | -125.14 | 10.00 | 5.68 | -47.28 |
| 10,200.00 | 22.44 | 199.03 | 10,174.27 | 115.13 | -222.46 | -96.40 | 10.00 | 8.90 | -15.26 |
| 10,300.00 | 31.97 | 192.35 | 10,263.12 | 71.12 | -234.38 | -51.55 | 10.00 | 9.54 | -6.68 |
| 10,400.00 | 41.71 | 188.53 | 10,343.07 | 12.20 | -245.00 | 8.04 | 10.00 | 9.74 | -3.83 |
| 10,500.00 | 51.53 | 185.94 | 10,411.67 | -59.82 | -254.01 | 80.55 | 10.00 | 9.82 | -2.59 |
| 10,600.00 | 61.40 | 183.98 | 10,466.85 | -142.76 | -261.12 | 163.80 | 10.00 | 9.87 | -1.96 |

OXY

Planning Report

| | | | |
|------------------|-------------------------------------|-------------------------------------|-----------------------------------|
| Database: | HOPSPP | Local Co-ordinate Reference: | Well Depth CC 6_7 Federal Com 41H |
| Company: | ENGINEERING DESIGNS | TVD Reference: | RKB=25' @ 2992.00ft |
| Project: | PRD NM DIRECTIONAL PLANS (NAD 1983) | MD Reference: | RKB=25' @ 2992.00ft |
| Site: | Depth CC 6_7 | North Reference: | Grid |
| Well: | Depth CC 6_7 Federal Com 41H | Survey Calculation Method: | Minimum Curvature |
| Wellbore: | Wellbore #1 | | |
| Design: | Permitting Plan | | |

| Planned Survey | | | | | | | | | |
|---------------------|-----------------|-------------|---------------------|------------|------------|-----------------------|-----------------------|----------------------|---------------------|
| Measured Depth (ft) | Inclination (°) | Azimuth (°) | Vertical Depth (ft) | +N/-S (ft) | +E/-W (ft) | Vertical Section (ft) | Dogleg Rate (°/100ft) | Build Rate (°/100ft) | Turn Rate (°/100ft) |
| 10,700.00 | 71.29 | 182.36 | 10,506.92 | -234.10 | -266.13 | 255.25 | 10.00 | 9.89 | -1.62 |
| 10,800.00 | 81.19 | 180.92 | 10,530.68 | -331.07 | -268.88 | 352.11 | 10.00 | 9.90 | -1.44 |
| 10,889.46 | 90.05 | 179.70 | 10,537.50 | -420.18 | -269.36 | 440.95 | 10.00 | 9.91 | -1.36 |
| 10,900.00 | 90.05 | 179.70 | 10,537.49 | -430.72 | -269.31 | 451.45 | 0.00 | 0.00 | 0.00 |
| 11,000.00 | 90.05 | 179.70 | 10,537.40 | -530.72 | -268.78 | 551.07 | 0.00 | 0.00 | 0.00 |
| 11,100.00 | 90.05 | 179.70 | 10,537.30 | -630.71 | -268.26 | 650.68 | 0.00 | 0.00 | 0.00 |
| 11,200.00 | 90.05 | 179.70 | 10,537.21 | -730.71 | -267.74 | 750.30 | 0.00 | 0.00 | 0.00 |
| 11,300.00 | 90.05 | 179.70 | 10,537.11 | -830.71 | -267.22 | 849.91 | 0.00 | 0.00 | 0.00 |
| 11,400.00 | 90.05 | 179.70 | 10,537.02 | -930.71 | -266.69 | 949.53 | 0.00 | 0.00 | 0.00 |
| 11,500.00 | 90.05 | 179.70 | 10,536.92 | -1,030.71 | -266.17 | 1,049.14 | 0.00 | 0.00 | 0.00 |
| 11,600.00 | 90.05 | 179.70 | 10,536.83 | -1,130.71 | -265.65 | 1,148.76 | 0.00 | 0.00 | 0.00 |
| 11,700.00 | 90.05 | 179.70 | 10,536.73 | -1,230.71 | -265.13 | 1,248.37 | 0.00 | 0.00 | 0.00 |
| 11,800.00 | 90.05 | 179.70 | 10,536.64 | -1,330.70 | -264.60 | 1,347.99 | 0.00 | 0.00 | 0.00 |
| 11,900.00 | 90.05 | 179.70 | 10,536.54 | -1,430.70 | -264.08 | 1,447.60 | 0.00 | 0.00 | 0.00 |
| 12,000.00 | 90.05 | 179.70 | 10,536.45 | -1,530.70 | -263.56 | 1,547.22 | 0.00 | 0.00 | 0.00 |
| 12,100.00 | 90.05 | 179.70 | 10,536.35 | -1,630.70 | -263.04 | 1,646.83 | 0.00 | 0.00 | 0.00 |
| 12,200.00 | 90.05 | 179.70 | 10,536.26 | -1,730.70 | -262.52 | 1,746.45 | 0.00 | 0.00 | 0.00 |
| 12,300.00 | 90.05 | 179.70 | 10,536.16 | -1,830.70 | -261.99 | 1,846.06 | 0.00 | 0.00 | 0.00 |
| 12,400.00 | 90.05 | 179.70 | 10,536.07 | -1,930.70 | -261.47 | 1,945.68 | 0.00 | 0.00 | 0.00 |
| 12,500.00 | 90.05 | 179.70 | 10,535.97 | -2,030.69 | -260.95 | 2,045.29 | 0.00 | 0.00 | 0.00 |
| 12,600.00 | 90.05 | 179.70 | 10,535.88 | -2,130.69 | -260.43 | 2,144.91 | 0.00 | 0.00 | 0.00 |
| 12,700.00 | 90.05 | 179.70 | 10,535.78 | -2,230.69 | -259.90 | 2,244.53 | 0.00 | 0.00 | 0.00 |
| 12,800.00 | 90.05 | 179.70 | 10,535.69 | -2,330.69 | -259.38 | 2,344.14 | 0.00 | 0.00 | 0.00 |
| 12,900.00 | 90.05 | 179.70 | 10,535.59 | -2,430.69 | -258.86 | 2,443.76 | 0.00 | 0.00 | 0.00 |
| 13,000.00 | 90.05 | 179.70 | 10,535.50 | -2,530.69 | -258.34 | 2,543.37 | 0.00 | 0.00 | 0.00 |
| 13,100.00 | 90.05 | 179.70 | 10,535.40 | -2,630.69 | -257.82 | 2,642.99 | 0.00 | 0.00 | 0.00 |
| 13,200.00 | 90.05 | 179.70 | 10,535.31 | -2,730.68 | -257.29 | 2,742.60 | 0.00 | 0.00 | 0.00 |
| 13,300.00 | 90.05 | 179.70 | 10,535.21 | -2,830.68 | -256.77 | 2,842.22 | 0.00 | 0.00 | 0.00 |
| 13,400.00 | 90.05 | 179.70 | 10,535.12 | -2,930.68 | -256.25 | 2,941.83 | 0.00 | 0.00 | 0.00 |
| 13,500.00 | 90.05 | 179.70 | 10,535.03 | -3,030.68 | -255.73 | 3,041.45 | 0.00 | 0.00 | 0.00 |
| 13,600.00 | 90.05 | 179.70 | 10,534.93 | -3,130.68 | -255.20 | 3,141.06 | 0.00 | 0.00 | 0.00 |
| 13,700.00 | 90.05 | 179.70 | 10,534.84 | -3,230.68 | -254.68 | 3,240.68 | 0.00 | 0.00 | 0.00 |
| 13,800.00 | 90.05 | 179.70 | 10,534.74 | -3,330.68 | -254.16 | 3,340.29 | 0.00 | 0.00 | 0.00 |
| 13,900.00 | 90.05 | 179.70 | 10,534.65 | -3,430.67 | -253.64 | 3,439.91 | 0.00 | 0.00 | 0.00 |
| 14,000.00 | 90.05 | 179.70 | 10,534.55 | -3,530.67 | -253.11 | 3,539.52 | 0.00 | 0.00 | 0.00 |
| 14,100.00 | 90.05 | 179.70 | 10,534.46 | -3,630.67 | -252.59 | 3,639.14 | 0.00 | 0.00 | 0.00 |
| 14,200.00 | 90.05 | 179.70 | 10,534.36 | -3,730.67 | -252.07 | 3,738.75 | 0.00 | 0.00 | 0.00 |
| 14,300.00 | 90.05 | 179.70 | 10,534.27 | -3,830.67 | -251.55 | 3,838.37 | 0.00 | 0.00 | 0.00 |
| 14,400.00 | 90.05 | 179.70 | 10,534.17 | -3,930.67 | -251.03 | 3,937.98 | 0.00 | 0.00 | 0.00 |
| 14,500.00 | 90.05 | 179.70 | 10,534.08 | -4,030.67 | -250.50 | 4,037.60 | 0.00 | 0.00 | 0.00 |
| 14,600.00 | 90.05 | 179.70 | 10,533.98 | -4,130.66 | -249.98 | 4,137.21 | 0.00 | 0.00 | 0.00 |
| 14,700.00 | 90.05 | 179.70 | 10,533.89 | -4,230.66 | -249.46 | 4,236.83 | 0.00 | 0.00 | 0.00 |
| 14,800.00 | 90.05 | 179.70 | 10,533.79 | -4,330.66 | -248.94 | 4,336.44 | 0.00 | 0.00 | 0.00 |
| 14,900.00 | 90.05 | 179.70 | 10,533.70 | -4,430.66 | -248.41 | 4,436.06 | 0.00 | 0.00 | 0.00 |
| 15,000.00 | 90.05 | 179.70 | 10,533.60 | -4,530.66 | -247.89 | 4,535.67 | 0.00 | 0.00 | 0.00 |
| 15,100.00 | 90.05 | 179.70 | 10,533.51 | -4,630.66 | -247.37 | 4,635.29 | 0.00 | 0.00 | 0.00 |
| 15,200.00 | 90.05 | 179.70 | 10,533.41 | -4,730.66 | -246.85 | 4,734.90 | 0.00 | 0.00 | 0.00 |
| 15,300.00 | 90.05 | 179.70 | 10,533.32 | -4,830.66 | -246.32 | 4,834.52 | 0.00 | 0.00 | 0.00 |
| 15,400.00 | 90.05 | 179.70 | 10,533.22 | -4,930.65 | -245.80 | 4,934.13 | 0.00 | 0.00 | 0.00 |
| 15,500.00 | 90.05 | 179.70 | 10,533.13 | -5,030.65 | -245.28 | 5,033.75 | 0.00 | 0.00 | 0.00 |
| 15,600.00 | 90.05 | 179.70 | 10,533.03 | -5,130.65 | -244.76 | 5,133.36 | 0.00 | 0.00 | 0.00 |
| 15,700.00 | 90.05 | 179.70 | 10,532.94 | -5,230.65 | -244.24 | 5,232.98 | 0.00 | 0.00 | 0.00 |
| 15,800.00 | 90.05 | 179.70 | 10,532.84 | -5,330.65 | -243.71 | 5,332.59 | 0.00 | 0.00 | 0.00 |
| 15,900.00 | 90.05 | 179.70 | 10,532.75 | -5,430.65 | -243.19 | 5,432.21 | 0.00 | 0.00 | 0.00 |
| 16,000.00 | 90.05 | 179.70 | 10,532.65 | -5,530.65 | -242.67 | 5,531.82 | 0.00 | 0.00 | 0.00 |

OXY

Planning Report

| | | | |
|------------------|-------------------------------------|-------------------------------------|-----------------------------------|
| Database: | HOPSPP | Local Co-ordinate Reference: | Well Depth CC 6_7 Federal Com 41H |
| Company: | ENGINEERING DESIGNS | TVD Reference: | RKB=25' @ 2992.00ft |
| Project: | PRD NM DIRECTIONAL PLANS (NAD 1983) | MD Reference: | RKB=25' @ 2992.00ft |
| Site: | Depth CC 6_7 | North Reference: | Grid |
| Well: | Depth CC 6_7 Federal Com 41H | Survey Calculation Method: | Minimum Curvature |
| Wellbore: | Wellbore #1 | | |
| Design: | Permitting Plan | | |

| Planned Survey | | | | | | | | | |
|---------------------|-----------------|-------------|---------------------|------------|------------|-----------------------|-----------------------|----------------------|---------------------|
| Measured Depth (ft) | Inclination (°) | Azimuth (°) | Vertical Depth (ft) | +N/-S (ft) | +E/-W (ft) | Vertical Section (ft) | Dogleg Rate (°/100ft) | Build Rate (°/100ft) | Turn Rate (°/100ft) |
| 16,100.00 | 90.05 | 179.70 | 10,532.56 | -5,630.64 | -242.15 | 5,631.44 | 0.00 | 0.00 | 0.00 |
| 16,200.00 | 90.05 | 179.70 | 10,532.46 | -5,730.64 | -241.62 | 5,731.05 | 0.00 | 0.00 | 0.00 |
| 16,300.00 | 90.05 | 179.70 | 10,532.37 | -5,830.64 | -241.10 | 5,830.67 | 0.00 | 0.00 | 0.00 |
| 16,400.00 | 90.05 | 179.70 | 10,532.27 | -5,930.64 | -240.58 | 5,930.29 | 0.00 | 0.00 | 0.00 |
| 16,500.00 | 90.05 | 179.70 | 10,532.18 | -6,030.64 | -240.06 | 6,029.90 | 0.00 | 0.00 | 0.00 |
| 16,600.00 | 90.05 | 179.70 | 10,532.08 | -6,130.64 | -239.53 | 6,129.52 | 0.00 | 0.00 | 0.00 |
| 16,700.00 | 90.05 | 179.70 | 10,531.99 | -6,230.64 | -239.01 | 6,229.13 | 0.00 | 0.00 | 0.00 |
| 16,800.00 | 90.05 | 179.70 | 10,531.89 | -6,330.63 | -238.49 | 6,328.75 | 0.00 | 0.00 | 0.00 |
| 16,900.00 | 90.05 | 179.70 | 10,531.80 | -6,430.63 | -237.97 | 6,428.36 | 0.00 | 0.00 | 0.00 |
| 17,000.00 | 90.05 | 179.70 | 10,531.70 | -6,530.63 | -237.45 | 6,527.98 | 0.00 | 0.00 | 0.00 |
| 17,100.00 | 90.05 | 179.70 | 10,531.61 | -6,630.63 | -236.92 | 6,627.59 | 0.00 | 0.00 | 0.00 |
| 17,200.00 | 90.05 | 179.70 | 10,531.51 | -6,730.63 | -236.40 | 6,727.21 | 0.00 | 0.00 | 0.00 |
| 17,300.00 | 90.05 | 179.70 | 10,531.42 | -6,830.63 | -235.88 | 6,826.82 | 0.00 | 0.00 | 0.00 |
| 17,400.00 | 90.05 | 179.70 | 10,531.32 | -6,930.63 | -235.36 | 6,926.44 | 0.00 | 0.00 | 0.00 |
| 17,500.00 | 90.05 | 179.70 | 10,531.23 | -7,030.62 | -234.83 | 7,026.05 | 0.00 | 0.00 | 0.00 |
| 17,600.00 | 90.05 | 179.70 | 10,531.13 | -7,130.62 | -234.31 | 7,125.67 | 0.00 | 0.00 | 0.00 |
| 17,700.00 | 90.05 | 179.70 | 10,531.04 | -7,230.62 | -233.79 | 7,225.28 | 0.00 | 0.00 | 0.00 |
| 17,800.00 | 90.05 | 179.70 | 10,530.94 | -7,330.62 | -233.27 | 7,324.90 | 0.00 | 0.00 | 0.00 |
| 17,900.00 | 90.05 | 179.70 | 10,530.85 | -7,430.62 | -232.74 | 7,424.51 | 0.00 | 0.00 | 0.00 |
| 18,000.00 | 90.05 | 179.70 | 10,530.76 | -7,530.62 | -232.22 | 7,524.13 | 0.00 | 0.00 | 0.00 |
| 18,100.00 | 90.05 | 179.70 | 10,530.66 | -7,630.62 | -231.70 | 7,623.74 | 0.00 | 0.00 | 0.00 |
| 18,200.00 | 90.05 | 179.70 | 10,530.57 | -7,730.61 | -231.18 | 7,723.36 | 0.00 | 0.00 | 0.00 |
| 18,300.00 | 90.05 | 179.70 | 10,530.47 | -7,830.61 | -230.66 | 7,822.97 | 0.00 | 0.00 | 0.00 |
| 18,400.00 | 90.05 | 179.70 | 10,530.38 | -7,930.61 | -230.13 | 7,922.59 | 0.00 | 0.00 | 0.00 |
| 18,500.00 | 90.05 | 179.70 | 10,530.28 | -8,030.61 | -229.61 | 8,022.20 | 0.00 | 0.00 | 0.00 |
| 18,600.00 | 90.05 | 179.70 | 10,530.19 | -8,130.61 | -229.09 | 8,121.82 | 0.00 | 0.00 | 0.00 |
| 18,700.00 | 90.05 | 179.70 | 10,530.09 | -8,230.61 | -228.57 | 8,221.43 | 0.00 | 0.00 | 0.00 |
| 18,800.00 | 90.05 | 179.70 | 10,530.00 | -8,330.61 | -228.04 | 8,321.05 | 0.00 | 0.00 | 0.00 |
| 18,900.00 | 90.05 | 179.70 | 10,529.90 | -8,430.60 | -227.52 | 8,420.66 | 0.00 | 0.00 | 0.00 |
| 19,000.00 | 90.05 | 179.70 | 10,529.81 | -8,530.60 | -227.00 | 8,520.28 | 0.00 | 0.00 | 0.00 |
| 19,100.00 | 90.05 | 179.70 | 10,529.71 | -8,630.60 | -226.48 | 8,619.89 | 0.00 | 0.00 | 0.00 |
| 19,200.00 | 90.05 | 179.70 | 10,529.62 | -8,730.60 | -225.96 | 8,719.51 | 0.00 | 0.00 | 0.00 |
| 19,300.00 | 90.05 | 179.70 | 10,529.52 | -8,830.60 | -225.43 | 8,819.12 | 0.00 | 0.00 | 0.00 |
| 19,400.00 | 90.05 | 179.70 | 10,529.43 | -8,930.60 | -224.91 | 8,918.74 | 0.00 | 0.00 | 0.00 |
| 19,500.00 | 90.05 | 179.70 | 10,529.33 | -9,030.60 | -224.39 | 9,018.35 | 0.00 | 0.00 | 0.00 |
| 19,600.00 | 90.05 | 179.70 | 10,529.24 | -9,130.59 | -223.87 | 9,117.97 | 0.00 | 0.00 | 0.00 |
| 19,700.00 | 90.05 | 179.70 | 10,529.14 | -9,230.59 | -223.34 | 9,217.58 | 0.00 | 0.00 | 0.00 |
| 19,800.00 | 90.05 | 179.70 | 10,529.05 | -9,330.59 | -222.82 | 9,317.20 | 0.00 | 0.00 | 0.00 |
| 19,900.00 | 90.05 | 179.70 | 10,528.95 | -9,430.59 | -222.30 | 9,416.81 | 0.00 | 0.00 | 0.00 |
| 20,000.00 | 90.05 | 179.70 | 10,528.86 | -9,530.59 | -221.78 | 9,516.43 | 0.00 | 0.00 | 0.00 |
| 20,100.00 | 90.05 | 179.70 | 10,528.76 | -9,630.59 | -221.25 | 9,616.04 | 0.00 | 0.00 | 0.00 |
| 20,200.00 | 90.05 | 179.70 | 10,528.67 | -9,730.59 | -220.73 | 9,715.66 | 0.00 | 0.00 | 0.00 |
| 20,300.00 | 90.05 | 179.70 | 10,528.57 | -9,830.58 | -220.21 | 9,815.28 | 0.00 | 0.00 | 0.00 |
| 20,400.00 | 90.05 | 179.70 | 10,528.48 | -9,930.58 | -219.69 | 9,914.89 | 0.00 | 0.00 | 0.00 |
| 20,500.00 | 90.05 | 179.70 | 10,528.38 | -10,030.58 | -219.17 | 10,014.51 | 0.00 | 0.00 | 0.00 |
| 20,600.00 | 90.05 | 179.70 | 10,528.29 | -10,130.58 | -218.64 | 10,114.12 | 0.00 | 0.00 | 0.00 |
| 20,700.00 | 90.05 | 179.70 | 10,528.19 | -10,230.58 | -218.12 | 10,213.74 | 0.00 | 0.00 | 0.00 |
| 20,800.00 | 90.05 | 179.70 | 10,528.10 | -10,330.58 | -217.60 | 10,313.35 | 0.00 | 0.00 | 0.00 |
| 20,900.00 | 90.05 | 179.70 | 10,528.00 | -10,430.58 | -217.08 | 10,412.97 | 0.00 | 0.00 | 0.00 |
| 20,903.46 | 90.05 | 179.70 | 10,528.00 | -10,434.03 | -217.06 | 10,416.41 | 0.00 | 0.00 | 0.00 |

OXY

Planning Report

| | | | |
|------------------|-------------------------------------|-------------------------------------|-----------------------------------|
| Database: | HOPSPP | Local Co-ordinate Reference: | Well Depth CC 6_7 Federal Com 41H |
| Company: | ENGINEERING DESIGNS | TVD Reference: | RKB=25' @ 2992.00ft |
| Project: | PRD NM DIRECTIONAL PLANS (NAD 1983) | MD Reference: | RKB=25' @ 2992.00ft |
| Site: | Depth CC 6_7 | North Reference: | Grid |
| Well: | Depth CC 6_7 Federal Com 41H | Survey Calculation Method: | Minimum Curvature |
| Wellbore: | Wellbore #1 | | |
| Design: | Permitting Plan | | |

| Design Targets | | | | | | | | | |
|---|------------------|-----------------|-------------|---------------|---------------|--------------------|-------------------|-----------|-------------|
| Target Name - hit/miss target - Shape | Dip Angle (°) | Dip Dir. (°) | TVD (ft) | +N/-S (ft) | +E/-W (ft) | Northing (usft) | Easting (usft) | Latitude | Longitude |
| PBHL (Depth CC 6_7 - plan hits target center - Point | 0.00 | 0.00 | 10,528.00 | -10,434.03 | -217.06 | 445,745.97 | 634,766.40 | 32.225071 | -104.031199 |
| FTP (Depth CC 6_7 - plan misses target center by 204.24ft at 10469.65ft MD (10392.18 TVD, -36.70 N, -251.46 E) - Point | 0.00 | 0.00 | 10,538.00 | 104.81 | -272.10 | 456,283.94 | 634,711.36 | 32.254039 | -104.031281 |
| Pilot BHL (Depth CC - plan misses target center by 610.68ft at 10600.00ft MD (10466.85 TVD, -142.76 N, -261.12 E) - Point | 0.00 | 0.00 | 11,000.00 | 154.81 | -272.36 | 456,333.94 | 634,711.10 | 32.254176 | -104.031281 |

| Formations | | | | | |
|------------------------|------------------------|-----------------|-----------|------------|----------------------|
| Measured Depth (ft) | Vertical Depth (ft) | Name | Lithology | Dip (°) | Dip Direction (°) |
| 109.00 | 109.00 | RUSTLER | | | |
| 522.00 | 522.00 | SALADO | | | |
| 1,270.00 | 1,270.00 | CASTILE | | | |
| 2,736.00 | 2,736.00 | DELAWARE | | | |
| 2,785.00 | 2,785.00 | BELL CANYON | | | |
| 3,636.00 | 3,636.00 | CHERRY CANYON | | | |
| 4,875.00 | 4,875.00 | BRUSHY CANYON | | | |
| 6,457.00 | 6,457.00 | BONE SPRING | | | |
| 7,434.00 | 7,434.00 | BONE SPRING 1ST | | | |
| 8,191.01 | 8,191.00 | BONE SPRING 2ND | | | |
| 9,319.17 | 9,310.00 | BONE SPRING 3RD | | | |
| 9,687.77 | 9,673.00 | WOLFCAMP | | | |
| 9,811.65 | 9,795.00 | WOLFCAMP A | | | |

| Plan Annotations | | | | |
|------------------------|------------------------|-------------------|---------------|----------------------------|
| Measured Depth (ft) | Vertical Depth (ft) | Local Coordinates | | Comment |
| | | +N/-S (ft) | +E/-W (ft) | |
| 8,049.00 | 8,049.00 | 0.00 | 0.00 | Build 1°/100' |
| 9,048.83 | 9,043.76 | 54.65 | -67.71 | Hold 10° Tangent |
| 9,925.91 | 9,907.52 | 150.30 | -186.20 | KOP, Build & Turn 10°/100' |
| 10,889.46 | 10,537.50 | -420.18 | -269.36 | Landing Point |
| 20,903.46 | 10,528.00 | -10,434.03 | -217.06 | TD at 20903.46' MD |

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 145114

CONDITIONS

| | |
|--|--|
| Operator: OXY USA INC P.O. Box 4294 Houston, TX 772104294 | OGRID: 16696 |
| | Action Number: 145114 |
| | Action Type: [C-103] NOI Change of Plans (C-103A) |

CONDITIONS

| | | |
|------------|---|----------------|
| Created By | Condition | Condition Date |
| kpickford | Adhere to previous NMOCD Conditions of Approval | 9/22/2022 |