1625 N. French Dr., Hobbs, NM 88240

Phone: (575) 393-6161 Fax: (575) 393-0720 District II

811 S. First St., Artesia, NM 88210 Phone: (575) 748-1283 Fax: (575) 748-9720

District III 1000 Rio Brazos Road, Aztec, NM 87410 Phone: (505) 334-6178 Fax: (505) 334-6170

District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505 Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico

Form C-101 Revised July 18, 2013

Energy Minerals and Natural Resources

Oil Conservation Division

1220 South St. Francis Dr.

Santa Fe, NM 87505

□AMENDED REPORT

	Al	PPLICAT) DRILL, RE-EN	TER, DEEP	EN, PLU	GBAC			
				rator Name						2. (OGRID Numbe	
1		4021	SC	O Permia	n, LLC) +- 1020					330782	
		432.	D: (2	O Permia enville Av allas TX 7 214) 390	75206 -4076	te 1030					^{3.} API Number 30 - 025-50	227
332910	ty Code					⁵ Property N Teague 16	_{ame} State				6. We	II No. 2
						7. Surface Loc					-	
UL - Lot	Section	Township		Range	Lo	t Idn Feet fro	om N	/S Line	Fe	eet From	E/W Line	County
K	16	23 S		37 E	3-50	231	X	S	0.000	2310	W	Lea
						Proposed Botton		tion				
UL - Lot K	Section 16	Township 23 S		Range 37 E	Lo	t Idn Feet fro 231		/S Line S		eet From 2310	E/W Line W	County
IX	10	23.3	<u> </u>	37 L		9. Pool Inforn		3		2310	VV	Lea
				***************************************		Pool Name	iation					Pool Code
			_2_2		Teagu	e;San Andres, N	lorth					96197
			12000							2007		
11. Work			12. V	Well Type O		R		S	S 3		nd Level Elevation 3305'	
^{16.} Mul				posed Depth 6100'		18. Formation 19. Co		^{19.} Controle det	ontractor 20. Spud Date etermined Aug. 16, 20			
Depth to Groun	d water			Distar	nnce from nearest fresh water well				Distance to nearest surface water			
145' ir	CP 004	23			0.36 mi west of CP 00423 ≈2 mi				≈2 mi west	west of Rattlesnake Canyon		
A closed-lo	op system	will be u	sed ins	stead of lin	ed pits.							
				21.	Propo	sed Casing and	Cement Pr	ogram				
Туре	Hole	e Size	Casin	ng Size	Ca	nsing Weight/ft	Settin	g Depth		Sacks of C	ement	Estimated TOC
Surface	12.	.25"	9.6	625"	36# J-55		GL -	1010'		331		GL
Production 8.75" 5.5		.5#		17# J-55		GL - 6100'		500		GL		
8				Casin	g/Cem	ent Program: A	dditional (Comment	ts			
GL – 1000'	: fresh w	ater spu	d muc	d 1000)' – TC): brine water; V	Vill set CIBI	@ 4998	3' & t	op w/ 2 sx c	ement	
				22.	Propo	sed Blowout Pre	evention Pr	ogram				
	Туре				Working	g Pressure (psi)		Test Pres	sure (ps	si)	Ma	nufacturer
annul	ar & doul	ble rams				5000		25	00		S	chaffer
										•		
^{23.} I hereby cert of my knowled			n given	above is tru	e and co	implete to the best		OIL	CON	SERVATIO	ON DIVISI	ON

Approved By:

Approved Date:

Conditions of Approval Attached

03/31/2023

Expiration Date: 03/31/2025

Title:

E-mail Address: brian@permitswest.com

19.15.14.9 (B) NMAC □, if applicable.

Printed name: Brian Wood

Title: Consultant

Date: 3-20-23

Signature:

I further certify that I have complied with 19.15.14.9 (A) NMAC and/or

Phone: 505 466-8120

District I 1625 N. French Dr., Hobbs, NM 88240 Phone: (575) 393-6161 Fax: (575) 393-0720 District II 811 S. First St., Artesia, NM 88210 Phone: (575) 748-1283 Fax: (575) 748-9720 District III 1000 Rio Brazos Road, Aztec, NM 87410 Phone: (505) 334-6178 Fax: (505) 334-6170

1220 S. St. Francis Dr., Santa Fe, NM 87505 Phone: (505) 476-3460 Fax: (505) 476-3462

District IV

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102 Revised August 1, 2011 Submit one copy to appropriate District Office

AMENDED REPORT (CHANGE POOL)

Type text here

WELL LOCATION AND ACREAGE DEDICATION PLAT


Troperty code			TEAGUE; SAN ANDRES,	, NORTH	
		operty Name JE 16 STATE	⁶ Well Number 2		
⁷ OGRID No. 330782			erator Name RMIAN, LLC	⁹ Elevation 3305.8	

Surface Location

	UL or lot no. K	Section 16	Township 23 S	Range 37 E	Lot Idn	Feet from the 2310	SOUTH	2310	WEST	LEA	
	Bottom Hole Location If Different From Surface										,
ſ	III or lot no	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County	ı

12 Dedicated Acres 13 Joint or Infill 14 Consolidation Code 40.00

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

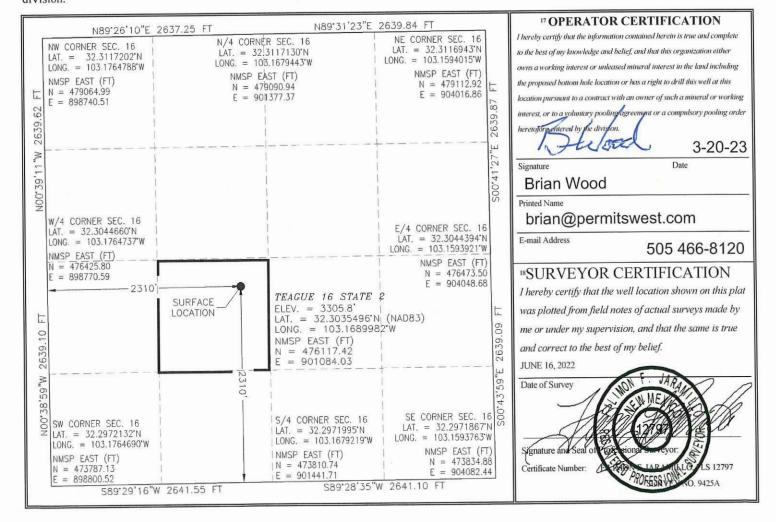

State of New Mexico Energy, Minerals and Natural Resources Department

Submit Electronically Via E-permitting

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description <u>Effective May 25, 2021</u>

I. Operator: SCO P	ermian, LLC		OGRID: 33	307892	Da	nte: 03 /	20 /23
II. Type: ☐ Original	☐ Amendment	due to □ 19.15.27.	.9.D(6)(a) NMA	C □ 19.15.27.9.D((6)(b) NMAC	☑ Other.	
If Other, please describ	_{e։} Change բ	oool, anticipate	d volumes, 8	& dates			
III. Well(s): Provide the recompleted from a	ne following inf single well pad	formation for each to or connected to a c	new or recomple central delivery p	ted well or set of voint.	wells propose	d to be dri	illed or proposed to
Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipate Gas MCF/		Anticipated Produced Water BBL/D
Teague 16 State 2	30-025-50227	K-16-23s-37e	2310 FSL & 2310 FWL	5	75		275
V. Anticipated Schedu proposed to be recompl	le: Provide the eted from a sin	following informating the following information for the following in formation for the following in formation for the following information for the followin	tion for each new	or recompleted wal delivery point.	vell or set of v	vells propo	27.9(D)(1) NMAC] osed to be drilled or
Well Name	API	Spud Date	TD Reached Date	Completion Commencement		ial Flow ck Date	First Production Date
Teague 16 State 2	30-025-50227	8-22-22	9-1-22	4-1-23	4	-10-23	4-15-23
VI. Separation Equipm VII. Operational Prac Subsection A through F VIII. Best Management during active and planner	tices: Attac of 19.15.27.8 int Practices:	h a complete descr NMAC. I Attach a complet	iption of the act	ions Operator will	I take to com	ply with t	he requirements of

Section 2 – Enhanced Plan <u>EFFECTIVE APRIL 1, 2022</u>

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF

X. Natural Gas Gathering System (NGGS):

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in

XI. Map. \square Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the
production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of
the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system \square will \square will not have capacity to gather 100% of the anticipated nat	tural ga	as
production volume from the well prior to the date of first production.	8	

XIII. Line Pressure. Operator \square does \square does not anticipate that its existing well(s) connected to the same segment, or portion, of the	ıe
natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s)	١.

☐ Attach Operator's plan to manage production in response to the	increased line pressure
--	-------------------------

XIV. Confidentiality: Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided
Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information
for which confidentiality is asserted and the basis for such assertion.

(i)

Section 3 - Certifications Effective May 25, 2021

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal: Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or □ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system. If Operator checks this box, Operator will select one of the following: Well Shut-In.

Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or Venting and Flaring Plan.

Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including: (a) power generation on lease; (b) power generation for grid; compression on lease; (c) (d) liquids removal on lease; (e) reinjection for underground storage; (f) reinjection for temporary storage; reinjection for enhanced oil recovery; (g) (h) fuel cell production; and

Section 4 - Notices

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

other alternative beneficial uses approved by the division.

- (a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or
- Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas (b) capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.
- 2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act. Signature: Printed Name: **Brian Wood** Title: Consultant brian@permitswest.com E-mail Address: Date: 3-20-23 Phone: 505 466-8120 OIL CONSERVATION DIVISION (Only applicable when submitted as a standalone form) Approved By: Title: Approval Date: Conditions of Approval:

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct

VI. SEPARATION EQUIPMENT

SCO Permian, LLC tentatively plans to install a 4' x 20' heater-treater based on estimated volumes. Associated equipment will include:

fuel safety shut-off valve gas scrubber oil tanks (two 500 bbl) separator (3-phase) vapor recovery tower vapor recovery piping for all tanks water tank (one 500 bbl)



VII. Operational Practices

NMAC 19.15.27.8 (A) Venting & Flaring of Natural Gas

 SCO Permian, LLC will comply NMAC 19.15.27.8 – venting and flaring of gas during drilling, completion, or production that constitutes waste as defined in 19.15.2 is banned.

NMAC 19.15.27.8 (B) Venting & Flaring During Drilling

- 1. SCO will capture or combust gas if technically feasible during drilling operations using best industry practices.
- 2. A flare stack with a 100% capacity for expected volume will be set on the pad \geq 100 feet from the nearest well head and storage tank.
- 3. In an emergency, SCO will vent gas in order to avoid substantial impact. SCO will report vented or flared gas to the NMOCD.

NMAC 19.15.27.8 (C) Venting & Flaring During Completion or Recompletion

- 1. Facilities will be built and ready from the first day of flowback
- 2. Test separator will be properly separate gas and liquids. Temporary test separator will be used initially to process volumes. In addition, separator will be tied into flowback tanks which will be tied into the gas processing equipment for sale down a pipeline.
- 3. Should the facility not be ready to process gas, or the gas does not meet quality standards, then storage tanks will be set that are tied into gas busters or a temporary flare to manage all gas. This flare would meet the following requirements:
 - a) An appropriate sized flare stack with an automatic igniter
 - b) SCO analyzes gas samples twice a week
 - c) SCO flows the gas into a gathering line as soon as the pipeline specifications are met
 - d) SCO provides the NMOCD with pipeline specifications and natural gas data.

NMAC 19.15.27.8 (D) Venting & Flaring During Production

SCO will not vent or flare natural gas except:

- 1. During an emergency or malfunction
- 2. To unload or clean-up liquid holdup in a well to atmospheric pressure, provided
 - a) SCO does not vent after the well achieves a stabilized rate and pressure
 - b) SCO will be on-site while unloading liquids by manual purging and take all reasonable actions to achieve a stabilized rate and pressure as soon as possible



- c) SCO will optimize the system to minimize gas venting if the well is equipped with a plunger lift or auto control system
- d) Best management practices will be used during downhole well maintenance.
- 3. During the first year of production from an exploratory well provided
 - a) SCO receives approval from the NMOCD
 - b) SCO stays in compliance with NMOCD gas capture requirements
 - c) SCO submits an updated C-129 form to the NMOCD
- 4. During the following activities unless prohibited
 - a) Gauging or sampling a storage tank or low-pressure production vessel
 - b) Loading out liquids from a storage tank
 - c) Repair and maintenance
 - d) Normal operation of a gas-activated pneumatic controller or pump
 - e) Normal operation of a storage tank but not including venting from a thief hatch
 - f) Normal operation of dehydration units
 - g) Normal operations of compressors, engines, turbines, valves, flanges, & connectors
 - h) During a Braden head, packer leaka test, or production test lasting <24 hours
 - i) When natural gas does not meet the gathering line specifications
 - j) Commissioning of lines, equipment, or facilities only for as long as necessary to purge introduced impurities.

NMAC 19.15.27.8 (E) Performance Standards

- 1. SCO used a safety factor to design the separation and storage equipment. The equipment will be routed to a vapor recovery system and uses a flare as back up for startup, shutdown, maintenance, or malfunction of the VRU system.
- 2. SCO will install a flare that will handle the full facility vapor volume in case the VRU fails. It will have an auto-ignition system.
- 3. Flare stacks will be appropriately sized and designed to ensure proper combustion efficiency
 - a) Flare stacks installed or replaced will be equipped with an automatic ignitor or continuous pilot.
 - b) Previously installed flare stacks will be retrofitted within 18 months of May 25, 2021 with an automatic ignitor, continuous pilot, or technology that alerts SCO to flare malfunction.
 - c) Flare stacks replaced after May 25, 2021 will be equipped with an automatic ignitor or continuous pilot if at a well or facility with an average production of ≤60 Mcfd of natural gas.
 - d) Flare stacks will be located >100 feet from well head and storage tanks and securely anchored.
- 4. SCO will conduct an audio/visual/olfactory inspection on all components for leaks and defects every week.



- 5. SCO will make and keep records of AVO inspections available to the NMOCD for at least 5 years.
- 6. SCO may use a remote or automated monitoring technology to detect leaks and releases in lieu of AVO inspections with prior NMOCD approval.
- 7. Facilities will be designed to minimize waste.
- 8. SCO will resolve emergencies as promptly as possible.

NMAC 19.15.27.8 (F) Measuring or Estimating Vented & Flared Natural Gas

- 1. SCO will have meters on both the low pressure and high-pressure sides of the flares. Volumes will be recorded in the SCADA system.
- 2. SCO will install equipment to measure the volume of flared natural gas that has an average production of <a>>60 Mcfd.
- 3. SCO's measuring equipment will conform to industry standards.
- 4. Measurement system will be designed such that it cannot be bypassed except for inspections and servicing the meters.
- 5. SCO will estimate the volume of vented or flared gas using a methodology that can be independently verified if metering is not practicable due to low flow rate or pressure.
- 6. SCO will estimate the volume of vented and flared gas based on the results of an annual GOR test for wells that do not require measuring equipment reported on form C-116.
- 7. SCO will install measuring equipment whenever the NMOCD determines that metering is necessary.



VIII. Best Management Practices

SCO Permian LLC will minimize venting during maintenance by:

- 1. Designing and operating system to route storage tank and process equipment emissions to the VRU. If the VRU is not operable, then vapors will be routed to the flare.
- 2. Scheduling maintenance for multiple tasks to minimize the need for blowdowns.
- 3. After completion of maintenance, gas will be flared until it meets pipeline specifications.



Operator:

SCO PERMIAN, LLC

Well Name: TEAQUE 16 STATE 002

API: 30-025-50227


Formation: PADDOCK-BLINEBRY Formation


County, State: Lea, NM

Field: PADDOCK-BLINEBRY

SH Location: 2310' FSL & 2310' FWL of Section 16 T23S R37E BH Location: 2310' FSL & 2310' FWL of Section 16 T23S R37E

Surface Latitude: 32.3035496 Surface Longitude: -103.1689982 KB Elevation: 3,317.0' Ground Elevation: 3,305.0

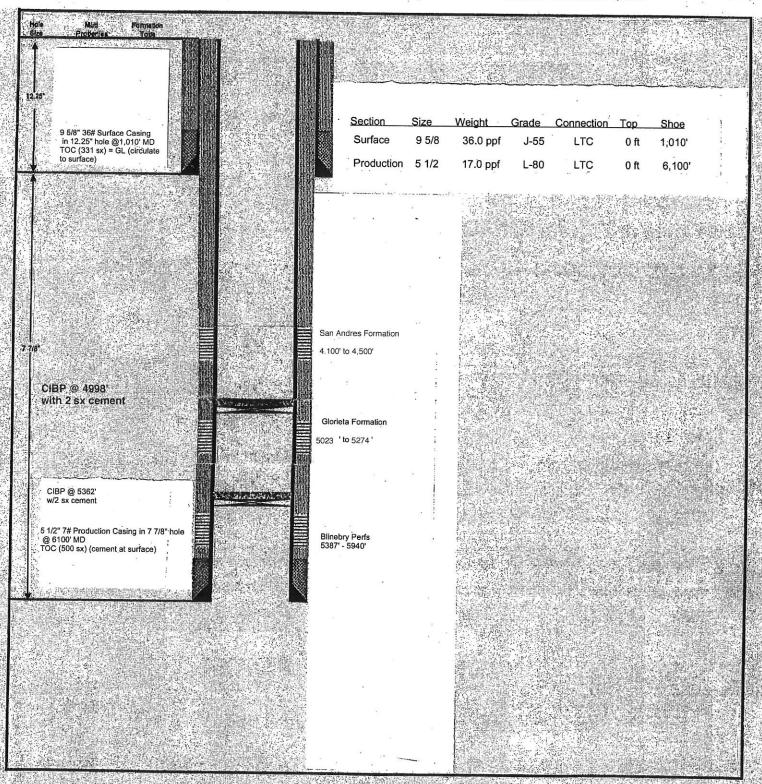

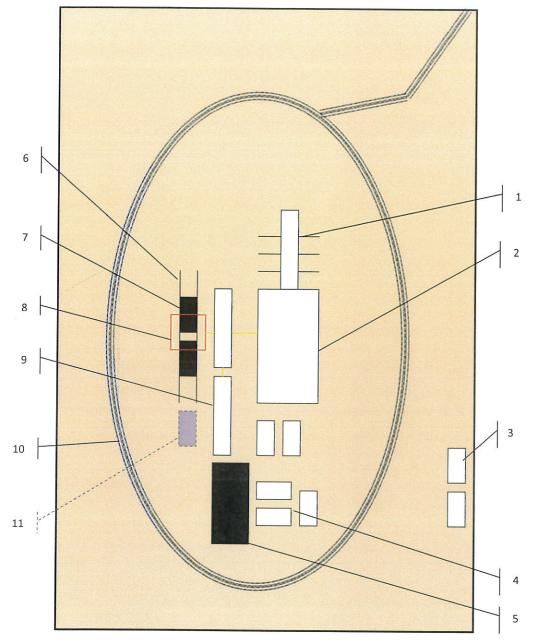

Schematic Closed Loop Drilling Rig*

- 1. Pipe Rack
- 2. Drill Rig
- 3. House Trailers/ Offices
- 4. Generator/Fuel/Storage
- 5. Overflow-Frac Tank
- 6. Skids
- 7. Roll Offs
- 8. Hopper or Centrifuge
- 9. Mud Tanks
- 10. Loop Drive
- 11. Generator (only for use with centrifuge)

*Not drawn to scale: Closed loop system requires at least 30 feet beyond mud tanks. Ideally 60 feet would be available





Above: Centrifugal Closed Loop System



Closed Loop Drilling System: Mud tanks to right (1)


Hopper in air to settle out solids (2)

Water return pipe (3)

Shaker between hopper and mud tanks (4)

Roll offs on skids (5)

Flow Chart for Drilling Fluids and Solids

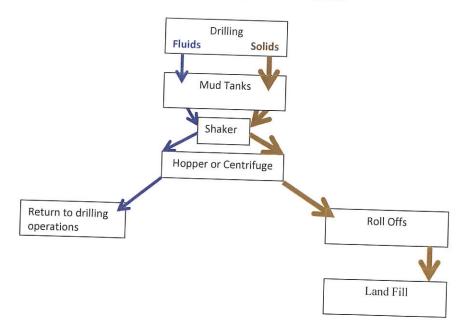

Photos Courtesy of Gandy Corporation Oil Field Service



TEAGUE 16 No. Z

INSTRUCTIONS

This form is to be filed with the appropriate District Office of the Division not later than 20 days after the completion of any newly-drilled or deepened well and not later than 60 days after completion of closure. When submitted as a completion report, this shall be accompanied by one copy of all electrical and radio-activity logs run on the well and a summary of all special tests conducted, including drill stem tests. All depths reported shall be measured depths. In the case of directionally drilled wells, true vertical depths shall also be reported. For multiple completions, items 11, 12 and 26-31 shall be reported for each zone.

INDICATE FORMATION TOPS IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE

	Southeastern	New Mexico	Northwestern New Mexico		
T. Anhy	050	T. Canyon	T. Ojo Alamo	T. Penn A"	
T. Salt		T. Strawn_	T. Kirtland	T. Penn. "B"	
B. Salt		T. Atoka	T. Fruitland	T. Penn. "C"	
T. Yates	2620	T. Miss	T. Pictured Cliffs	T. Penn. "D"	
T. 7 Rivers	2830	T. Devonian	T. Cliff House	T. Leadville	
T. Queen	3364	T. Silurian_	T. Menefee	T. Madison	
T. Grayburg	3598	T. Montoya	T. Point Lookout	T. Elbert	
T. San Andres	3864	T. Simpson	T. Mancos	T. McCracken	
T. Glorieta	4982	T. McKee	T. Gallup	T. Ignacio Otzte	
T. Paddock		T. Ellenburger	Base Greenhorn	T.Granite	
T. Blinebry	5347	T. Gr. Wash	T. Dakota		
T.Tubb	60Z8'	T. Delaware Sand	T. Morrison		
T. Drinkard	,	T. Bone Springs	T.Todilto		
T. Abo		T. QUEEN PAY 3480	T. Entrada		
T. Wolfcamp		T	T. Wingate		
T. Penn		Т	T. Chinle		
T. Cisco (Bough C)	T	T. Permian	OIL OR GAS	

No 1 from 3364	to 3598	No. 3, from. 4982' No. 4, from. 5347'	SANDS OR ZONES
No. 2 from 3864	to 4982	No. 4, from. 5347	to 6028
	IMPORTANT	WATER SANDS	
Include data on rate of water in	flow and elevation to which was	ter rose in hole.	
No. 1, from	to	feet	~
		feet	
		feet	
*		(Attach additional sheet if neces	

	LITHOLOGY RECORD (Attach additional sheet if necessary)							
From	То	Thickness In Feet	Lithology		From	То	Thickness In Feet	Lithology
1050	2620	1570	ANHYDRITE					
2620	2830	210	SANDSTONE & DOLOMITE					
2830	3364	634	DOLOMITE SANDSTONE					*
3364	3598	234	SANDSTONE & DOLOMITE					
3598	3864	266	DOLOMITE SANDSTONE					
3864	498Z	1118	DULOMITE /					4
4982	5347	365	DOLOMITE & SANDSTONE					
5347	6028	681	DOLOMITE & SANDSTONE DOLOMITE & SANDSTONE DOLOMITE & SANDSTONE					
6028	6100	72	VOLOMILE & OHNDOTONE					

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

District II

811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720 District III 1000 Rio Brazos Rd., Aztec, NM 87410

Phone:(505) 334-6178 Fax:(505) 334-6170

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. **Santa Fe, NM 87505**

CONDITIONS

Action 198872

CONDITIONS

Operator:	OGRID:
SCO PERMIAN, LLC	330782
5728 NW 132nd Street Oklahoma City, OK 73142	Action Number: 198872
	Action Type: [C-101] Drilling Non-Federal/Indian (APD)

CONDITIONS

Created By		Condition Date
pkautz	None	3/31/2023