

District I

1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form C-101

August 1, 2011

Permit 340608

APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE

1. Operator Name and Address LONGFELLOW ENERGY, LP 8115 Preston Road Dallas, TX 75225		2. OGRID Number 372210
		3. API Number 30-015-53818
4. Property Code 334079	5. Property Name Marley State Com 31 AB	6. Well No. 001H

7. Surface Location

UL - Lot A	Section 36	Township 17S	Range 27E	Lot Idn	Feet From 1045	N/S Line N	Feet From 1210	E/W Line E	County Eddy
---------------	---------------	-----------------	--------------	---------	-------------------	---------------	-------------------	---------------	----------------

8. Proposed Bottom Hole Location

UL - Lot A	Section 31	Township 17S	Range 28E	Lot Idn A	Feet From 390	N/S Line N	Feet From 20	E/W Line E	County Eddy
---------------	---------------	-----------------	--------------	--------------	------------------	---------------	-----------------	---------------	----------------

9. Pool Information

RED LAKE; GLORIETA-YESO, NORTHEAST	96836
------------------------------------	-------

Additional Well Information

11. Work Type New Well	12. Well Type OIL	13. Cable/Rotary	14. Lease Type State	15. Ground Level Elevation 3623
16. Multiple N	17. Proposed Depth 9212	18. Formation Yeso	19. Contractor	20. Spud Date 6/1/2023
Depth to Ground water		Distance from nearest fresh water well		Distance to nearest surface water

☒ We will be using a closed-loop system in lieu of lined pits**21. Proposed Casing and Cement Program**

Type	Hole Size	Casing Size	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC
Surf	12.25	9.625	36	1300	650	0
Prod	8.75	7	32	3917	735	1050
Prod	8.75	5.5	20	9212	735	1050

Casing/Cement Program: Additional Comments

--

22. Proposed Blowout Prevention Program

Type	Working Pressure	Test Pressure	Manufacturer
Double Ram	3000	3000	Shaffer
Blind	3000	3000	Shaffer

23. I hereby certify that the information given above is true and complete to the best of my knowledge and belief. I further certify I have complied with 19.15.14.9 (A) NMAC ☒ and/or 19.15.14.9 (B) NMAC ☒ if applicable.		OIL CONSERVATION DIVISION	
Signature:			
Printed Name:	Electronically filed by David Cain	Approved By:	Ward Rikala
Title:	Engineering Technologist	Title:	
Email Address:	david.cain@longfellowenergy.com	Approved Date:	5/30/2023
Date:	5/16/2023	Phone:	214-265-4715
		Expiration Date: 5/30/2025	
		Conditions of Approval Attached	

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720

District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170

District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office
☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-015-53818	² Pool Code 96836	³ Pool Name RED LAKE; GLORIETA-YESO, NORTHEAST
⁴ Property Code 334079	⁵ Property Name MARLEY STATE COM 31 AB	
⁷ OGRID No. 372210	⁸ Operator Name LONGFELLOW ENERGY, LP	⁶ Well Number 001H
		⁹ Elevation 3623.5

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
A	36	17 S	27 E		1045	NORTH	1210	EAST	EDDY

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
A	31	17 S	28 E		390	NORTH	20	EAST	EDDY

¹² Dedicated Acres	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.
327.09		C	

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

MAP DATA:

- NW CORNER SEC. 36: LAT. = 32.7979021°N, LONG. = 104.2408232°W, NMSP EAST (FT) N = 654021.62, E = 569763.43
- N/4 CORNER SEC. 36: LAT. = 32.7978419°N, LONG. = 104.2322059°W, NMSP EAST (FT) N = 654002.13, E = 572411.33
- SECTION CORNER: LAT. = 32.7977832°N, LONG. = 104.2235908°W, NMSP EAST (FT) N = 653983.43, E = 575058.52
- N/4 CORNER SEC. 31: LAT. = 32.7978197°N, LONG. = 104.2148231°W, NMSP EAST (FT) N = 653999.63, E = 577752.59
- NE CORNER SEC. 31: LAT. = 32.7978599°N, LONG. = 104.2064288°W, NMSP EAST (FT) N = 654017.25, E = 580331.94
- W/4 CORNER SEC. 36: LAT. = 32.7906662°N, LONG. = 104.2408127°W, NMSP EAST (FT) N = 651389.10, E = 569768.96
- QUARTER CORNER: LAT. = 32.7905221°N, LONG. = 104.2235473°W, NMSP EAST (FT) N = 651341.75, E = 575074.64
- S/4 CORNER SEC. 36: LAT. = 32.7834265°N, LONG. = 104.2408028°W, NMSP EAST (FT) N = 648755.20, E = 569774.30
- S/4 CORNER SEC. 31: LAT. = 32.7833994°N, LONG. = 104.2146438°W, NMSP EAST (FT) N = 648753.38, E = 577813.59
- SE CORNER SEC. 31: LAT. = 32.7835350°N, LONG. = 104.2061844°W, NMSP EAST (FT) N = 648805.73, E = 580413.30

17 OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Signature: *Brian Wood* Date: **5-16-23**

Printed Name: **BRIAN WOOD**

E-mail Address: **brian@permitswest.com**

505 466-8120

18 SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

MAY 2, 2023

Date of Survey: **MAY 2, 2023**

Signature and Seal of Professional Surveyor: *Imon F. Jaramilla*

Certificate Number: **12797**

Professional Surveyor License No. **8806E**

Intent ☐ As Drilled ☐

API #

Operator Name: LONGFELLOW ENERGY, LP	Property Name: MARLEY STATE COM 31 AB	Well Number 001H
---	--	---------------------

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude			NAD	

First Take Point (FTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
D	31	17S	28E		409	NORTH	100	WEST	EDDY
Latitude 32.7966607					Longitude 104.2232588			NAD 83	

Last Take Point (LTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
A	31	17S	28E		390	NORTH	100	EAST	EDDY
Latitude 32.7967868					Longitude 104.2067359			NAD 83	

Is this well the defining well for the Horizontal Spacing Unit? ☐ NOIs this well an infill well? ☐ YES

If infill is yes please provide API if available, Operator Name and well number for Defining well for Horizontal Spacing Unit.

API #

Operator Name: LONGFELLOW ENERGY, LP	Property Name: MARLEY STATE COM 31 AB	Well Number 003H
---	--	---------------------

KZ 06/29/2018

District I

1625 N. French Dr., Hobbs, NM 88240
 Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
 Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
 Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form APD Conditions

Permit 340608

PERMIT CONDITIONS OF APPROVAL

Operator Name and Address: LONGFELLOW ENERGY, LP [372210] 8115 Preston Road Dallas, TX 75225	API Number: 30-015-53818
	Well: Marley State Com 31 AB #001H

OCD Reviewer	Condition
ward.rikala	Notify OCD 24 hours prior to casing & cement
ward.rikala	Will require a File As Drilled C-102 and a Directional Survey with the C-104
ward.rikala	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string
ward.rikala	Cement is required to circulate on both surface and intermediate1 strings of casing
ward.rikala	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system
ward.rikala	The Operator is to notify NMOCD by sundry (Form C-103) within ten (10) days of the well being spud





PROJECT DETAILS: Eddy Co., NM (Nad-83)

Geodetic System: US State Plane 1983
Datum: North American Datum 1983
Ellipsoid: GRS 1980
Zone: New Mexico Eastern Zone
System Datum: Mean Sea Level

FORMATION TOP DETAILS

TVDPath	Formation
1006.00	QUEEN
1426.00	GRAYBURG
1769.00	SAN ANDRES
3164.00	GLORIETA
3196.00	PADDOCK

Company: Longfellow Energy
Project: Eddy Co., NM (Nad-83)
Site: MARLEY STATE COM 31 AB
Well: 001H
Wellbore: Wellbore #1
Rig: TBD
Design: PLAN #6 / 14:03, May 08 2023

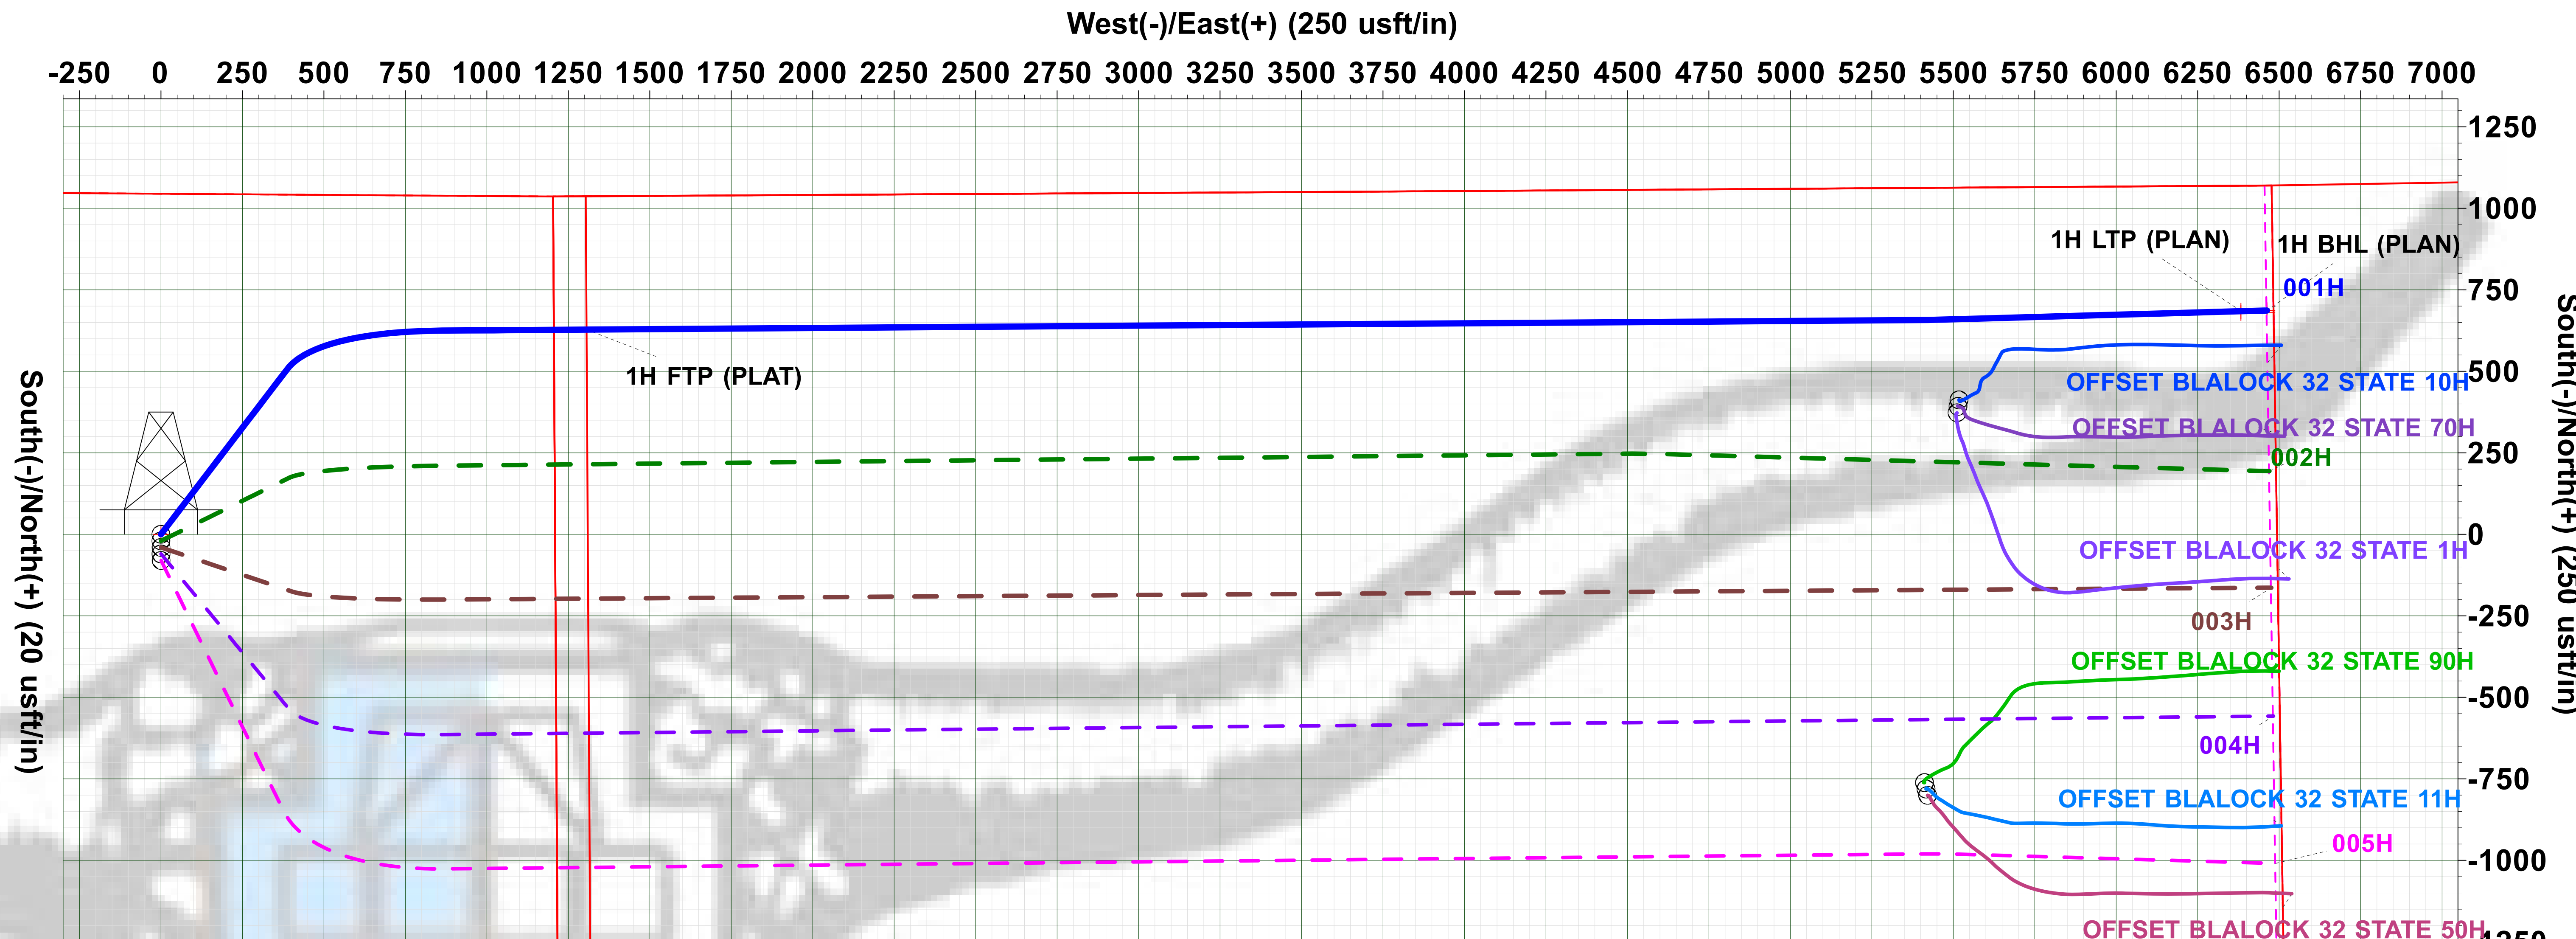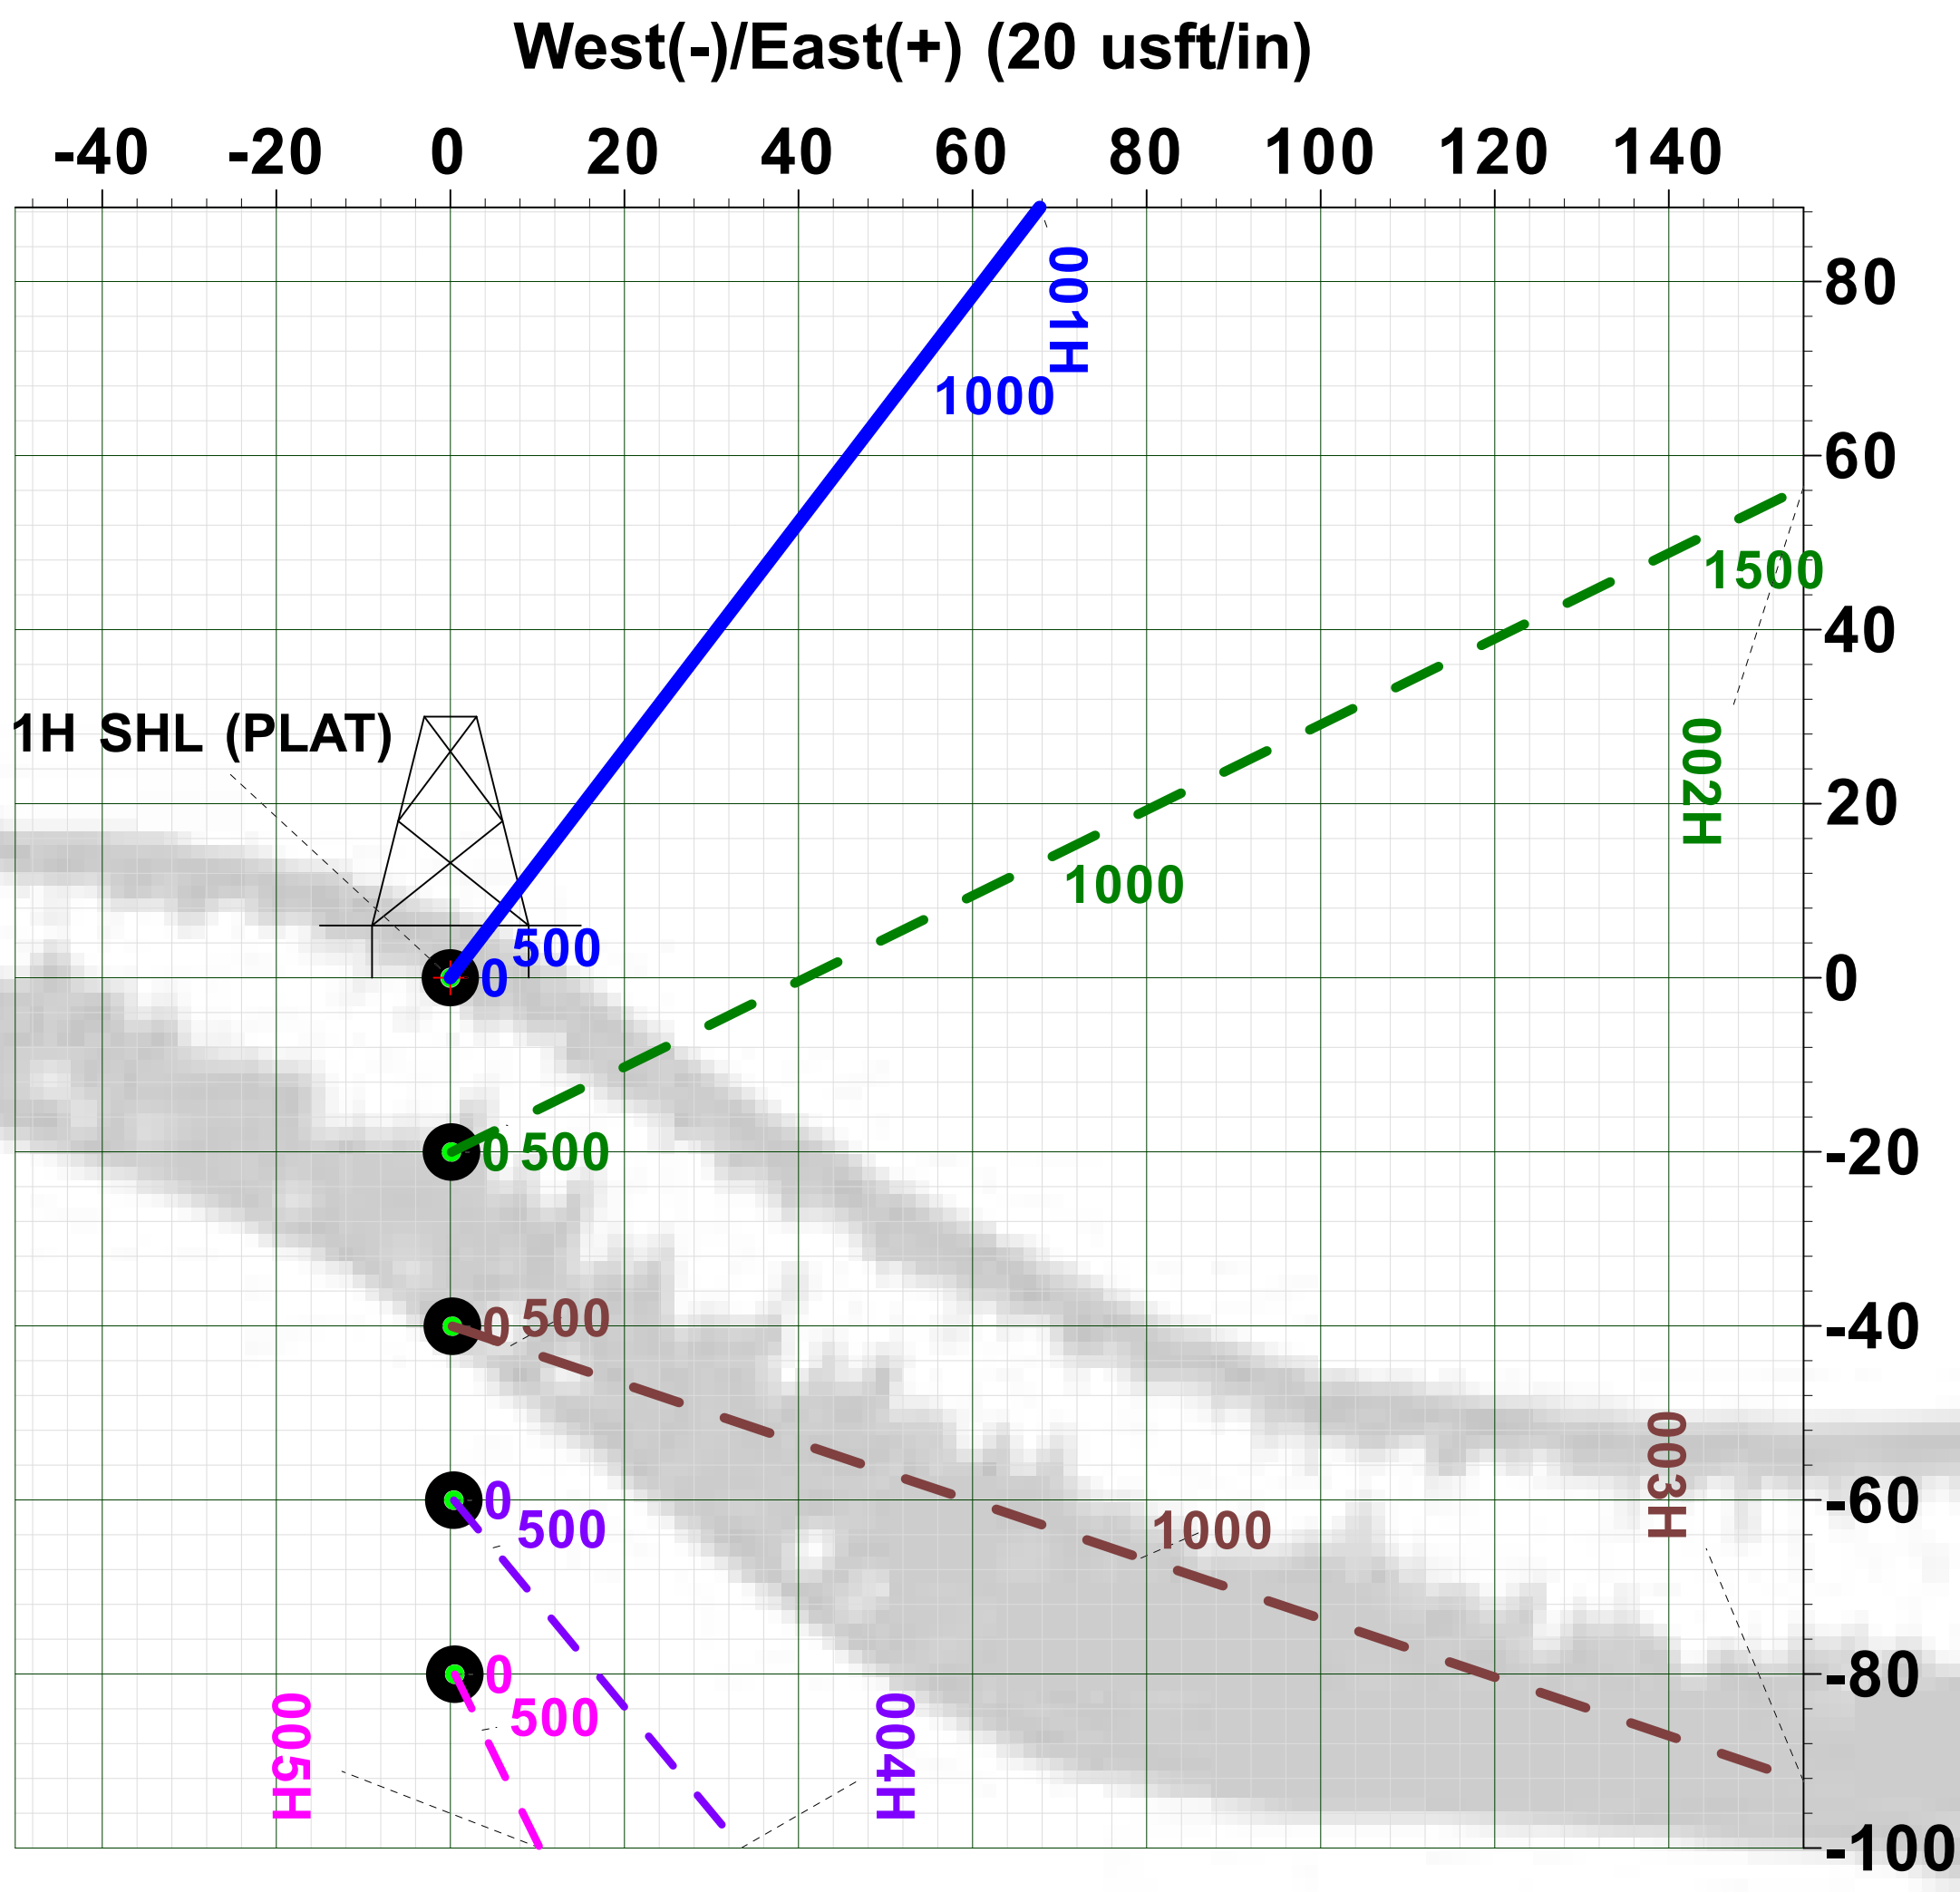

WELL DETAILS: 001H

RKB = 20.3' @ 3643.80usft (TBD)
3623.50


+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
0.00	0.00	652947.14	573855.11	32.794938	-104.227511

SECTION DETAILS



Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	VSect	Target
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2	300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	
3	1248.30	18.97	37.42	1231.08	123.51	94.51	2.00	95.76	
4	2736.63	18.97	37.42	2638.61	507.67	388.46	0.00	393.58	
5	3566.59	60.00	89.59	3279.40	624.82	859.85	6.00	866.13	
6	3766.59	60.00	89.59	3379.40	626.06	1033.05	0.00	1039.33	
7	4052.93	88.63	89.59	3456.00	628.01	1305.86	10.00	1312.15	1H FTP (PLAT)
8	8141.96	88.63	89.59	3553.44	657.27	5393.62	0.00	5400.00	
9	8201.93	88.63	88.39	3554.87	658.32	5453.57	2.00	5459.96	
10	9211.85	88.63	88.39	3579.00	686.69	6462.80	0.00	6469.42	1H BHL (PLAN)

DESIGN TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
1H SHL (PLAT)	0.00	0.00	0.00	652947.14	573855.11	32.794938	-104.227511
1H FTP (PLAT)	3456.00	628.01	1305.86	653575.15	575160.97	32.796661	-104.223259
1H LTP (PLAN)	3577.09	685.40	6382.94	653632.54	580238.05	32.796803	-104.206736
1H LTP (PLAT)	3577.09	679.64	6382.94	653626.78	580238.05	32.796787	-104.206736
1H BHL (PLAN)	3579.00	686.69	6462.80	653633.83	580317.91	32.796806	-104.206476
1H BHL (PLAT)	3579.00	680.10	6462.90	653627.24	580318.01	32.796788	-104.206476

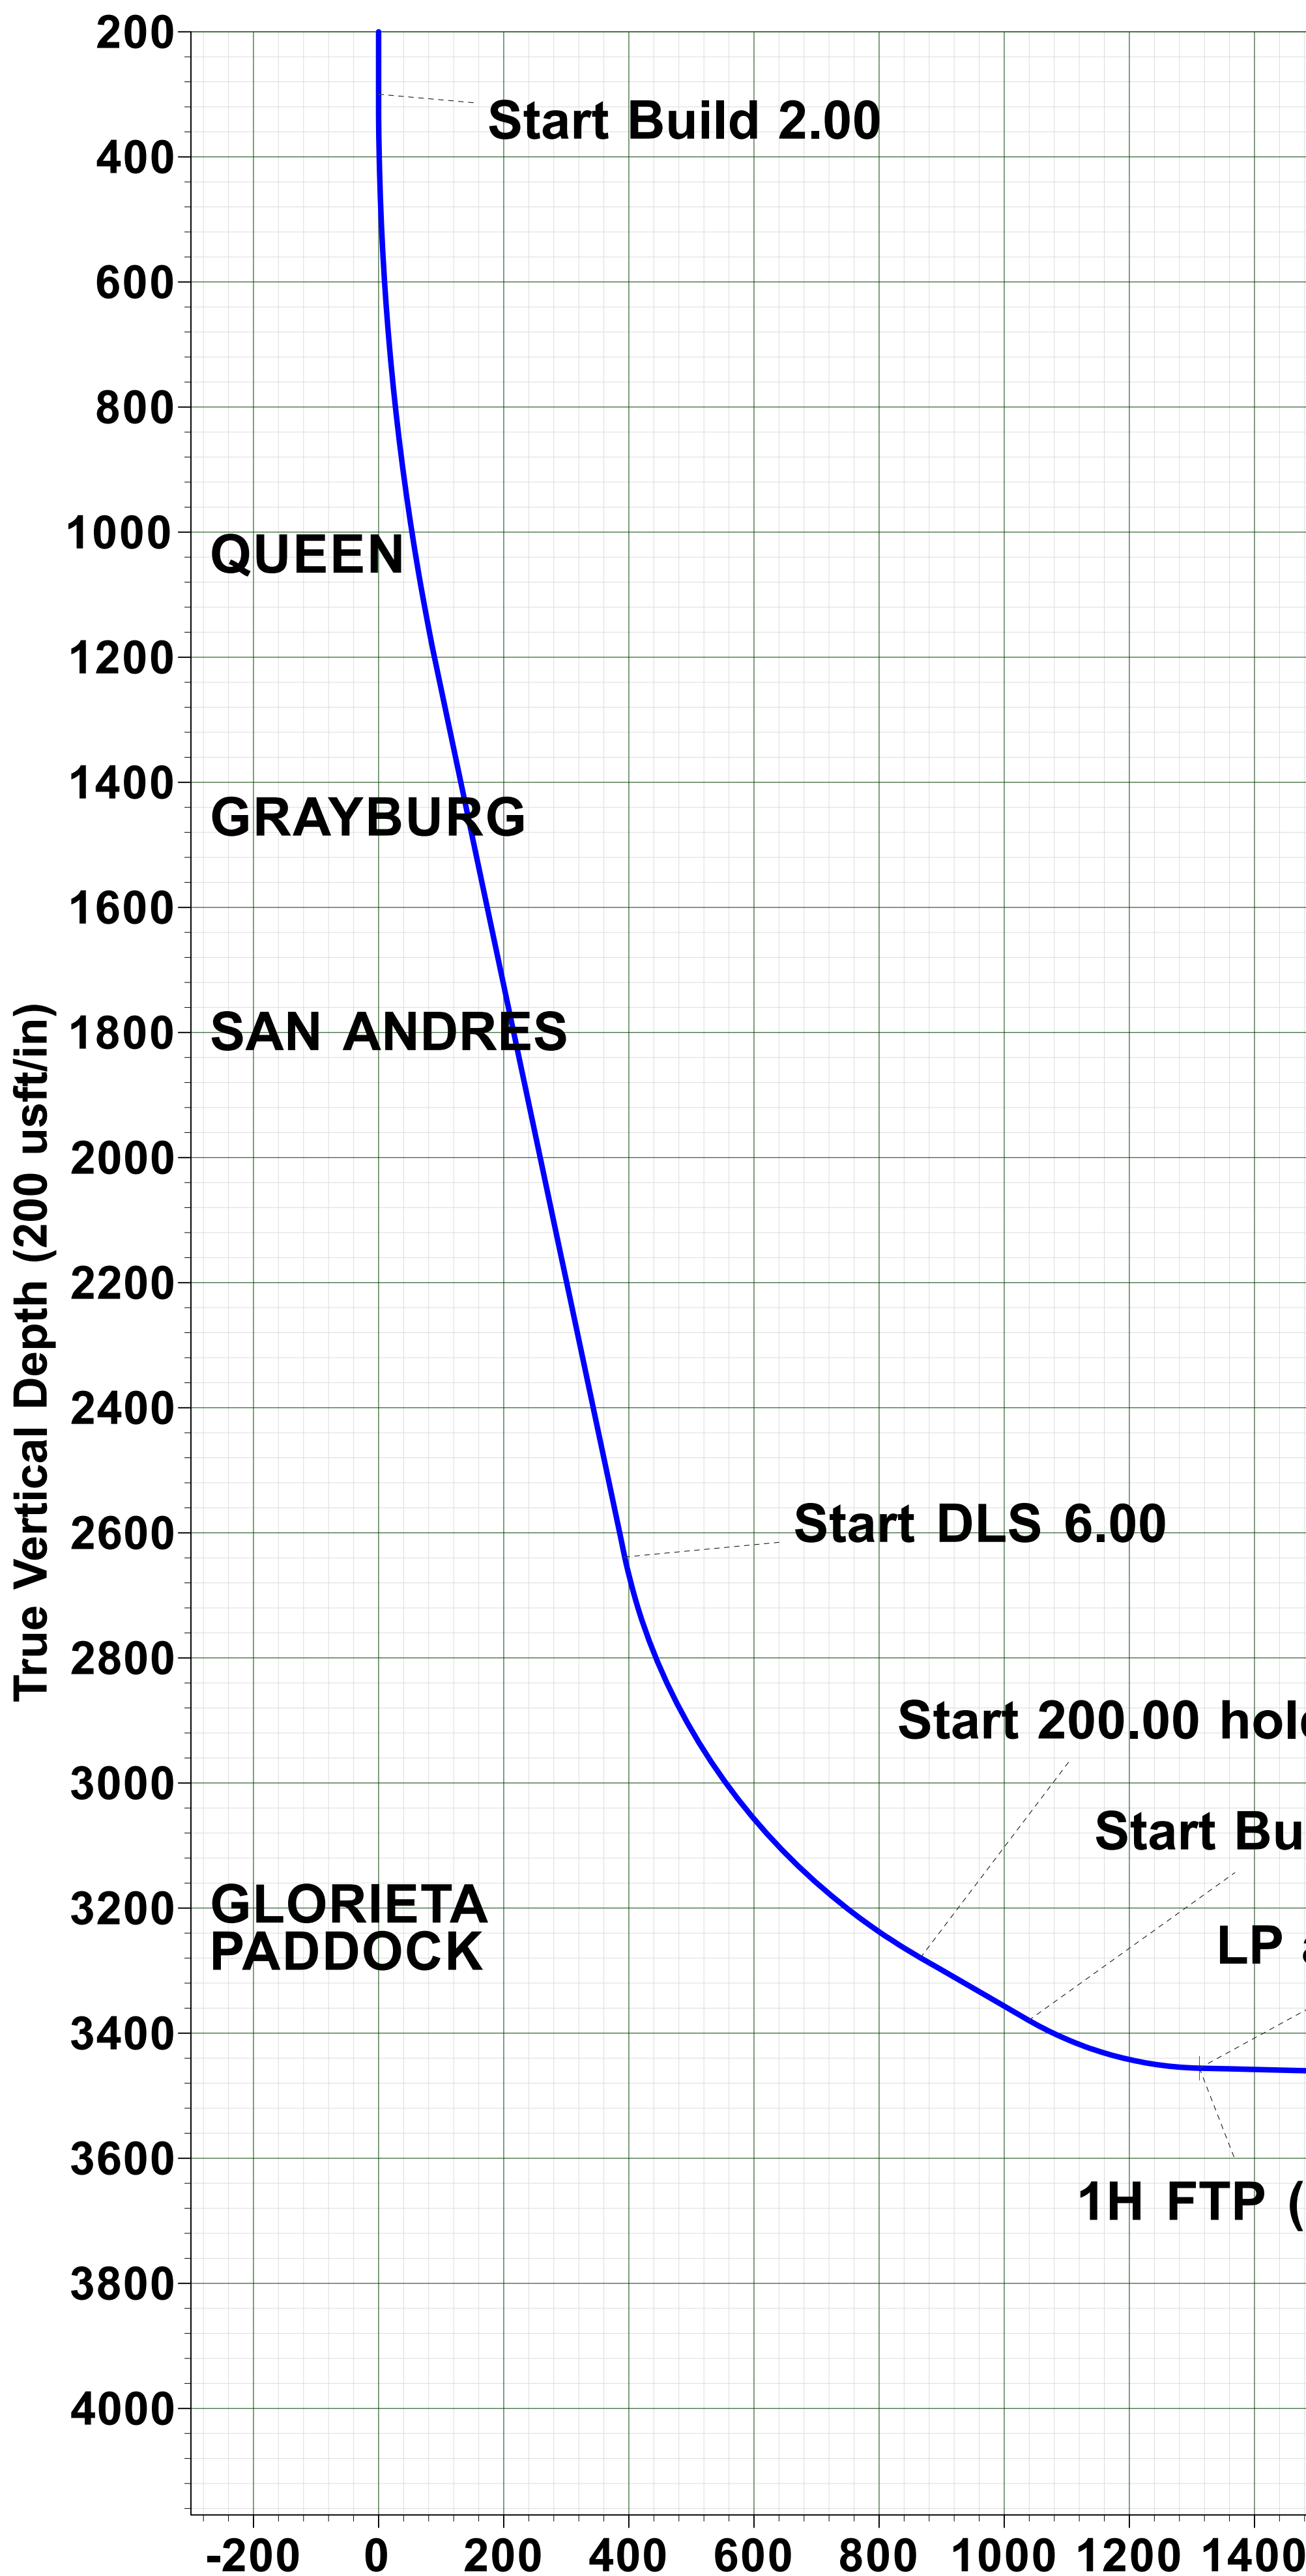

Vertical Section at 89.42° (200 usft/in)

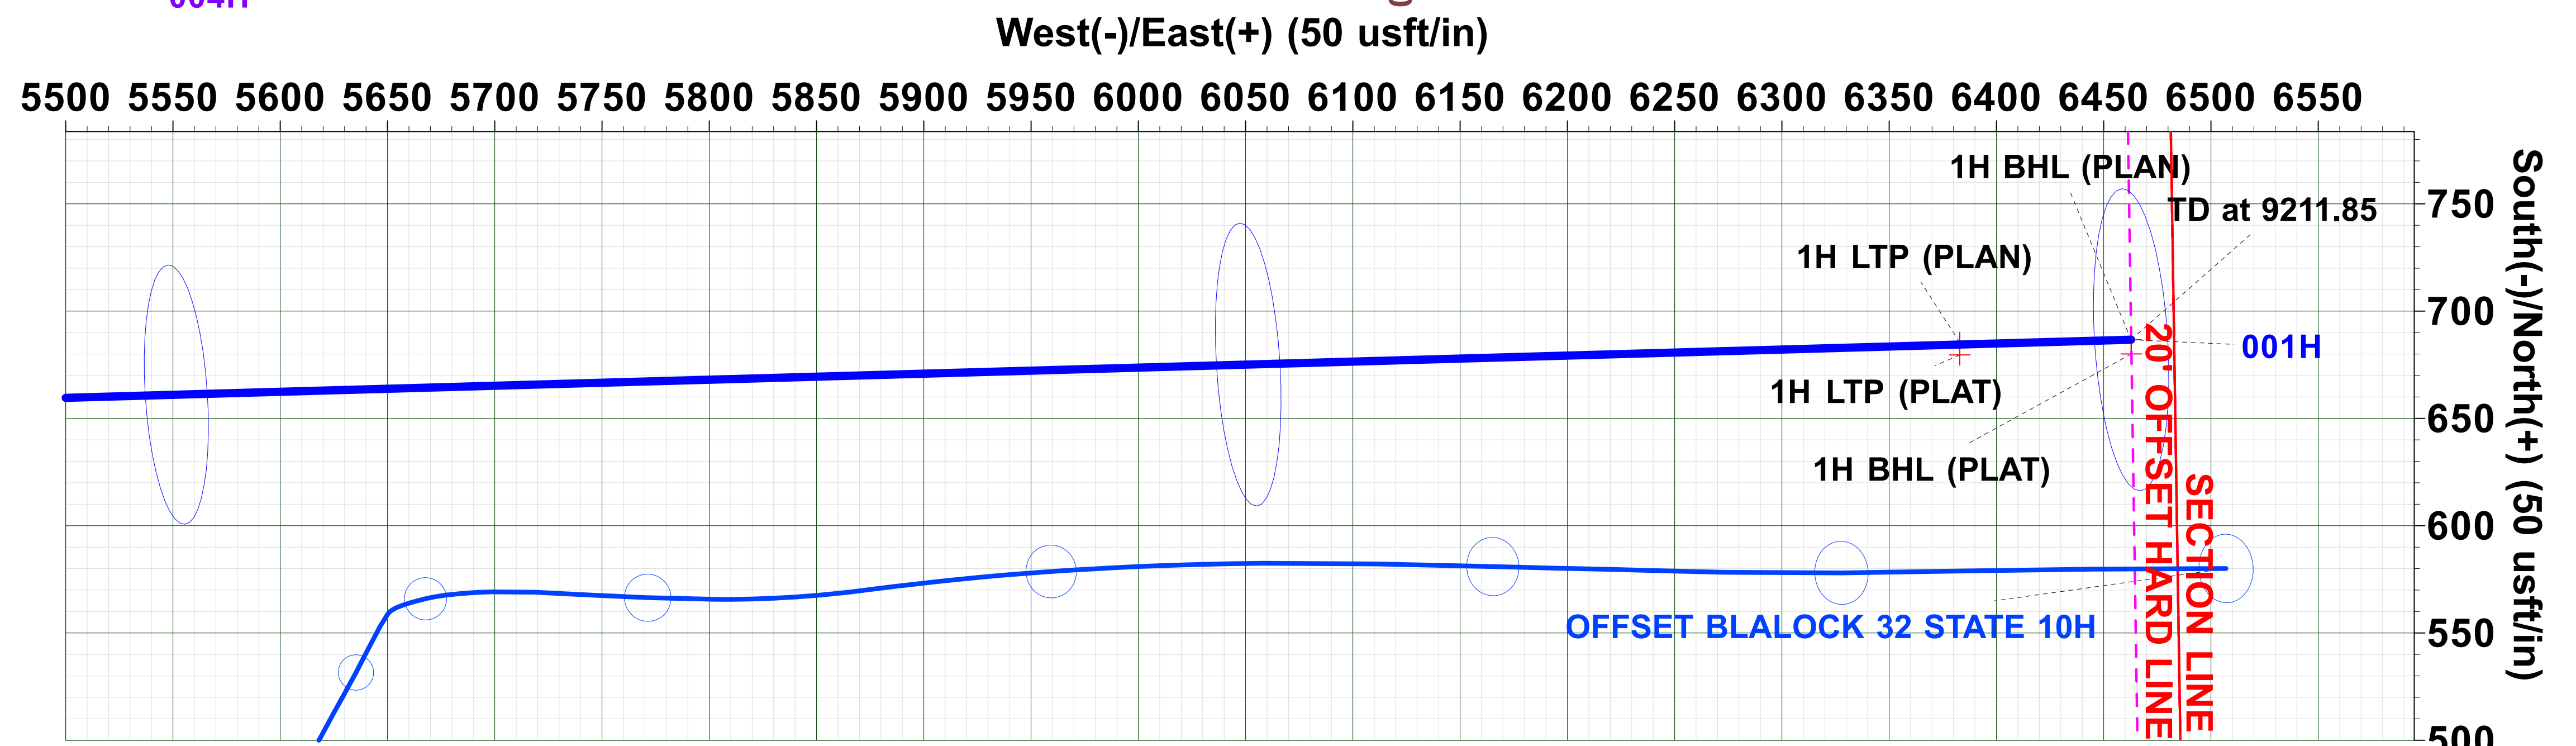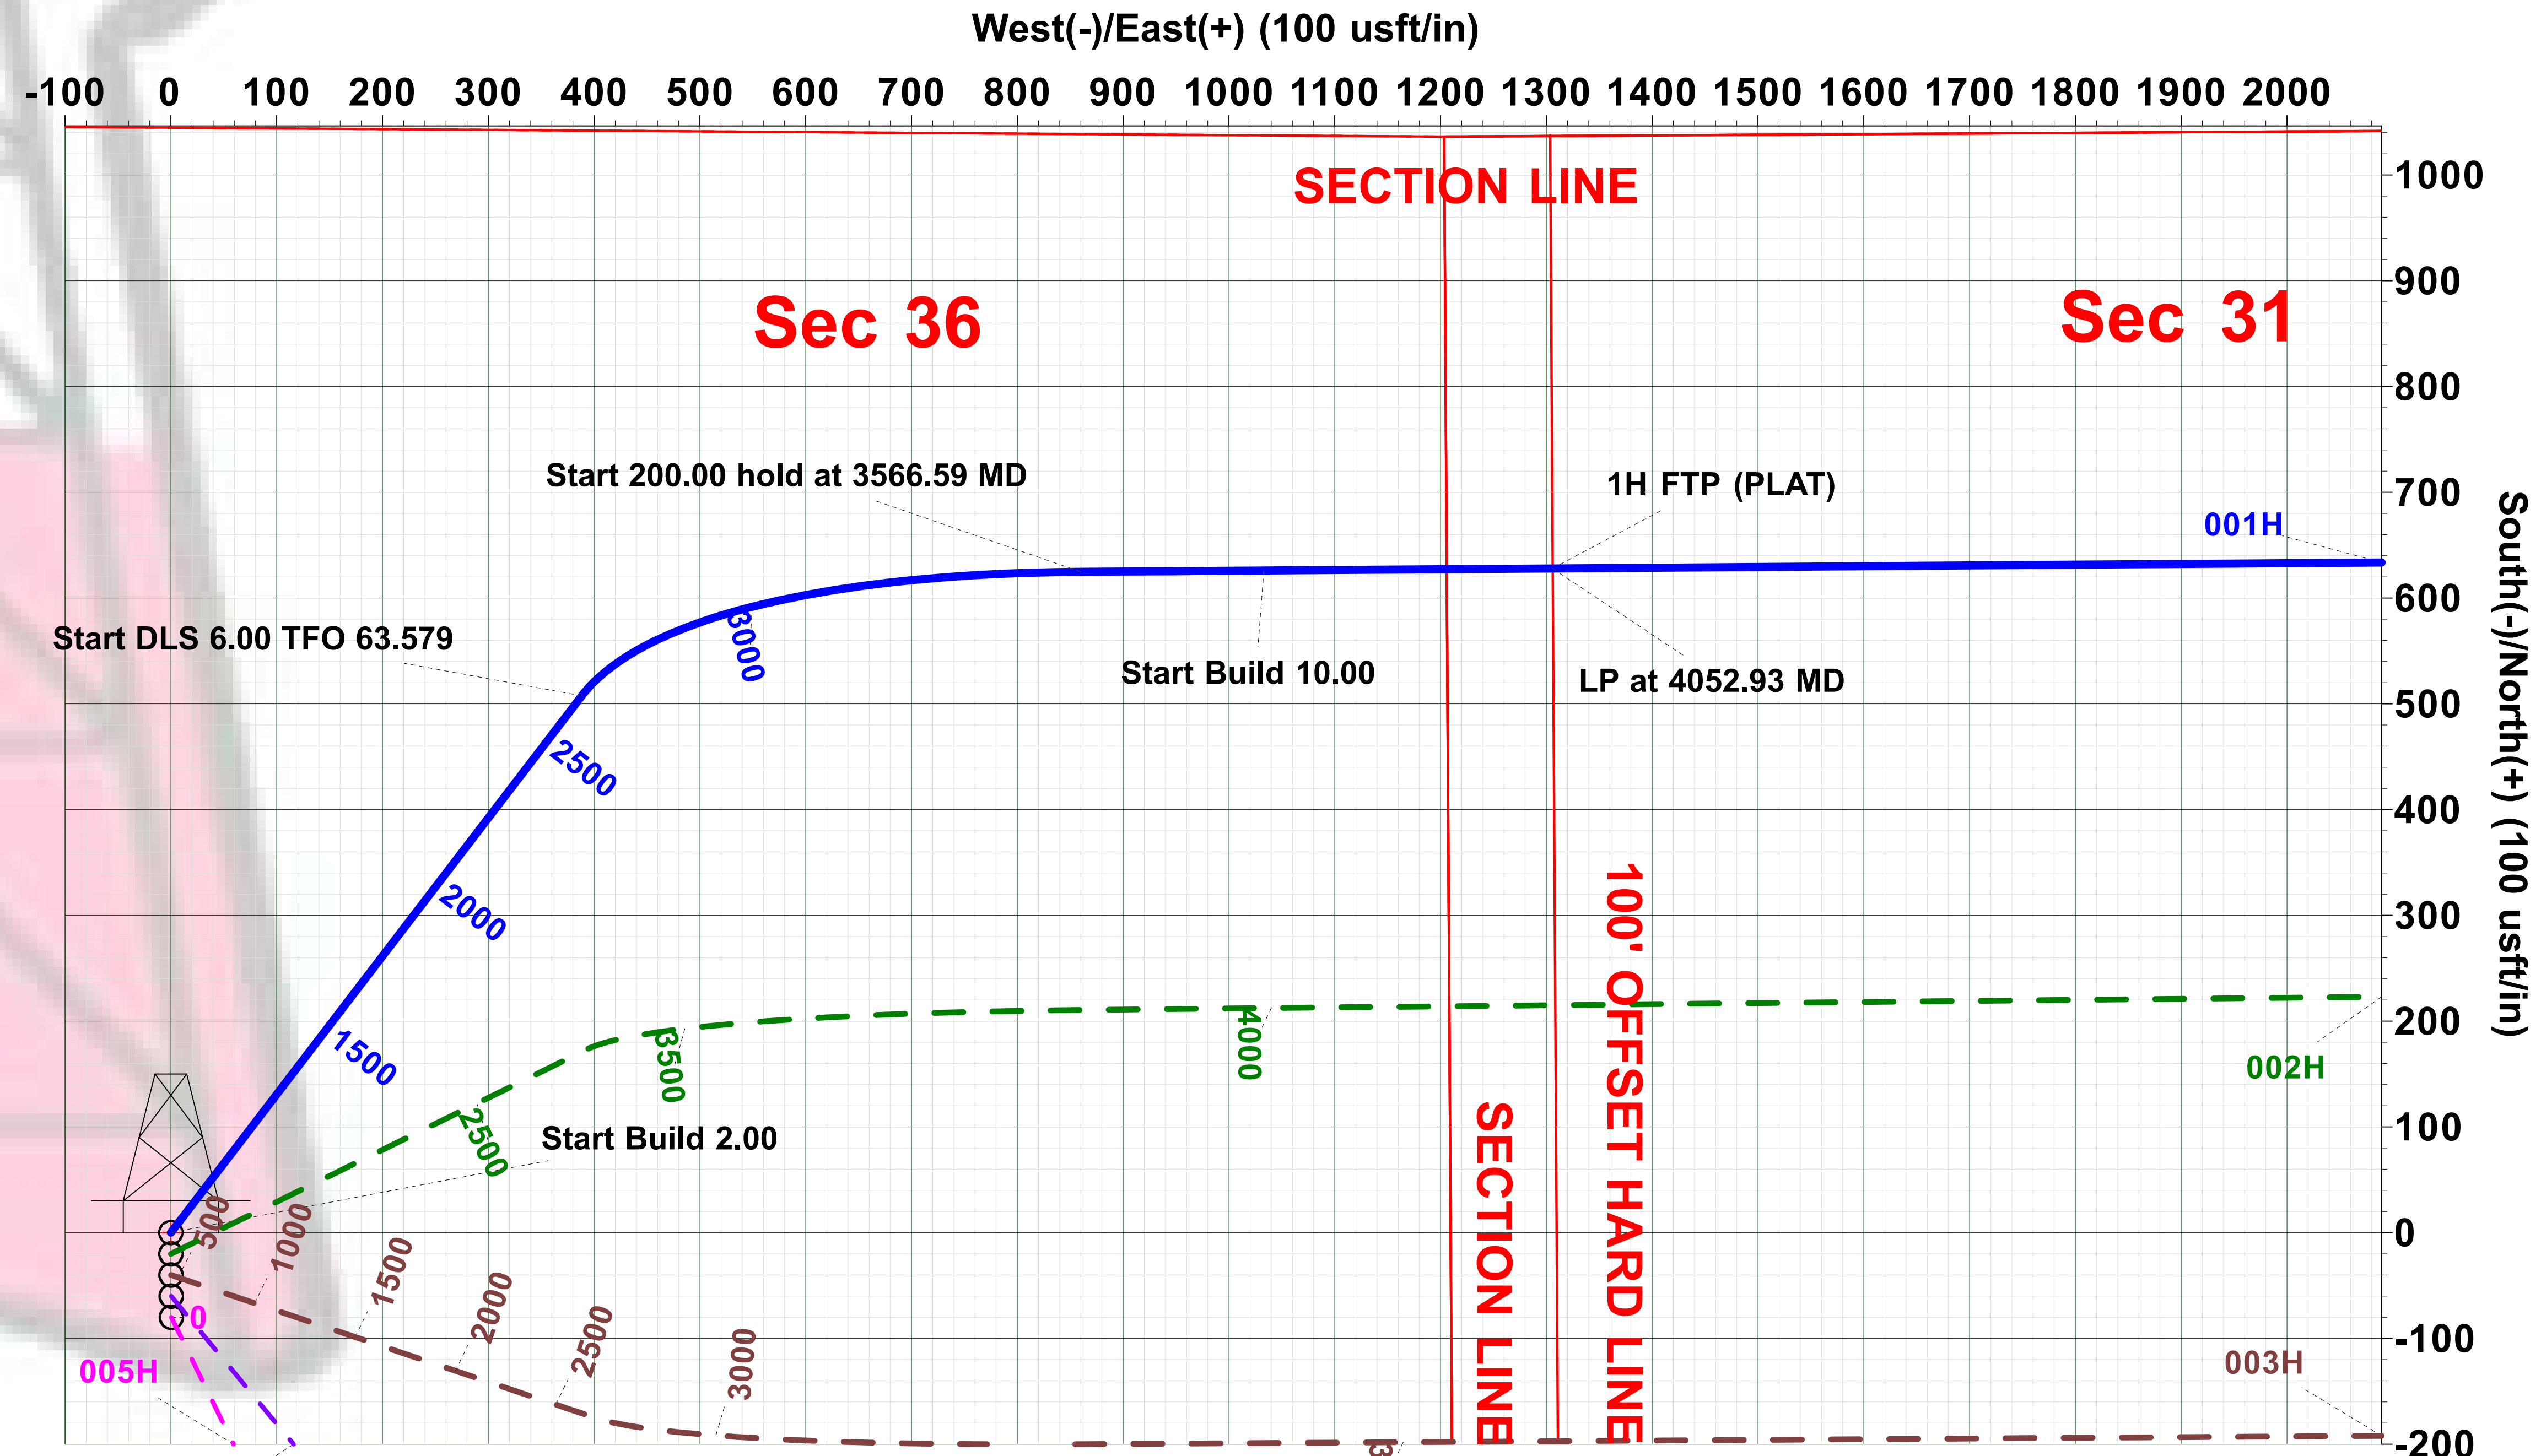

Plan: PLAN #6 (001H/Wellbore #1) TBD

Created By: MATTHEW MAY Date: 14:03, May 08 2023



Planning Report



Database:	WBDS_SQL_2	Local Co-ordinate Reference:	Well 001H
Company:	Longfellow Energy	TVD Reference:	RKB = 20.3' @ 3643.80usft (TBD)
Project:	Eddy Co., NM (Nad-83)	MD Reference:	RKB = 20.3' @ 3643.80usft (TBD)
Site:	MARLEY STATE COM 31 AB	North Reference:	Grid
Well:	001H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	PLAN #6		

Project	Eddy Co., NM (Nad-83)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site		MARLEY STATE COM 31 AB			
Site Position:		Northing:	652,447.99 usft	Latitude:	32.793545
From:	Map	Easting:	580,846.39 usft	Longitude:	-104.204761
Position Uncertainty:	0.00 usft	Slot Radius:	13.200 in	Grid Convergence:	0.070 °

Well	001H					
Well Position	+N-S	499.15 usft	Northing:	652,947.14 usft	Latitude:	32.794938
	+E-W	-6,991.28 usft	Easting:	573,855.11 usft	Longitude:	-104.227511
Position Uncertainty	0.00 usft		Wellhead Elevation:		Ground Level:	3,623.50 usft

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2020	05/30/23	6.666	60.257	47,557.78635821

Design	PLAN #6				
Audit Notes:					
Version:		Phase:	PLAN	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)	
	0.00	0.00	0.00	89.42	

Plan Survey Tool Program	Date	05/08/23			
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks	
1	0.00	9,211.13	PLAN #6 (Wellbore #1)	MWD+IFR1+SAG+FDIR	
				OWSG MWD + IFR1 + Sag	



Planning Report



Database:	WBDS_SQL_2	Local Co-ordinate Reference:	Well 001H
Company:	Longfellow Energy	TVD Reference:	RKB = 20.3' @ 3643.80usft (TBD)
Project:	Eddy Co., NM (Nad-83)	MD Reference:	RKB = 20.3' @ 3643.80usft (TBD)
Site:	MARLEY STATE COM 31 AB	North Reference:	Grid
Well:	001H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	PLAN #6		

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.000	
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.000	
1,248.30	18.97	37.42	1,231.08	123.51	94.51	2.00	2.00	0.00	37.423	
2,736.63	18.97	37.42	2,638.61	507.67	388.46	0.00	0.00	0.00	0.000	
3,566.59	60.00	89.59	3,279.40	624.82	859.85	6.00	4.94	6.29	63.579	
3,766.59	60.00	89.59	3,379.40	626.06	1,033.05	0.00	0.00	0.00	0.000	
4,052.93	88.63	89.59	3,456.00	628.01	1,305.86	10.00	10.00	0.00	0.000	1H FTP (PLAT)
8,141.96	88.63	89.59	3,553.44	657.27	5,393.62	0.00	0.00	0.00	0.000	
8,201.93	88.63	88.39	3,554.87	658.32	5,453.58	2.00	-0.01	-2.00	-90.177	
9,211.85	88.63	88.39	3,579.00	686.69	6,462.80	0.00	0.00	0.00	0.000	1H BHL (PLAN)



Planning Report



Database:	WBDS_SQL_2	Local Co-ordinate Reference:	Well 001H
Company:	Longfellow Energy	TVD Reference:	RKB = 20.3' @ 3643.80usft (TBD)
Project:	Eddy Co., NM (Nad-83)	MD Reference:	RKB = 20.3' @ 3643.80usft (TBD)
Site:	MARLEY STATE COM 31 AB	North Reference:	Grid
Well:	001H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	PLAN #6		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	2.00	37.42	399.98	1.39	1.06	1.07	2.00	2.00	0.00
500.00	4.00	37.42	499.84	5.54	4.24	4.30	2.00	2.00	0.00
600.00	6.00	37.42	599.45	12.46	9.54	9.66	2.00	2.00	0.00
700.00	8.00	37.42	698.70	22.14	16.94	17.17	2.00	2.00	0.00
800.00	10.00	37.42	797.47	34.56	26.45	26.80	2.00	2.00	0.00
900.00	12.00	37.42	895.62	49.72	38.04	38.54	2.00	2.00	0.00
1,000.00	14.00	37.42	993.06	67.58	51.71	52.39	2.00	2.00	0.00
1,100.00	16.00	37.42	1,089.64	88.14	67.44	68.33	2.00	2.00	0.00
1,200.00	18.00	37.42	1,185.27	111.35	85.21	86.33	2.00	2.00	0.00
1,248.30	18.97	37.42	1,231.08	123.51	94.51	95.76	2.00	2.00	0.00
1,300.00	18.97	37.42	1,279.97	136.86	104.72	106.10	0.00	0.00	0.00
1,400.00	18.97	37.42	1,374.54	162.67	124.47	126.11	0.00	0.00	0.00
1,500.00	18.97	37.42	1,469.11	188.48	144.22	146.12	0.00	0.00	0.00
1,600.00	18.97	37.42	1,563.68	214.29	163.97	166.13	0.00	0.00	0.00
1,700.00	18.97	37.42	1,658.25	240.10	183.72	186.14	0.00	0.00	0.00
1,800.00	18.97	37.42	1,752.83	265.91	203.47	206.16	0.00	0.00	0.00
1,900.00	18.97	37.42	1,847.40	291.73	223.22	226.17	0.00	0.00	0.00
2,000.00	18.97	37.42	1,941.97	317.54	242.97	246.18	0.00	0.00	0.00
2,100.00	18.97	37.42	2,036.54	343.35	262.73	266.19	0.00	0.00	0.00
2,200.00	18.97	37.42	2,131.11	369.16	282.48	286.20	0.00	0.00	0.00
2,300.00	18.97	37.42	2,225.68	394.97	302.23	306.21	0.00	0.00	0.00
2,400.00	18.97	37.42	2,320.25	420.78	321.98	326.22	0.00	0.00	0.00
2,500.00	18.97	37.42	2,414.82	446.59	341.73	346.23	0.00	0.00	0.00
2,600.00	18.97	37.42	2,509.39	472.40	361.48	366.24	0.00	0.00	0.00
2,700.00	18.97	37.42	2,603.97	498.22	381.23	386.25	0.00	0.00	0.00
2,736.63	18.97	37.42	2,638.61	507.67	388.46	393.58	0.00	0.00	0.00
2,750.00	19.34	39.59	2,651.24	511.10	391.19	396.35	6.00	2.77	16.23
2,800.00	20.93	46.99	2,698.19	523.57	403.00	408.28	6.00	3.18	14.80
2,850.00	22.79	53.31	2,744.60	535.45	417.30	422.70	6.00	3.73	12.64
2,900.00	24.87	58.68	2,790.34	546.70	434.05	439.56	6.00	4.15	10.73
2,950.00	27.11	63.24	2,835.29	557.30	453.21	458.83	6.00	4.48	9.12
3,000.00	29.47	67.14	2,879.32	567.21	474.72	480.43	6.00	4.73	7.79
3,050.00	31.94	70.49	2,922.31	576.41	498.52	504.33	6.00	4.93	6.71
3,100.00	34.48	73.41	2,964.14	584.87	524.55	530.45	6.00	5.08	5.83
3,150.00	37.08	75.97	3,004.70	592.57	552.75	558.72	6.00	5.20	5.12
3,200.00	39.73	78.23	3,043.89	599.48	583.02	589.06	6.00	5.30	4.53
3,250.00	42.42	80.26	3,081.58	605.60	615.29	621.39	6.00	5.38	4.05
3,300.00	45.14	82.08	3,117.68	610.89	649.47	655.62	6.00	5.44	3.65
3,350.00	47.89	83.74	3,152.09	615.35	685.46	691.66	6.00	5.50	3.32
3,400.00	50.66	85.26	3,184.71	618.97	723.17	729.40	6.00	5.54	3.04
3,450.00	53.44	86.67	3,215.45	621.74	762.50	768.75	6.00	5.58	2.81
3,500.00	56.25	87.98	3,244.24	623.64	803.33	809.60	6.00	5.61	2.61
3,550.00	59.06	89.20	3,270.99	624.67	845.55	851.83	6.00	5.63	2.45
3,566.59	60.00	89.59	3,279.40	624.82	859.85	866.13	6.00	5.65	2.35
3,600.00	60.00	89.59	3,296.11	625.03	888.78	895.06	0.00	0.00	0.00
3,700.00	60.00	89.59	3,346.11	625.65	975.38	981.67	0.00	0.00	0.00
3,766.59	60.00	89.59	3,379.40	626.06	1,033.05	1,039.33	0.00	0.00	0.00
3,800.00	63.34	89.59	3,395.25	626.27	1,062.45	1,068.74	10.00	10.00	0.00
3,850.00	68.34	89.59	3,415.71	626.60	1,108.06	1,114.34	10.00	10.00	0.00
3,900.00	73.34	89.59	3,432.12	626.94	1,155.27	1,161.56	10.00	10.00	0.00



Planning Report



Database:	WBDS_SQL_2	Local Co-ordinate Reference:	Well 001H
Company:	Longfellow Energy	TVD Reference:	RKB = 20.3' @ 3643.80usft (TBD)
Project:	Eddy Co., NM (Nad-83)	MD Reference:	RKB = 20.3' @ 3643.80usft (TBD)
Site:	MARLEY STATE COM 31 AB	North Reference:	Grid
Well:	001H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	PLAN #6		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
3,950.00	78.34	89.59	3,444.34	627.28	1,203.74	1,210.03	10.00	10.00	0.00
4,000.00	83.34	89.59	3,452.30	627.64	1,253.08	1,259.37	10.00	10.00	0.00
4,052.93	88.63	89.59	3,456.00	628.01	1,305.86	1,312.16	10.00	10.00	0.00
4,100.00	88.63	89.59	3,457.12	628.35	1,352.92	1,359.21	0.00	0.00	0.00
4,200.00	88.63	89.59	3,459.50	629.07	1,452.89	1,459.18	0.00	0.00	0.00
4,300.00	88.63	89.59	3,461.89	629.78	1,552.86	1,559.15	0.00	0.00	0.00
4,400.00	88.63	89.59	3,464.27	630.50	1,652.83	1,659.12	0.00	0.00	0.00
4,500.00	88.63	89.59	3,466.65	631.21	1,752.80	1,759.09	0.00	0.00	0.00
4,600.00	88.63	89.59	3,469.04	631.93	1,852.76	1,859.07	0.00	0.00	0.00
4,700.00	88.63	89.59	3,471.42	632.64	1,952.73	1,959.04	0.00	0.00	0.00
4,800.00	88.63	89.59	3,473.80	633.36	2,052.70	2,059.01	0.00	0.00	0.00
4,900.00	88.63	89.59	3,476.19	634.07	2,152.67	2,158.98	0.00	0.00	0.00
5,000.00	88.63	89.59	3,478.57	634.79	2,252.64	2,258.95	0.00	0.00	0.00
5,100.00	88.63	89.59	3,480.95	635.50	2,352.61	2,358.92	0.00	0.00	0.00
5,200.00	88.63	89.59	3,483.33	636.22	2,452.58	2,458.89	0.00	0.00	0.00
5,300.00	88.63	89.59	3,485.72	636.94	2,552.55	2,558.86	0.00	0.00	0.00
5,400.00	88.63	89.59	3,488.10	637.65	2,652.52	2,658.84	0.00	0.00	0.00
5,500.00	88.63	89.59	3,490.48	638.37	2,752.49	2,758.81	0.00	0.00	0.00
5,600.00	88.63	89.59	3,492.87	639.08	2,852.45	2,858.78	0.00	0.00	0.00
5,700.00	88.63	89.59	3,495.25	639.80	2,952.42	2,958.75	0.00	0.00	0.00
5,800.00	88.63	89.59	3,497.63	640.51	3,052.39	3,058.72	0.00	0.00	0.00
5,900.00	88.63	89.59	3,500.02	641.23	3,152.36	3,158.69	0.00	0.00	0.00
6,000.00	88.63	89.59	3,502.40	641.94	3,252.33	3,258.66	0.00	0.00	0.00
6,100.00	88.63	89.59	3,504.78	642.66	3,352.30	3,358.63	0.00	0.00	0.00
6,200.00	88.63	89.59	3,507.17	643.37	3,452.27	3,458.60	0.00	0.00	0.00
6,300.00	88.63	89.59	3,509.55	644.09	3,552.24	3,558.58	0.00	0.00	0.00
6,400.00	88.63	89.59	3,511.93	644.80	3,652.21	3,658.55	0.00	0.00	0.00
6,500.00	88.63	89.59	3,514.31	645.52	3,752.18	3,758.52	0.00	0.00	0.00
6,600.00	88.63	89.59	3,516.70	646.24	3,852.15	3,858.49	0.00	0.00	0.00
6,700.00	88.63	89.59	3,519.08	646.95	3,952.11	3,958.46	0.00	0.00	0.00
6,800.00	88.63	89.59	3,521.46	647.67	4,052.08	4,058.43	0.00	0.00	0.00
6,900.00	88.63	89.59	3,523.85	648.38	4,152.05	4,158.40	0.00	0.00	0.00
7,000.00	88.63	89.59	3,526.23	649.10	4,252.02	4,258.37	0.00	0.00	0.00
7,100.00	88.63	89.59	3,528.61	649.81	4,351.99	4,358.35	0.00	0.00	0.00
7,200.00	88.63	89.59	3,531.00	650.53	4,451.96	4,458.32	0.00	0.00	0.00
7,300.00	88.63	89.59	3,533.38	651.24	4,551.93	4,558.29	0.00	0.00	0.00
7,400.00	88.63	89.59	3,535.76	651.96	4,651.90	4,658.26	0.00	0.00	0.00
7,500.00	88.63	89.59	3,538.14	652.67	4,751.87	4,758.23	0.00	0.00	0.00
7,600.00	88.63	89.59	3,540.53	653.39	4,851.84	4,858.20	0.00	0.00	0.00
7,700.00	88.63	89.59	3,542.91	654.10	4,951.80	4,958.17	0.00	0.00	0.00
7,800.00	88.63	89.59	3,545.29	654.82	5,051.77	5,058.14	0.00	0.00	0.00
7,900.00	88.63	89.59	3,547.68	655.53	5,151.74	5,158.11	0.00	0.00	0.00
8,000.00	88.63	89.59	3,550.06	656.25	5,251.71	5,258.09	0.00	0.00	0.00
8,100.00	88.63	89.59	3,552.44	656.97	5,351.68	5,358.06	0.00	0.00	0.00
8,141.96	88.63	89.59	3,553.44	657.27	5,393.62	5,400.00	0.00	0.00	0.00
8,201.93	88.63	88.39	3,554.87	658.32	5,453.58	5,459.96	2.00	-0.01	-2.00
8,300.00	88.63	88.39	3,557.22	661.08	5,551.57	5,557.98	0.00	0.00	0.00
8,400.00	88.63	88.39	3,559.61	663.89	5,651.51	5,657.94	0.00	0.00	0.00
8,500.00	88.63	88.39	3,561.99	666.69	5,751.44	5,757.89	0.00	0.00	0.00
8,600.00	88.63	88.39	3,564.38	669.50	5,851.37	5,857.85	0.00	0.00	0.00
8,700.00	88.63	88.39	3,566.77	672.31	5,951.30	5,957.80	0.00	0.00	0.00
8,800.00	88.63	88.39	3,569.16	675.12	6,051.23	6,057.76	0.00	0.00	0.00
8,900.00	88.63	88.39	3,571.55	677.93	6,151.17	6,157.71	0.00	0.00	0.00
9,000.00	88.63	88.39	3,573.94	680.74	6,251.10	6,257.67	0.00	0.00	0.00



Planning Report



Database:	WBDS_SQL_2	Local Co-ordinate Reference:	Well 001H
Company:	Longfellow Energy	TVD Reference:	RKB = 20.3' @ 3643.80usft (TBD)
Project:	Eddy Co., NM (Nad-83)	MD Reference:	RKB = 20.3' @ 3643.80usft (TBD)
Site:	MARLEY STATE COM 31 AB	North Reference:	Grid
Well:	001H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	PLAN #6		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	
9,100.00	88.63	88.39	3,576.33	683.55	6,351.03	6,357.62	0.00	0.00	0.00	
9,200.00	88.63	88.39	3,578.72	686.36	6,450.96	6,457.58	0.00	0.00	0.00	
9,211.85	88.63	88.39	3,579.00	686.69	6,462.80	6,469.42	0.00	0.00	0.00	

Design Targets										
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude	
1H SHL (PLAT) - plan hits target center - Point	0.00	0.00	0.00	0.00	0.00	652,947.14	573,855.11	32.794938	-104.227511	
1H FTP (PLAT) - plan hits target center - Point	0.00	0.00	3,456.00	628.01	1,305.86	653,575.16	575,160.98	32.796661	-104.223259	
1H LTP (PLAT) - plan misses target center by 4.80usft at 9131.79usft MD (3577.09 TVD, 684.44 N, 6382.80 E) - Point	0.00	0.00	3,577.09	679.64	6,382.94	653,626.79	580,238.05	32.796787	-104.206736	
1H LTP (PLAN) - plan misses target center by 0.96usft at 9131.96usft MD (3577.09 TVD, 684.44 N, 6382.97 E) - Point	0.00	0.00	3,577.09	685.40	6,382.94	653,632.55	580,238.05	32.796803	-104.206736	
1H BHL (PLAT) - plan misses target center by 6.59usft at 9211.76usft MD (3579.00 TVD, 686.69 N, 6462.71 E) - Point	0.00	0.00	3,579.00	680.10	6,462.90	653,627.24	580,318.01	32.796788	-104.206476	
1H BHL (PLAN) - plan hits target center - Point	0.00	0.00	3,579.00	686.69	6,462.80	653,633.83	580,317.91	32.796806	-104.206476	

Formations						
Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)	
1,013.35	1,006.00	QUEEN		0.000		
1,454.41	1,426.00	GRAYBURG		0.000		
1,817.10	1,769.00	SAN ANDRES		0.000		
3,367.94	3,164.00	GLORIETA		0.000		
3,418.00	3,196.00	PADDock		0.000		

State of New Mexico
Energy, Minerals and Natural Resources Department

Submit Electronically
Via E-permitting

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description

Effective May 25, 2021

I. Operator: Longfellow Energy, LLC **OGRID:** 372210 **Date:** 05-15-23

II. Type: ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe: _____

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
Marley State Com 31 AB 001H	30-015-	A-36-17S-27E	1045 FNL & 1210 FEL	500	500	5000
Marley State Com 31 AB 002H	30-015-	A-36-17S-27E	1065 FNL & 1210 FEL	500	500	5000
Marley State Com 31 AB 003H	30-015-	A-36-17S-27E	1085 FNL & 1210 FEL	500	500	5000
Marley State Com 31 AB 004H	30-015-	A-36-17S-27E	1105 FNL & 1210 FEL	500	500	5000
Marley State Com 31 AB 005H	30-015-	A-36-17S-27E	1125 FNL & 1210 FEL	500	500	5000

IV. Central Delivery Point Name: DCP Midstream, LP (248749) @ same pad in A-36-17s-27e [See 19.15.27.9(D)(1) NMAC]

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
Marley State Com 31 AB 001H	30-015-	8-1-23	8-10-23	8-20-23	8-20-23	9-5-23
Marley State Com 31 AB 002H	30-015-	7-15-23	7-25-23	8-1-23	9-1-23	9-15-23
Marley State Com 31 AB 003H	30-015-	7-1-23	7-10-23	8-20-23	9-20-23	10-5-23
Marley State Com 31 AB 004H	30-015-	6-15-23	6-25-23	8-1-23	9-1-23	9-15-23
Marley State Com 31 AB 005H	30-015-	6-1-23	6-10-23	6-20-23	7-20-23	8-5-23

VI. Separation Equipment: ☒ Attach a complete description of how Operator will size separation equipment to optimize gas capture.

VII. Operational Practices: ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices: ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

Section 2 – Enhanced Plan **EFFECTIVE APRIL 1, 2022**

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☒ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF

X. Natural Gas Gathering System (NGGS):

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in

XI. Map. ☐ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system ☐ will ☐ will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

XIII. Line Pressure. Operator ☐ does ☐ does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

XIV. Confidentiality: ☐ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

Section 3 - Certifications**Effective May 25, 2021**

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☒ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

If Operator checks this box, Operator will select one of the following:

Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

Venting and Flaring Plan. ☒ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

Section 4 - Notices

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:


(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature:

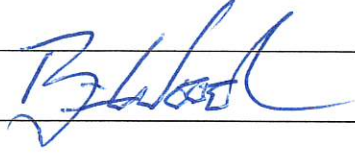

Printed Name: Brian Wood

Title: Consultant

E-mail Address: brian@permitswest.com

Date: 5-15-23

Phone: 505 466-8120

OIL CONSERVATION DIVISION
(Only applicable when submitted as a standalone form)

Approved By:

Title:

Approval Date:

Conditions of Approval:

**Attachment VI. Separation Equipment:**

Longfellow Energy (LFE) production facilities include separation equipment designed to efficiently separate gas from liquid phases to optimize gas capture based on projected and estimated volumes from the completion project. LFE will utilize flowback separation equipment and production separation equipment designed and built to industry specifications after the completion to optimize gas capture and send gas to sales or flare based on analytical composition. LFE operates facilities that are typically multi-well facilities. Production separation equipment is upgraded or installed before new wells are completed. This equipment is on-site and tied into sales gas lines prior to flowback.

Attachment VII. Operational Practices:***19.15.27.8 Subsection A: Venting and Flaring of Natural Gas***

Longfellow Energy (LFE) understands the requirements of NMAC 19.15.27.8 which states that the venting and flaring of natural gas during drilling, completion, or production operations that constitutes waste as defined in 19.15.2 are prohibited.

19.15.27.8 Subsection B: Venting and flaring during drilling operations

1. LFE shall capture or combust natural gas if technically feasible using best industry practices
2. A properly-sized flare stack shall be located at a minimum of 100 feet from the nearest surface hole location unless otherwise approved by the division.
3. In an emergency or malfunction, LFE may vent natural gas to avoid a risk of an immediate and substantial adverse impact on safety, public health, or the environment. LFE will report natural gas vented or flared during an emergency or malfunction to the NMOCD.

19.15.27.8 Subsection C: Venting and flaring during completion or recompletion operations

1. During initial flowback, LFE shall route flowback fluids into a completion or storage tank and, if technically feasible under the applicable well conditions, flare rather than vent and commence operation of a separator as soon as it is technically feasible for a separator to function
2. During separation flowback, LFE shall capture and route natural gas from the separation equipment:
 - a. to a gas flowline or collection system, reinject into the well, or use on-site as a fuel source or other purpose that a purchased fuel or raw material would serve; or
 - b. to a flare if routing the natural gas to a gas flowline or collection system, reinjecting it into the well, or using it on-site as a fuel source or other purpose that a purchased fuel or raw material would serve would pose a risk to safe operation or personnel safety.
3. If natural gas does not meet gathering pipeline quality specifications, LFE may flare the natural gas for 60 days or until the natural gas meets the pipeline quality specifications, whichever is sooner, provided that:

19.15.27.8 Subsection D: Venting and flaring during production operations

LFE shall not vent or flare natural gas except:

1. during an emergency or malfunction;
2. to unload or clean-up liquid holdup in a well to atmospheric pressure, provided
 - a. LFE does not vent after the well achieves a stabilized rate and pressure;
 - b. for liquids unloading by manual purging, LFE remains present on-site until the end of unloading or posts at the well site the contact information of the personnel conducting the liquids unloading operation and ensures that personnel remains within 30 minutes' drive time of the well being unloaded until the end of unloading, takes all reasonable actions to achieve a stabilized rate and pressure at the earliest practical time and takes reasonable actions to minimize venting to the maximum extent practicable;
 - c. during downhole well maintenance, only when LFE uses a workover rig, swabbing rig, coiled tubing unit or similar specialty equipment and minimizes the venting of natural gas to the extent that it does not pose a risk to safe operations and personnel safety
3. during the following activities unless prohibited by applicable state or federal law, rule, or regulation for the emission of hydrocarbons and volatile organic compounds:
 - a. gauging or sampling a storage tank or other low-pressure production vessel;
 - b. loading out liquids from a storage tank or other low-pressure production vessel to a transport vehicle;
 - c. repair and maintenance, including blowing down and depressurizing production equipment to perform repair and maintenance;
 - d. normal operation of a gas-activated pneumatic controller or pump;
 - e. normal operation of a storage tank or other low-pressure production vessel, but not including venting from a thief hatch that is not properly closed or maintained
 - f. normal operations of valves, flanges and connectors that is not the result of inadequate equipment design or maintenance;
 - g. a packer leakage test;
 - h. a production test lasting less than 24 hours unless the division requires or approves a longer test period;
 - i. when natural gas does not meet the gathering pipeline specifications, provided LFE analyzes natural gas samples twice per week to determine whether the specifications have been achieved, routes the natural gas into a gathering pipeline as soon as the pipeline specifications are met and provides the pipeline specifications and natural gas analyses to the division upon request; or
 - j. Commissioning of pipelines, equipment, or facilities only for as long as necessary to purge introduced impurities from the pipeline or equipment.

19.15.27.8 Subsection E: Performance Standards

1. LFE designed completion and production separation equipment and storage tanks for maximum anticipated throughput and pressure to minimize waste.
2. LFE permanent storage tanks associated with production operations that is routed to a flare or control device are equipped with automatic gauging system that reduces the venting of natural gas.
3. LFE shall combust natural gas in a flare stack that is properly sized and designed to ensure proper combustion efficiency.
 - a. The flare stack shall be equipped with an automatic ignitor or continuous pilot.

4. The flare stack shall be securely anchored and located at least 100 feet from the well and storage tanks unless otherwise approved by the division.
5. LFE shall conduct an AVO inspection weekly to confirm that all production equipment is operating properly and there are no leaks or releases except as allowed in Subsection D of 19.15.27.8 NMAC.
 - a. During an AVO inspection the LFE shall inspect all components, including flare stacks, thief hatches, closed vent systems, pumps, compressors, pressure relief devices, valves, lines, flanges, connectors, and associated piping to identify defects, leaks, and releases by:
 - i. a comprehensive external visual inspection;
 - ii. listening for pressure and liquid leaks; and
 - iii. smelling for unusual and strong odors.
 - b. LFE shall make and keep a record of an AVO inspection for not less than five years and make such record available for inspection by the division upon request.
6. facilities shall be designed to minimize waste;
7. LFE has an obligation to minimize waste and shall resolve emergencies as quickly and safely as is feasible.

19.15.27.8 Subsection F: Measurement or estimation of vented and flared natural gas

1. LFE shall measure or estimate the volume of natural gas that it vents, flares, or beneficially uses during drilling, completion, and production operations regardless of the reason or authorization for such venting or flaring.
2. LFE shall install equipment to measure the volume of natural gas flared from existing process piping or a flowline piped from equipment such as high pressure separators, heater treaters, or vapor recovery units associated with a well or facility associated with a well authorized by the APD

Attachment VIII. Best Management Practices:

Longfellow Energy (LFE) utilizes the following best management practices to minimize venting during active and planned maintenance

1. LFE has a closed vent capture system to route emissions from the heater treater, tanks and vapor to the VRU with a flare for backup. The system is designed such that if the VRU is taken out of service for any reason, the vapors will be routed to the flare for combustion.
2. LFE will isolate and attempt to route all vapors to the VRU or flare prior to opening any lines for maintenance to minimize venting from the equipment when technically feasible
3. LFE will shut in wells in the event of a takeaway disruption, emergency situations, or other operations where venting or flaring may occur due to equipment failures.
4. Lease operators will be visiting the location daily to check and maintain all equipment ensuring all scrubbers, flame arrestors, and the flare ignitor is functioning properly.