

DISTRICT I

1625 N. French Dr., Hobbs, NM 88240

DISTRICT II

811 S. First St., Artesia, NM 88210

DISTRICT III

1000 Rio Brazos Rd., Aztec, NM 87410

DISTRICT IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural ResourcesForm C-104
Revised August 1, 2011Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Submit one copy to appropriate District Office

☐ AMENDED REPORT

I. REQUEST FOR ALLOWABLE AND AUTHORIZATION TO TRANSPORT

¹ Operator name and Address TAP ROCK OPERATING, LLC 523 PARK POINT DRIVE, SUITE 200 GOLDEN, CO 80401		² OGRID Number 372043
		³ Reason for Filing Code/ Effective Date NW
⁴ API Number 30 - 0 15-47863	⁵ Pool Name PURPLE SAGE WOLFCAMP NSL-8361	⁶ Pool Code 98220
⁷ Property Code 329906	⁸ Property Name CYPRESS 33 FED COM	⁹ Well Number 242H

II. ¹⁰ Surface Location

UI or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South Line	Feet from the	East/West line	County
D	33	23S	29E	-	226	NORTH	1314	WEST	EDDY

¹¹ Bottom Hole Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
N	33	23S	29E	-	33	SOUTH	2084	WEST	EDDY
¹² Lse Code F	¹³ Producing Method Code F	¹⁴ Gas Connection Date 7/30/2022	¹⁵ C-129 Permit Number	¹⁶ C-129 Effective Date	¹⁷ C-129 Expiration Date				

III. Oil and Gas Transporters

¹⁸ Transporter OGRID	¹⁹ Transporter Name and Address	²⁰ O/G/W
373554	SALT CREEK MIDSTREAM, LLC 20329 STATE HIGHWAY 249 HOUSTON, TX U.S.A 77070	O
373554	SALT CREEK MIDSTREAM, LLC 20329 STATE HIGHWAY 249 HOUSTON, TX U.S.A 77070	G

IV. Well Completion Data

²¹ Spud Date	²² Ready Date	²³ TD	²⁴ PBTB	²⁵ Perforations	²⁶ DHC, MC
4/23/2022	7/26/2022	15955'	15893'	10910 ft to 15688 ft	
²⁷ Hole Size	²⁸ Casing & Tubing Size	²⁹ Depth Set	³⁰ Sacks Cement		
17.5"	13.375"	363'	405 sks		
9.875"	7.625"	10340'	1010 sks		
6.75"	5.5"	15939'	770 sks		

V. Well Test Data

³¹ Date New Oil	³² Gas Delivery Date	³³ Test Date	³⁴ Test Length	³⁵ Tbg. Pressure	³⁶ Csg. Pressure
7/30/2022	7/30/2022	8/5/2022	24 hrs.	0	3275
³⁷ Choke Size	³⁸ Oil	³⁹ Water	⁴⁰ Gas		⁴¹ Test Method
32/64	45	2843	7209		Flowing
⁴² I hereby certify that the rules of the Oil Conservation Division have been complied with and that the information given above is true and complete to the best of my knowledge and belief. Signature:			OIL CONSERVATION DIVISION		
Printed name: Jeff Trlica			Approved by: PATRICIA MARTINEZ		
Title: Regulatory Analyst			Title: PETROLEUM SPECIALIST		
E-mail Address: jtrlica@taprk.com			Approval Date: 6/29/2023		
Date: 8/31/2022		Phone: 720-771-5910			

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720

District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170

District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 746-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources
Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

FORM C-102

Revised August 1, 2011

Submit one copy to appropriate

District Office☐ **AMENDED REPORT**

As Drilled

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-015-47863	² Pool Code 98220	³ Pool Name PRUPLE SAGE; WOLFCAMP
⁴ Property Code 329906	⁵ Property Name CYPRESS 33 FED COM	
⁷ OGRID No. 372043	⁸ Operator Name TAP ROCK OPERATING, LLC.	⁶ Well Number 242H ⁹ Elevation 3005'

¹⁰Surface Location


UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
D	33	23-S	29-E	-	226'	NORTH	1314'	WEST	EDDY


¹¹Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
N	33	23-S	29-E	-	33'	SOUTH	2084'	WEST	EDDY

¹² Dedicated Acres 320	¹³ Joint or Infill Infill	¹⁴ Consolidation Code	¹⁵ Order No.
--------------------------------------	---	----------------------------------	-------------------------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

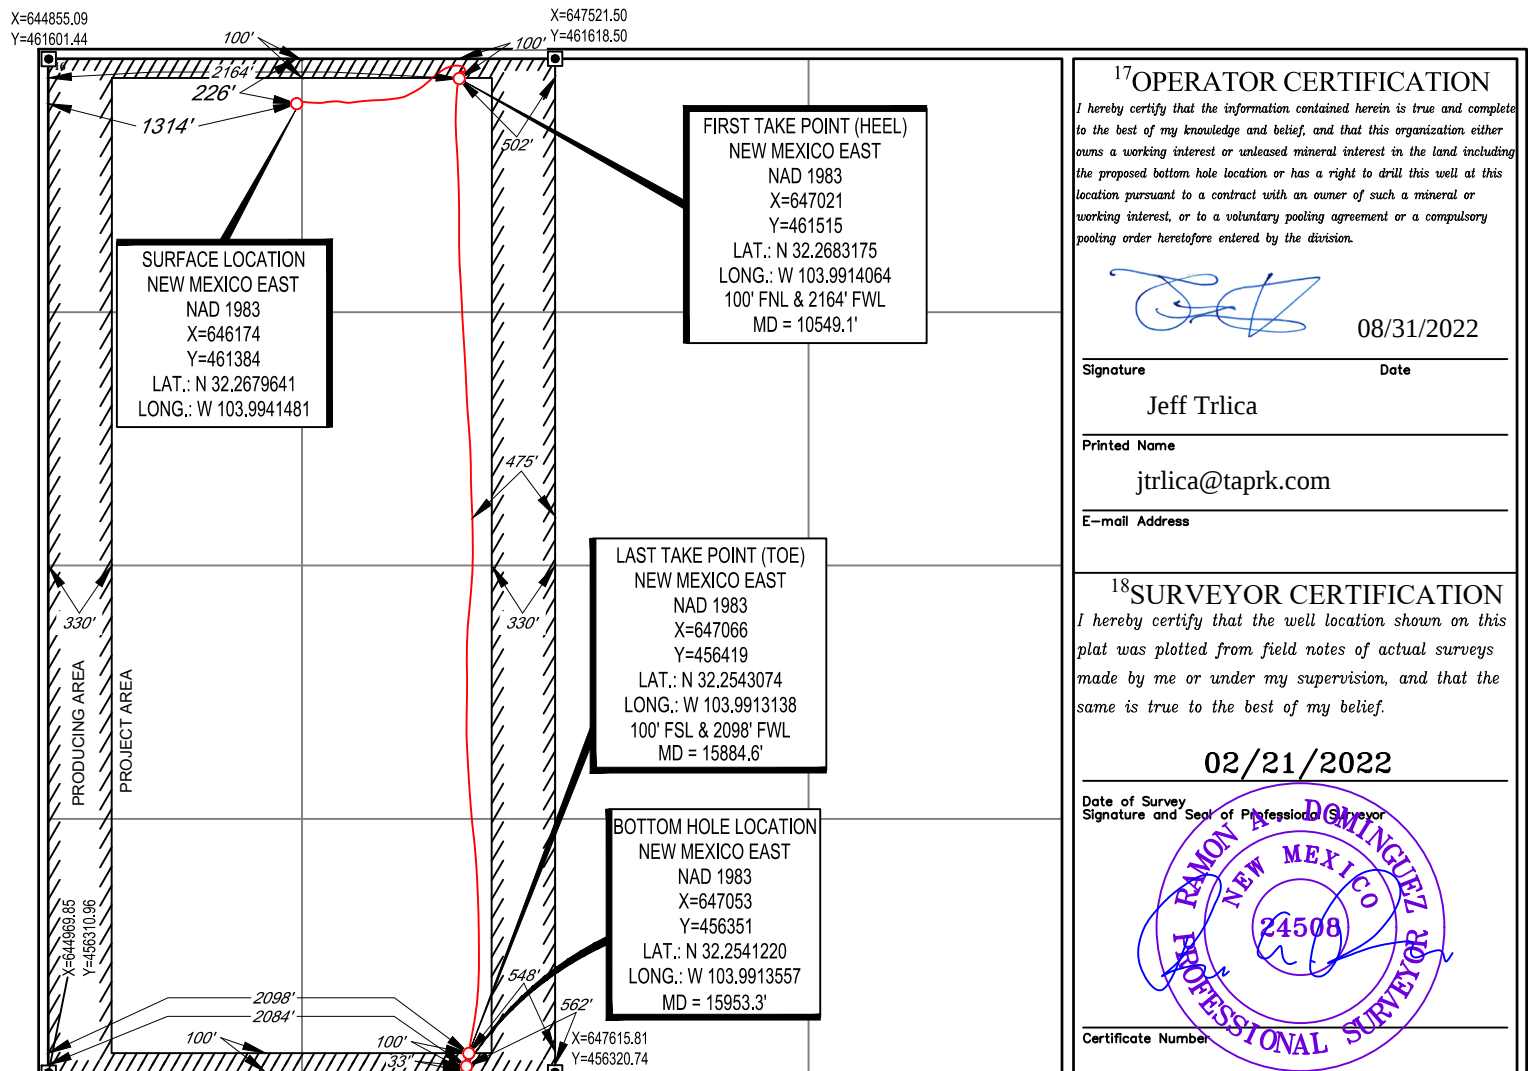



INTERNAL
PRE-COMPLETION
PLAT



1400 EVERMAN PARKWAY, Ste. 146 • FT. WORTH, TEXAS 76140
TELEPHONE: (817) 744-7512 • FAX (817) 744-7554
TEXAS FIRM REGISTRATION NO. 10042504
WWW.TOPOGRAPHIC.COM

CYPRESS 33 FED COM 242H PRE-COMPLETION	REVISION:		NOTES: 1. ORIGINAL DOCUMENT SIZE: 8.5" X 11" 2. ALL BEARINGS, DISTANCES, AND COORDINATE VALUES CONTAINED HEREIN ARE GRID BASED UPON THE NEW MEXICO COORDINATE SYSTEM OF 1983, EAST ZONE, U.S. SURVEY FEET. 3. THIS WELL LOCATION SHOWN HEREON HAS BEEN SURVEYED ON THE GROUND UNDER MY SUPERVISION AND PREPARED ACCORDING TO THE EVIDENCE FOUND AT THE TIME OF SURVEY, AND DATA PROVIDED BY TAP ROCK OPERATING, LLC. THIS CERTIFICATION IS MADE AND LIMITED TO THOSE PERSONS OR ENTITIES SHOWN ON THE FACE OF THIS PLAT AND IS NON-TRANSFERABLE. THIS SURVEY IS CERTIFIED FOR THIS TRANSACTION ONLY.
DATE: 06/29/2022			
FILE: C:\CYPRESS_33_FED_COM_242H			
DRAWN BY: IMU			
SHEET : 2 OF 2			



Operator: Tap Rock Resources, LLC
Well Name: Cypress 33 Fed Com 242H
County: Eddy
State: New Mexico
Rig Name: H&P 388
API: 30-015-47863

Intrepid Directional Drilling Specialists certifies that the surveys performed on the above referenced well are true and correct MWD surveys, data provided as follows:

Surveyor: Intrepid Directional Drilling Specialists
Survey Depths: 198' MD – 15,882' MD
Projection to Bit: 15,955' MD
Dates Performed: 04/23/2022 – 05/21/2022
Type of Survey: MWD

Sincerely,

A handwritten signature in black ink, appearing to read "T. Henk".

Travis Henk
MWD Operations Manager
Intrepid Directional Drilling Specialists





Tap Rock Resources, LLC

Eddy County, NM (NAD 83 NME)
(Cypress) Sec-33_T-23-S_R-29-E
Cypress 33 Fed Com #242H

OWB

Design: AWB

Standard Survey Report

23 May, 2022





Intrepid Survey Report



Company:	Tap Rock Resources, LLC	Local Co-ordinate Reference:	Well Cypress 33 Fed Com #242H
Project:	Eddy County, NM (NAD 83 NME)	TVD Reference:	KB @ 3032.0usft (H&P 388)
Site:	(Cypress) Sec-33_T-23-S_R-29-E	MD Reference:	KB @ 3032.0usft (H&P 388)
Well:	Cypress 33 Fed Com #242H	North Reference:	Grid
Wellbore:	OWB	Survey Calculation Method:	Minimum Curvature
Design:	AWB	Database:	EDM 5000.15 Single User Db

Project	Eddy County, NM (NAD 83 NME)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	(Cypress) Sec-33_T-23-S_R-29-E		
Site Position:		Northing:	461,636.00 usft
From:	Map	Easting:	648,734.00 usft
Position Uncertainty:	0.0 usft	Slot Radius:	13-3/16 "
		Latitude:	32° 16' 7.083 N
		Longitude:	103° 59' 9.109 W
		Grid Convergence:	0.19 °

Well	Cypress 33 Fed Com #242H		
Well Position	+N/-S	0.0 usft	Northing:
	+E/-W	0.0 usft	Easting:
Position Uncertainty	0.0 usft	Wellhead Elevation:	usft
		Latitude:	32° 16' 4.670 N
		Longitude:	103° 59' 38.935 W
		Ground Level:	3,006.0 usft

Wellbore	OWB				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	HDGM	04/25/22	6.73	59.92	47,630.85047188

Design	AWB				
Audit Notes:					
Version:	1.0	Phase:	ACTUAL	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)	
	0.0	0.0	0.0	178.75	

Survey Program	Date	05/23/22			
From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description	
198.0	15,955.0	Intrepid MWD (OWB)	MWD	OWSG MWD - Standard	

Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00	
198.0	1.41	285.43	198.0	0.6	-2.3	-0.7	0.71	0.71	0.00	
311.0	1.93	291.14	310.9	1.7	-5.5	-1.8	0.48	0.46	5.05	
413.0	1.10	322.78	412.9	3.1	-7.7	-3.3	1.13	-0.81	31.02	
508.0	1.01	300.46	507.9	4.3	-8.9	-4.4	0.44	-0.09	-23.49	
602.0	1.10	284.90	601.9	4.9	-10.5	-5.1	0.32	0.10	-16.55	
695.0	1.27	275.85	694.8	5.2	-12.4	-5.5	0.27	0.18	-9.73	
789.0	1.23	275.14	788.8	5.4	-14.4	-5.8	0.05	-0.04	-0.76	
884.0	1.49	267.76	883.8	5.5	-16.7	-5.8	0.33	0.27	-7.77	
978.0	2.11	265.74	977.7	5.3	-19.6	-5.7	0.66	0.66	-2.15	



Intrepid Survey Report



Company:	Tap Rock Resources, LLC	Local Co-ordinate Reference:	Well Cypress 33 Fed Com #242H
Project:	Eddy County, NM (NAD 83 NME)	TVD Reference:	KB @ 3032.0usft (H&P 388)
Site:	(Cypress) Sec-33_T-23-S_R-29-E	MD Reference:	KB @ 3032.0usft (H&P 388)
Well:	Cypress 33 Fed Com #242H	North Reference:	Grid
Wellbore:	OWB	Survey Calculation Method:	Minimum Curvature
Design:	AWB	Database:	EDM 5000.15 Single User Db

Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
1,129.0	1.05	267.23	1,128.7	5.0	-23.8	-5.5	0.70	-0.70	0.99	
1,224.0	0.40	112.11	1,223.7	4.9	-24.4	-5.4	1.50	-0.68	-163.28	
1,319.0	4.40	89.34	1,318.6	4.8	-20.4	-5.2	4.25	4.21	-23.97	
1,413.0	5.85	80.91	1,412.2	5.6	-12.1	-5.8	1.73	1.54	-8.97	
1,506.0	5.80	78.18	1,504.7	7.3	-2.8	-7.3	0.30	-0.05	-2.94	
1,600.0	7.21	81.52	1,598.1	9.1	7.7	-9.0	1.55	1.50	3.55	
1,695.0	8.75	89.78	1,692.2	10.0	20.8	-9.6	2.02	1.62	8.69	
1,789.0	8.62	91.72	1,785.1	9.9	35.0	-9.1	0.34	-0.14	2.06	
1,882.0	7.30	99.89	1,877.2	8.6	47.8	-7.6	1.87	-1.42	8.78	
1,975.0	7.74	96.55	1,969.4	6.9	59.8	-5.6	0.67	0.47	-3.59	
2,070.0	9.80	92.95	2,063.3	5.8	74.3	-4.1	2.24	2.17	-3.79	
2,165.0	11.47	93.12	2,156.7	4.8	91.8	-2.8	1.76	1.76	0.18	
2,258.0	10.59	89.52	2,248.0	4.4	109.6	-2.0	1.20	-0.95	-3.87	
2,353.0	9.19	90.31	2,341.5	4.4	125.9	-1.7	1.48	-1.47	0.83	
2,448.0	10.73	83.19	2,435.1	5.4	142.2	-2.3	2.07	1.62	-7.49	
2,541.0	14.64	78.97	2,525.8	8.7	162.4	-5.2	4.32	4.20	-4.54	
2,635.0	16.13	85.92	2,616.5	11.9	187.1	-7.8	2.52	1.59	7.39	
2,728.0	14.55	93.21	2,706.2	12.2	211.6	-7.6	2.68	-1.70	7.84	
2,823.0	11.34	99.89	2,798.7	9.9	232.7	-4.8	3.72	-3.38	7.03	
2,917.0	9.45	101.21	2,891.2	6.8	249.4	-1.4	2.03	-2.01	1.40	
3,012.0	8.62	93.30	2,985.0	4.9	264.2	0.9	1.57	-0.87	-8.33	
3,107.0	9.93	85.92	3,078.8	5.1	279.5	1.0	1.86	1.38	-7.77	
3,202.0	11.96	82.05	3,172.0	7.0	297.4	-0.5	2.27	2.14	-4.07	
3,297.0	12.00	80.20	3,265.0	10.1	316.9	-3.1	0.41	0.04	-1.95	
3,391.0	12.04	85.48	3,356.9	12.5	336.3	-5.1	1.17	0.04	5.62	
3,486.0	12.48	85.21	3,449.7	14.1	356.4	-6.3	0.47	0.46	-0.28	
3,580.0	12.35	83.45	3,541.5	16.1	376.5	-7.9	0.43	-0.14	-1.87	
3,675.0	12.35	89.26	3,634.4	17.4	396.7	-8.8	1.31	0.00	6.12	
3,770.0	12.75	88.46	3,727.1	17.8	417.4	-8.7	0.46	0.42	-0.84	
3,864.0	11.74	86.62	3,818.9	18.7	437.3	-9.1	1.15	-1.07	-1.96	
3,959.0	10.68	86.09	3,912.1	19.8	455.7	-9.9	1.12	-1.12	-0.56	
4,054.0	10.59	84.16	4,005.5	21.3	473.2	-11.0	0.39	-0.09	-2.03	
4,148.0	10.24	83.01	4,098.0	23.2	490.1	-12.5	0.43	-0.37	-1.22	
4,242.0	10.24	82.58	4,190.5	25.3	506.6	-14.3	0.08	0.00	-0.46	
4,336.0	10.24	80.91	4,283.0	27.7	523.2	-16.3	0.32	0.00	-1.78	
4,431.0	10.02	78.44	4,376.5	30.7	539.6	-18.9	0.51	-0.23	-2.60	
4,526.0	9.41	74.58	4,470.1	34.4	555.2	-22.3	0.94	-0.64	-4.06	
4,619.0	8.88	68.16	4,561.9	39.1	569.2	-26.7	1.24	-0.57	-6.90	
4,713.0	9.19	62.18	4,654.8	45.3	582.6	-32.6	1.05	0.33	-6.36	
4,808.0	10.02	61.13	4,748.4	52.9	596.5	-39.8	0.89	0.87	-1.11	
4,902.0	10.46	61.22	4,840.9	60.9	611.2	-47.6	0.47	0.47	0.10	
4,994.0	10.51	60.08	4,931.4	69.1	625.7	-55.4	0.23	0.05	-1.24	
5,087.0	10.29	57.53	5,022.9	77.8	640.1	-63.8	0.55	-0.24	-2.74	
5,182.0	9.05	54.54	5,116.5	86.7	653.3	-72.4	1.41	-1.31	-3.15	



Intrepid Survey Report



Company:	Tap Rock Resources, LLC	Local Co-ordinate Reference:	Well Cypress 33 Fed Com #242H
Project:	Eddy County, NM (NAD 83 NME)	TVD Reference:	KB @ 3032.0usft (H&P 388)
Site:	(Cypress) Sec-33_T-23-S_R-29-E	MD Reference:	KB @ 3032.0usft (H&P 388)
Well:	Cypress 33 Fed Com #242H	North Reference:	Grid
Wellbore:	OWB	Survey Calculation Method:	Minimum Curvature
Design:	AWB	Database:	EDM 5000.15 Single User Db

Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
5,276.0	9.85	50.32	5,209.3	96.1	665.6	-81.6	1.13	0.85	-4.49
5,371.0	10.59	47.51	5,302.7	107.2	678.3	-92.4	0.94	0.78	-2.96
5,466.0	11.69	49.00	5,396.0	119.4	692.0	-104.3	1.20	1.16	1.57
5,561.0	10.42	47.33	5,489.2	131.6	705.5	-116.1	1.38	-1.34	-1.76
5,655.0	9.98	47.59	5,581.7	142.8	717.8	-127.1	0.47	-0.47	0.28
5,750.0	11.52	52.08	5,675.0	154.2	731.4	-138.2	1.84	1.62	4.73
5,845.0	12.35	54.10	5,768.0	166.0	747.1	-149.6	0.98	0.87	2.13
5,939.0	13.80	58.84	5,859.5	177.7	764.8	-160.9	1.92	1.54	5.04
5,987.0	13.76	65.09	5,906.2	183.0	774.9	-166.1	3.10	-0.08	13.02
6,034.0	13.49	66.05	5,951.8	187.6	785.0	-170.5	0.75	-0.57	2.04
6,128.0	13.71	75.37	6,043.2	194.9	805.8	-177.3	2.34	0.23	9.91
6,222.0	11.47	86.79	6,135.0	198.2	825.9	-180.2	3.55	-2.38	12.15
6,316.0	9.23	95.50	6,227.4	198.0	842.7	-179.6	2.90	-2.38	9.27
6,410.0	8.04	107.71	6,320.4	195.3	856.5	-176.6	2.32	-1.27	12.99
6,505.0	5.85	120.02	6,414.7	190.9	867.0	-171.9	2.77	-2.31	12.96
6,598.0	4.48	139.79	6,507.3	185.7	873.5	-166.6	2.39	-1.47	21.26
6,693.0	2.95	168.09	6,602.1	180.5	876.4	-161.3	2.47	-1.61	29.79
6,787.0	2.24	177.76	6,696.0	176.3	876.9	-157.1	0.88	-0.76	10.29
6,881.0	2.07	177.94	6,789.9	172.7	877.1	-153.6	0.18	-0.18	0.19
6,976.0	1.23	187.69	6,884.9	170.0	877.0	-150.9	0.93	-0.88	10.26
7,070.0	0.88	250.36	6,978.9	168.8	876.2	-149.6	1.21	-0.37	66.67
7,164.0	0.57	230.76	7,072.9	168.2	875.1	-149.1	0.42	-0.33	-20.85
7,259.0	1.01	256.77	7,167.9	167.8	874.0	-148.6	0.59	0.46	27.38
7,353.0	1.63	245.26	7,261.9	167.0	871.9	-147.9	0.71	0.66	-12.24
7,448.0	1.71	257.13	7,356.8	166.1	869.3	-147.1	0.37	0.08	12.49
7,542.0	2.42	267.50	7,450.8	165.7	866.0	-146.8	0.85	0.76	11.03
7,637.0	1.32	292.55	7,545.7	166.1	863.0	-147.2	1.42	-1.16	26.37
7,732.0	0.48	318.47	7,640.7	166.8	861.7	-147.9	0.96	-0.88	27.28
7,825.0	0.62	273.30	7,733.7	167.1	860.9	-148.3	0.48	0.15	-48.57
7,920.0	0.70	287.36	7,828.7	167.3	859.9	-148.5	0.19	0.08	14.80
8,015.0	0.66	37.93	7,923.7	167.9	859.6	-149.1	1.18	-0.04	116.39
8,110.0	1.49	105.43	8,018.7	168.0	861.2	-149.2	1.45	0.87	71.05
8,205.0	1.63	121.42	8,113.6	167.0	863.5	-148.1	0.48	0.15	16.83
8,300.0	1.19	198.77	8,208.6	165.3	864.3	-146.4	1.89	-0.46	81.42
8,395.0	0.88	158.95	8,303.6	163.7	864.3	-144.8	0.80	-0.33	-41.92
8,489.0	0.22	228.21	8,397.6	162.9	864.4	-144.0	0.88	-0.70	73.68
8,584.0	0.18	173.10	8,492.6	162.7	864.3	-143.8	0.20	-0.04	-58.01
8,678.0	1.76	344.67	8,586.6	163.9	863.9	-145.0	2.06	1.68	182.52
8,774.0	0.79	53.48	8,682.6	165.7	864.1	-146.8	1.72	-1.01	71.68
8,868.0	0.57	131.53	8,776.5	165.8	864.9	-146.9	0.93	-0.23	83.03
8,961.0	1.23	186.46	8,869.5	164.5	865.2	-145.6	1.09	0.71	59.06
9,056.0	2.59	208.00	8,964.5	161.6	864.1	-142.7	1.59	1.43	22.67
9,151.0	2.77	233.31	9,059.4	158.3	861.2	-139.5	1.25	0.19	26.64



Intrepid Survey Report



Company:	Tap Rock Resources, LLC	Local Co-ordinate Reference:	Well Cypress 33 Fed Com #242H
Project:	Eddy County, NM (NAD 83 NME)	TVD Reference:	KB @ 3032.0usft (H&P 388)
Site:	(Cypress) Sec-33_T-23-S_R-29-E	MD Reference:	KB @ 3032.0usft (H&P 388)
Well:	Cypress 33 Fed Com #242H	North Reference:	Grid
Wellbore:	OWB	Survey Calculation Method:	Minimum Curvature
Design:	AWB	Database:	EDM 5000.15 Single User Db

Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
9,243.0	2.20	217.66	9,151.3	155.6	858.3	-136.8	0.96	-0.62	-17.01	
9,338.0	1.23	225.05	9,246.3	153.4	856.5	-134.7	1.05	-1.02	7.78	
9,433.0	0.84	223.64	9,341.2	152.2	855.3	-133.5	0.41	-0.41	-1.48	
9,528.0	0.48	249.66	9,436.2	151.6	854.5	-132.9	0.48	-0.38	27.39	
9,623.0	0.70	221.79	9,531.2	151.0	853.7	-132.3	0.37	0.23	-29.34	
9,717.0	1.19	186.64	9,625.2	149.6	853.2	-130.9	0.78	0.52	-37.39	
9,813.0	1.41	181.63	9,721.2	147.4	853.1	-128.8	0.26	0.23	-5.22	
9,907.0	0.75	174.07	9,815.2	145.7	853.1	-127.0	0.72	-0.70	-8.04	
10,002.0	0.53	46.10	9,910.2	145.3	853.5	-126.7	1.22	-0.23	-134.71	
10,096.0	1.14	342.20	10,004.2	146.5	853.5	-127.9	1.09	0.65	-67.98	
10,191.0	0.92	298.87	10,099.1	147.8	852.5	-129.2	0.83	-0.23	-45.61	
10,285.0	0.88	271.54	10,193.1	148.2	851.2	-129.6	0.45	-0.04	-29.07	
10,360.0	0.88	290.09	10,268.1	148.4	850.0	-129.8	0.38	0.00	24.73	
10,420.0	0.57	296.50	10,328.1	148.7	849.3	-130.1	0.53	-0.52	10.68	
10,515.0	12.04	185.06	10,422.4	139.0	848.0	-120.5	12.90	12.07	-117.31	
10,549.3	14.12	189.69	10,455.8	131.3	847.0	-112.8	6.79	6.07	13.50	
FTP @ 10549.3'MD, 100'FNL & 2163.1'FWL										
10,609.0	17.89	195.16	10,513.2	115.3	843.4	-96.8	6.79	6.31	9.16	
10,704.0	23.69	187.69	10,602.0	82.2	837.0	-64.0	6.70	6.11	-7.86	
10,798.0	35.30	181.80	10,683.7	36.2	833.6	-18.0	12.72	12.35	-6.27	
10,893.0	43.78	183.74	10,756.9	-24.1	830.6	42.2	9.02	8.93	2.04	
10,988.0	57.54	179.08	10,817.0	-97.4	829.1	115.4	14.97	14.48	-4.91	
11,082.0	68.09	176.35	10,859.9	-180.8	832.5	198.9	11.52	11.22	-2.90	
11,177.0	76.48	176.88	10,888.8	-271.1	837.9	289.3	8.85	8.83	0.56	
11,271.0	80.40	177.50	10,907.6	-363.0	842.4	381.3	4.22	4.17	0.66	
11,367.0	87.12	178.73	10,918.0	-458.3	845.5	476.7	7.11	7.00	1.28	
11,461.0	88.40	179.43	10,921.7	-552.3	847.0	570.6	1.55	1.36	0.74	
11,556.0	89.14	180.57	10,923.7	-647.2	847.0	665.6	1.43	0.78	1.20	
11,651.0	90.68	179.52	10,923.9	-742.2	846.9	760.5	1.96	1.62	-1.11	
11,746.0	88.35	176.88	10,924.7	-837.2	849.9	855.5	3.71	-2.45	-2.78	
11,841.0	88.66	176.18	10,927.2	-932.0	855.7	950.4	0.81	0.33	-0.74	
11,936.0	91.43	178.02	10,927.1	-1,026.8	860.5	1,045.3	3.50	2.92	1.94	
12,030.0	90.46	176.62	10,925.6	-1,120.7	864.9	1,139.3	1.81	-1.03	-1.49	
12,125.0	91.69	176.62	10,923.8	-1,215.5	870.5	1,234.2	1.29	1.29	0.00	
12,219.0	91.38	176.53	10,921.3	-1,309.3	876.1	1,328.1	0.34	-0.33	-0.10	
12,312.0	87.34	176.88	10,922.3	-1,402.1	881.4	1,421.0	4.36	-4.34	0.38	
12,407.0	89.05	178.02	10,925.3	-1,497.0	885.6	1,516.0	2.16	1.80	1.20	
12,502.0	89.27	176.53	10,926.7	-1,591.9	890.2	1,610.9	1.59	0.23	-1.57	
12,597.0	87.52	174.33	10,929.3	-1,686.5	897.7	1,705.7	2.96	-1.84	-2.32	
12,691.0	87.96	176.79	10,933.0	-1,780.2	905.0	1,799.5	2.66	0.47	2.62	
12,786.0	89.10	179.69	10,935.5	-1,875.1	907.9	1,894.4	3.28	1.20	3.05	
12,881.0	91.25	179.52	10,935.2	-1,970.1	908.6	1,989.4	2.27	2.26	-0.18	
12,975.0	88.04	176.53	10,935.8	-2,064.0	911.8	2,083.4	4.67	-3.41	-3.18	
13,069.0	89.23	177.50	10,938.0	-2,157.8	916.7	2,177.3	1.63	1.27	1.03	



Intrepid Survey Report



Company:	Tap Rock Resources, LLC	Local Co-ordinate Reference:	Well Cypress 33 Fed Com #242H
Project:	Eddy County, NM (NAD 83 NME)	TVD Reference:	KB @ 3032.0usft (H&P 388)
Site:	(Cypress) Sec-33_T-23-S_R-29-E	MD Reference:	KB @ 3032.0usft (H&P 388)
Well:	Cypress 33 Fed Com #242H	North Reference:	Grid
Wellbore:	OWB	Survey Calculation Method:	Minimum Curvature
Design:	AWB	Database:	EDM 5000.15 Single User Db

Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
13,163.0	88.62	180.40	10,939.8	-2,251.8	918.4	2,271.3	3.15	-0.65	3.09
13,257.0	89.93	179.43	10,941.0	-2,345.8	918.6	2,365.2	1.73	1.39	-1.03
13,351.0	90.07	183.21	10,941.0	-2,439.7	916.4	2,459.1	4.02	0.15	4.02
13,445.0	89.27	185.14	10,941.5	-2,533.5	909.5	2,552.7	2.22	-0.85	2.05
13,539.0	89.01	185.32	10,942.9	-2,627.1	901.0	2,646.1	0.34	-0.28	0.19
13,633.0	89.98	184.97	10,943.8	-2,720.7	892.5	2,739.5	1.10	1.03	-0.37
13,728.0	87.12	180.93	10,946.2	-2,815.5	887.7	2,834.2	5.21	-3.01	-4.25
13,821.0	89.23	179.43	10,949.1	-2,908.4	887.4	2,927.1	2.78	2.27	-1.61
13,916.0	89.27	179.17	10,950.4	-3,003.4	888.5	3,022.1	0.28	0.04	-0.27
14,010.0	89.14	181.19	10,951.7	-3,097.4	888.2	3,116.1	2.15	-0.14	2.15
14,101.0	87.65	181.63	10,954.2	-3,188.3	886.0	3,206.9	1.71	-1.64	0.48
14,195.0	89.32	178.64	10,956.7	-3,282.3	885.8	3,300.8	3.64	1.78	-3.18
14,288.0	88.18	176.79	10,958.7	-3,375.2	889.5	3,393.8	2.34	-1.23	-1.99
14,380.0	87.74	176.71	10,962.0	-3,467.0	894.7	3,485.7	0.49	-0.48	-0.09
14,475.0	88.84	176.35	10,964.8	-3,561.8	900.4	3,580.6	1.22	1.16	-0.38
14,567.0	91.08	175.48	10,964.9	-3,653.5	907.0	3,672.5	2.61	2.43	-0.95
14,663.0	87.65	173.81	10,966.0	-3,749.1	916.0	3,768.2	3.97	-3.57	-1.74
14,757.0	85.67	173.81	10,971.4	-3,842.4	926.1	3,861.7	2.11	-2.11	0.00
14,852.0	85.14	175.83	10,979.1	-3,936.7	934.6	3,956.1	2.19	-0.56	2.13
14,946.0	86.77	176.88	10,985.7	-4,030.3	940.6	4,049.8	2.06	1.73	1.12
15,003.0	90.33	177.76	10,987.1	-4,087.2	943.2	4,106.8	6.43	6.25	1.54
15,041.0	89.10	177.76	10,987.3	-4,125.1	944.7	4,144.8	3.24	-3.24	0.00
15,135.0	89.58	178.02	10,988.4	-4,219.1	948.2	4,238.7	0.58	0.51	0.28
15,230.0	94.11	179.87	10,985.3	-4,314.0	949.9	4,333.7	5.15	4.77	1.95
15,325.0	93.14	179.52	10,979.3	-4,408.8	950.4	4,428.5	1.09	-1.02	-0.37
15,419.0	89.58	180.40	10,977.1	-4,502.7	950.5	4,522.4	3.90	-3.79	0.94
15,512.0	88.70	183.21	10,978.5	-4,595.7	947.6	4,615.2	3.17	-0.95	3.02
15,607.0	90.24	186.29	10,979.4	-4,690.3	939.7	4,709.7	3.62	1.62	3.24
15,701.0	88.22	189.63	10,980.6	-4,783.4	926.7	4,802.5	4.15	-2.15	3.55
15,796.0	90.46	191.56	10,981.7	-4,876.8	909.2	4,895.4	3.11	2.36	2.03
15,882.0	91.96	190.68	10,979.9	-4,961.1	892.7	4,979.4	2.02	1.74	-1.02
LAST SVY									
15,886.3	91.96	190.68	10,979.8	-4,965.3	891.9	4,983.6	0.00	0.00	0.00
LTP @ 15886.3'MD, 100'FSL & 2097.9'FWL									
15,955.0	91.96	190.68	10,977.4	-5,032.8	879.1	5,050.8	0.00	0.00	0.00
Projection to TD @ 15955'MD, 32.5'FSL & 2083.7'FWL									



Intrepid Survey Report



Company:	Tap Rock Resources, LLC	Local Co-ordinate Reference:	Well Cypress 33 Fed Com #242H
Project:	Eddy County, NM (NAD 83 NME)	TVD Reference:	KB @ 3032.0usft (H&P 388)
Site:	(Cypress) Sec-33_T-23-S_R-29-E	MD Reference:	KB @ 3032.0usft (H&P 388)
Well:	Cypress 33 Fed Com #242H	North Reference:	Grid
Wellbore:	OWB	Survey Calculation Method:	Minimum Curvature
Design:	AWB	Database:	EDM 5000.15 Single User Db

Design Targets									
Target Name									
- hit/miss target	Dip Angle	Dip Dir.	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
- Shape	(°)	(°)	(usft)	(usft)	(usft)	(usft)	(usft)		
FTP (Cypress 33 Fed Com #242H)	0.00	0.00	10,925.0	131.0	828.0	461,515.00	647,002.00	32° 16' 5.941 N	103° 59' 29.287 W
- actual wellpath misses target center by 228.8usft at 10893.0usft MD (10756.9 TVD, -24.1 N, 830.6 E)									
- Point									
LTP (Cypress 33 Fed Com #242H)	0.00	0.00	10,969.0	-4,965.0	939.0	456,419.00	647,113.00	32° 15' 15.508 N	103° 59' 28.183 W
- actual wellpath misses target center by 47.6usft at 15877.1usft MD (10980.1 TVD, -4956.3 N, 893.6 E)									
- Point									
PBHL (Cypress 33 Fed Com #242H)	0.50	178.75	10,969.0	-5,035.0	941.0	456,349.00	647,115.00	32° 15' 14.815 N	103° 59' 28.162 W
- actual wellpath misses target center by 61.8usft at 15946.0usft MD (10977.7 TVD, -5024.0 N, 880.8 E)									
- Rectangle (sides W100.0 H5,166.0 D30.0)									

Formations						
Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)	
165.0	165.0	Rustler Anhydrite				
465.1	465.0	Top Salt				
2,757.7	2,735.0	Base Salt				
2,986.7	2,960.0	Delaware Mountain Gp				
2,986.7	2,960.0	Lamar				
3,012.0	2,985.0	Bell Canyon				
3,057.5	3,030.0	Ramsey Sand				
3,921.2	3,875.0	Cherry Canyon				
5,119.6	5,055.0	Brushy Canyon				
6,766.0	6,675.0	Bone Spring Lime				
6,876.0	6,785.0	Upper Avalon				
7,216.1	7,125.0	Middle Avalon				
7,581.3	7,490.0	Lower Avalon				
7,756.3	7,665.0	1st Bone Spring Sand				
8,041.3	7,950.0	2nd Bone Spring Carb				
8,336.4	8,245.0	2nd Bone Spring Sand				
8,876.5	8,785.0	3rd Bone Spring Carb				
9,691.8	9,600.0	3rd Bone Spring Sand				
9,976.8	9,885.0	3rd BS W Sand				
10,031.8	9,940.0	Wolfcamp A X Sand				
10,121.8	10,030.0	Wolfcamp A Y Sand				
10,176.9	10,085.0	Wolfcamp A Lower				
10,492.2	10,400.0	Wolfcamp B				
10,769.6	10,660.0	Wolfcamp B1				
10,949.8	10,795.0	Wolfcamp C				



Intrepid Survey Report



Company:	Tap Rock Resources, LLC	Local Co-ordinate Reference:	Well Cypress 33 Fed Com #242H
Project:	Eddy County, NM (NAD 83 NME)	TVD Reference:	KB @ 3032.0usft (H&P 388)
Site:	(Cypress) Sec-33_T-23-S_R-29-E	MD Reference:	KB @ 3032.0usft (H&P 388)
Well:	Cypress 33 Fed Com #242H	North Reference:	Grid
Wellbore:	OWB	Survey Calculation Method:	Minimum Curvature
Design:	AWB	Database:	EDM 5000.15 Single User Db

Design Annotations

Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
10,549.3	10,455.8	131.3	847.0	FTP @ 10549.3'MD, 100'FNL & 2163.1'FWL
15,882.0	10,979.9	-4,961.1	892.7	LAST SVY
15,886.3	10,979.8	-4,965.3	891.9	LTP @ 15886.3'MD, 100'FSL & 2097.9'FWL
15,955.0	10,977.4	-5,032.8	879.1	Projection to TD @ 15955'MD, 32.5'FSL & 2083.7'FWL

Checked By: _____ Approved By: _____ Date: _____

Well Name: CYPRESS 33 FED COM	Well Location: T23S / R29E / SEC 33 / NWNW / 32.2679651 / -103.994326	County or Parish/State: EDDY / NM
Well Number: 242H	Type of Well: CONVENTIONAL GAS WELL	Allottee or Tribe Name:
Lease Number: NMNM86024	Unit or CA Name:	Unit or CA Number:
US Well Number: 3001547863	Well Status: Drilling Well	Operator: TAP ROCK OPERATING LLC

Subsequent Report

Sundry ID: 2686703

Type of Submission: Subsequent Report

Date Sundry Submitted: 08/11/2022

Date Operation Actually Began: 06/25/2022

Type of Action: Hydraulic Fracturing

Time Sundry Submitted: 09:12

Actual Procedure: 6/25/2022: Pressure test casing to 5005 psi for 30 minutes, good test. 6/30/2022 to 7/9/2022: Perforate from 10910 ft to 15688 ft, 1 SPF, .55 inch holes with 247 total shots. 19 stage frac with 12,895,934 lbs of 100 mesh sand. 7/24/2022 to 7/25/2022: Drill out plugs Plug Back Measured depth at 15893 ft MD, 10980 ft TVD. 7/26/2022: Ready to produce

Received by OCD: 6/28/2023 8:16:21 AM

Page 14 of 18

Well Name: CYPRESS 33 FED COM	Well Location: T23S / R29E / SEC 33 / NWNW / 32.2679651 / -103.994326	County or Parish/State: EDDY / NM
Well Number: 242H	Type of Well: CONVENTIONAL GAS WELL	Allottee or Tribe Name:
Lease Number: NMNM86024	Unit or CA Name:	Unit or CA Number:
US Well Number: 3001547863	Well Status: Drilling Well	Operator: TAP ROCK OPERATING LLC

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: JEFFREY TRLICA	Signed on: AUG 11, 2022 09:12 AM
Name: TAP ROCK OPERATING LLC	
Title: Regulatory Analyst	
Street Address: 523 PARK POINT DRIVE SUITE 200	
City: GOLDEN	State: CO
Phone: (720) 772-5910	
Email address: JTRLICA@TAPRK.COM	

Field

Representative Name:		
Street Address:		
City:	State:	Zip:
Phone:		
Email address:		

BLM Point of Contact

BLM POC Name: Jonathon W Shepard	BLM POC Title: Petroleum Engineer
BLM POC Phone: 5752345972	BLM POC Email Address: jshepard@blm.gov
Disposition: Accepted	Disposition Date: 08/27/2022
Signature: Jonathon Shepard	

Submit To Appropriate District Office Two Copies <u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 <u>District II</u> 811 S. First St., Artesia, NM 88210 <u>District III</u> 1000 Rio Brazos Rd., Aztec, NM 87410 <u>District IV</u> 1220 S. St. Francis Dr., Santa Fe, NM 87505		State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505			Form C-105 Revised April 3, 2017													
WELL COMPLETION OR RECOMPLETION REPORT AND LOG								1. WELL API NO. 30-015-47863										
4. Reason for filing: ☒ COMPLETION REPORT (Fill in boxes #1 through #31 for State and Fee wells only) ☐ C-144 CLOSURE ATTACHMENT (Fill in boxes #1 through #9, #15 Date Rig Released and #32 and/or #33; attach this and the plat to the C-144 closure report in accordance with 19.15.17.13.K NMAC)								5. Lease Name or Unit Agreement Name CYPRESS 33 FED COM										
								6. Well Number: 242H										
7. Type of Completion: ☒ NEW WELL ☐ WORKOVER ☐ DEEPENING ☐ PLUGBACK ☐ DIFFERENT RESERVOIR ☐ OTHER																		
8. Name of Operator TAP ROCK OPERATING, LLC							9. OGRID 372043											
10. Address of Operator 523 PARK POINT DRIVE, SUITE 200, GOLDEN, CO							11. Pool name or Wildcat PURPLE SAGE; WOLFCAMP											
12. Location	Unit Ltr	Section	Township	Range	Lot	Feet from the	N/S Line	Feet from the	E/W Line	County								
Surface:	D	33	23S	29E	-	226	NORTH	1314	WEST	EDDY								
BH:	N	33	23S	29E	-	33	SOUTH	2084	WEST	EDDY								
13. Date Spudded 4/23/2022	14. Date T.D. Reached 5/21/2022		15. Date Rig Released 5/24/2022			16. Date Completed (Ready to Produce) 7/26/2022		17. Elevations (DF and RKB, RT, GR, etc.) 3005 GR										
18. Total Measured Depth of Well 15955 ft			19. Plug Back Measured Depth 15893 ft			20. Was Directional Survey Made? YES		21. Type Electric and Other Logs Run GAMMA										
22. Producing Interval(s), of this completion - Top, Bottom, Name 10910 ft to 15688 ft							WOLFCAMP											
23. CASING RECORD (Report all strings set in well)																		
CASING SIZE		WEIGHT LB./FT.		DEPTH SET		HOLE SIZE		CEMENTING RECORD		AMOUNT PULLED								
13.375"		54.5		363'		17.5"		405 sks		0								
7.625"		29.7		10340'		9.875"		1010 sks		0								
5.5"		20		15939'		6.75"		770 sks		0								
24. LINER RECORD						25. TUBING RECORD												
SIZE	TOP	BOTTOM	SACKS CEMENT	SCREEN		SIZE	DEPTH SET		PACKER SET									
26. Perforation record (interval, size, and number) Perforate from 10910 ft to 15688 ft, 1 SPF, .55 inch holes with 247 total shots						27. ACID, SHOT, FRACTURE, CEMENT, SQUEEZE, ETC. <table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th>DEPTH INTERVAL</th> <th>AMOUNT AND KIND MATERIAL USED</th> </tr> <tr> <td>10910 ft to 15688 ft</td> <td>19 stage frac with 12,895,934 lbs of 100 mesh sand</td> </tr> <tr> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> </tr> </table>					DEPTH INTERVAL	AMOUNT AND KIND MATERIAL USED	10910 ft to 15688 ft	19 stage frac with 12,895,934 lbs of 100 mesh sand				
DEPTH INTERVAL	AMOUNT AND KIND MATERIAL USED																	
10910 ft to 15688 ft	19 stage frac with 12,895,934 lbs of 100 mesh sand																	
28. PRODUCTION																		
Date First Production 7/30/2022		Production Method (Flowing, gas lift, pumping - Size and type pump) Flowing				Well Status (Prod. or Shut-in) Producing												
Date of Test 8/5/2022	Hours Tested 24 hrs	Choke Size 32/64	Prod'n For Test Period	Oil - Bbl 45	Gas - MCF 7209	Water - Bbl. 2843	Gas - Oil Ratio 160200											
Flow Tubing Press. 0	Casing Pressure 3275	Calculated 24-Hour Rate	Oil - Bbl. 45	Gas - MCF 7209	Water - Bbl. 2843	Oil Gravity - API - (Corr.)												
29. Disposition of Gas (Sold, used for fuel, vented, etc.) Sold							30. Test Witnessed By											
31. List Attachments C-102, Directional Survey																		
32. If a temporary pit was used at the well, attach a plat with the location of the temporary pit.							33. Rig Release Date:											
34. If an on-site burial was used at the well, report the exact location of the on-site burial:																		
Latitude			Longitude			NAD83												
I hereby certify that the information shown on both sides of this form is true and complete to the best of my knowledge and belief																		
Signature 			Printed Name Jeff Trlica			Title Regulatory Analyst			Date 8/31/2022									
E-mail Address jtrlica@taprllc.com																		

This form is to be filed with the appropriate District Office of the Division not later than 20 days after the completion of any newly-drilled or deepened well and not later than 60 days after completion of closure. When submitted as a completion report, this shall be accompanied by one copy of all electrical and radio-activity logs run on the well and a summary of all special tests conducted, including drill stem tests. All depths reported shall be measured depths. In the case of directionally drilled wells, true vertical depths shall also be reported. For multiple completions, items 11, 12 and 26-31 shall be reported for each zone.

[illegible]

No. 1, from.....to.....
No. 2, from.....to.....
No. 3, from.....to.....
No. 4, from.....to.....

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from.....to.....feet.....
 No. 2, from.....to.....feet.....
 No. 3, from.....to.....feet.....

From	To	Thickness In Feet	Lithology		From	To	Thickness In Feet	Lithology
0	61		Quaternary					
61	351		Rustler					
351	2759		Top of Salt					
2759	2992		Base of Salt					
2992	3013		Lamar					
3013	3866		Bell Canyon					
3866	5050		Cherry Canyon					
5050	6680		Brushy Canyon					
6680	7338		Bone Spring					
7338	7653		Avalon					
7653	8451		1st Bone Spring Sand					
8451	9553		2nd Bone Spring Sand					
9553	9924		3rd Bone Spring Sand					
9924	10382		Wolfcamp A					
10382	10784		Wolfcamp B					
10784			Wolfcamp C					

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

ACKNOWLEDGMENTS

Action 233705

ACKNOWLEDGMENTS

Operator: OXY USA INC P.O. Box 4294 Houston, TX 772104294	OGRID: 16696
	Action Number: 233705
	Action Type: [C-104] Completion Packet (C-104C)

ACKNOWLEDGMENTS

☒	I hereby certify that the required Water Use Report has been, or will be, submitted for this wells completion.
☒	I hereby certify that the required FracFocus disclosure has been, or will be, submitted for this wells completion.

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 233705

CONDITIONS

Operator: OXY USA INC P.O. Box 4294 Houston, TX 772104294	OGRID: 16696
	Action Number: 233705
	Action Type: [C-104] Completion Packet (C-104C)

CONDITIONS

Created By	Condition	Condition Date
plmartinez	File 3160-4 Completion Report within 10 days to NMOCD after BLM approval.	6/29/2023