<u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 Phone:(575) 393-6161 Fax:(575) 393-0720

District II 811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720

District III 1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. **Santa Fe, NM 87505**

Form C-101 August 1, 2011

Permit 350576

		APPLICATION	FOR PERMIT TO	DRILL, RE-E	NTER, DEEPEN	I, PLUGBACK	, OR ADD A ZO	NE		
1. Operator Name							2. OG	RID Number		
MEWBOURNE OIL CO P.O. Box 5270						0.45	14744			
_	s, NM 88241						3. API	Number 30-025-52020		
4. Property Code		5. Prop	erty Name				6. We	l No.		
33474	14		MAD DOG 26 35 S	STATE COM				405H		
				7. Surfa	ce Location					
UL - Lot	Section	Township	Range	Lot Idn	Feet From	N/S Line	Feet From	E/W Line	County	
В	26	23S	34E	В	205	N	1560	E		Lea

8. Proposed Bottom Hole Location UL - Lot Section Township Range Lot Idn Feet From N/S Line Feet From E/W Line County 35 23S 34E 2080 Lea

9. Pool Information

ANTELOPE RIDGE;BONE SPRING 2200

Additional Well Information

11. Work Type	12. Well Type	13. Cable/Rotary	14. Lease Type	15. Ground Level Elevation
New Well	OIL		State	3386
16. Multiple	17. Proposed Depth	18. Formation	19. Contractor	20. Spud Date
N	19975	1st Bone Spring Sand		11/20/2023
Depth to Ground water		Distance from nearest fresh water well		Distance to nearest surface water

☑ We will be using a closed-loop system in lieu of lined pits

21. Proposed Casing and Cement Program

Type	Hole Size	Casing Size	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC
Surf	17.5	13.375	48	850	730	0
Int1	12.25	9.625	36	3837	1040	0
Int1	12.25	9.62	40	5050	1040	0
Int1	12.25	9.62	40	4881	1040	0
Prod	8.75	7	26	9148	610	4850
Liner1	6.125	4.5	13.5	19975	700	8998

Casing/Cement Program: Additional Comments

MOC proposed to drill & test the Bone Springs formation. H2S rule 118 does not apply because MOC has researched the area & no high concentrations were found. Will have on location & working all H2S safety equiptment before Yates formation for safety & insurance purposes. Will stimulate as needed for production.

22. Proposed Blowout Prevention Program

Туре	Working Pressure	Test Pressure	Manufacturer
Annular	5000	2500	Schaffer
Double Ram	5000	5000	Schaffer
Annular	5000	2500	Schaffer

knowledge and b				OIL CONSI	ERVATION DIVISION		
Printed Name:	Electronically filed by Monty Whe	tstone	Approved By:	Paul F Kautz			
Title:	Vice President Operations		Title:	Geologist			
Email Address:	fking@mewbourne.com		Approved Date:	9/28/2023	Expiration Date: 9/28/2025		
Date:	9/26/2023	Phone: 903-561-2900	Conditions of Approval Attached				

23S

13 Joint or Infill

34E

14 Consolidation Code

District I 1625 N. French Dr., Hobbs, NM 88240 Phone: (575) 393-6161 Fax: (575) 393-0720 District II 811 S. First St., Artesia, NM 88210 Phone: (575) 748-1283 Fax: (575) 748-9720 District III 1000 Rio Brazos Road, Aztec, NM 87410 Phone: (505) 334-6178 Fax: (505) 334-6170 District IV 1220 S. St. Francis Dr., Santa Fe. NM 87505

Phone: (505) 476-3460 Fax: (505) 476-3462

0 12 Dedicated Acres

320

State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Santa Fe, NM 87505

Form C-102 Revised August 1, 2011 Submit one copy to appropriate District Office

☐ AMENDED REPORT

LEA

WELL LOCATION AND ACREAGE DEDICATION PLAT

	l API Numbei	r	² Pool Code				³ Pool Name					
				2200			Antelo	pe Ridge;	Bone	Springs		
4Property Co										6Well Number 405H		
70GRID NO. 14744 MEWBOUF						Operator Name NE OIL COMPANY					9Elevation 3386'	
					10 Surfa	ice I	Location					
UL or lot no.	Section	Township	Range	Lot Idn	Feet from th	he	North/South line	Feet From the	East/W	est line	County	
В	26	23S 34E 205 NORTH 1560 EAS							ST	LEA		
			¹¹]	Bottom H	Iole Locati	ion	If Different Fro	om Surface				
UL or lot no.	Section	Township	Range	Lot Idn	Feet from th	he	North/South line	Feet from the	East/W	est line	County	

No allowable will be assigned to this completion until all interest have been consolidated or a non-standard unit has been approved by the division.


100

15 Order No.

SOUTH

2080

EAST

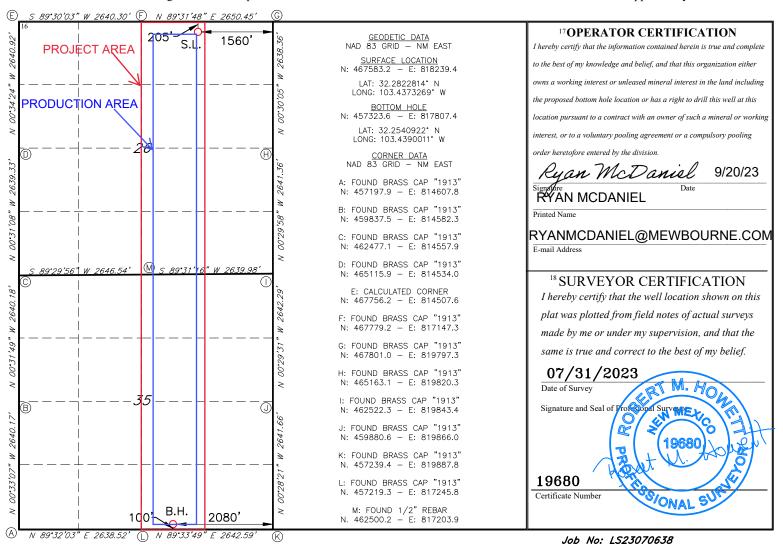

<u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 Phone:(575) 393-6161 Fax:(575) 393-0720 District II

811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720 District III

1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. **Santa Fe, NM 87505**

Form APD Conditions

Permit 350576

PERMIT CONDITIONS OF APPROVAL

Operator Name and Address:	API Number:
MEWBOURNE OIL CO [14744]	30-025-52020
P.O. Box 5270	Well:
Hobbs, NM 88241	MAD DOG 26 35 STATE COM #405H

OCD Reviewer	Condition
pkautz	Notify OCD 24 hours prior to casing & cement
pkautz	Will require a File As Drilled C-102 and a Directional Survey with the C-104
pkautz	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string
pkautz	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system
pkautz	Cement is required to circulate on both surface and intermediate1 strings of casing
pkautz	If cement does not circulate on any string , a CBL is required for that string of casing.

Mewbourne Oil Company

Lea County, New Mexico NAD 83 Mad Dog 26/35 State Com #405H

Sec 26, T23S, R34E

SHL: 205' FNL & 1560' FEL (Sec 26) BHL: 100' FSL & 2080' FEL (Sec 35)

Plan: Design #1

Standard Planning Report

13 September, 2023

Hobbs Database:

Company: Mewbourne Oil Company Project: Lea County, New Mexico NAD 83 Mad Dog 26/35 State Com #405H Site:

Well:

Wellbore: Design #1 Design:

Sec 26, T23S, R34E BHL: 100' FSL & 2080' FEL (Sec 35)

Lea County, New Mexico NAD 83

New Mexico Eastern Zone Map Zone:

Local Co-ordinate Reference:

TVD Reference: MD Reference: North Reference:

Survey Calculation Method:

Site Mad Dog 26/35 State Com #405H

WELL @ 3414.0usft (Original Well Elev) WELL @ 3414.0usft (Original Well Elev)

Minimum Curvature

Project

US State Plane 1983 Map System: North American Datum 1983 Geo Datum:

System Datum:

Mean Sea Level

Mad Dog 26/35 State Com #405H Site

Northing: 467,583.20 usft Site Position: Latitude: 32.2822814 From: Мар Easting: 818,239.40 usft Longitude: -103.4373268

Position Uncertainty: 0.0 usft Slot Radius: 13-3/16 "

Well Sec 26, T23S, R34E

32.2822814 **Well Position** +N/-S 0.0 usft Northing: 467,583.20 usft Latitude: +E/-W 0.0 usft Easting: 818,239.40 usft Longitude: -103.4373268 **Position Uncertainty** 0.0 usft Wellhead Elevation: 3,414.0 usft **Ground Level:** 3,386.0 usft

0.48° **Grid Convergence:**

BHL: 100' FSL & 2080' FEL (Sec 35) Wellbore

Declination Magnetics **Model Name** Sample Date Dip Angle Field Strength (°) (°) (nT) IGRF2010 48,311.43649991 12/31/2014 7.09 60.17

Design #1 Design

Audit Notes:

PROTOTYPE Tie On Depth: 0.0 Version: Phase:

Vertical Section: Depth From (TVD) +N/-S +E/-W Direction (usft) (usft) (usft) (°) 182.41 0.0 0.0 0.0

Plan Survey Tool Program Date 9/13/2023

Depth From Depth To

(usft) (usft) Survey (Wellbore) **Tool Name** Remarks

0.0 19,975.3 Design #1 (BHL: 100' FSL & 2080

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
4,700.0	0.00	0.00	4,700.0	0.0	0.0	0.00	0.00	0.00	0.00	
5,088.6	7.77	290.07	5,087.4	9.0	-24.7	2.00	2.00	0.00	290.07	
8,809.0	7.77	290.07	8,773.6	181.7	-497.2	0.00	0.00	0.00	0.00	
9,197.5	0.00	0.00	9,161.0	190.7	-521.9	2.00	-2.00	0.00	180.00	KOP: 10' FNL & 2080'
10,097.9	90.03	179.51	9,734.0	-382.6	-517.0	10.00	10.00	0.00	179.51	
19,975.3	90.03	179.51	9,729.0	-10,259.6	-432.0	0.00	0.00	0.00	0.00	BHL: 100' FSL & 208(

Database: Hobbs

Company:Mewbourne Oil CompanyProject:Lea County, New Mexico NAD 83Site:Mad Dog 26/35 State Com #405H

Well: Sec 26, T23S, R34E
Wellbore: BHL: 100' FSL & 2080' FEL (Sec 35)

Design: Design #1

Local Co-ordinate Reference:

TVD Reference: MD Reference: North Reference:

Survey Calculation Method:

Site Mad Dog 26/35 State Com #405H WELL @ 3414.0usft (Original Well Elev) WELL @ 3414.0usft (Original Well Elev)

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
SHL: 205' FI	NL & 1560' FEL (
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	0.00	0.00	700.0	0.0	0.0	0.0	0.00	0.00	0.00
800.0	0.00	0.00	800.0	0.0	0.0	0.0	0.00	0.00	0.00
900.0	0.00	0.00	900.0	0.0	0.0	0.0	0.00	0.00	0.00
1,000.0	0.00	0.00	1,000.0	0.0	0.0	0.0	0.00	0.00	0.00
1,100.0	0.00	0.00	1,100.0	0.0	0.0	0.0	0.00	0.00	0.00
1,200.0	0.00	0.00	1,200.0	0.0	0.0	0.0	0.00	0.00	0.00
1,300.0	0.00	0.00	1,300.0	0.0	0.0	0.0	0.00	0.00	0.00
1,400.0	0.00	0.00	1,400.0	0.0	0.0	0.0	0.00	0.00	0.00
1,500.0	0.00	0.00	1,500.0	0.0	0.0	0.0	0.00	0.00	0.00
1,600.0	0.00	0.00	1,600.0	0.0	0.0	0.0	0.00	0.00	0.00
1,700.0	0.00	0.00	1,700.0	0.0	0.0	0.0	0.00	0.00	0.00
1,800.0	0.00	0.00	1,800.0	0.0	0.0	0.0	0.00	0.00	0.00
1,900.0	0.00	0.00	1,900.0	0.0	0.0	0.0	0.00	0.00	0.00
2,000.0	0.00	0.00	2,000.0	0.0	0.0	0.0	0.00	0.00	0.00
2,100.0	0.00	0.00	2,100.0	0.0	0.0	0.0	0.00	0.00	0.00
2,200.0	0.00	0.00	2,200.0	0.0	0.0	0.0	0.00	0.00	0.00
2,300.0	0.00	0.00	2,300.0	0.0	0.0	0.0	0.00	0.00	0.00
2,400.0	0.00	0.00	2,400.0	0.0	0.0	0.0	0.00	0.00	0.00
2,500.0	0.00	0.00	2,500.0	0.0	0.0	0.0	0.00	0.00	0.00
2,600.0	0.00	0.00	2,600.0	0.0	0.0	0.0	0.00	0.00	0.00
2,700.0	0.00	0.00	2,700.0	0.0	0.0	0.0	0.00	0.00	0.00
2,800.0	0.00	0.00	2,800.0	0.0	0.0	0.0	0.00	0.00	0.00
2,900.0	0.00	0.00	2,900.0	0.0	0.0	0.0	0.00	0.00	0.00
3,000.0	0.00	0.00	3,000.0	0.0	0.0	0.0	0.00	0.00	0.00
3,100.0	0.00	0.00	3,100.0	0.0	0.0	0.0	0.00	0.00	0.00
3,200.0	0.00	0.00	3,200.0	0.0	0.0	0.0	0.00	0.00	0.00
3,300.0	0.00	0.00	3,300.0	0.0	0.0	0.0	0.00	0.00	0.00
3,400.0	0.00	0.00	3,400.0	0.0	0.0	0.0	0.00	0.00	0.00
3,500.0	0.00	0.00	3,500.0	0.0	0.0	0.0	0.00	0.00	0.00
3,600.0	0.00	0.00	3,600.0	0.0	0.0	0.0	0.00	0.00	0.00
3,700.0	0.00	0.00	3,700.0	0.0	0.0	0.0	0.00	0.00	0.00
3,800.0	0.00	0.00	3,800.0	0.0	0.0	0.0	0.00	0.00	0.00
3,900.0	0.00	0.00	3,900.0	0.0	0.0	0.0	0.00	0.00	0.00
4,000.0	0.00	0.00	4,000.0	0.0	0.0	0.0	0.00	0.00	0.00
4,100.0	0.00	0.00	4,100.0	0.0	0.0	0.0	0.00	0.00	0.00
4,200.0	0.00	0.00	4,200.0	0.0	0.0	0.0	0.00	0.00	0.00
4,300.0 4,400.0	0.00 0.00	0.00 0.00	4,300.0 4,400.0	0.0 0.0	0.0 0.0	0.0 0.0	0.00 0.00	0.00 0.00	0.00 0.00
4,500.0	0.00	0.00	4,500.0	0.0	0.0	0.0	0.00	0.00	0.00
4,600.0 4,700.0	0.00 0.00	0.00 0.00	4,600.0 4,700.0	0.0	0.0	0.0	0.00 0.00	0.00	0.00
4,700.0	2.00	290.07	4,700.0	0.0 0.6	0.0 -1.6	0.0 -0.5	2.00	0.00 2.00	0.00 0.00
4,800.0	4.00	290.07	4,899.8	2.4	-1.6 -6.6	-0.5 -2.1	2.00	2.00	0.00
5,000.0	6.00	290.07	4,999.5	5.4	-14.7	-4.8	2.00	2.00	0.00
5,000.0	7.77	290.07	4,999.5 5,087.4	9.0	-14.7 -24.7	-4.0 -8.0	2.00	2.00	0.00
5,100.0	7.77	290.07	5,098.7	9.6	-26.2	-8.5	0.00	0.00	0.00

Database: Hobbs

Company:Mewbourne Oil CompanyProject:Lea County, New Mexico NAD 83Site:Mad Dog 26/35 State Com #405H

Well: Sec 26, T23S, R34E
Wellbore: BHL: 100' FSL & 2080' FEL (Sec 35)

Design: Design #1

Local Co-ordinate Reference:

TVD Reference:
MD Reference:
North Reference:

Survey Calculation Method:

Site Mad Dog 26/35 State Com #405H WELL @ 3414.0usft (Original Well Elev) WELL @ 3414.0usft (Original Well Elev)

Planne	d Survey									
	Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
	5,200.0	7.77	290.07	5,197.8	14.2	-38.9	-12.6	0.00	0.00	0.00
	5,300.0	7.77	290.07	5,296.9	18.8	-51.6	-16.7	0.00	0.00	0.00
	5,400.0	7.77	290.07	5,395.9	23.5	-64.3	-20.8	0.00	0.00	0.00
	5,500.0	7.77	290.07	5,495.0	28.1	-77.0	-24.9	0.00	0.00	0.00
	5,600.0	7.77	290.07	5,594.1	32.8	-89.7	-29.0	0.00	0.00	0.00
	5,700.0	7.77	290.07	5,693.2	37.4	-102.4	-33.1	0.00	0.00	0.00
	5,800.0	7.77	290.07	5,792.3	42.0	-115.1	-37.2	0.00	0.00	0.00
	5,900.0	7.77	290.07	5,891.4	46.7	-127.8	-41.3	0.00	0.00	0.00
	6,000.0	7.77	290.07	5,990.4	51.3	-140.5	-45.4	0.00	0.00	0.00
	6,100.0	7.77	290.07	6,089.5	56.0	-153.2	-49.5	0.00	0.00	0.00
	6,200.0	7.77	290.07	6,188.6	60.6	-165.9	-53.6	0.00	0.00	0.00
	6,300.0	7.77	290.07	6,287.7	65.2	-178.6	-57.7	0.00	0.00	0.00
	6,400.0	7.77	290.07	6,386.8	69.9	-191.3	-61.8	0.00	0.00	0.00
	6,500.0	7.77	290.07	6,485.8	74.5	-204.0	-65.9	0.00	0.00	0.00
	6,600.0	7.77	290.07	6,584.9	79.2	-216.7	-70.0	0.00	0.00	0.00
	6,700.0	7.77	290.07	6,684.0	83.8	-229.4	-74.1 70.0	0.00	0.00	0.00
	6,800.0	7.77	290.07	6,783.1	88.4	-242.1	-78.2	0.00	0.00	0.00
	6,900.0	7.77	290.07	6,882.2	93.1	-254.8	-82.3	0.00	0.00	0.00
	7,000.0	7.77	290.07	6,981.3	97.7	-267.5	-86.4	0.00	0.00	0.00
	7,100.0	7.77	290.07	7,080.3	102.4	-280.2	-90.5	0.00	0.00	0.00
	7,200.0	7.77	290.07	7,179.4	107.0	-292.9	-94.6	0.00	0.00	0.00
	7,300.0	7.77	290.07	7,278.5	111.6	-305.6	-98.7	0.00	0.00	0.00
	7,400.0	7.77	290.07	7,377.6	116.3	-318.3	-102.8	0.00	0.00	0.00
	7,500.0	7.77	290.07	7,476.7	120.9	-331.0	-106.9	0.00	0.00	0.00
	7,600.0	7.77	290.07	7,575.7	125.6	-343.7	-111.0	0.00	0.00	0.00
	7,700.0	7.77	290.07	7,674.8	130.2	-356.4	-115.1	0.00	0.00	0.00
	7,800.0	7.77	290.07	7,773.9	134.8	-369.1	-119.2	0.00	0.00	0.00
	7,900.0	7.77	290.07	7,873.0	139.5	-381.8	-123.3	0.00	0.00	0.00
	8,000.0	7.77	290.07	7,972.1	144.1	-394.5	-127.4	0.00	0.00	0.00
	8,100.0	7.77	290.07	8,071.2	148.8	-407.2	-131.5	0.00	0.00	0.00
	8,200.0 8,300.0	7.77 7.77	290.07 290.07	8,170.2 8,269.3	153.4 158.0	-419.9 -432.6	-135.6 -139.7	0.00 0.00	0.00 0.00	0.00 0.00
	8,400.0	7.77	290.07	8,368.4	162.7	-445.3	-143.8	0.00	0.00	0.00
	8,500.0	7.77	290.07	8,467.5	167.3	-458.0	-147.9	0.00	0.00	0.00
	8,600.0 8,700.0	7.77 7.77	290.07	8,566.6 8.665.6	172.0 176.6	-470.7	-152.0	0.00	0.00	0.00
	8,700.0 8,809.0	7.77 7.77	290.07 290.07	8,005.0	176.6	-483.4 -497.2	-156.1 -160.6	0.00 0.00	0.00 0.00	0.00 0.00
	8,900.0	5.95	290.07	8,864.0	185.4	-507.4	-163.9	2.00	-2.00	0.00
	9,000.0	3.95	290.07	8,963.6	188.4	-515.5	-166.5	2.00	-2.00	0.00
	9,100.0 9,197.5	1.95 0.00	290.07 0.00	9,063.5 9,161.0	190.1 190.7	-520.4 -521.9	-168.1 -168.6	2.00 2.00	-2.00 -2.00	0.00 0.00
		0.00 L & 2080' FEL (S		3,101.0	130.7	-521.9	-100.0	2.00	-2.00	0.00
	9,200.0	0.25	179.51	9,163.5	190.7	-521.9	-168.6	10.00	10.00	0.00
	,									
	9,250.0	5.24	179.51	9,213.4	188.3	-521.9	-166.2	10.00	10.00	0.00
	9,300.0 9,350.0	10.24 15.24	179.51 179.51	9,262.9 9,311.7	181.6 170.5	-521.9 -521.8	-159.4 -148.4	10.00 10.00	10.00 10.00	0.00 0.00
	9,350.0 9,400.0	20.24	179.51	9,311.7	170.5	-521.8 -521.6	-148.4 -133.2	10.00	10.00	0.00
	9,450.0	25.24	179.51	9,405.4	136.0	-521.5	-133.2	10.00	10.00	0.00
	9,500.0	30.24	179.51	9,449.6	112.7	-521.3	-90.7	10.00	10.00	0.00
	9,523.1	32.55	179.51	9,469.3	100.7	-521.2	-78.7	10.00	10.00	0.00
		L & 2080' FEL (•	0.404.0	0.5.7	F04.0	00.7	40.00	40.00	0.00
	9,550.0 9,600.0	35.24 40.24	179.51 179.51	9,491.6 9,531.2	85.7 55.1	-521.0 -520.8	-63.7 -33.1	10.00 10.00	10.00 10.00	0.00 0.00
	9,650.0	45.24	179.51	9,567.9	21.2	-520.5	0.8	10.00	10.00	0.00

Database: Hobbs

Company:Mewbourne Oil CompanyProject:Lea County, New Mexico NAD 83Site:Mad Dog 26/35 State Com #405H

Well: Sec 26, T23S, R34E
Wellbore: BHL: 100' FSL & 2080' FEL (Sec 35)

Design: Design #1

Local Co-ordinate Reference:

TVD Reference:
MD Reference:
North Reference:

Survey Calculation Method:

Site Mad Dog 26/35 State Com #405H WELL @ 3414.0usft (Original Well Elev) WELL @ 3414.0usft (Original Well Elev)

ign:	Design #1								
nned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
9,700.0	50.24	179.51	9,601.5	-15.8	-520.2	37.7	10.00	10.00	0.00
9,750.0	55.24	179.51	9,631.8	-55.6	-519.8	77.4	10.00	10.00	0.00
9,800.0	60.24	179.51	9,658.4	-97.9	-519.5	119.7	10.00	10.00	0.00
9,850.0	65.24	179.51	9,681.3	-142.3	-519.1	164.0	10.00	10.00	0.00
9,900.0	70.24	179.51	9,700.3	-188.6	-518.7	210.2	10.00	10.00	0.00
9,950.0	75.24	179.51	9,715.1	-236.3	-518.3	257.9	10.00	10.00	0.00
10,000.0	80.24	179.51	9,725.7	-285.1	-517.8	306.7	10.00	10.00	0.00
10,050.0	85.24	179.51	9,732.0	-334.7	-517.4	356.2	10.00	10.00	0.00
10,097.6	90.00	179.51	9,734.0	-382.3	-517.0	403.7	10.00	10.00	0.00
	. & 2080' FEL (Se								
10,097.9	90.03	179.51	9,734.0	-382.6	-517.0	404.0	10.00	10.00	0.00
10 100 0	00.00	170 54	0.724.0	2047	E47.0	406.4	0.00	0.00	0.00
10,100.0	90.03	179.51	9,734.0	-384.7	-517.0	406.1	0.00		0.00
10,200.0	90.03	179.51	9,733.9	-484.7	-516.1	506.0	0.00	0.00	0.00
10,300.0	90.03	179.51	9,733.9	-584.7	-515.3	605.8	0.00	0.00	0.00
10,400.0	90.03	179.51	9,733.8	-684.7	-514.4	705.7	0.00	0.00	0.00
10,500.0	90.03	179.51	9,733.8	-784.7	-513.5	805.6	0.00	0.00	0.00
10,600.0	90.03	179.51	9,733.7	-884.7	-512.7	905.4	0.00	0.00	0.00
10,700.0	90.03	179.51	9,733.7	-984.7	-511.8	1,005.3	0.00	0.00	0.00
10,800.0	90.03	179.51	9.733.6	-1,084.6	-511.0	1,105.2	0.00	0.00	0.00
10,900.0	90.03	179.51	9,733.6	-1,184.6	-510.1	1,205.1	0.00	0.00	0.00
11,000.0	90.03	179.51	9,733.5	-1,284.6	-509.2	1,304.9	0.00	0.00	0.00
11,100.0	90.03	179.51	9,733.5	-1,384.6	-508.4	1,404.8	0.00	0.00	0.00
11,200.0	90.03	179.51	9,733.4	-1,484.6	-507.5	1,504.7	0.00	0.00	0.00
11,300.0	90.03	179.51	9,733.4	-1,584.6	-506.7	1,604.5	0.00	0.00	0.00
11,400.0	90.03	179.51	9,733.3	-1,684.6	-505.8	1,704.4	0.00	0.00	0.00
11,500.0	90.03	179.51	9,733.3	-1,784.6	-504.9	1,804.3	0.00	0.00	0.00
11,600.0	90.03	179.51	9,733.2	-1,884.6	-504.1	1,904.2	0.00	0.00	0.00
11,700.0	90.03	179.51	9,733.2	-1,984.6	-503.2	2,004.0	0.00	0.00	0.00
11,800.0	90.03	179.51	9,733.1	-2,084.6	-502.4	2,103.9	0.00	0.00	0.00
11,900.0	90.03	179.51	9,733.1	-2,184.6	-501.5	2,103.9	0.00	0.00	0.00
			,				0.00		0.00
12,000.0	90.03	179.51	9,733.0	-2,284.6	-500.6	2,303.6	0.00	0.00	0.00
12,100.0	90.03	179.51	9,733.0	-2,384.6	-499.8	2,403.5	0.00	0.00	0.00
12,200.0	90.03	179.51	9,732.9	-2,484.6	-498.9	2,503.4	0.00	0.00	0.00
12,300.0	90.03	179.51	9,732.9	-2,584.6	-498.1	2,603.3	0.00	0.00	0.00
12,400.0	90.03	179.51	9,732.8	-2,684.6	-497.2	2,703.1	0.00	0.00	0.00
12,500.0	90.03	179.51	9,732.8	-2,784.6	-496.3	2,803.0	0.00	0.00	0.00
12,600.0	90.03	179.51	9,732.7	-2,884.6	-495.5	2.902.9	0.00	0.00	0.00
12,700.0	90.03	179.51	9,732.7	-2,984.6	-493.5 -494.6	3,002.7	0.00	0.00	0.00
12,800.0	90.03	179.51	9,732.6	-3,084.6	-494.0 -493.8	3,102.6	0.00	0.00	0.00
,									
12,900.0 13,000.0	90.03 90.03	179.51 179.51	9,732.6 9,732.5	-3,184.6 -3,284.6	-492.9 -492.0	3,202.5 3,302.4	0.00 0.00	0.00 0.00	0.00 0.00
13,100.0	90.03	179.51	9,732.5	-3,384.6	-491.2	3,402.2	0.00	0.00	0.00
13,200.0	90.03	179.51	9,732.4	-3,484.6	-490.3	3,502.1	0.00	0.00	0.00
13,300.0	90.03	179.51	9,732.4	-3,584.6	-489.5	3,602.0	0.00	0.00	0.00
13,400.0	90.03	179.51	9,732.3	-3,684.6	-488.6	3,701.8	0.00	0.00	0.00
13,500.0	90.03	179.51	9,732.3	-3,784.5	-487.7	3,801.7	0.00	0.00	0.00
13,600.0	90.03	179.51	9,732.2	-3,884.5	-486.9	3,901.6	0.00	0.00	0.00
13,700.0				-3,004.5 -3,984.5					
	90.03	179.51	9,732.2	,	-486.0	4,001.5	0.00	0.00	0.00
13,800.0	90.03	179.51	9,732.1	-4,084.5	-485.1	4,101.3	0.00	0.00	0.00
13,900.0	90.03	179.51	9,732.1	-4,184.5	-484.3	4,201.2	0.00	0.00	0.00
14,000.0	90.03	179.51	9,732.0	-4,284.5	-483.4	4,301.1	0.00	0.00	0.00
14,100.0	90.03	179.51	9,732.0	-4,384.5	-482.6	4,400.9	0.00	0.00	0.00

Hobbs Database:

Company: Mewbourne Oil Company Project: Lea County, New Mexico NAD 83 Mad Dog 26/35 State Com #405H Site:

Well: Sec 26, T23S, R34E BHL: 100' FSL & 2080' FEL (Sec 35) Wellbore:

Local Co-ordinate Reference: TVD Reference: MD Reference:

North Reference: **Survey Calculation Method:**

Site Mad Dog 26/35 State Com #405H WELL @ 3414.0usft (Original Well Elev) WELL @ 3414.0usft (Original Well Elev)

Design:	Design #1								
Planned Survey									
Measured Depth (usft)	Inclination	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
14,300.0	90.03	179.51	9,731.9	-4,584.5	-480.8	4,600.7	0.00	0.00	0.00
14,400.0 14,500.0	90.03 90.03	179.51 179.51	9,731.8 9,731.8	-4,684.5 -4,784.5	-480.0 -479.1	4,700.6 4,800.4	0.00 0.00	0.00 0.00	0.00 0.00
14,600.0 14,700.0	90.03 90.03	179.51 179.51	9,731.7 9,731.7	-4,884.5 -4,984.5	-478.3 -477.4	4,900.3 5,000.2	0.00 0.00	0.00 0.00	0.00 0.00
14,800.0	90.03	179.51	9,731.6	-5,084.5	-476.5	5,100.0	0.00	0.00	0.00
14,900.0	90.03	179.51	9,731.6	-5,184.5	-475.7	5,199.9	0.00	0.00	0.00
15,000.0	90.03	179.51	9,731.5	-5,284.5	-474.8	5,299.8	0.00	0.00	0.00
15,100.0	90.03	179.51	9,731.5	-5,384.5	-474.0	5,399.7	0.00	0.00	0.00
15,200.0	90.03	179.51	9,731.4	-5,484.5	-473.1	5,499.5	0.00	0.00	0.00
15,300.0	90.03	179.51	9,731.4	-5,584.5	-472.2	5,599.4	0.00	0.00	0.00
15,400.0	90.03	179.51	9,731.3	-5,684.5	-471.4	5,699.3	0.00	0.00	0.00
15,500.0	90.03	179.51	9,731.3	-5,784.5	-470.5	5,799.1	0.00	0.00	0.00
15,600.0	90.03	179.51	9,731.2	-5,884.5	-469.7	5,899.0	0.00	0.00	0.00
15,700.0	90.03	179.51	9,731.2	-5,984.5	-468.8	5,998.9	0.00	0.00	0.00
15,800.0 15,900.0	90.03 90.03	179.51 179.51	9,731.1 9,731.1	-6,084.5 -6,184.5	-467.9 -467.1	6,098.8 6,198.6	0.00 0.00	0.00 0.00	0.00 0.00
16,000.0	90.03	179.51	9,731.0	-6,284.5	-466.2	6,298.5	0.00	0.00	0.00
16,100.0	90.03	179.51	9,731.0	-6,384.5	-465.4	6,398.4	0.00	0.00	0.00
16,200.0	90.03	179.51	9,730.9	-6,484.4	-464.5	6,498.2	0.00	0.00	0.00
16,300.0	90.03	179.51	9,730.9	-6,584.4	-463.6	6,598.1	0.00	0.00	0.00
16,400.0	90.03	179.51	9,730.8	-6,684.4	-462.8	6,698.0	0.00	0.00	0.00
16,500.0	90.03	179.51	9,730.8	-6,784.4	-461.9	6,797.9	0.00	0.00	0.00
16,600.0	90.03	179.51	9,730.7	-6,884.4	-461.0	6,897.7	0.00	0.00	0.00
16,700.0	90.03	179.51	9,730.7	-6,984.4	-460.2	6,997.6	0.00	0.00	0.00
16,800.0	90.03	179.51	9,730.6	-7,084.4	-459.3	7,097.5	0.00	0.00	0.00
16,900.0	90.03	179.51 179.51	9,730.6 9,730.5	-7,184.4 -7,284.4	-458.5	7,197.3	0.00	0.00 0.00	0.00
17,000.0	90.03				-457.6	7,297.2	0.00		0.00
17,100.0	90.03	179.51	9,730.5	-7,384.4	-456.7	7,397.1	0.00	0.00	0.00
17,200.0 17,300.0	90.03 90.03	179.51 179.51	9,730.4 9,730.4	-7,484.4 -7,584.4	-455.9 -455.0	7,497.0 7,596.8	0.00 0.00	0.00 0.00	0.00 0.00
17,400.0	90.03	179.51	9,730.3	-7,684.4	-454.2	7,696.7	0.00	0.00	0.00
17,500.0	90.03	179.51	9,730.3	-7,784.4	-453.3	7,796.6	0.00	0.00	0.00
17,600.0	90.03	179.51	9,730.2	-7,884.4	-452.4	7,896.4	0.00	0.00	0.00
17,700.0	90.03	179.51	9,730.2	-7,984.4	-451.6	7,996.3	0.00	0.00	0.00
17,800.0	90.03	179.51	9,730.1	-8,084.4	-450.7	8,096.2	0.00	0.00	0.00
17,900.0	90.03	179.51	9,730.1	-8,184.4	-449.9	8,196.1	0.00	0.00	0.00
18,000.0	90.03	179.51	9,730.0	-8,284.4	-449.0	8,295.9	0.00	0.00	0.00
18,100.0	90.03	179.51	9,729.9	-8,384.4	-448.1	8,395.8	0.00	0.00	0.00
18,200.0	90.03	179.51	9,729.9	-8,484.4	-447.3	8,495.7	0.00	0.00	0.00
18,300.0	90.03	179.51	9,729.8	-8,584.4	-446.4	8,595.5	0.00	0.00	0.00
18,400.0 18,500.0	90.03 90.03	179.51 179.51	9,729.8 9,729.7	-8,684.4 -8,784.4	-445.6 -444.7	8,695.4 8,795.3	0.00 0.00	0.00 0.00	0.00 0.00
ŕ									
18,600.0 18,700.0	90.03 90.03	179.51 179.51	9,729.7 9,729.6	-8,884.4 -8,984.4	-443.8 -443.0	8,895.2 8,995.0	0.00	0.00	0.00
18,700.0	90.03	179.51	9,729.6 9,729.6	-8,984.4 -9,084.3	-443.0 -442.1	8,995.0 9,094.9	0.00 0.00	0.00 0.00	0.00 0.00
18,900.0	90.03	179.51	9,729.5	-9,064.3 -9,184.3	-442.1 -441.3	9,094.9	0.00	0.00	0.00
19,000.0	90.03	179.51	9,729.5	-9,284.3	-440.4	9,294.7	0.00	0.00	0.00
19,100.0	90.03	179.51	9,729.4	-9,384.3	-439.5	9,394.5	0.00	0.00	0.00
19,200.0	90.03	179.51	9,729.4	-9,484.3	-438.7	9,494.4	0.00	0.00	0.00
19,300.0	90.03	179.51	9,729.3	-9,584.3	-437.8	9,594.3	0.00	0.00	0.00
19,400.0	90.03	179.51	9,729.3	-9,684.3	-437.0	9,694.1	0.00	0.00	0.00
19,500.0	90.03	179.51	9,729.2	-9,784.3	-436.1	9,794.0	0.00	0.00	0.00
19,600.0	90.03	179.51	9,729.2	-9,884.3	-435.2	9,893.9	0.00	0.00	0.00

Database:HobbsCompany:Mewbourne Oil CompanyProject:Lea County, New Mexico NAD 83Site:Mad Dog 26/35 State Com #405H

Well: Sec 26, T23S, R34E
Wellbore: BHL: 100' FSL & 2080' FEL (Sec 35)

Design: Design #1

Local Co-ordinate Reference: TVD Reference: MD Reference:

North Reference: Survey Calculation Method: Site Mad Dog 26/35 State Com #405H WELL @ 3414.0usft (Original Well Elev) WELL @ 3414.0usft (Original Well Elev)

nned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
19,700.0	90.03	179.51	9,729.1	-9,984.3	-434.4	9,993.8	0.00	0.00	0.00
19,800.0	90.03	179.51	9,729.1	-10,084.3	-433.5	10,093.6	0.00	0.00	0.00
19,900.0	90.03	179.51	9,729.0	-10,184.3	-432.6	10,193.5	0.00	0.00	0.00
19.975.3	90.03	179.51	9,729.0	-10,259.6	-432.0	10,268.7	0.00	0.00	0.00

Design Targets									
Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
SHL: 205' FNL & 1560' F - plan hits target cent - Point	0.00 er	0.00	0.0	0.0	0.0	467,583.20	818,239.40	32.2822814	-103.4373268
KOP: 10' FNL & 2080' FI - plan hits target cent - Point	0.00 eer	0.00	9,161.0	190.7	-521.9	467,773.89	817,717.46	32.2828175	-103.4390104
FTP: 100' FNL & 2080' F - plan hits target cent - Point	0.00 er	0.00	9,469.3	100.7	-521.2	467,683.89	817,718.23	32.2825701	-103.4390103
BHL: 100' FSL & 2080' F - plan hits target cent - Point	0.00 er	0.00	9,729.0	-10,259.6	-432.0	457,323.60	817,807.40	32.2540922	-103.4390012
LP: 583' FNL & 2080' FE - plan hits target cen - Point	0.00 er	0.00	9,734.0	-382.3	-517.0	467,200.91	817,722.39	32.2812425	-103.4390099

Mewbourne Oil Company, Mad Dog 26/35 State Com 405H Sec 26, T23S, R34E

SHL: 205' FNL 1560' FEL (Sec 26) BHL: 100' FSL 2080' FEL (Sec 35)

Operator Name:	Property Name:	Well Number
Mewbourne Oil Company	Mad Dog 26/35 State Com	405H

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County	
В	26	23	34	-	10'	FNL	2080'	FEL	Lea	
Latitude						Longitude				
32.2828175					-103.43901	-103.4390104				

First Take Point (FTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
В	26	23	34	-	100'	FNL	2080'	FEL	Lea
		Latitude				Long	NAD		
32.2825701					-032.28257	83			

Last Take Point (LTP)

	UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
ſ	0	35	23	34	-	100'	FSL	2080'	FEL	Lea
[Latitude Longitude								NAD	
I	32.2540922	2				-103.43900	83			

Is this well the defining well for the Horizontal Is this well an infill well?	Spacing Unit? Y	
If infill is yes please provide API if available, C Spacing Unit.	Operator Name and well number for Defining well for Horizontal	
API#		
Operator Name:	Property Name:	Well Number

State of New Mexico Energy, Minerals and Natural Resources Department

Submit Electronically Via E-permitting

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

NATURAL GAS MANAGEMENT PLAN									
This Natural Gas Man	agement Plan m	ust be submitted w	ith each Applicat	ion for Permit to I	Orill (APD) for a	new or recompleted well.			
			1 – Plan De						
I. Operator: M6	ewbourne (Oil Co.	OGRID:	14744	Date:	5/2/22			
II. Type: 🗶 Original	☐ Amendment	due to □ 19.15.27	.9.D(6)(a) NMA	C □ 19.15.27.9.D((6)(b) NMAC 🗆 (Other.			
If Other, please descri	be:								
III. Well(s): Provide to be recompleted from a					wells proposed to	be drilled or proposed to			
Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D			
Mad Dog 26-35 State Com 405H		B 26 23S 234E	205' FNL x 1560' F	L 1500	1500	1500			
IV. Central Delivery V. Anticipated Sched proposed to be recomp	l ule: Provide the	following informa	tion for each new	or recompleted w		9.15.27.9(D)(1) NMAC] s proposed to be drilled or			
Well Name	API	Spud Date	TD Reached Date	Completion Commencement					
Mad Dog 26-35 State Com 405H		7/2/22	8/2/22	9/2/22	9/17/2	2 9/17/22			
VII. Operational Pra Subsection A through	nctices: Attac F of 19.15.27.8	h a complete desc NMAC.	ription of the act	ions Operator wil	I take to comply	at to optimize gas capture. with the requirements of tices to minimize venting			

Section 2 – Enhanced Plan EFFECTIVE APRIL 1, 2022

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

X Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

Well		API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF			
X. Natural Gas Gathering System (NGGS):							
Operator	System	ULSTR of Tie-in	Anticipated Gathering	Available Maximum Daily Capacity			

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in

XI. Map. \square Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natur	al gas gathering system	. 🗆 will 🗆 will n	ot have capacity to	o gather 10	0% of the anticipated	l natural gas
production volume from the we	ll prior to the date of fir	rst production.				

XIII. Line Pressure. Operator \square does \square does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

Attach O	perator's	plan to	manage	production	in res	sponse to	o the	increased	line '	pressure

XIV. Confidentiality:

Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

Released to Imaging: 9/28/2023 9:16:26 AM

Section 3 - Certifications Effective May 25, 2021

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal: 🖾 Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or ☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system. If Operator checks this box, Operator will select one of the following: Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or Venting and Flaring Plan.

Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including: power generation on lease; (a) power generation for grid; (b) compression on lease; (c) liquids removal on lease: (d) reinjection for underground storage; (e) reinjection for temporary storage; **(f)**

- **(g)** reinjection for enhanced oil recovery;
- **(h)** fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

Section 4 - Notices

- 1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:
- (a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or
- (b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.
- 2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature:	Bradley Bishop				
Printed Name:					
Title:	Title: REGULATORY MANAGER				
E-mail Address:	BBISHOP@MEWBOURNE.COM				
Date:	5/2/22				
Phone:	575-393-5905				
	OIL CONSERVATION DIVISION (Only applicable when submitted as a standalone form)				
Approved By:					
Title:					
Approval Date:					
Conditions of A	oproval:				

Mewbourne Oil Company

Natural Gas Management Plan – Attachment

- VI. Separation equipment will be sized by construction engineering staff based on stated manufacturer daily throughput capacities and anticipated daily production rates to ensure adequate capacity. Closed vent system piping, compression needs, and VRUs will be sized utilizing ProMax modelling software to ensure adequate capacity for anticipated production volumes and conditions.
- VII. Mewbourne Oil Company (MOC) will take following actions to comply with the regulations listed in 19.15.27.8:
 - A. MOC will maximize the recovery of natural gas by minimizing the waste, as defined by 19.15.2 NMAC, of natural gas through venting and flaring. MOC will ensure that well(s) will be connected to a natural gas gathering system with sufficient capacity to transport natural gas. If there is no adequate takeaway for the gas, well(s) will be shut in until the natural gas gathering system is available.
 - B. All drilling operations will be equipped with a rig flare located at least 100 ft from the nearest surface hole. Rig flare will be utilized to combust any natural gas that is brought to surface during normal drilling operations. In the case of emergency venting or flaring the volumes will be estimated and reported appropriately.
 - C. During completion operations any natural gas brought to surface will be flared. Immediately following the finish of completion operations, all well flow will be directed to permanent separation equipment. Produced natural gas from separation equipment will be sent to sales. It is not anticipated that gas will not meet pipeline standards. However, if natural gas does not meet gathering pipeline quality specifications, MOC will flare the natural gas for 60 days or until the natural gas meets the pipeline quality specifications, whichever is sooner. MOC will ensure that the flare is sized properly and is equipped with automatic igniter or continuous pilot. The gas sample will analyzed twice per week and the gas will be routed into a gathering system as soon as pipeline specifications are met.
 - D. Natural gas will not be flared with the exceptions and provisions listed in the 19.15.27.8 D.(1) through (4). If there is no adequate takeaway for the separator gas, well(s) will be shut in until the natural gas gathering system is available with exception of emergency or malfunction situations. Venting and/or flaring volumes will be estimated and reported appropriately.
 - E. MOC will comply with the performance standards requirements and provisions listed in 19.15.27.8 E.(1) through (8). All equipment will be designed and sized to handle maximum anticipated pressures and throughputs in order to minimize the waste. Production storage tanks constructed after May 25, 2021 will be equipped with automatic gauging system. Flares constructed after May 25, 2021 will be equipped with automatic igniter or continuous pilot. Flares will be located at least 100' from the well and storage tanks unless otherwise approved by the division. MOC will conduct AVO inspections as described in 19.15.27.8 E (5) (a) with frequencies specified in 19.15.27.8 E (5) (b) and (c). All emergencies will be resolved as quickly and safely as feasible to minimize waste.
 - F. The volume of natural gas that is vented or flared as the result of malfunction or emergency during drilling and completions operations will be estimated. The volume of natural gas that is vented, flared or beneficially used during production operations, will be measured or estimated. MOC will install equipment to measure

the volume of natural gas flared from existing process piping or a flowline piped from equipment such as high pressure separators, heater treaters, or vapor recovery units associated with a well or facility associated with a well authorized by an APD issued after May 25, 2021 that has an average daily production greater than 60 Mcf/day. If metering is not practicable due to circumstances such as low flow rate or low pressure venting and flaring, MOC will estimate the volume of vented or flared natural gas. Measuring equipment will conform to industry standards and will not be designed or equipped with a manifold that allows the diversion of natural gas around the metering element except for the sole purpose of inspecting and servicing the measurement equipment.

VIII. For maintenance activities involving production equipment and compression, venting will be limited to the depressurization of the subject equipment to ensure safe working conditions. For maintenance of production and compression equipment the associated producing wells will be shut in to eliminate venting. For maintenance of VRUs all gas normally routed to the VRU will be routed to flare to eliminate venting.