

Well Name: HONDO 4 FEDERAL	Well Location: T18S / R31E / SEC 4 / SESE / 32.7710848 / -103.8681297	County or Parish/State: EDDY / NM
Well Number: 3	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMLC029389B	Unit or CA Name:	Unit or CA Number:
US Well Number: 3001525398	Well Status: Abandoned	Operator: MATADOR PRODUCTION COMPANY

Accepted for record –NMOCD gc12/5/2023

Subsequent Report

Sundry ID: 2762173

Type of Submission: Subsequent Report	Type of Action: Plug and Abandonment
Date Sundry Submitted: 11/17/2023	Time Sundry Submitted: 09:49
Date Operation Actually Began: 10/18/2023	

**Actual Procedure:** 10/18/23: MIRU WOR. 10/19/23: NU & function test BOPs; POOH w/ rods. 10/20/23: POOH w/ tubing. 10/24/23: RIH & set CIBP @ 8,200' WLM; TIH & tag CIBP @ 8,188' TM; Circulate wellbore full of MLF; Pressure test casing to 500 psi for 30 minutes, good test; Spot 25 sks of Class H cmt on CIBP. 10/25/23: TIH & tag TOC @ 8,075' TM; PU & spot a 75 sk Class C cmt balanced plug @ 5,825' TM; WOC for 4 hrs; RIH & tag TOC @ 5,102' WLM; PU & spot a 25 sk Class C cmt balanced plug @ 4,577' TM. 10/26/23: TIH & tag TOC @ 4,317' TM; RIH & perforate @ 2,415' WLM; Establish circulation & squeeze 115 sks of Class C cmt. 10/27/23: TIH & tag TOC @ 1,966' TM; RIH & perf @ 450' WLM; Establish circulation & squeeze Class C cmt to surface (145 sks Class C cmt total). 11/2/23: Cut & removed wellhead; Verified cement to surface in all casing strings; Install dryhole marker; Fill cellar and back drag location. Spud Date: 9/30/1985 Rig Release Date: RDMO; 10/27/2023 Inspector: Rodrigo Gonzalez

SR Attachments

- Actual Procedure
- Pictures\_20231117094936.pdf
  - Hondo\_4\_Federal\_\_003\_As\_Plugged\_WBD\_20231117094927.pdf

Well Name: HONDO 4 FEDERAL	Well Location: T18S / R31E / SEC 4 / SESE / 32.7710848 / -103.8681297	County or Parish/State: EDDY / NM
Well Number: 3	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMLC029389B	Unit or CA Name:	Unit or CA Number:
US Well Number: 3001525398	Well Status: Abandoned	Operator: MATADOR PRODUCTION COMPANY

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: BRETT JENNINGS  
Signed on: NOV 17, 2023 09:49 AM  
Name: MATADOR PRODUCTION COMPANY  
Title: Regulatory Analyst  
Street Address: 5400 LBJ FREEWAY, STE 1500  
City: DALLAS State: TX  
Phone: (972) 629-2160  
Email address: BRETT.JENNINGS@MATADORRESOURCES.COM

Field

Representative Name:  
Street Address:  
City: State: Zip:  
Phone:  
Email address:

BLM Point of Contact

BLM POC Name: JAMES A AMOS  
BLM POC Title: Acting Assistant Field Manager  
BLM POC Phone: 5752345927  
BLM POC Email Address: jamos@blm.gov  
Disposition: Accepted  
Disposition Date: 11/27/2023  
Signature: James A Amos

10/18/23: MIRU WOR.

10/19/23: NU & function test BOPs; POOH w/ rods.

10/20/23: POOH w/ tubing.

10/24/23: RIH & set CIBP @ 8,200' WLM; TIH & tag CIBP @ 8,188' TM; Circulate wellbore full of MLF; Pressure test casing to 500 psi for 30 minutes, good test; Spot 25 sks of Class H cmt on CIBP.

10/25/23: TIH & tag TOC @ 8,075' TM; PU & spot a 75 sk Class C cmt balanced plug @ 5,825' TM; WOC for 4 hrs; RIH & tag TOC @ 5,102' WLM; PU & spot a 25 sk Class C cmt balanced plug @ 4,577' TM.

10/26/23: TIH & tag TOC @ 4,317' TM; RIH & perforate @ 2,415' WLM; Establish circulation & squeeze 115 sks of Class C cmt.

10/27/23: TIH & tag TOC @ 1,966' TM; RIH & perf @ 450' WLM; Establish circulation & squeeze Class C cmt to surface (145 sks Class C cmt total).

11/2/23: Cut & removed wellhead; Verified cement to surface in all casing strings; Install dryhole marker; Fill cellar and back drag location.

Spud Date: 9/30/1985

Rig Release Date: RDMO; 10/27/2023


Inspector: Rodrigo Gonzalez

**Hondo 4 Federal #003**  
**660' FSL & 660' FEL Sec. 4-T18S-R31E**  
**Eddy County, NM**  
**API: 30-015-25398**  
**As Plugged WELLBORE SCHEMATIC**  
**Spudded: 9/30/1985**

	Casing Information					
	Hole Size	Casing Size	Type	Weight (lb/ft)	Joints	Depth Set
Surface	17-1/2"	13-3/8"	J-55	54.5#	10	400
Intermediate	11"	8-5/8"	J-55	24#	71	2,133
Production	7-7/8"	5-1/2"	N-80, J-55	17#	214	8,936
DV Tool						5,767
Marker Joint						7,535

	Cementing Record	
	Type	TOC
Surface	410 sks	Surface
Intermediate	800 sks	Surface
Production 1st	1660 sks	2410

Geologic Markers	
Top of Salt	400
Rustler	672
Yates	2,100
Bottom of Salt	2,363
Queen	3,190
Grayburg	3,674
Delaware	4,525
Bone Spring	5,165

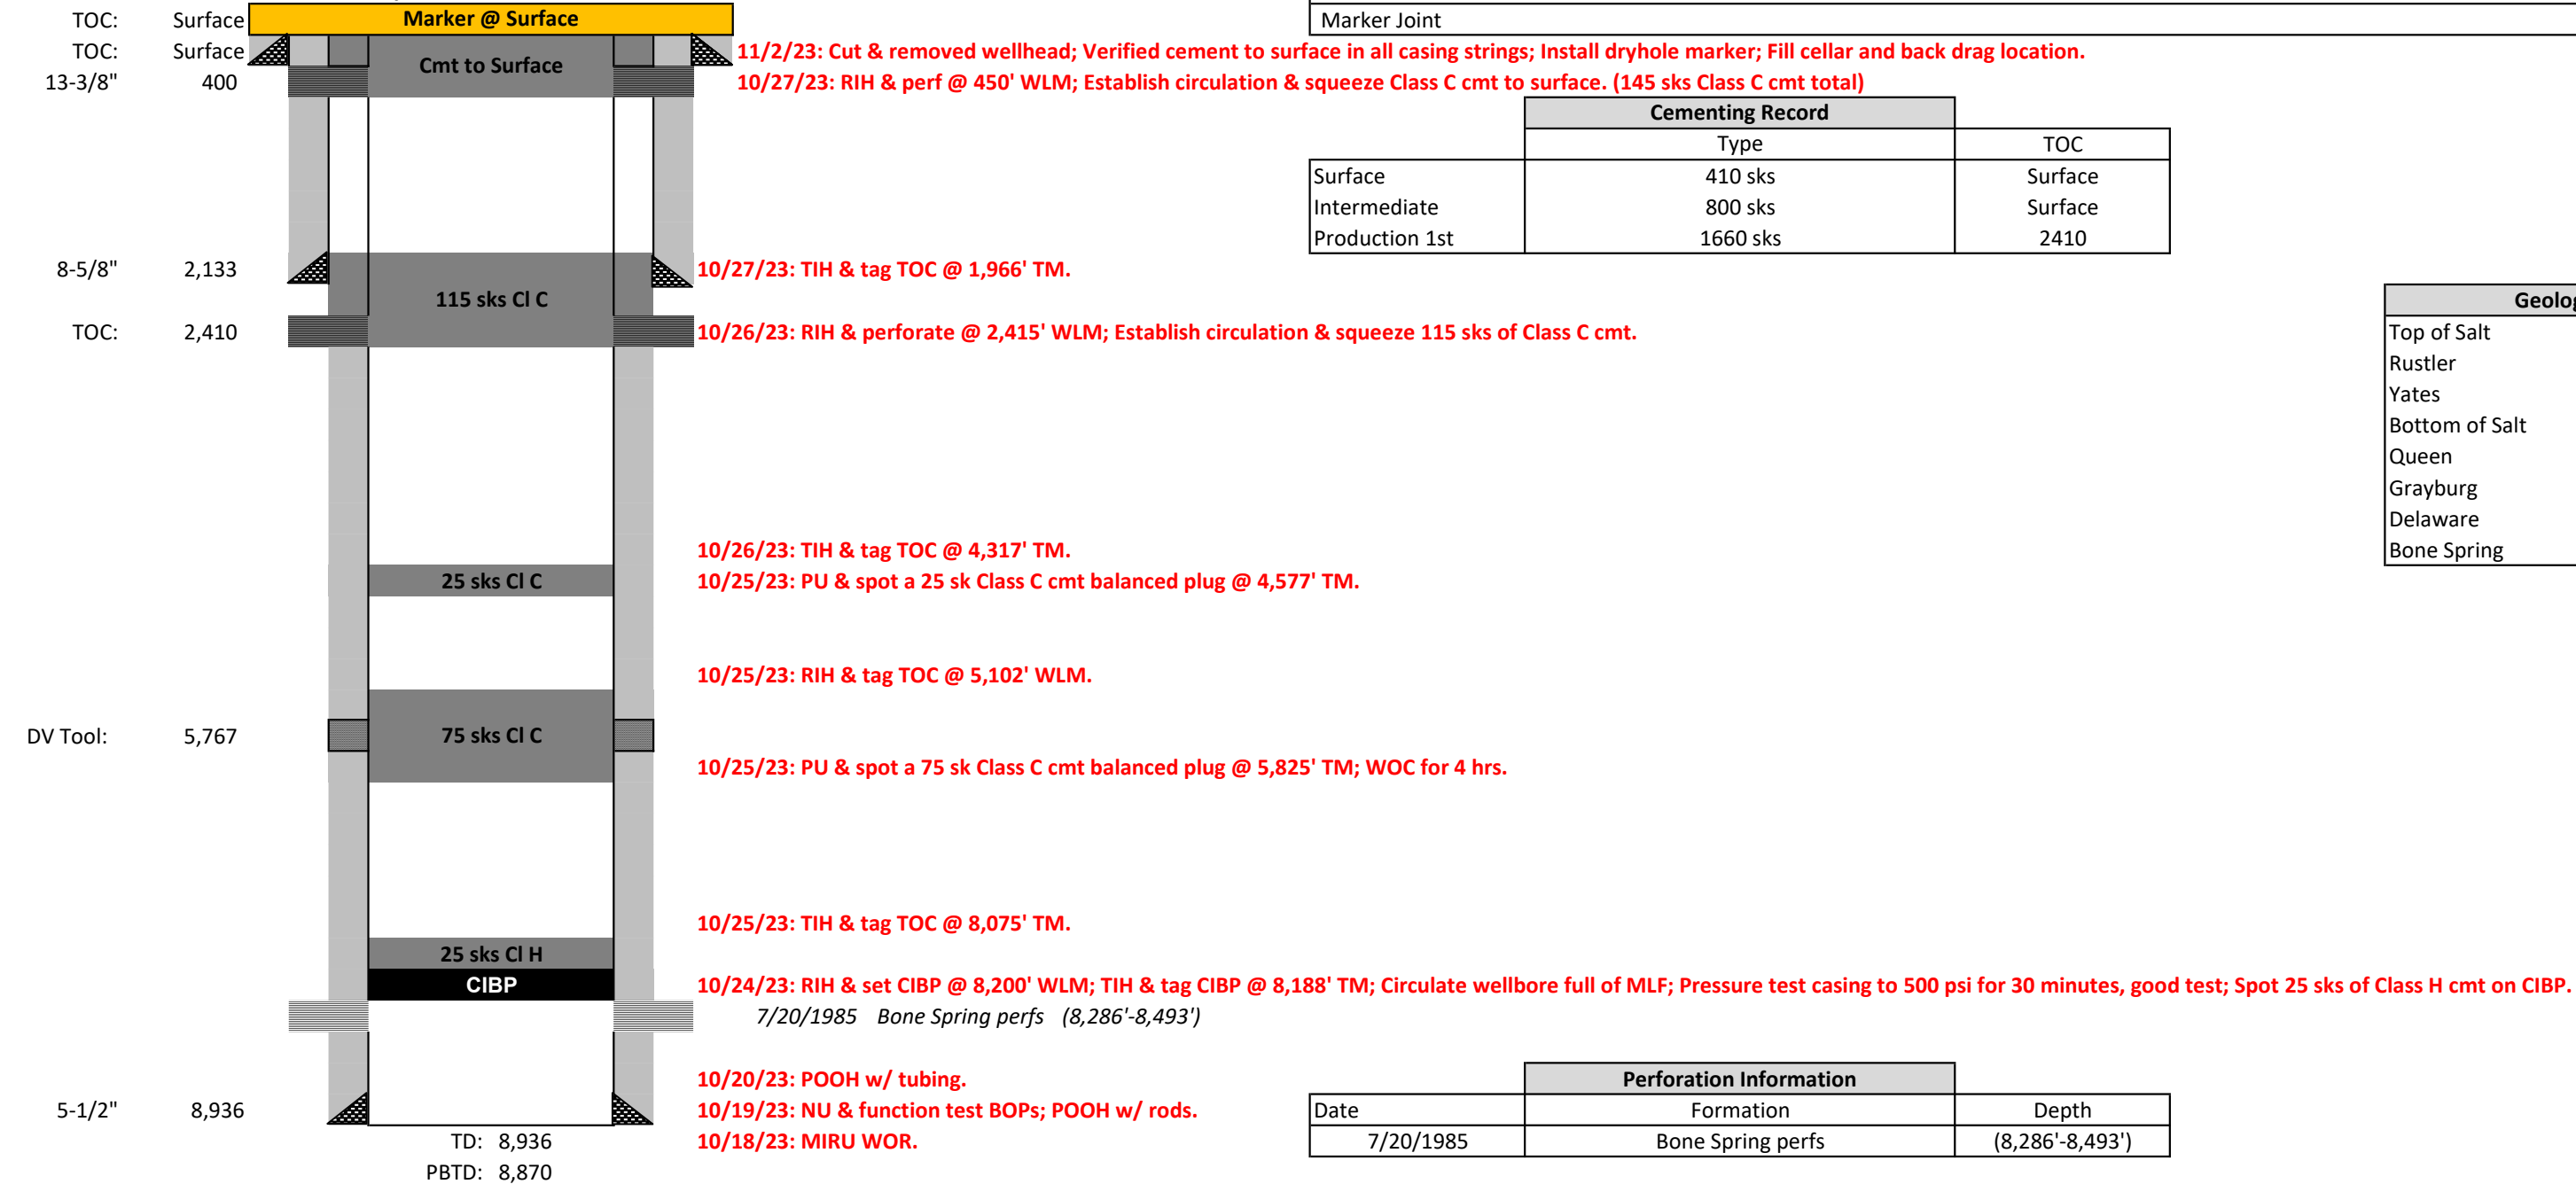

	Perforation Information	
Date	Formation	Depth
7/20/1985	Bone Spring perms	(8,286'-8,493')

**District I**  
1625 N. French Dr., Hobbs, NM 88240  
Phone:(575) 393-6161 Fax:(575) 393-0720  
**District II**  
811 S. First St., Artesia, NM 88210  
Phone:(575) 748-1283 Fax:(575) 748-9720  
**District III**  
1000 Rio Brazos Rd., Aztec, NM 87410  
Phone:(505) 334-6178 Fax:(505) 334-6170  
**District IV**  
1220 S. St Francis Dr., Santa Fe, NM 87505  
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico  
Energy, Minerals and Natural Resources  
Oil Conservation Division  
1220 S. St Francis Dr.  
Santa Fe, NM 87505

CONDITIONS

Action 288287

CONDITIONS

Operator: MATADOR PRODUCTION COMPANY One Lincoln Centre Dallas, TX 75240	OGRID: 228937
	Action Number: 288287
	Action Type: [C-103] Sub. Plugging (C-103P)

CONDITIONS

Created By	Condition	Condition Date
gcordero	None	12/5/2023