

Well Name: POKER LAKE UNIT	Well Location: T24S / R30E / SEC 4 / SENE /	County or Parish/State: EDDY / NM
Well Number: 318H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMLC068905	Unit or CA Name: CNSOL DLWR PA BDEFHI	Unit or CA Number: NMNM71016AN
US Well Number: 3001539731	Well Status: Producing Oil Well	Operator: XTO PERMIAN OPERATING LLC

Accepted for record –NMOCD gc12/20/2023

Notice of Intent**Sundry ID:** 2762527**Type of Submission:** Notice of Intent**Type of Action:** Plug and Abandonment**Date Sundry Submitted:** 11/21/2023**Time Sundry Submitted:** 09:30**Date proposed operation will begin:** 11/06/2023

Procedure Description: XTO Permian Operating, LLC. is submitting this NOI P&A to replace the previous approved NOI P&A, due to revising the proposed WBD. 1) MIRU plugging company. Set open top steel pit for plugging. 2) ND WH and NU 3K manual BOP. Function test BOP. 3) Perform Fishing Operations and recover 2-7/8" tubing from 38' to 6737.8' with an ESP, Cross Over and Bull Plug from 6737.8' to 6850.3'. 4) MIRU WLU, RIH GR to 6900'; RIH set CIBP at 6840', pressure test to 500 PSI for 30 minutes; spot 30 SKS Class C cement from 6840' to 6670'. WOC and tag to verify TOC. (T/ kickoff point) 5) Spot 30 SKS Class C cement from 5070' to 4886'. WOC and tag to verify TOC. (DV Tool) 6) Spot 555 SKS Class C cement from 3955' to 558'. WOC and tag to verify TOC. (Intermediate Casing Shoe 1, T/Delaware, B/Salt, Surface Casing Shoe, T/Salt) 7) Spot Class C cement from 100' to surface. (~13 SKS) 8) ND BOP and cut off wellhead 5' below surface. RDMO PU, transport trucks, and pump truck. 9) Set P&A marker. 10) Pull fluid from steel tank and haul to disposal. Release steel tank.

Surface Disturbance**Is any additional surface disturbance proposed?:** No**NOI Attachments****Procedure Description**

Poker_Lake_Unit_318_Current___Proposed_WBD_20231121092932.pdf

Well Name: POKER LAKE UNIT

Well Location: T24S / R30E / SEC 4 /
SENE /County or Parish/State: EDDY /
NM

Well Number: 318H

Type of Well: OIL WELL

Allottee or Tribe Name:

Lease Number: NMLC068905

Unit or CA Name: CNSOL DLWR PA
BDEFHIUnit or CA Number:
NMNM71016AN

US Well Number: 3001539731

Well Status: Producing Oil Well

Operator: XTO PERMIAN
OPERATING LLC

Conditions of Approval

Specialist Review

POKER_LAKE_UNIT_318H__2762527__COA_AND_PROCEDURE_20231207184646.pdf

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: KRISTEN HOUSTON

Signed on: NOV 21, 2023 09:29 AM

Name: XTO PERMIAN OPERATING LLC

Title: Regulatory Analyst

Street Address: 6401 HOLIDAY HILL ROAD BLDG 5

City: MIDLAND

State: TX

Phone: (432) 620-6700

Email address: KRISTEN.HOUSTON@EXXONMOBIL.COM

Field

Representative Name:

Street Address:

City:

State:

Zip:

Phone:

Email address:

BLM Point of Contact

BLM POC Name: KEITH P IMMATTY

BLM POC Title: ENGINEER

BLM POC Phone: 5759884722

BLM POC Email Address: KIMMATTY@BLM.GOV

Disposition: Approved

Disposition Date: 12/07/2023




Pre-Pull Report

Well Name: Poker Lake Unit 318H


APIUWI 3001539731		SAP Cost Center ID 1139791001		Permit Number		State/Province New Mexico		County Eddy		Surface Casing Flange Elevatio...	
Surface Location T24S-R30E-S04		Spud Date 10/21/2012 01:45		Original KB Elevation (ft) 3,436.00		Ground Elevation (ft) 3,415.00		KB-Ground Distance (ft) 21.00			
Wellbores											
Wellbore Name Original Hole		Parent Wellbore Original Hole		Wellbore APIUWI		Lat/Long Datum NAD 27		Latitude (°) 32° 14' 52.652" N		Longitude (°) 103° 52' 41.041" W	
Start Depth (ftKB) 21.0				Profile Type Horizontal				Total Depth of Wellbore (ftKB) 16,165.00			
Survey Data											
Measured Depth (ftKB) 7,315.00		Inclination (°) 36.90		DLS (°/100ft) 9.06							
Measured Depth (ftKB) 7,346.00		Inclination (°) 39.10		DLS (°/100ft) 7.49							
Measured Depth (ftKB) 7,378.00		Inclination (°) 40.80		DLS (°/100ft) 6.31							
Measured Depth (ftKB) 7,409.00		Inclination (°) 42.40		DLS (°/100ft) 5.97							
Measured Depth (ftKB) 7,440.00		Inclination (°) 44.30		DLS (°/100ft) 6.97							
Kick Offs & Key Depths											
Type				Top Depth (ftKB)							
Top of Curve = KOP											
Secondary Type								Planned Start Depth (ftKB)			
Casing Strings											
Casing Description Conductor		Set Depth (ftKB) 142.0		String Nominal OD (in) 20		Weight/Length (lb/ft) 94.00		String Grade J-55			
Casing Description Surface		Set Depth (ftKB) 694.0		String Nominal OD (in) 13 3/8		Weight/Length (lb/ft) 48.00		String Grade J-55			
Casing Description Intermediate 1		Set Depth (ftKB) 3,904.0		String Nominal OD (in) 9 5/8		Weight/Length (lb/ft) 40.00		String Grade J-55			
Casing Description Intermediate 2		Set Depth (ftKB) 7,878.0		String Nominal OD (in) 7		Weight/Length (lb/ft) 26.00		String Grade N-80			
Casing Description Production		Set Depth (ftKB) 16,099.0		String Nominal OD (in) 4 1/2		Weight/Length (lb/ft) 11.60		String Grade HCP-110			
Marker Joint Details											
Top Connection Thread		Joints		Length (ft)		Top Depth (ftKB)		Bottom Depth (ftKB)			
Other In Hole											
Run Date 9/24/2023		Des Perforated Joint		OD (in) 3		Top (ftKB) 2,380.0		Btm (ftKB) 2,382.0			
Perforations											
Date 12/18/2012		Top (ftKB) 7,935.0		Btm (ftKB) 7,939.0		Linked Zone					

Vertical schematic (actual)		
perf 4 SPF: 2,380.0; 9/24/2023	Conductor: 20 in; 142.0 ftKB	
perf 4 SPF : 3,116.0; 9/24/2023	Surface: 17 1/2 in; 700.0 ftKB	
perf 4 SPF: 4,640.0; 9/24/2023	Surface: 13 3/8 in; 694.0 ftKB	
perf 4 SPF: 4,655.0; 9/26/2023	Intermediate: 12 1/4 in; 3,904.0 ftKB	
DV Tool @: 5,020.0; 11/6/2012	Intermediate 1: 9 5/8 in; 3,904.0 ftKB	
perf 4 SPF : 6,729.0; 9/24/2023	Intermediate: 8 3/4 in; 7,878.0 ftKB	
TOL @: 7,807.5; 11/20/2012	Intermediate 2: 7 in; 7,878.0 ftKB	
100.1	100.2	1.2
2,379.9	2,379.8	0.3
4,654.9	4,654.5	0.2
7,600.1	7,480.8	53.9
7,842.2	7,609.4	59.7
8,064.3	7,706.5	74.5
8,414.0	7,720.6	90.1
8,725.4	7,719.1	91.1
9,076.1	7,718.5	90.0
9,385.8	7,717.0	91.9
9,736.2	7,716.6	89.9
10,045.3	7,721.9	88.0
10,396.0	7,723.7	90.3
10,705.1	7,721.9	90.4
11,055.4	7,720.6	89.9
11,365.2	7,721.4	89.8
11,714.2	7,722.3	89.9
12,023.3	7,724.8	89.3
12,374.3	7,727.3	90.3
12,684.4	7,725.3	90.4
13,034.8	7,729.2	89.3
13,304.8	7,733.9	88.8
13,693.9	7,738.8	89.4
14,003.9	7,740.5	89.5
14,353.0	7,743.5	89.9
14,700.8	7,744.2	89.9
15,011.8	7,747.4	89.4
15,322.8	7,750.0	89.9
15,673.9	7,751.9	89.4
15,982.6	7,753.8	89.9
16,089.2	7,754.1	89.8

PBTD: 16,099.0 ftKB
Production: 4 1/2 in;
16,099.0 ftKB
TD - Original Hole;
16,165.0 ftKB

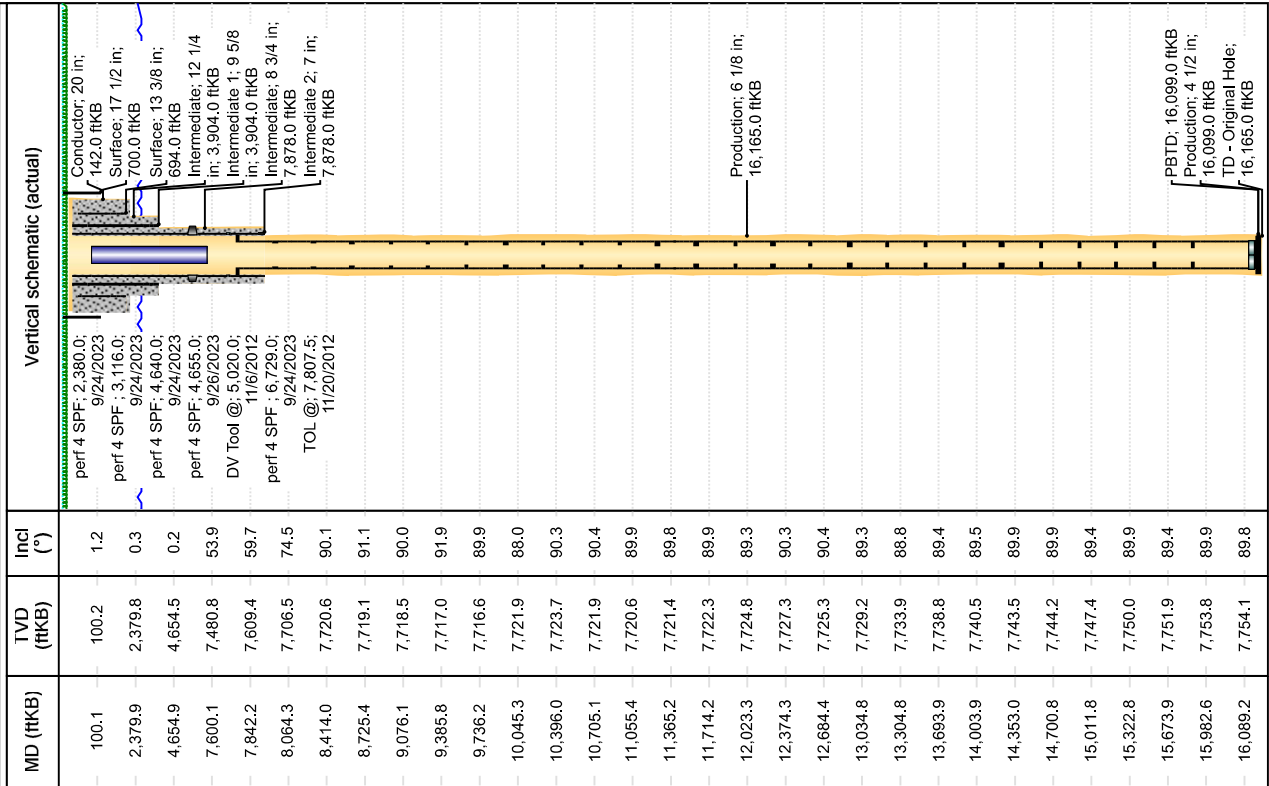

PLU 318 - Proposed WBD

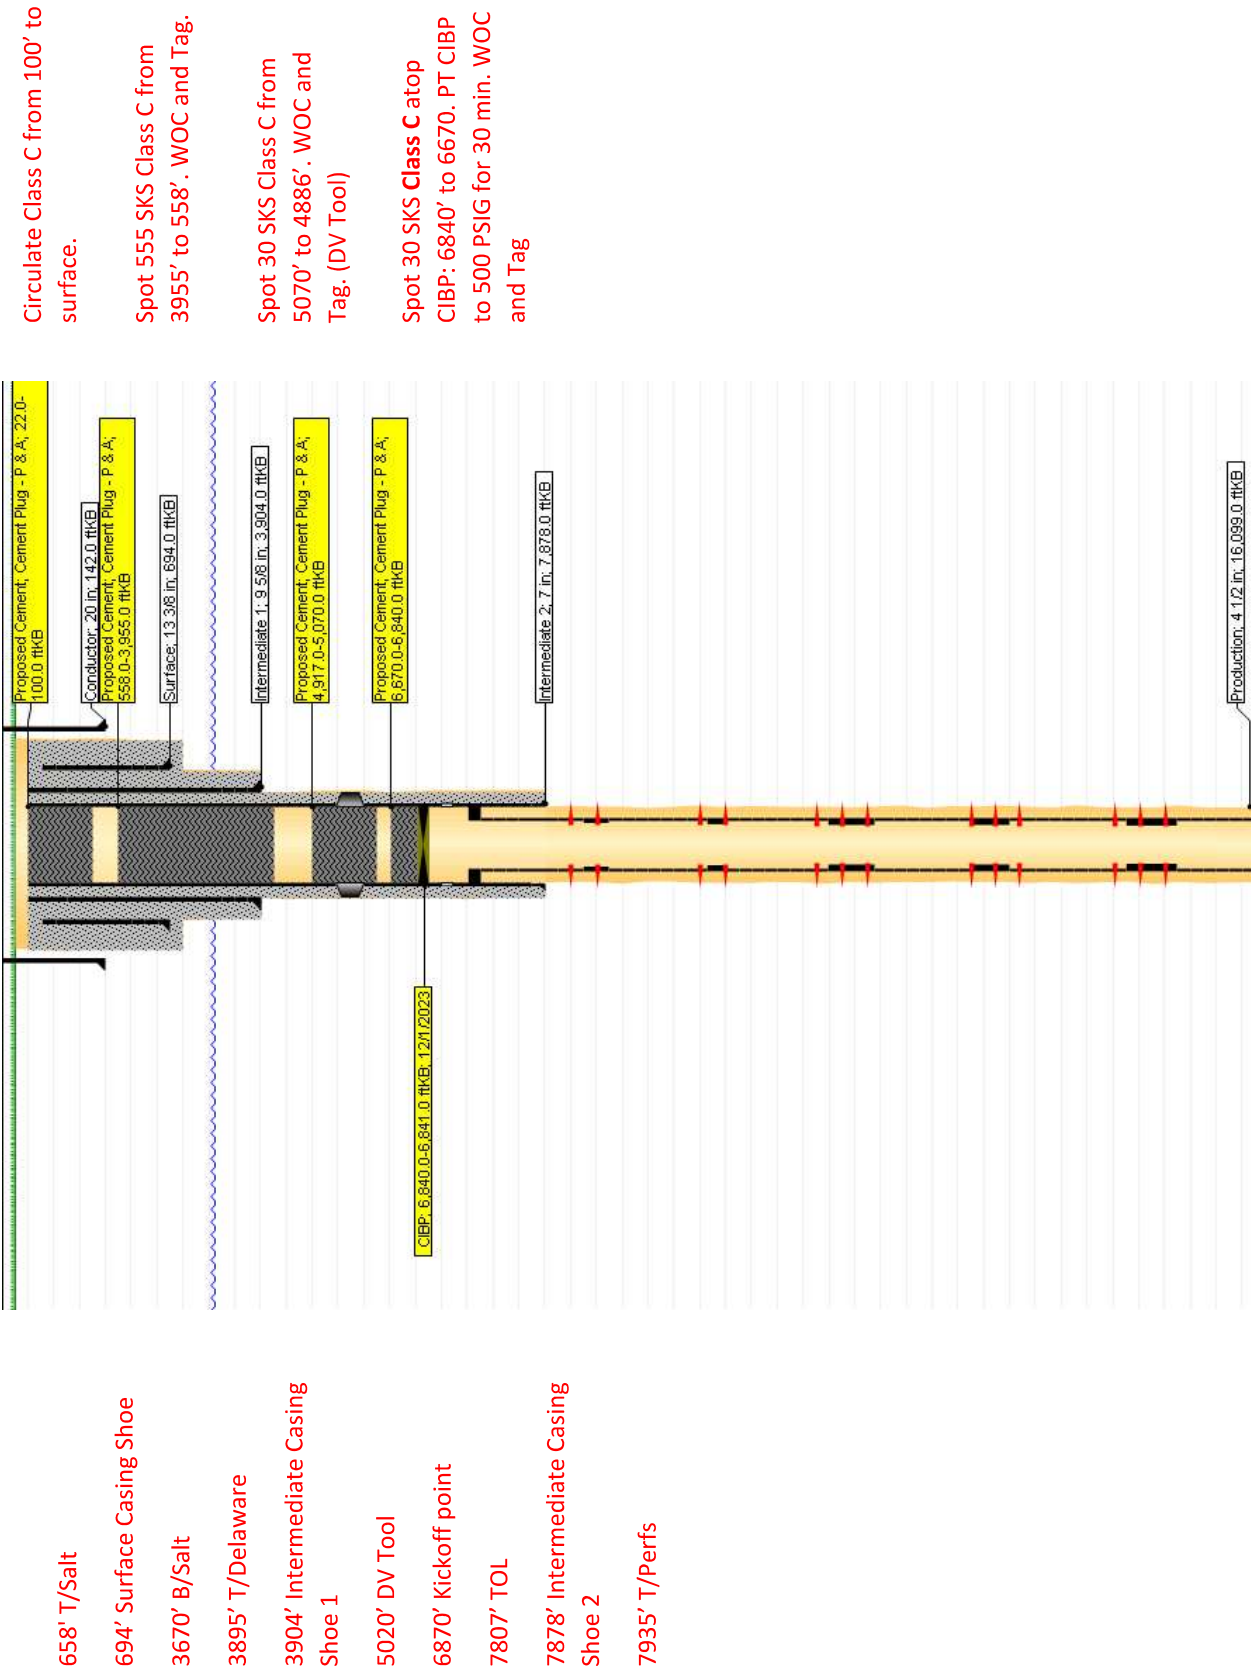

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 292569

CONDITIONS

Operator: XTO ENERGY, INC 6401 Holiday Hill Road Midland, TX 79707	OGRID: 5380
	Action Number: 292569
	Action Type: [C-103] NOI Plug & Abandon (C-103F)

CONDITIONS

Created By	Condition	Condition Date
gcordero	None	12/20/2023