

U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

Sundry Print Reports

Well Name: SAN JUAN 31-6 UNIT Well Location: T31N / R6W / SEC 35 / County or Parish/State: RIO

NENE / 36.861084 / -107.426575 ARRIBA / NM

Well Number: 35 Type of Well: CONVENTIONAL GAS Allottee or Tribe Name:

NELL

Lease Number: NMSF078999 Unit or CA Name: SAN JUAN 31-6 Unit or CA Number:

UNIT--DK NMNM78421B

US Well Number: 3003922109 Well Status: Producing Gas Well Operator: HILCORP ENERGY

COMPANY

# **Notice of Intent**

**Sundry ID: 2776681** 

Type of Submission: Notice of Intent

Type of Action: Recompletion

Date Sundry Submitted: 02/26/2024 Time Sundry Submitted: 11:35

Date proposed operation will begin: 05/01/2024

**Procedure Description:** Hilcorp Energy Company requests permission to recomplete the subject well in the Mesaverde and downhole commingle with the existing Dakota. Please see the attached procedure, current and proposed wellbore diagram, plat and natural gas management plan. A closed loop system will be used. A pre-reclamation onsite is not required as this well is located on State surface.

# **Surface Disturbance**

Is any additional surface disturbance proposed?: No

# **NOI Attachments**

# **Procedure Description**

 $San\_Juan\_31\_6\_Unit\_35\_RC\_NOI\_20240226113407.pdf$ 

eceived by OCD: 2/27/2024 7:11:25 AM Well Name: SAN JUAN 31-6 UNIT

Well Location: T31N / R6W / SEC 35 /

NENE / 36.861084 / -107.426575

County or Parish/State: Rige 2 of

ARRIBA / NM

Well Number: 35

Type of Well: CONVENTIONAL GAS

WELL

Allottee or Tribe Name:

Lease Number: NMSF078999

Unit or CA Name: SAN JUAN 31-6

UNIT--DK

Unit or CA Number:

NMNM78421B

**US Well Number:** 3003922109

Well Status: Producing Gas Well

**Operator: HILCORP ENERGY** 

COMPANY

Zip:

# **Operator**

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: AMANDA WALKER Signed on: FEB 26, 2024 11:35 AM

Name: HILCORP ENERGY COMPANY

Title: Operations/Regulatory Technician

Street Address: 1111 TRAVIS ST

City: HOUSTON State: TX

Phone: (346) 237-2177

Email address: MWALKER@HILCORP.COM

# **Field**

**Representative Name:** 

**Street Address:** 

City:

Phone:

**Email address:** 

**BLM Point of Contact** 

BLM POC Name: MATTHEW H KADE BLM POC Title: Petroleum Engineer

BLM POC Phone: 5055647736 BLM POC Email Address: MKADE@BLM.GOV

**Disposition:** Approved **Disposition Date:** 02/26/2024

State:

Signature: Matthew Kade



**NMOCD** 

 $\checkmark$ 

# HILCORP ENERGY COMPANY SAN JUAN 31-6 UNIT 35 MESAVERDE RECOMPLETION SUNDRY

Contact OCD and BLM (where applicable) 24 hrs prior to MIRU or running MITs. Record and document all casing pressures


	SAN JUAN 31-0 UNIT 35
Hillcorp	MESAVERDE RECOMPLETION SUNDRY
	API: 3003922109
	JOB PROCEDURES

<u></u>	BLM	<u>daily</u> , including BH, IC (if present) and PC. Comply with all NMOCD, BLM (where applicable), and HEC safety and environmental regulations.

- 1. Hold pre-job safety meeting. MIRU service rig and associated equipment. NU and test BOP per HEC, State, and Federal guidelines.
- 2. TOOH with 2-3/8" tubing.
- 3. Set a 4-1/2" plug within 50' of the top Dakota perforation (+/-7,883') for zonal isolation.
- 4. Load hole with fluid, PT the csg to 600 psi and run a CBL on the 4-1/2" casing. Verify cement bond within the Mesaverde and confirm TOC. Review CBL results with engineering and regulatory agencies. Perform cmt remediation, as required.
- 5. Perform a witnessed MIT test on the csg with the appropriate regulatory agencies (Notify NMOCD 24 hours prior to test).
- 6. If frac will be pumped down casing: ND BOP, NU frac stack and test frac stack and casing to frac pressure.
- 7. RU WL. Perforate the Mesaverde. (Top perforation @ 5,161', Bottom perforation @ 6,214').
- 8. If frac will be pumped down a frac string: RIH w/ frac string and packer. Set packer within 50' of top perforation. ND BOP, NU frac stack. Pressure test frac string and frac stack to frac pressure.
- 9. RDMO service rig. RU stimulation crew. Frac the Mesaverde in one or more stages. Set plugs in between stages, if necessary.
- 10. MIRU service rig and associated equipment. ND frac stack, NU BOP and test.
- 11. If frac was performed down frac string: POOH w/ frac string and packer.
- 12. TIH with a bit and drill out top isolation plug and any stage plugs (if necessary). Clean out to the top of the Dakota isolation plug.
- 13. Pending commingle approval, drill out Dakota isolation plug. Cleanout to PBTD at 8,023'. TOOH w/ cleanout assembly.
- 14. Run and land production tubing. RDMO service rig and associated equipment. Return well to production.




# HILCORP ENERGY COMPANY SAN JUAN 31-6 UNIT 35 MESAVERDE RECOMPLETION SUNDRY

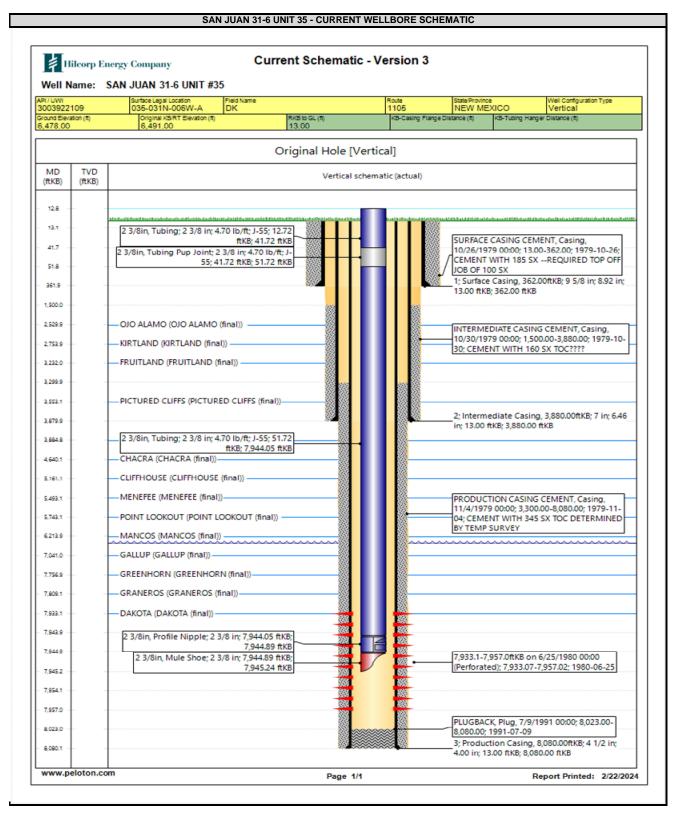



# HILCORP ENERGY COMPANY SAN JUAN 31-6 UNIT 35 MESAVERDE RECOMPLETION SUNDRY

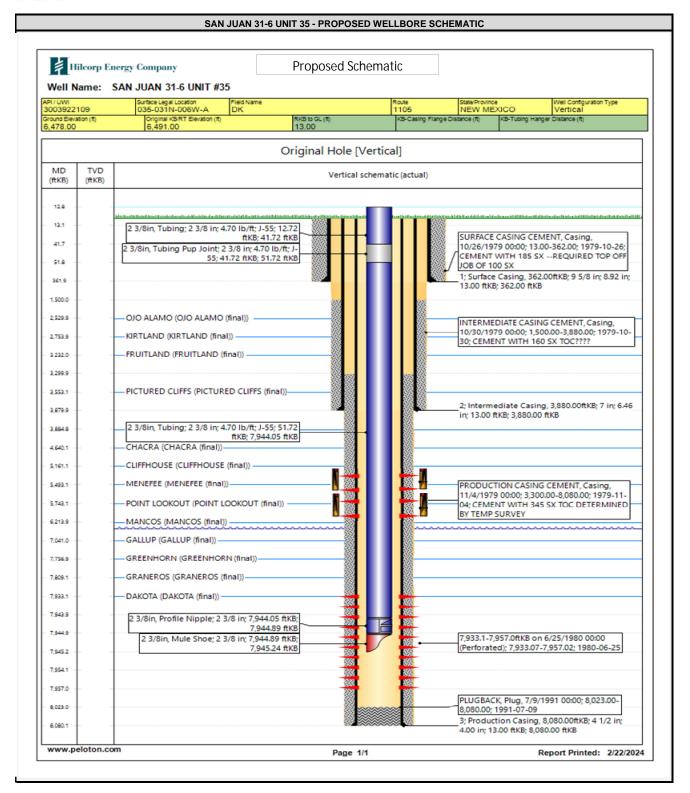

Form C-102 August 1, 2011

Permit 360386

District I

1625 N. French Dr., Hobbs, NM 88240 Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720 **District III** 

1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170

**District IV** 

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

# State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

## WELL LOCATION AND ACREAGE DEDICATION PLAT

1. API Number	2. Pool Code	3. Pool Name
30-039-22109	72319	BLANCO-MESAVERDE (PRORATED GAS)
4. Property Code 318839	5. Property Name SAN JUAN 31 6 UNIT	6. Well No. 035
7. OGRID No. 372171	8. Operator Name HILCORP ENERGY COMPANY	9. Elevation 6478

#### 10. Surface Location

Ī	UL - Lot	Section	Township	Range	Lot Idn	Feet From	N/S Line	Feet From	E/W Line	County
	Α	35	31N	06W		880	N	1185	E	RIO
										ARRIBA

#### 11. Bottom Hole Location If Different From Surface

UL - Lot	Section	Township	Range	Lot Idn	Feet From	N/S Line	Feet From	E/W Line	County
12. Dedicated Ao 320.			13. Joint or Infill		14. Consolidatio	n Code		15. Order No.	

## NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

### **OPERATOR CERTIFICATION**

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location(s) or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

E-Signed By: Wukker

Title:Operations Regulatory Tech Sr.

Date: 2/23/2024

#### **SURVEYOR CERTIFICATION**

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

Surveyed By: Fred B Kerr Jr
Date of Survey: 6/23/1979
Certificate Number: 3950

# State of New Mexico Energy, Minerals and Natural Resources Department

Submit Electronically Via E-permitting

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

# NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

# Section 1 – Plan Description Effective May 25, 2021

I. Operator: Hilcorp Energy Company			OGRID: 372171 Date: 02/23/2024					
II. Type: ⊠ Origi	nal □ Amendme	nt due to □ 19.15.2	27.9.D(6)(a) NMA	.C □ 19.15	5.27.9.D(6)(b) N	MAC □ Other.		
If Other, please des	scribe:							
III. Well(s): Provide be recompleted from					r set of wells pro	posed to be dril	led or proposed to	
Well Name	API	ULSTR	Footag	es	Anticipated Oil BBL/D		Anticipated Produced Water BBL/D	
SJ 31-6 Unit 35	30-039-22109	A-35-31N-06W	880 FNL & 1185	FEL	0.25	500	3	
SJ 31-6 Unit 35	30-039-22109							
VI. Separation Equipment:   Attach a complete description of how Operator will size separation equipment to optimize gas capture.  VII. Operational Practices:   Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.  VIII. Best Management Practices:   Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.								

# Section 2 – Enhanced Plan EFFECTIVE APRIL 1, 2022

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

🗵 Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

# IX. Anticipated Natural Gas Production:

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF

# X. Natural Gas Gathering System (NGGS):

Operator	System	ULSTR of Tie-in	Anticipated Gathering	Available Maximum Daily Capacity
	-		Start Date	of System Segment Tie-in

<b>XI. Map.</b> $\square$ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the
production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of
the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural	gas gathering system	☐ will ☐ will not have	capacity to gather	100% of the an	ticipated natura	ıl gas
production volume from the well	prior to the date of first	production.				

XIII. Line Pressure. Operator $\square$ does $\square$ does not anticipate that its existing well(s) connected to the same segment, or portion	on, of the
natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new	well(s).

	Operator	's plan to	o manage prod	luction in response	to the increased li	ine pressure
--	----------	------------	---------------	---------------------	---------------------	--------------

XIV. Confidentiality: Uperator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information providentiality.	ided in
Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific infor	rmation
for which confidentiality is asserted and the basis for such assertion.	

(i)

# Section 3 - Certifications <u>Effective May 25, 2021</u>

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal: 🗵 Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system: or ☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system. If Operator checks this box, Operator will select one of the following: Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or Venting and Flaring Plan. 

Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including: (a) power generation on lease; **(b)** power generation for grid; (c) compression on lease; (d) liquids removal on lease; reinjection for underground storage; (e) **(f)** reinjection for temporary storage; (g) reinjection for enhanced oil recovery; fuel cell production; and (h)

# **Section 4 - Notices**

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

other alternative beneficial uses approved by the division.

- (a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or
- (b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.
- 2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature: Alluskur
Printed Name: Amanda Walker
Title: Operations Regulatory Tech Sr.
E-mail Address: <a href="mailto:mwalker@hilcorp.com">mwalker@hilcorp.com</a>
Date: 2/23/2024
Phone: 346-237-2177
OIL CONSERVATION DIVISION (Only applicable when submitted as a standalone form)
Approved By:
Title:
Approval Date:
Conditions of Approval:

# VI. Separation Equipment:

Hilcorp Energy Company (HEC or Operator) production facilities include separation equipment designed to efficiently separate gas from liquid phases to optimize gas capture based on projected and estimated volumes from the targeted pool of our recomplete project. HEC will utilize flowback separation equipment and production separation equipment designed and built to industry specifications after the recomplete to optimize gas capture and send gas to sales or flare based on analytical composition. HEC operates facilities that are typically one-well facilities. Production separation equipment is upgraded prior to well being completed, if determined to be undersized or inadequate. This equipment is already on-site and tied into our sales gas lines prior to the recomplete operations.

# VII. Operational Practices:

- 1. Subsection (A) Venting and Flaring of Natural Gas
  - HEC understands the requirements of NMAC 19.15.27.8 which outlines that the venting and flaring of natural gas during drilling, completion or production operations that constitutes waste as defined in 19.15.2 are prohibited.
- 2. Subsection (B) Venting and Flaring during drilling operations
  - This gas capture plan isn't for a well being drilled.
- 3. Subsection (C) Venting and flaring during completion or recompletion
  - o Flowlines will be routed for flowback fluids into a completion or storage tank and if feasible under well conditions, flare rather than vent and commence operation of a separator as soon as it is technically feasible for a separator to function.
  - At any point in the well life (completion, production, inactive) an audio, visual and olfactory inspection be performed at prescribed intervals (weekly or monthly) pursuant to Subsection D of 19.15.27.8 NMAC, to confirm that all production equipment is operating properly and there are no leaks or releases.
- 4. Subsection (D) Venting and flaring during production operations
  - At any point in the well life (completion, production, inactive) an audio, visual and olfactory inspection be performed at prescribed intervals (weekly or monthly) pursuant to Subsection D of 19.15.27.8 NMAC, to confirm that all production equipment is operating properly and there are no leaks or releases.
  - o Monitor manual liquid unloading for wells on-site or in close proximity (<30 minutes' drive time), take reasonable actions to achieve a stabilized rate and pressure at the earliest practical time, and take reasonable actions to minimize venting to the maximum extent practicable.
  - o HEC will not vent or flare except during the approved activities listed in NMAC 19.15.27.8 (D) 1-4.
- 5. Subsection (E) Performance standards
  - All tanks and separation equipment are designed for maximum throughput and pressure to minimize waste.
  - o If a flare is utilized during production operations it will have a continuous pilot and is located more than 100 feet from any known well or storage tanks.
  - At any point in the well life (completion, production, inactive) an audio, visual and olfactory inspection be performed at prescribed intervals (weekly or monthly) pursuant to Subsection D of 19.15.27.8 NMAC, to confirm that all production equipment is operating properly and there are no leaks or releases.

- 6. Subsection (F) Measurement or estimation of vented and flared natural gas
  - o Measurement equipment is installed to measure the volume of natural gas flared from process piping.
  - o When measurement isn't practicable, estimation of vented and flared natural gas will be completed as noted in 19.15.27.8 (F) 5-6.

# VIII. Best Management Practices:

- 1. Operator has adequate storage and takeaway capacity for wells it chooses to recomplete as the flowlines at the sites are already in place and tied into a gathering system.
- 2. Operator will flare rather than vent vessel blowdown gas when technically feasible during active and/or planned maintenance to equipment on-site.
- 3. Operator combusts natural gas that would otherwise be vented or flared, when technically feasible.
- 4. Operator will shut in wells in the event of a takeaway disruption, emergency situation, or other operations where venting or flaring may occur due to equipment failures.

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

District II 811 S. First St., Artesia, NM 88210 Phone: (575) 748-1283 Fax: (575) 748-9720

District III 1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

**State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division** 1220 S. St Francis Dr. **Santa Fe, NM 87505** 

CONDITIONS

Action 317847

## **CONDITIONS**

Operator:	OGRID:
HILCORP ENERGY COMPANY	372171
1111 Travis Street	Action Number:
Houston, TX 77002	317847
	Action Type:
	[C-103] NOI Recompletion (C-103E)

#### CONDITIONS

Created By	Condition	Condition Date
dmcclure	Notify NMOCD 24 Hours Prior to beginning operations.	
dmcclure	DHC required	4/1/2024
dmcclure	All conducted logs shall be submitted to the Division as a [UF-WL] EP Well Log Submission (WellLog).	4/1/2024
dmcclure	The appropriate compliance officer supervisor shall be consulted and remedial action conducted as directed if the cement sheath around the casing is neadequate to protect the casing and isolate strata from: (a) the uppermost perforation in each added pool to at least 150 feet above that perforation; and (b the lowermost perforation in each added pool to at least 100 feet below that perforation.	