

<b>Well Name:</b> GINNY CORBETT	<b>Well Location:</b> T25N / R11W / SEC 31 / NESE / 36.354919 / -108.036667	<b>County or Parish/State:</b> SAN JUAN / NM
<b>Well Number:</b> 2	<b>Type of Well:</b> OIL WELL	<b>Allottee or Tribe Name:</b>
<b>Lease Number:</b> NMNM76857	<b>Unit or CA Name:</b>	<b>Unit or CA Number:</b>
<b>US Well Number:</b> 3004527101	<b>Well Status:</b> Abandoned	<b>Operator:</b> DJR OPERATING LLC

**Subsequent Report**

**Sundry ID:** 2772213

**Type of Submission:** Subsequent Report

**Type of Action:** Plug and Abandonment

**Date Sundry Submitted:** 01/29/2024

**Time Sundry Submitted:** 08:43

**Date Operation Actually Began:** 01/29/2024

**Actual Procedure:** The subject well was Plugged & Abandoned on 1/12/2024 per the attached End of Well Report, As Plugged Wellbore Diagram, and Marker.

**SR Attachments**

**Actual Procedure**

EOWR\_BLM\_20240129084331.pdf

Well Name: GINNY CORBETT

Well Location: T25N / R11W / SEC 31 / NESE / 36.354919 / -108.036667

County or Parish/State: SAN JUAN / NM

Well Number: 2

Type of Well: OIL WELL

Allottee or Tribe Name:

Lease Number: NMNM76857

Unit or CA Name:

Unit or CA Number:

US Well Number: 3004527101

Well Status: Abandoned

Operator: DJR OPERATING LLC

**Operator**

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: SHAW-MARIE FORD

Signed on: JAN 29, 2024 08:43 AM

Name: DJR OPERATING LLC

Title: Regulatory Specialist

Street Address: 1 ROAD 3263

City: AZTEC

State: NM

Phone: (505) 632-3476

Email address: SFORD@DJRLLC.COM

**Field**

Representative Name:

Street Address:

City:

State:

Zip:

Phone:

Email address:

**BLM Point of Contact**

BLM POC Name: MATTHEW H KADE

BLM POC Title: Petroleum Engineer

BLM POC Phone: 5055647736

BLM POC Email Address: MKADE@BLM.GOV

Disposition: Accepted

Disposition Date: 01/29/2024

Signature: Matthew Kade

DJR Operating, LLC  
P&A End of Well Report  
Ginny Corbett 2  
API # 30-045-27101  
NE/SE, Unit I. Sec 31, T25N, R11W  
San Juan County, NM  
Spud Date: 11-27-1988  
Plug Date: 1-12-2024

12-27-2023:

MIRU rig and equipment. SITP = 0, SICP = 0, BH = 0. NDWH, NU BOP. TOO H with 94 jts production string.

12-28-2023:

TIH with 2 3/8" workstring and tri-cone tooth bit. Tagged up at 3075'. Load and roll hole, PT casing, did not test. Swivel up, drilled on metal for rest of the day.

12-29-2023:

Continue drilling on CR with tri-cone tooth bit, getting large chunks of metal, bit torquing up. Decision made to get a junk mill, TOO H. RU XK-90 swivel and MU junk mill. SD for holiday WE.

1-2-2024:

Start milling with XK-90 swivel and junk mill. Mill to 3135', cuttings very small, decision made to use tooth bit again. TOO H. SDFN.

1-3-2024:

Drill cement from 3135', broke through cement at 3274'. Tagged cement again at 3290', drilled cement to 3463', broke out of cement. TIH, tagged lower CR, (set in 2-26-2014) at 4680'. Pull up 10 stands, SDFN.

1-4-2024:

SD due to weather and road conditions.

1-5-2024:

SITP = N/A, SICP = 0, BH = 0. TIH, tagged up at 4675'. Load and roll the hole. PT casing, did not test. TOO H.

RIH, run CBL log from 4675' to surface.

TIH to 4675'.

P&A Plug 1: Gallup formation top off: Mix and spot a balanced plug of 20 sx from top of old CR and cement at 4675'. Pull up hole, WOC.

1-8-2024:

SITP = N/A, SICP = 0, BH = 0. TIH, tagged Plug 1 at 4521'. Started to TOO H. SD due to high winds.

1-9-2024:

Finish TOO H with workstring.

RIH, perforate holes at 3825'. POOH.

TIH, set retainer at 3777'. Attempt to establish injection, could not inject, obtained approval to spot a plug of 18 sx above retainer.

P&A Plug 2: Mancos: Mix and spot a balanced plug of 18 sx above retainer at 3777'. WOC.

1-10-2024:

TIH, tagged Plug 2 at 3653'. Pull up to 1967'.

P&A Plug 3: Mesa Verde and Chacra formation tops: Mix and spot a balanced plug of 69 sx from 1967'. Pull up hole, WOC.

TIH, tagged Plug 3 at 1485'.

P&A Plug 4: Chacra formation top off. Mix and spot a balanced plug of 18 sx from 1485'. Pull up hole, WOC.

1-11-2024:

TIH, tagged Plug 4 at 1367'. Pull up to 1139'. PT casing, did not test.

P&A Plug 5: Pictured Cliffs formation top: Mix and spot a balanced plug of 18 sx from 1139'. Pull up hole. WOC.

1-12-2024:

TIH, tagged Plug 5 at 984'. PT casing, good test.

P&A Plug 6: Fruitland, Kirtland, Ojo Alamo formation tops, surface casing shoe to surface. Mix and spot a balanced plug of 100 sx from 810' to surface.

NDBOP. Cut off WH, TOC in 5 1/2" casing at 62' and in 8 5/8" casing at 87'. Install P&A marker.

P&A Plug 7: Top off casings and cellar with poly pipe with 55 sx.

All cement used was Class G mixed at 15.8 ppg, yield 1.15 cu ft/sx.

Regulatory representative; Fred Brandenburg and Ashley Schneider, BLM and Monica Kuehling, NMOCD via phone

GPS Coordinates: Lat; 36.35492 N, Long; 108.03727 W

**End of Well Report**  
**DJR Operating, LLC**  
**Ginny Corbett 2**  
 API # 30-045-27101  
 NE/SE, Unit I, Sec 31, T25N, R11W  
 San Juan County, NM

GL            6420'  
 KB            6432'  
 Spud Date    11/27/1988

**SURF CSG**

Hole size: 12.25"  
 Csg Size: 8.625"  
 Wt: 24#  
 Grade: J-55  
 ID: 8.097"  
 Depth: 318'  
 Csg cap ft<sup>3</sup>: 0.3576  
 TOC: Surf

**FORMATION TOPS**

Nacimiento	Surface
Ojo Alamo	BSC
Kirtland	478'
Fruitland	760'
Pictured Cliffs	1089'
Chacra	1474'
Mesa Verde	1917'
Mancos	3775'
Gallup	4624'

**PROD CSG**


Hole size: 7.875"  
 Csg Size: 5.5"  
 Wt: 15.5#  
 Grade: K-55  
 ID: 4.95"  
 Depth: 4952'  
 Csg cap ft<sup>3</sup>: 0.1336  
 Csg/Csg Ann ft<sup>3</sup>: 0.1926  
 Csg/OH cap ft<sup>3</sup>: 0.1732  
 TOC: Circ

**NOTE: 2-28-2014: CR set at 3098', Squeezed casing leak from 3133' to 3183' with 50 sx under CR and 20' cement above CR. CR and cement were not drilled out in 2014.**

**NOTE: 2-26-2014: CR set at 4683', 50 sx under CR and 20' cement above CR.**

Perfs: 4746'-4756'

TD 4950'

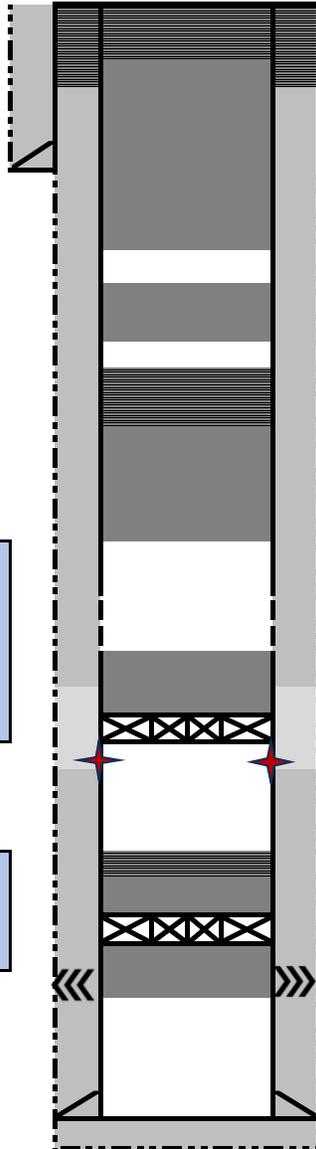

1-12-2024: Plug 7: Top off plug. Cut off WH, TOC in 5 1/2" casing at 62', and at 87' in 8 5/8" casing. Install P&A marker, Top off casings and cellar with poly pipe and 55 sx.

1-12-2024: Plug 6: Fruitland, Kirtland, Ojo to surface. Mix and pump balanced plug of 100 sx from 810' to surface.

1-11-2024: Plug 5: Pictured Cliffs: Mix and spot a balanced plug of 18 sx from 1139'. WOC, 1-12-2024, tagged Plug 5 at 984'. PT casing, good test.

1-10-2024: Plug 4: Chacra top off. Mix and spot a balanced plug of 18 sx from 1485'. WOC. 1-11-2024, tagged Plug 4 at 1367'. PT casing, did not test.

1-10-2024: Plug 3: Mesa Verde and Chacra: Mix and spot a balanced plug of 69 sx from 1967'. WOC, tagged Plug 3 at 1485'.

1-9-2024: Plug 2: Mancos: Perforate at 3825', set CR at 3777', attempt to establish injection, could not inject. Spot plug of 18 sx above CR from 3777'. WOC, 1-10-2024: tagged Plug 2 at 3653'.

1-5-2024: Plug 1: Gallup top off: TIH to lower CR and cement at 4675'. Load and roll hole. PT casing, did not test. TOOH. Run CBL from 4675' to surface. TIH, mix and spot balanced plug of 20 sx from 4675'. WOC, 1-8-2024, tagged Plug 1 at 4521'.

12-28-2023 to 1-3-2024: Drill and mill CR at 3075' and cement to 3463'. CR and cement had been placed while squeezing casing leak from 3133' to 3183' in 2014. (See NOTE above left.) TIH, tagged lower CR and cement at 4675'. Pull up hole, SDFN.

All cement used was Class G mixed at 15.8 ppg, yield 1.15 cu ft/sx  
 Regulatory Representative: Fred Brandenburg and Ashley Schneider, BLM and Monica Kuehling, NMOCD via phone  
 GPS Coordinates: Lat; 36.35492 N, Long; 108.03727 W

DJR Operating, LLC  
P&A Marker  
Ginny Corbett 2  
API # 30-045-27101  
NE/SE, Unit I, Sec 31, T25N, R11W  
San Juan County, NM  
Spud Date: 11-27-1988  
Plug Date: 1-12-2024



**End of Well Report**  
**DJR Operating, LLC**  
**Ginny Corbett 2**  
 API # 30-045-27101  
 NE/SE, Unit I, Sec 31, T25N, R11W  
 San Juan County, NM

GL            6420'  
 KB            6432'  
 Spud Date    11/27/1988

**SURF CSG**

Hole size: 12.25"  
 Csg Size: 8.625"  
 Wt: 24#  
 Grade: J-55  
 ID: 8.097"  
 Depth: 318'  
 Csg cap ft<sup>3</sup>: 0.3576  
 TOC: Surf

**FORMATION TOPS**

Nacimiento	Surface
Ojo Alamo	BSC
Kirtland	478'
Fruitland	760'
Pictured Cliffs	1089'
Chacra	1474'
Mesa Verde	1917'
Mancos	3775'
Gallup	4624'

**PROD CSG**


Hole size: 7.875"  
 Csg Size: 5.5"  
 Wt: 15.5#  
 Grade: K-55  
 ID: 4.95"  
 Depth: 4952'  
 Csg cap ft<sup>3</sup>: 0.1336  
 Csg/Csg Ann ft<sup>3</sup>: 0.1926  
 Csg/OH cap ft<sup>3</sup>: 0.1732  
 TOC: Circ

**NOTE: 2-28-2014: CR set at 3098', Squeezed casing leak from 3133' to 3183' with 50 sx under CR and 20' cement above CR. CR and cement were not drilled out in 2014.**

**NOTE: 2-26-2014: CR set at 4683', 50 sx under CR and 20' cement above CR.**

Perfs: 4746'-4756'

TD 4950'

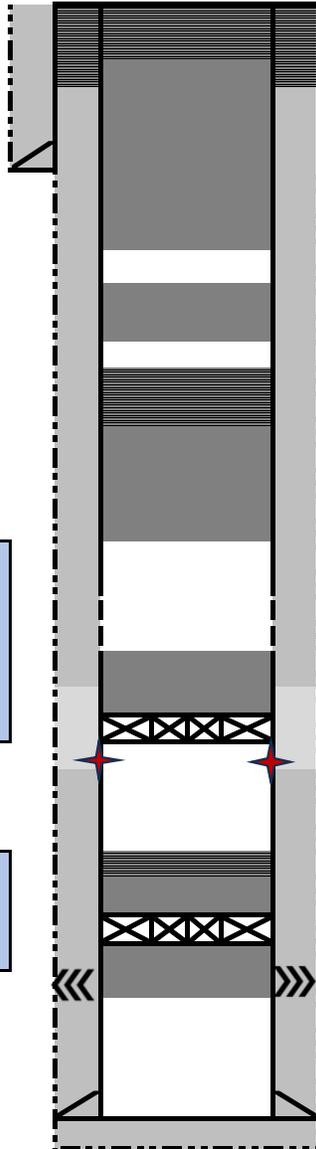

**1-12-2024: Plug 7: Top off plug. Cut off WH, TOC in 5 1/2" casing at 62', and at 87' in 8 5/8" casing. Install P&A marker, Top off casings and cellar with poly pipe and 55 sx.**

**1-12-2024: Plug 6: Fruitland, Kirtland, Ojo to surface. Mix and pump balanced plug of 100 sx from 810' to surface.**

**1-11-2024: Plug 5: Pictured Cliffs: Mix and spot a balanced plug of 18 sx from 1139'. WOC, 1-12-2024, tagged Plug 5 at 984'. PT casing, good test.**

**1-10-2024: Plug 4: Chacra top off. Mix and spot a balanced plug of 18 sx from 1485'. WOC. 1-11-2024, tagged Plug 4 at 1367'. PT casing, did not test.**

**1-10-2024: Plug 3: Mesa Verde and Chacra: Mix and spot a balanced plug of 69 sx from 1967'. WOC, tagged Plug 3 at 1485'.**

**1-9-2024: Plug 2: Mancos: Perforate at 3825', set CR at 3777', attempt to establish injection, could not inject. Spot plug of 18 sx above CR from 3777'. WOC, 1-10-2024: tagged Plug 2 at 3653'.**

**1-5-2024: Plug 1: Gallup top off: TIH to lower CR and cement at 4675'. Load and roll hole. PT casing, did not test. TOOH. Run CBL from 4675' to surface. TIH, mix and spot balanced plug of 20 sx from 4675'. WOC, 1-8-2024, tagged Plug 1 at 4521'.**

**12-28-2023 to 1-3-2024: Drill and mill CR at 3075' and cement to 3463'. CR and cement had been placed while squeezing casing leak from 3133' to 3183' in 2014. (See NOTE above left.) TIH, tagged lower CR and cement at 4675'. Pull up hole, SDFN.**

All cement used was Class G mixed at 15.8 ppg, yield 1.15 cu ft/sx  
 Regulatory Representative: Fred Brandenburg and Ashley Schneider, BLM and Monica Kuehling, NMOCD via phone  
 GPS Coordinates: Lat; 36.35492 N, Long; 108.03727 W

**District I**  
 1625 N. French Dr., Hobbs, NM 88240  
 Phone:(575) 393-6161 Fax:(575) 393-0720

**District II**  
 811 S. First St., Artesia, NM 88210  
 Phone:(575) 748-1283 Fax:(575) 748-9720

**District III**  
 1000 Rio Brazos Rd., Aztec, NM 87410  
 Phone:(505) 334-6178 Fax:(505) 334-6170

**District IV**  
 1220 S. St Francis Dr., Santa Fe, NM 87505  
 Phone:(505) 476-3470 Fax:(505) 476-3462

**State of New Mexico**  
**Energy, Minerals and Natural Resources**  
**Oil Conservation Division**  
**1220 S. St Francis Dr.**  
**Santa Fe, NM 87505**

CONDITIONS

Action 327262

**CONDITIONS**

Operator: DJR OPERATING, LLC 200 Energy Court Farmington, NM 87401	OGRID: 371838
	Action Number: 327262
	Action Type: [C-103] Sub. Plugging (C-103P)

**CONDITIONS**

Created By	Condition	Condition Date
mkuehling	well plugged 1/12/2024	3/29/2024