

Well Name: EAST BISTI COAL 6

Well Location: T25N / R11W / SEC 6 / NESE / 36.42883 / -108.039135

County or Parish/State: SAN JUAN / NM

Well Number: 1T

Type of Well: OTHER

Allottee or Tribe Name:

Lease Number: NMSF078062A

Unit or CA Name:

Unit or CA Number:

US Well Number: 3004532712

Well Status: Abandoned

Operator: DJR OPERATING LLC

Subsequent Report

Sundry ID: 2763224

Type of Submission: Subsequent Report

Type of Action: Plug and Abandonment

Date Sundry Submitted: 11/28/2023

Time Sundry Submitted: 10:05

Date Operation Actually Began: 11/13/2023

Actual Procedure: The subject well was Plugged & Abandoned on 11/13/23 per the attached End of Well Report, As Plugged Wellbore Diagram, and Marker.

SR Attachments

Actual Procedure

EOWR_BLM_Submittal_20231128100536.pdf

Well Name: EAST BISTI COAL 6

Well Location: T25N / R11W / SEC 6 / NESE / 36.42883 / -108.039135

County or Parish/State: SAN JUAN / NM

Well Number: 1T

Type of Well: OTHER

Allottee or Tribe Name:

Lease Number: NMSF078062A

Unit or CA Name:

Unit or CA Number:

US Well Number: 3004532712

Well Status: Abandoned

Operator: DJR OPERATING LLC

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: SHAW-MARIE FORD

Signed on: NOV 28, 2023 10:05 AM

Name: DJR OPERATING LLC

Title: Regulatory Specialist

Street Address: 1 ROAD 3263

City: AZTEC

State: NM

Phone: (505) 632-3476

Email address: SFORD@DJRLLC.COM

Field

Representative Name:

Street Address:

City:

State:

Zip:

Phone:

Email address:

BLM Point of Contact

BLM POC Name: MATTHEW H KADE

BLM POC Title: Petroleum Engineer

BLM POC Phone: 5055647736

BLM POC Email Address: MKADE@BLM.GOV

Disposition: Accepted

Disposition Date: 11/28/2023

Signature: Matthew Kade

DJR Operating, LLC
P&A End of Well Report
East Bisti Coal 6 1T
API # 30-045-32712
NE/SE, Unit I. Sec 6, T25N, R11W
San Juan County, NM
Spud Date: 3-25-2006
Plug Date: 11-13-2023

11-10-2023:

MIRU rig and equipment. SITP = 5, SICP = 5, BH = 0. Pull rods and tubing.

11-13-2023:

SITP = N/A, SICP = 25, BH = 0. TIH, set cement retainer at 1202'. Load and roll hole, PT casing, casing did not test.

P&A Plug 1: Fruitland Coal perforations: Mix and pump a plug of 10 sx through retainer and into Fruitland perforations. TOOH; take off retainer stinger.

TIH, to 1202'.

P&A Plugs 2 and 3: Fruitland, Kirtland, Ojo Alamo formation tops to surface: Mix and spot a balanced plug of 72 sx from 1202' to 582'. Pull up to 587', mix and spot a balanced plug of 62 sx from 587' to 54'. TOOH.

P&A Plug 4, Top off: ND BOP. Cut off WH. TOC in 8 5/8" at 18' and 90' in 5 1/2" casing. Installed P&A marker, top off casings and cellar with poly pipe and 40 sx cement.

All cement used was Class G mixed at 15.8 ppg, yield 1.15 cu ft/sx.

Regulatory representative; Lucas Mason, BLM and Monica Kuehling, NMOCD via phone

GPS Coordinates: Lat; 36.428889 N, Long; 108.039167 W

DJR Operating, LLC
P&A Marker
East Bisti Coal 6 1T
API # 30-045-32712
NE/SE, Unit I. Sec 6, T25N, R11W
San Juan County, NM
Spud Date: 3-25-2006
Plug Date: 11-13-2023



DJR Operating, LLC
End of Well Report
East Bisti Coal 6 1T
 API # 30-045-32712
 NE/SE, Unit 1, Sec 6, T25N, R11W
 San Juan County, NM

GL 6320'
 KB N/A
 Spud Date 3/25/2006

SURF CSG

Hole size: 12.25"
 Csg Size: 8.625"
 Wt: 24#
 Grade: K-55
 ID: 6.336"
 Depth: 119'
 casing cap ft3/ft: 0.3575
 TOC: Circ cmt
 to surface

PROD CSG


Hole size: 7.625"
 Csg Size: 5.5"
 Wt: 15.5#
 Grade: J-55
 ID: 4.95"
 Depth: 1436'
 casing cap ft3/ft: 0.1336
 8.625x5.5 cap ft3/ft: 0.1926
 TOC: Circ cmt
 to surface

FORMATION TOPS

Nacimiento	Surface
Ojo Alamo	276'
Kirtland	391'
Fruitland	1009'
Pictured Cliffs	1258'

Fruitland Coal perms
 1231-1250'

PBTD 1391'
 TD 1455'

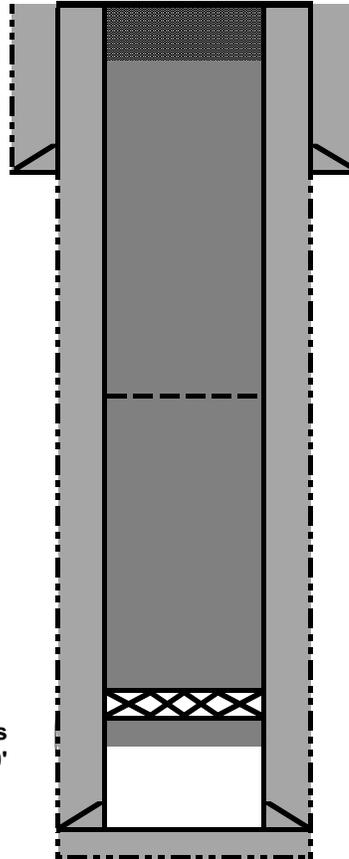

11-13-2023: Plug 4: Surface casing shoe to surface: Cut off WH, TOC at 18' in 8 5/8" surface casing and at 90' in 5 1/2" casing. Install P&A marker. Top off casings and cellar with 49 sx.

11-13-2023: Plugs 2 and 3: Fruitland, Kirtland and Ojo Alamo formation tops: Mix and spot a balanced plug of 72 sx from 1202' to 583'. Pull up to 587', mix and spot a balanced plug of 62 sx from 587' to 54'.

11-13-2023: Plug 1: Fruitland perforations: Set CR at 1202'. Load and roll hole, PT casing, did not test. Mix and pump plug of 10 sx through CR into perforations.

All cement used was Class G mixed at 15.8 ppg, yield 1.15 cu ft/sx
 Regulatory representative: Lucas Mason, BLM ; Monica Kuehling, NMOCD via phone
 GPS Coordinates: Lat; 36.428889 N, Long; 108.039167 W

DJR Operating, LLC
End of Well Report
East Bisti Coal 6 1T
 API # 30-045-32712
 NE/SE, Unit 1, Sec 6, T25N, R11W
 San Juan County, NM

GL 6320'
 KB N/A
 Spud Date 3/25/2006

SURF CSG

Hole size: 12.25"
 Csg Size: 8.625"
 Wt: 24#
 Grade: K-55
 ID: 6.336"
 Depth: 119'
 casing cap ft3/ft: 0.3575
 TOC: Circ cmt
 to surface

FORMATION TOPS


Formation	Depth
Nacimiento	Surface
Ojo Alamo	276'
Kirtland	391'
Fruitland	1009'
Pictured Cliffs	1258'

PROD CSG

Hole size: 7.625"
 Csg Size: 5.5"
 Wt: 15.5#
 Grade: J-55
 ID: 4.95"
 Depth: 1436'
 casing cap ft3/ft: 0.1336
 8.625x5.5 cap ft3/ft: 0.1926
 TOC: Circ cmt
 to surface

Fruitland Coal perms
 1231-1250'

PBTD 1391'
 TD 1455'

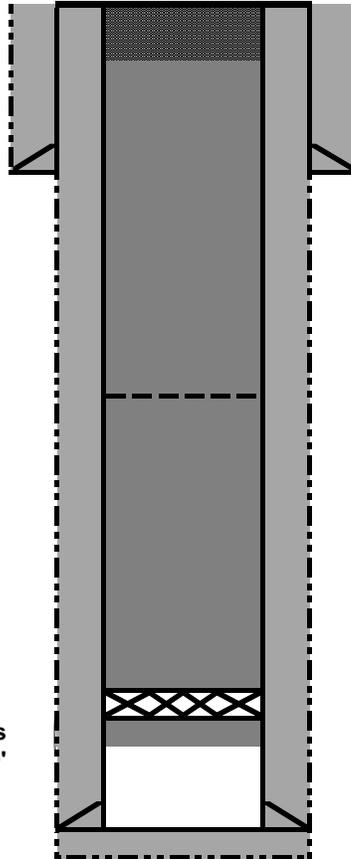

11-13-2023: Plug 4: Surface casing shoe to surface: Cut off WH, TOC at 18' in 8 5/8" surface casing and at 90' in 5 1/2" casing. Install P&A marker. Top off casings and cellar with 49 sx.

11-13-2023: Plugs 2 and 3: Fruitland, Kirtland and Ojo Alamo formation tops: Mix and spot a balanced plug of 72 sx from 1202' to 583'. Pull up to 587', mix and spot a balanced plug of 62 sx from 587' to 54'.

11-13-2023: Plug 1: Fruitland perforations: Set CR at 1202'. Load and roll hole, PT casing, did not test. Mix and pump plug of 10 sx through CR into perforations.

All cement used was Class G mixed at 15.8 ppg, yield 1.15 cu ft/sx
 Regulatory representative: Lucas Mason, BLM ; Monica Kuehling, NMOCD via phone
 GPS Coordinates: Lat; 36.428889 N, Long; 108.039167 W

District I
 1625 N. French Dr., Hobbs, NM 88240
 Phone:(575) 393-6161 Fax:(575) 393-0720

District II
 811 S. First St., Artesia, NM 88210
 Phone:(575) 748-1283 Fax:(575) 748-9720

District III
 1000 Rio Brazos Rd., Aztec, NM 87410
 Phone:(505) 334-6178 Fax:(505) 334-6170

District IV
 1220 S. St Francis Dr., Santa Fe, NM 87505
 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 321733

CONDITIONS

Operator: DJR OPERATING, LLC 200 Energy Court Farmington, NM 87401	OGRID: 371838
	Action Number: 321733
	Action Type: [C-103] Sub. Plugging (C-103P)

CONDITIONS

Created By	Condition	Condition Date
mkuehling	well plugged 11/13/2023	3/29/2024