

U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Sundry Print Report

08/19/2024

Well Name: ORE IDA 14 FEDERAL	Well Location: T24S / R29E / SEC 14 / SESW / 32.212055 / -103.9573062	County or Parish/State: EDDY / NM
Well Number: 13	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM96222	Unit or CA Name:	Unit or CA Number:
US Well Number: 3001529417	Operator: SHACKELFORD OIL COMPANY	

Notice of Intent

LONG VO

Digitally signed by
LONG VO
Date: 2024.08.19
15:53:22 -05'00'

Sundry ID: 2807297

Type of Submission: Notice of Intent

Type of Action: Plug and Abandonment

Date Sundry Submitted: 08/16/2024

Time Sundry Submitted: 01:00

Date proposed operation will begin: 08/20/2024

Procedure Description: RIH with CIBP - set at 5311' - Leak Test CIBP - Spot 25 sxs cement plug on top of CIBP - WOC and Tag Spot cement for shoe/formation plug at 2964-3165' - WOC and Tag Spot cement for salt formation plug at 2475-2627' - WOC and Tag Spot cement at 100' and Circulate to Surface Cut off well head and casing below ground level Run CBL while plugging well Reclaim and seed location

See Attached.

Surface Disturbance

Is any additional surface disturbance proposed?: No

NOI Attachments

Procedure Description

Orelda13.wellboreschematic.Plugging.2024_20240816125125.pdf

APPROVAL SUBJECT TO
GENERAL REQUIREMENTS AND
SPECIAL STIPULATIONS
ATTACHED

Well Name: ORE IDA 14 FEDERAL	Well Location: T24S / R29E / SEC 14 / SESW / 32.212055 / -103.9573062	County or Parish/State: EDDY / NM
Well Number: 13	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM96222	Unit or CA Name:	Unit or CA Number:
US Well Number: 3001529417	Operator: SHACKELFORD OIL COMPANY	

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: BRADY SHACKELFORD**Signed on:** AUG 16, 2024 12:40 PM**Name:** SHACKELFORD OIL COMPANY**Title:** Controller**Street Address:** 11417 W COUNTY RD 33**City:** MIDLAND**State:** TX**Phone:** (432) 682-9784**Email address:** BRADY@CHOCTAWSERVICES.COM**Field****Representative Name:** Art Marquez**Street Address:** 3212 N Enterprise**City:** Hobbs**State:** NM**Zip:** 88240**Phone:** (575)405-1334**Email address:** amarquez201953@gmail.com

Form 3160-5
(June 2019)UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENTFORM APPROVED
OMB No. 1004-0137
Expires: October 31, 2021**SUNDRY NOTICES AND REPORTS ON WELLS**
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No. NMNM96222

6. If Indian, Allottee or Tribe Name

SUBMIT IN TRIPLICATE - Other instructions on page 2

7. If Unit of CA/Agreement, Name and/or No.

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

8. Well Name and No. ORE IDA 14 FEDERAL/13

2. Name of Operator SHACKELFORD OIL COMPANY

9. API Well No. 3001529417

3a. Address 11417 W COUNTY ROAD 33, MIDLAND, TX 7973b. Phone No. (include area code)
(432) 682-978410. Field and Pool or Exploratory Area
E PIERCE CROSSING/E PIERCE CROSSING4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
SEC 14/T24S/R29E/NMP11. Country or Parish, State
EDDY/NM

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Hydraulic Fracturing	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input checked="" type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleation in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

5280'
RIH with CIBP - set at 5311' - Leak Test CIBP - Spot 25 sxs cement plug on top of CIBP - WOC and Tag

~~Spot cement for shoe/formation plug at 2964-3465' - WOC and Tag~~

~~Spot cement for salt formation plug at 2475-2627' - WOC and Tag~~

~~Spot cement at 400' and Circulate to Surface~~

Cut off well head and casing below ground level

Run CBL while plugging well

Reclaim and seed location

* Run CBL from CIBP to surface

14. I hereby certify that the foregoing is true and correct. Name (Printed Typed)

BRADY SHACKELFORD / Ph: (432) 682-9784

Title Controller

Signature (Electronic Submission)

Date 08/16/2024

THE SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Long V.

Title Petroleum Engineer

Date 8/19/2024

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office CFO

Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

GENERAL INSTRUCTIONS

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

SPECIFIC INSTRUCTIONS

Item 4 - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve **hydraulic fracturing operations**, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c) and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.


BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

Additional Information

Location of Well

0. SHL: SESW / 660 FSL / 1980 FWL / TWSP: 24S / RANGE: 29E / SECTION: 14 / LAT: 32.212055 / LONG: -103.9573062 (TVD: 0 feet, MD: 0 feet)

BHL: SESW / 660 FSL / 1980 FWL / TWSP: 24S / SECTION: / LAT: 0.0 / LONG: 0.0 (TVD: 0 feet, MD: 0 feet)

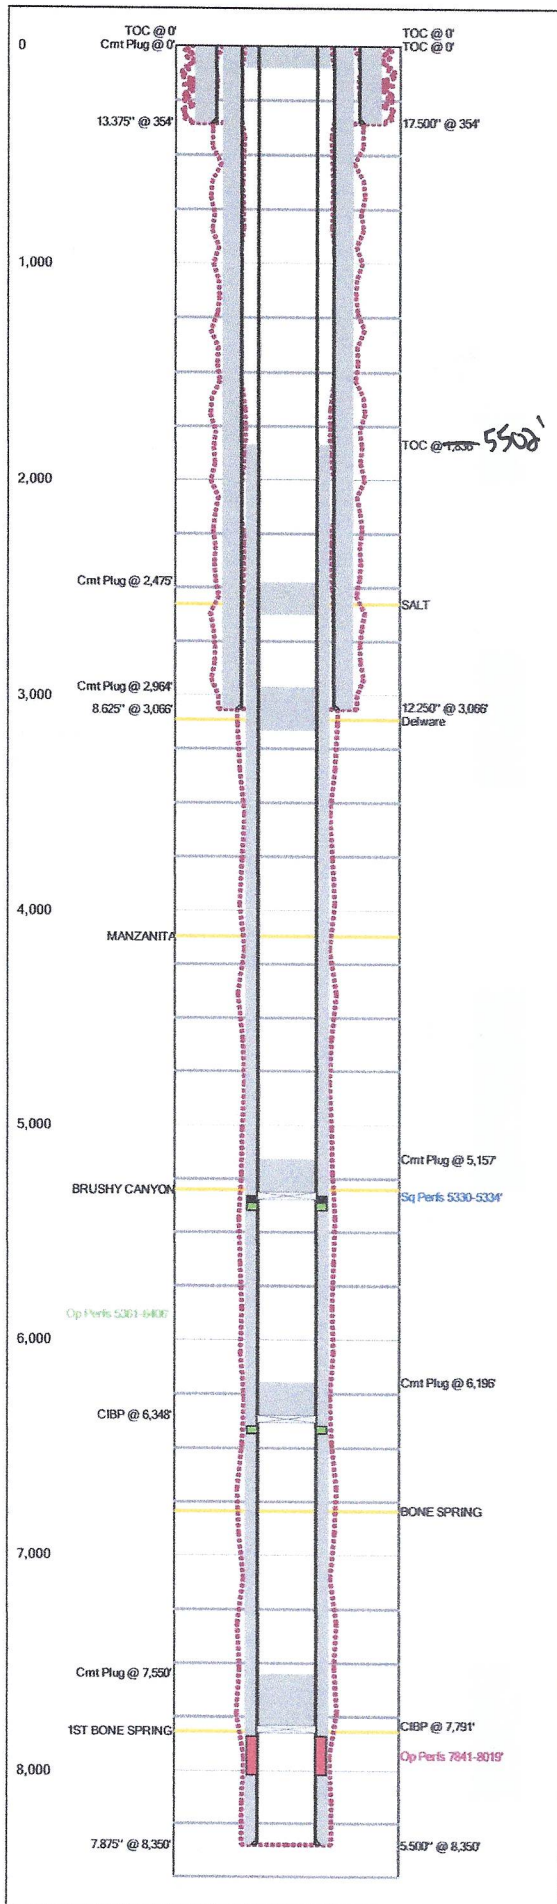

www.WellShadow.com

Last Updated: 8/16/2024 10:55 AM

Field Name			Lease Name		Well No.	
East Pierce Crossing			Ore Ida 14 Federal		13	
County			State		API No.	
Eddy			New Mexico		30015294170000	
Version		Version Tag				
3		Plugging				
GL (ft)	KB (ft)	Section	Township/Block		Range/Survey	
		14	24S		29E	
Operator		Well Status		Latitude	Longitude	
Shackelford Oil Company		Producer				
Dist. N/S (ft)		N/S Line	Dist. E/W (ft)	E/W Line	Footage From	
660		FSL	1980 FWL			
Prop Num			Spud Date		Comp. Date	
340-013			4/8/1997		5/2/1997	
Additional Information						
Other 1		Other 2		Other 3		Other 4
Prepared By		Updated By			Last Updated	
Shackelford		Shackelford			8/16/2024 10:55 AM	

Hole Summary

Date	O.D. (in)	Top (MD ft)	Bottom (MD ft)	Comments
	17.500	0	354	
	12.250	0	3,066	
	7.875	0	8,350	

Tubular Summary

Date	Description	O.D. (in)	Wt (lb/ft)	Grade	Top (MD ft)	Bottom (MD ft)
	Surface Casing	13.375			0	354
	Intermediate Casing	8.625			0	3,066
	Production Casing	5.500			0	8,350

Casing Cement Summary

C	Date	No. Sx	Csg. O.D. (in)	Top (MD ft)	Bottom (MD ft)	Comments
		185	13.375	0	354	CIRC TO SURFACE
		300	8.625	0	3,066	CIRC TO SURFACE
		25	5.500	0	100	
		910	5.500	1,836	8,350	460 + 450

Tools/Problems Summary

Date	Tool Type	O.D. (in)	I.D. (in)	Top (MD ft)	Bottom (MD ft)
	CIBP	5.500	0.000	5,911	0
	CIBP	5.500	0.000	6,348	0
	CIBP	5.500	0.000	7,791	0

Cement Plug Summary

Date	No. Sx	O.D. (in)	Top (MD ft)	Bottom (MD ft)	Comments
175	25	5.500	0	100	Proposed - Surface Plug
	25	5.500	2,475	2,627	Proposed - Salt Plug
87	25	5.500	2,304	3,165	Proposed - Shoe/Formation Plug
	25	5.500	5,157	5,311	Proposed - Formation Plug
	25	5.500	6,196	6,348	Current
	25	5.500	7,550	7,790	CLASS C - Current

Perforation Summary

C	Date	Perf. Status	Formation	OA Top (MD ft)	OA Bottom (MD ft)	Shots
	5/13/2024	Squeezed		5,330	5,334	
		Open		5,361	6,406	
		Open	BONE SPRING	7,841	8,019	0

Formation Tops Summary

Formation	Top (TVD ft)	Comments
SALT	2,577	
Delaware	3,115	
MANZANITA	4,120	
BRUSHY CANYON	5,300	
BONE SPRING	6,794	
1ST BONE SPRING	7,820	

Last Updated: 8/16/2024 10:55 AM

Field Name	Lease Name	Well No.	County	State	API No.
East Pierce Crossing	Ore Ida 14 Federal	13	Eddy	New Mexico	30015294170000
Version	Version Tag	Spud Date	Comp. Date	GL (ft)	KB (ft)
3	Plugging	4/8/1997	5/2/1997		
Section	Township/Block	Range/Survey	Dist. N/S (ft)	N/S Line	Dist. E/W (ft)
14	24S	29E	660	FSL	1,980
Operator	Well Status	Latitude	Longitude	Prop Num	
Shackelford Oil Company	Producer			340-013	
Other 1	Other 2	Other 3	Other 4		
Last Updated	Prepared By	Updated By			
08/16/2024 10:55 AM	Shackelford	Shackelford			
Additional Information					

Hole Summary

Date	O.D. (in)	Top (MD ft)	Bottom (MD ft)	Comments
	17.500	0	354	
	12.250	0	3,066	
	7.875	0	8,350	

Tubular Summary

Date	Description	No. Jts	O.D. (in)	Wt (lb/ft)	Grade	Top (MD ft)	Bottom (MD ft)	Comments
	Surface Casing		13.375			0	354	
	Intermediate Casing		8.625			0	3,066	
	Production Casing		5.500			0	8,350	

Casing Cement Summary

C	Date	No. Sx	Yield (ft ³ /sk)	Vol. (ft ³)	Csg. O.D. (in)	Top (MD ft)	Bottom (MD ft)	Description	Comments
		185	1.00	185	13.375	0	354		CIRC TO SURFACE
		300	1.00	300	8.625	0	3,066		CIRC TO SURFACE
		25	1.00	25	5.500	0	100		
		910	1.16	1,060	5.500	1,836	8,350		460 + 450

Tools/Problems Summary

Date	Tool Type	O.D. (in)	I.D. (in)	Top (MD ft)	Bottom (MD ft)	Description	Comments
	Cast Iron Bridge Plug	5.500	0.000	5,341	6,460		
	Cast Iron Bridge Plug	5.500	0.000	6,348			
	Cast Iron Bridge Plug	5.500	0.000	7,791			

Cement Plug Summary

Date	No. Sx	O.D. (in)	Top (MD ft)	Bottom (MD ft)	Comments
25	5.500	0	100		Proposed - Surface Plug
25	5.500	2,473	2,627		Proposed - Salt Plug
25	5.500	2,904	3,165		Proposed - Shoe/Formation Plug
25	5.500	5,157	5,341		Proposed - Formation Plug
25	5.500	6,196	6,348		Current
25	5.500	7,550	7,790		CLASS C - Current

see procedure

Perforation Summary

C	Date	Perf. Status	Formation		Comments		
		Open	BONE SPRING				
	Top (MD ft)	Bottom (MD ft)	SPF	Shots	Phasing (deg)	Interval Comments	
	7,841	8,019	0				
C	Date	Perf. Status	Formation		Comments		
	5/13/2024	Squeezed					
	Top (MD ft)	Bottom (MD ft)	SPF	Shots	Phasing (deg)	Interval Comments	
	5,330	5,334					
C	Date	Perf. Status	Formation		Comments		
		Open					
	Top (MD ft)	Bottom (MD ft)	SPF	Shots	Phasing (deg)	Interval Comments	
	5,361	5,372					
	6,398	6,406					

Formation Top Summary

Formation Name	Top(TVD ft)	Comments
SALT	2,577	
Delware	3,115	
MANZANITA	4,120	
BRUSHY CANYON	5,300	
BONE SPRING	6,794	
1ST BONE SPRING	7,820	

**BUREAU OF LAND MANAGEMENT
Carlsbad Field Office
620 East Greene Street
Carlsbad, New Mexico 88220
575-234-5972**

**Permanent Abandonment of Federal Wells
Conditions of Approval**

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within **ninety (90)** days from the approval date of this Notice of Intent to Abandon.

If you are unable to plug the well by the 90th day provide this office, prior to the 90th day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged. Failure to do so will result in enforcement action.

The rig used for the plugging procedure cannot be released and moved off without the prior approval of the authorized officer. Failure to do so may result in enforcement action.

2. **Notification:** Contact the appropriate BLM office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Eddy County, call 575-361-2822; Lea County, call 575-689-5981.

3. **Blowout Preventers:** A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.

4. **Mud Requirement:** Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of **fresh** water. Minimum nine (9) pounds per gallon.

5. **Cement Requirement:** Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours for Class C or accelerated cement (calcium chloride) and 6 hours for Class H. Tagging the plug means running in the hole with a string of tubing or drill pipe and placing sufficient weight on the plug to ensure its integrity. Other methods of tagging the plug may be approved by the BLM authorized officer or BLM field representative.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient. **Before pumping or bailing cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.**

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

Fluid used to mix the cement in R111Q shall be saturated with the salts common to the section penetrated, and in suitable proportions but not less than 1% and not more than 3% calcium chloride by weight of cement will be considered the desired mixture whenever possible.

6. Dry Hole Marker: All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). **The BLM is to be notified *BY PHONE* (numbers listed in 2. Notifications) a minimum of 4 hours prior to the wellhead being cut off to verify that cement is to surface in the casing and all annuluses. Wellhead cut off shall commence within ten (10) calendar days of the well being plugged. If the cut off cannot be done by the 10th day, the BLM is to be contacted with justification to receive an extension for completing the cut off.**

The well bore shall then be capped with a 4-inch pipe, 10-feet in length, 4 feet above ground and embedded in cement, unless otherwise noted in COA (requirements will be attached). The following information shall be permanently inscribed on the dry hole marker: well name and number, name of the operator, lease serial number, surveyed location (quarter-quarter section, section, township and range or other authorized survey designation acceptable to the authorized officer such as metes and bounds). A weep hole shall be left if a metal plate is welded in place.

7. Subsequent Plugging Reporting: Within 30 days after plugging work is completed, file one original and three copies of the Subsequent Report of Abandonment, Form 3160-5 to BLM. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. **Show date well was plugged.**

8. Trash: All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Following the submission and approval of the Subsequent Report of Abandonment, surface restoration will be required. See attached reclamation objectives.



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Carlsbad Field Office
620 E. Greene St.
Carlsbad, New Mexico 88220-6292
www.blm.gov/nm



In Reply Refer To: 1310

Reclamation Objectives and Procedures

Reclamation Objective: Oil and gas development is one of many uses of the public lands and resources. While development may have a short- or long-term effect on the land, successful reclamation can ensure the effect is not permanent. During the life of the development, all disturbed areas not needed for active support of production operations should undergo “interim” reclamation in order to minimize the environmental impacts of development on other resources and uses. At final abandonment, well locations, production facilities, and access roads must undergo “final” reclamation so that the character and productivity of the land and water are restored.

The long-term objective of final reclamation is to set the course for eventual ecosystem restoration, including the restoration of the natural vegetation community, hydrology, and wildlife habitats. In most cases this means returning the land to a condition approximating or equal to that which existed prior to the disturbance. The final goal of reclamation is to restore the character of the land and water to its pre-disturbance condition. The operator is generally not responsible for achieving full ecological restoration of the site. Instead, the operator must achieve the short-term stability, visual, hydrological, and productivity objectives of the surface management agency and take steps necessary to ensure that long-term objectives will be reached through natural processes.

To achieve these objectives, remove any/all contaminants, scrap/trash, equipment, pipelines and powerlines **(Contact service companies, allowing plenty of time to have the risers and power lines and poles removed prior to reclamation, don't wait till the last day and try to get them to remove infrastructure)**. Strip and remove caliche, contour the location to blend with the surrounding landscape, re-distribute the native soils, provide erosion control as needed, rip (across the slope and seed as specified in the original APD COA. **This will apply to well pads, facilities, and access roads.** Barricade access road at the starting point. If reserve pits have not reclaimed due to salts or other contaminants, submit a plan for approval, as to how you propose to provide adequate restoration of the pit area.

1. The Application for Permit to Drill or Reenter (APD, Form 3160-3), Surface Use Plan of Operations must include adequate measures for stabilization and reclamation of disturbed lands. Oil and Gas operators must plan for reclamation, both interim and final, up front in the APD process as per Onshore Oil and Gas Order No. 1.
2. For wells and/or access roads not having an approved plan, or an inadequate plan for surface reclamation (either interim or final reclamation), the operator must submit a proposal describing the procedures for reclamation. For interim reclamation, the appropriate time for submittal would be when filing the Well Completion or Recompletion Report and Log (Form 3160-4). For final reclamation, the appropriate time for submittal would be when filing the Notice of Intent, or the Subsequent Report of Abandonment, Sundry Notices and Reports on Wells (Form 3160-5). Interim reclamation is to be completed within 6 months of well completion, and final reclamation is to be completed within 6 months of well abandonment.
3. The operator must file a Subsequent Report Plug and Abandonment (Form 3160-5) following the plugging of a well.
4. Previous instruction had you waiting for a BLM specialist to inspect the location and provide you with reclamation requirements. If you have an approved Surface Use Plan of Operation and/or an approved Sundry Notice, you are free to proceed with reclamation as per approved APD. If you have issues or

concerns, contact a BLM specialist to assist you. It would be in your interest to have a BLM specialist look at the location and access road prior to the removal of reclamation equipment to ensure that it meets BLM objectives. Upon conclusion submit a Form 3160-5, Subsequent Report of Reclamation. This will prompt a specialist to inspect the location to verify work was completed as per approved plans.

5. The approved Subsequent Report of Reclamation will be your notice that the native soils, contour and seedbed have been reestablished. If the BLM objectives have not been met the operator will be notified and corrective actions may be required.
6. It is the responsibility of the operator to monitor these locations and/or access roads until such time as the operator feels that the BLM objective has been met. If after two growing seasons the location and/or access roads are not showing the potential for successful revegetation, additional actions may be needed. When you feel the BLM objectives have been met submit a Final Abandonment Notice (FAN), Form 3160-5, stating that all reclamation requirements have been achieved and the location and/or access road is ready for a final abandonment inspection.
7. At this time the BLM specialist will inspect the location and/or access road. If the native soils and contour have been restored, and the revegetation is successful, the FAN will be approved, releasing the operator of any further liability of the location and/or access road. If the location and/or access road have not achieved the objective, you will be notified as to additional work needed or additional time being needed to achieve the objective.

If there are any questions, please feel free to contact any of the following specialists:

Jim Amos
Supervisory Petroleum Engineering Tech/Environmental Protection Specialist
575-234-5909 (Office), 575-361-2648 (Cell)

Arthur Arias
Environmental Protection Specialist
575-234-6230

Crisha Morgan
Environmental Protection Specialist
575-234-5987

Jose Martinez-Colon
Environmental Protection Specialist
575-234-5951

Mark Mattozzi
Environmental Protection Specialist
575-234-5713

Robert Duenas
Environmental Protection Specialist
575-234-2229

Doris Lauger Martinez
Environmental Protection Specialist
575-234-5926

Jaden Johnston
Environmental Protection Asst. (Intern)
575-234-6252

Sundry ID

2807297

Plug Type	Top	Bottom	Length	Tag	Sacks	Cement Class	Notes
Surface Plug	0.00	100.00	100.00	Tag/Verify			
Fresh Water @ 350	296.50	400.00	103.50	If solid			
13.375 inch- Shoe Plug	300.46	404.00	103.54	Tag/Verify			
Top of Salt @ 696	639.04	746.00	106.96	Tag/Verify	175.00	C	Perf and squeeze from 746' to surface. (In 74 sxs/Out 101 sxs)
8.625 inch- Shoe Plug	2985.34	3116.00	130.66	Tag/Verify			
Delaware @ 3123	3041.77	3173.00	131.23	base no need to Tag			
Base of Salt @ 3306	3222.94	3356.00	133.06	Tag/Verify	87.00	C	Perf and attempt squeeze from 3356' to 2985'. WOC and Tag. (In 37 sxs/Out 50 sxs)
Perforations Plug (If No CIBP)	5230.66	5384.00	153.34	Tag/Verify			
CIBP Plug	5245.00	5280.00	35.00	If solid base no need to Tag (CIBP present and/or Mechanical Integrity Test), If Perf & Sqz then Tag, Leak Test all CIBP if no Open Perforations	25.00	C	Set CIBP at 5280'. Spot 25 sxs on top. Leak test CIBP.
Perforations Plug (If No CIBP)	5311.00	6456.00	1145.00	Tag/Verify			
Bonesprings @ 6753	6635.47	6803.00	167.53	If solid			
5.5 inch- Shoe Plug	8216.50	8400.00	183.50	Tag/Verify			

No more than 2000' is to be allowed between plugs in open hole, and no more than 3000' between plugs in cased hole.

Class H >7500'

Class C <7500'

Fluid used to mix the cement in R111P shall be saturated with the salts common to the section penetrated, and in suitable proportions, but not more than 3% calcium chloride by weight of cement will be considered the desired mixture whenever possible.

Medium, Secretary: Top of salt to surface If no salt take the deepest fresh water or Karst Depth

High, Critical: Bottom of Karst to surface or Deepest fresh water, whichever is greater

R111P: 50 Feet from Base of Salt to surface.

Class C: 1.32 ft³/sx


Class H: 1.06 ft³/sx

Onshore Order 2.III.G Drilling Abandonment Requirements: "All formations bearing usable-quality water, oil, gas, or geothermal resources, and/or a prospectively valuable deposit of minerals shall be protected.

<u>Cave Karst/Potash Cement Requirement:</u>	<u>Medium</u>	<u>Top of Salt to surface</u>	
13.375 inch- Shoe Plug @	354.00		
8.625 inch- Shoe Plug @	3066.00		
5.5 inch- Shoe Plug @	8350.00	TOC @	5502.00
Perforatons Top @	5361.00	Perforations	6406.00
Perforatons Top @	5330.00	Perforations	5334.00
		CIBP @	5280.00

Ore Ida 14 Federal #13 Plugging Procedures

1. RIH with CIBP – set at 5280' – Leak Test CIBP – Spot 25 sxs cement on top of CIBP – WOC and Tag
2. Perf and Squeeze from 2985' to 3356' (In 37 sxs/Out 50 sxs) – WOC and Tag
3. Perf and Squeeze from surface to 746' (In 74 sxs/Out 101 sxs) – Circulate to surface
4. Cut off well head and casing below ground level
5. Run CBL while plugging well
6. Reclaim and see location

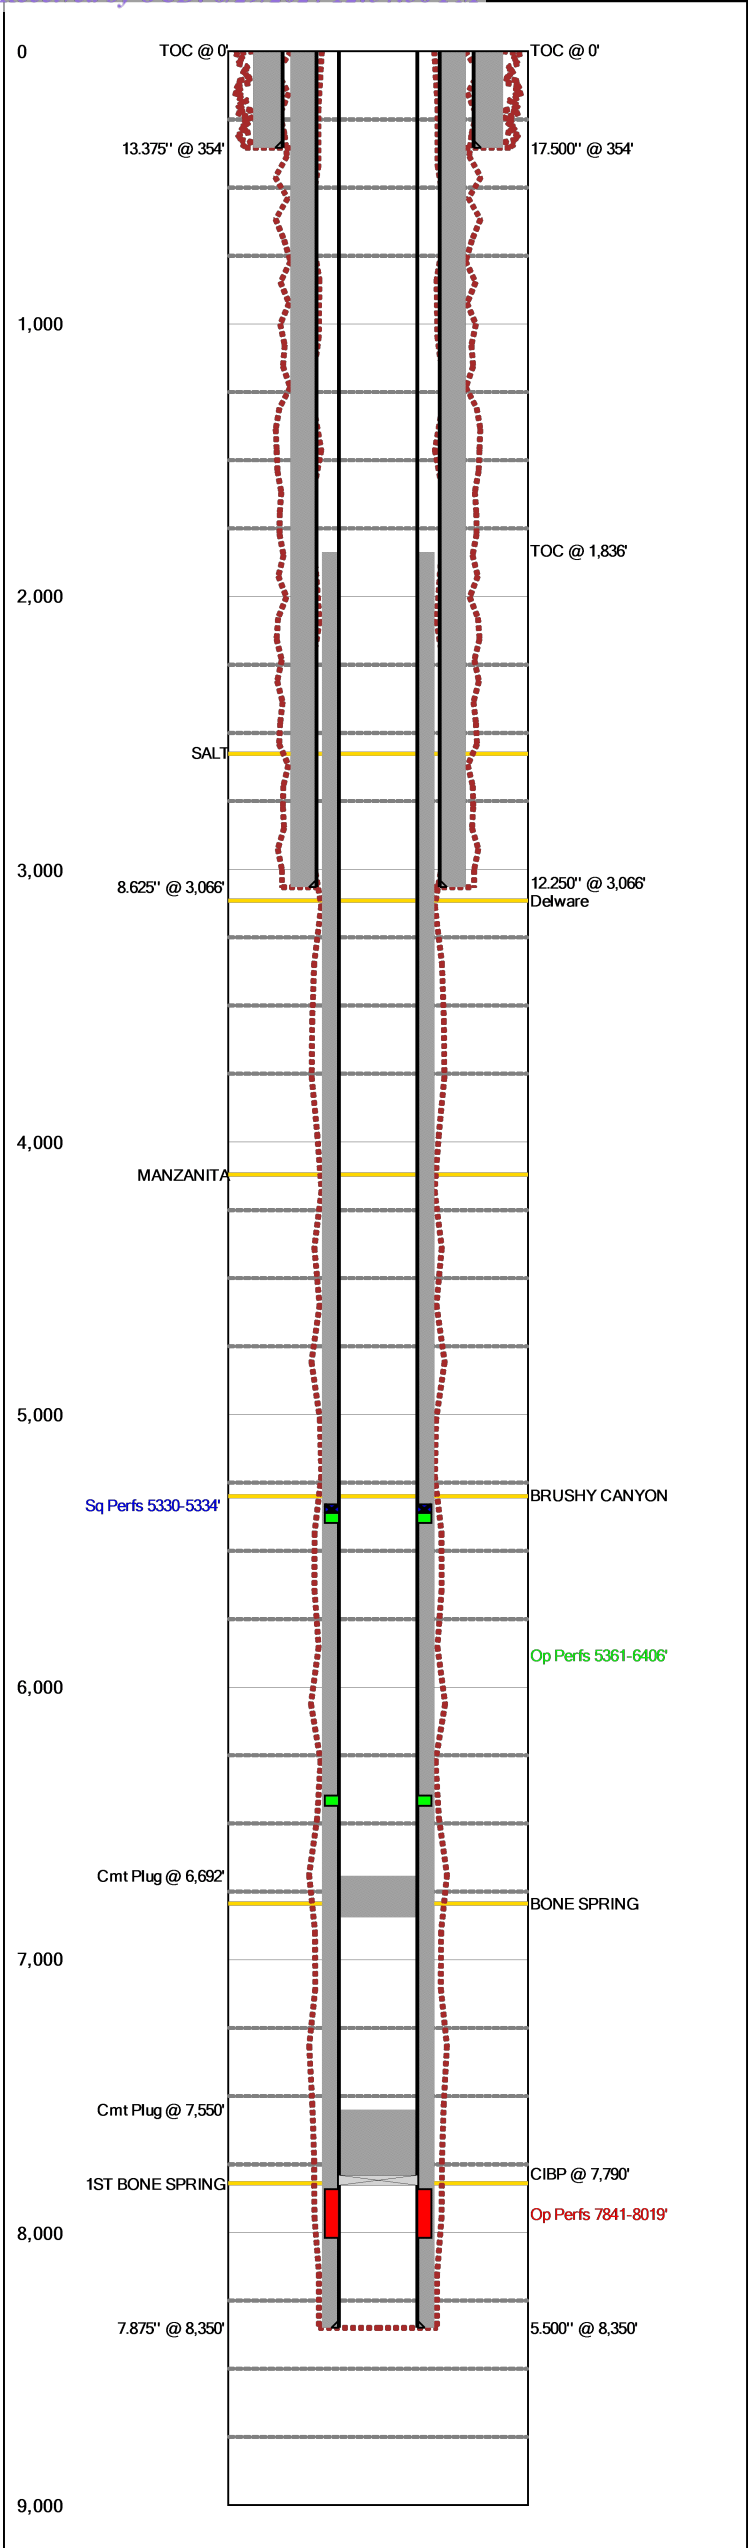

Last Updated: 8/29/2024 10:23 AM

Field Name		Lease Name		Well No.
East Pierce Crossing		Ore Ida 14 Federal		13
County		State		API No.
Eddy		New Mexico		30015294170000
Version	Version Tag			
4	CURRENT			
GL (ft)	KB (ft)	Section	Township/Block	Range/Survey
		14	24S	29E
Operator		Well Status	Latitude	Longitude
Shackelford Oil Company		Producer		
Dist. N/S (ft)	N/S Line	Dist. E/W (ft)	E/W Line	Footage From
660	FSL	1980	FWL	
Prop Num			Spud Date	Comp. Date
340-013			4/8/1997	5/2/1997
Additional Information				
Recompletion P&A Bone Spring Formation				
Other 1		Other 2		Other 4
Prepared By		Updated By		Last Updated
Shackelford		Shackelford		8/29/2024 10:23 AM

Hole Summary

Date	O.D. (in)	Top (MD ft)	Bottom (MD ft)	Comments
	17.500	0	354	
	12.250	0	3,066	
	7.875	0	8,350	

Tubular Summary

Date	Description	O.D. (in)	Wt (lb/ft)	Grade	Top (MD ft)	Bottom (MD ft)
	Surface Casing	13.375			0	354
	Intermediate Casing	8.625			0	3,066
	Production Casing	5.500			0	8,350

Casing Cement Summary

C	Date	No. Sx	Csg. O.D. (in)	Top (MD ft)	Bottom (MD ft)	Comments
		185	13.375	0	354	CIRC TO SURFACE
		300	8.625	0	3,066	CIRC TO SURFACE
		910	5.500	1,836	8,350	460 + 450

Tools/Problems Summary

Date	Tool Type	O.D. (in)	I.D. (in)	Top (MD ft)	Bottom (MD ft)
	CIBP	5.500	0.000	7,790	0

Cement Plug Summary

Date	No. Sx	O.D. (in)	Top (MD ft)	Bottom (MD ft)	Comments
	25	5.500	6,692	6,844	Bone Spring Formation Plug
	25	5.500	7,550	7,790	CLASS C

Perforation Summary

C	Date	Perf. Status	Formation	OA Top (MD ft)	OA Bottom (MD ft)	Shots
		Squeezed		5,330	5,334	
		Open		5,361	6,406	
		Open	BONE SPRING	7,841	8,019	0

Formation Tops Summary

Formation	Top (TVD ft)	Comments
SALT	2,577	
Delware	3,115	
MANZANITA	4,120	
BRUSHY CANYON	5,300	
BONE SPRING	6,794	
1ST BONE SPRING	7,820	

Last Updated: 8/29/2024 10:23 AM

Field Name		Lease Name		Well No.	County	State		API No.	
East Pierce Crossing		Ore Ida 14 Federal		13	Eddy	New Mexico		30015294170000	
Version	Version Tag				Spud Date		Comp. Date	GL (ft)	KB (ft)
4	CURRENT				4/8/1997		5/2/1997		
Section	Township/Block	Range/Survey		Dist. N/S (ft)	N/S Line	Dist. E/W (ft)	E/W Line	Footage From	
14	24S	29E		660	FSL	1,980	FWL		
Operator			Well Status		Latitude		Longitude		Prop Num
Shackelford Oil Company			Producer						340-013
Other 1		Other 2		Other 3			Other 4		
Last Updated		Prepared By			Updated By				
08/29/2024 10:23 AM		Shackelford			Shackelford				
Additional Information									
Recompletion P&A Bone Spring Formation									

Hole Summary

Date	O.D. (in)	Top (MD ft)	Bottom (MD ft)	Comments
	17.500	0	354	
	12.250	0	3,066	
	7.875	0	8,350	

Tubular Summary

Date	Description	No. Jts	O.D. (in)	Wt (lb/ft)	Grade	Top (MD ft)	Bottom (MD ft)	Comments
	Surface Casing		13.375			0	354	
	Intermediate Casing		8.625			0	3,066	
	Production Casing		5.500			0	8,350	

Casing Cement Summary

C	Date	No. Sx	Yield (ft3/sk)	Vol. (ft3)	Csg. O.D. (in)	Top (MD ft)	Bottom (MD ft)	Description	Comments
		185	1.00	185	13.375	0	354		CIRC TO SURFACE
		300	1.00	300	8.625	0	3,066		CIRC TO SURFACE
		910	1.16	1,060	5.500	1,836	8,350		460 + 450

Tools/Problems Summary

Date	Tool Type	O.D. (in)	I.D. (in)	Top (MD ft)	Bottom (MD ft)	Description	Comments
	Cast Iron Bridge Plug	5.500	0.000	7,790	0		

Cement Plug Summary


Date	No. Sx	O.D. (in)	Top (MD ft)	Bottom (MD ft)	Comments
	25	5.500	6,692	6,844	Bone Spring Formation Plug
	25	5.500	7,550	7,790	CLASS C

Perforation Summary

C	Date	Perf. Status	Formation		Comments		
		Open	BONE SPRING				
Top (MD ft)		Bottom (MD ft)		SPF	Shots	Phasing (deg)	Interval Comments
7,841		8,019		0			
C	Date	Perf. Status	Formation		Comments		
		Squeezed					
Top (MD ft)		Bottom (MD ft)		SPF	Shots	Phasing (deg)	Interval Comments
5,330		5,334					
C	Date	Perf. Status	Formation		Comments		
		Open					
Top (MD ft)		Bottom (MD ft)		SPF	Shots	Phasing (deg)	Interval Comments
5,361		5,372					
6,398		6,406					

Formation Top Summary

Formation Name	Top(TVD ft)	Comments
SALT	2,577	
Delware	3,115	
MANZANITA	4,120	
BRUSHY CANYON	5,300	
BONE SPRING	6,794	
1ST BONE SPRING	7,820	

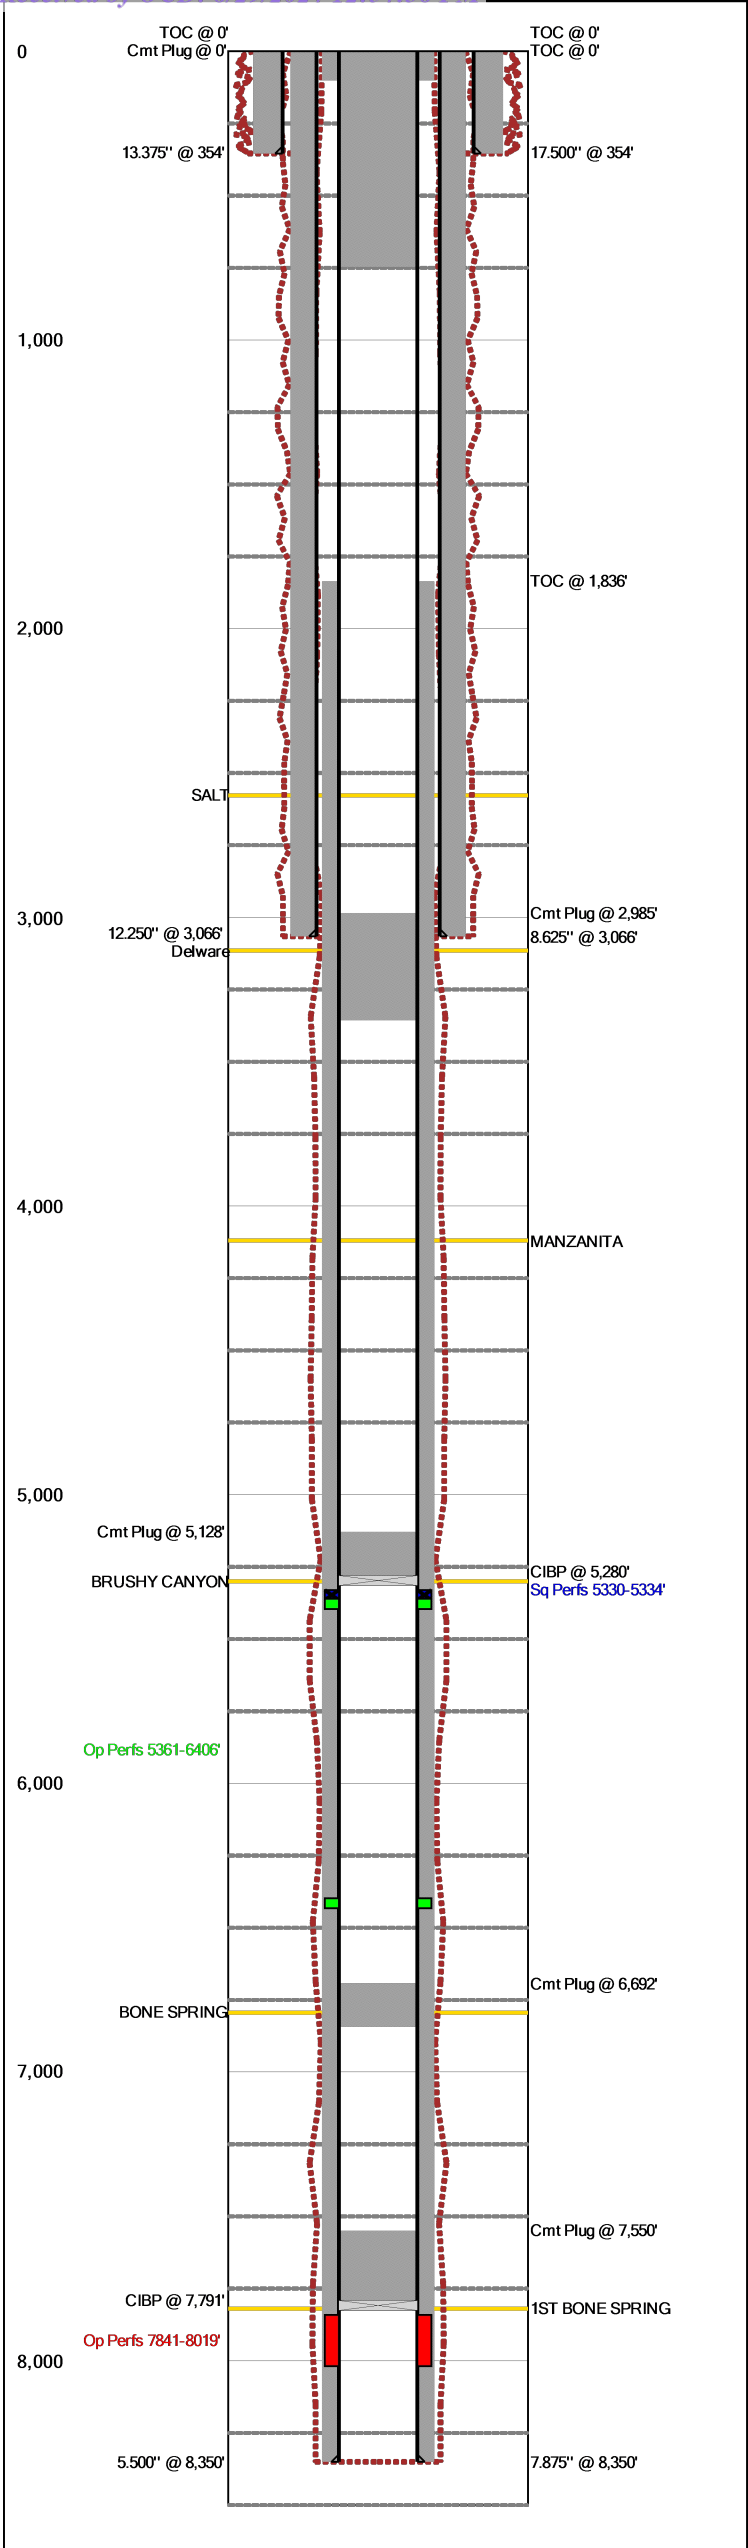

Last Updated: 8/29/2024 10:27 AM

Field Name		Lease Name		Well No.
East Pierce Crossing		Ore Ida 14 Federal		13
County		State		API No.
Eddy		New Mexico		30015294170000
Version	Version Tag			
	3 Plugging			
GL (ft)	KB (ft)	Section	Township/Block	Range/Survey
		14	24S	29E
Operator		Well Status	Latitude	Longitude
Shackelford Oil Company		Producer		
Dist. N/S (ft)	N/S Line	Dist. E/W (ft)	E/W Line	Footage From
660	FSL	1980	FWL	
Prop Num			Spud Date	Comp. Date
340-013			4/8/1997	5/2/1997
Additional Information				
Other 1		Other 2		Other 4
Prepared By		Updated By		Last Updated
Shackelford		Shackelford		8/29/2024 10:27 AM

Hole Summary

Date	O.D. (in)	Top (MD ft)	Bottom (MD ft)	Comments
	17.500	0	354	
	12.250	0	3,066	
	7.875	0	8,350	

Tubular Summary

Date	Description	O.D. (in)	Wt (lb/ft)	Grade	Top (MD ft)	Bottom (MD ft)
	Surface Casing	13.375			0	354
	Intermediate Casing	8.625			0	3,066
	Production Casing	5.500			0	8,350

Casing Cement Summary

C	Date	No. Sx	Csg. O.D. (in)	Top (MD ft)	Bottom (MD ft)	Comments
		185	13.375	0	354	CIRC TO SURFACE
		300	8.625	0	3,066	CIRC TO SURFACE
		25	5.500	0	100	
		910	5.500	1,836	8,350	460 + 450

Tools/Problems Summary

Date	Tool Type	O.D. (in)	I.D. (in)	Top (MD ft)	Bottom (MD ft)
	CIBP	5.500	0.000	5,280	0
	CIBP	5.500	0.000	7,791	0

Cement Plug Summary

Date	No. Sx	O.D. (in)	Top (MD ft)	Bottom (MD ft)	Comments
	175	5.500	0	746	Perf/Squeeze (75 sxs In/101 sxs Out) - Surface/Base of Salt Plug
	87	5.500	2,985	3,356	Perf/Squeeze (37 SXS IN/50 SXS OUT) - Base of Salt
	25	5.500	5,128	5,280	Spot 25 sxs on top of CIBP - Perforations Plug
	25	5.500	6,692	6,844	Current
	25	5.500	7,550	7,790	CLASS C - Current

Perforation Summary

C	Date	Perf. Status	Formation	OA Top (MD ft)	OA Bottom (MD ft)	Shots
	5/13/2024	Squeezed		5,330	5,334	
		Open		5,361	6,406	
		Open	BONE SPRING	7,841	8,019	0

Formation Tops Summary

Formation	Top (TVD ft)	Comments
SALT	2,577	
Delaware	3,115	
MANZANITA	4,120	
BRUSHY CANYON	5,300	
BONE SPRING	6,794	
1ST BONE SPRING	7,820	

Field Name		Lease Name		Well No.	County	State		API No.	
East Pierce Crossing		Ore Ida 14 Federal		13	Eddy	New Mexico		30015294170000	
Version	Version Tag				Spud Date		Comp. Date	GL (ft)	KB (ft)
3	Plugging				4/8/1997		5/2/1997		
Section	Township/Block		Range/Survey		Dist. N/S (ft)	N/S Line	Dist. E/W (ft)	E/W Line	Footage From
14	24S		29E		660	FSL	1,980	FWL	
Operator			Well Status			Latitude		Longitude	Prop Num
Shackelford Oil Company			Producer						340-013
Other 1		Other 2			Other 3			Other 4	
Last Updated		Prepared By				Updated By			
08/29/2024 10:27 AM		Shackelford				Shackelford			
Additional Information									

Hole Summary

Date	O.D. (in)	Top (MD ft)	Bottom (MD ft)	Comments
	17.500	0	354	
	12.250	0	3,066	
	7.875	0	8,350	

Tubular Summary

Date	Description	No. Jts	O.D. (in)	Wt (lb/ft)	Grade	Top (MD ft)	Bottom (MD ft)	Comments
	Surface Casing		13.375			0	354	
	Intermediate Casing		8.625			0	3,066	
	Production Casing		5.500			0	8,350	

Casing Cement Summary

C	Date	No. Sx	Yield (ft3/sk)	Vol. (ft3)	Csg. O.D. (in)	Top (MD ft)	Bottom (MD ft)	Description	Comments
		185	1.00	185	13.375	0	354		CIRC TO SURFACE
		300	1.00	300	8.625	0	3,066		CIRC TO SURFACE
		25	1.00	25	5.500	0	100		
		910	1.16	1,060	5.500	1,836	8,350		460 + 450

Tools/Problems Summary

Date	Tool Type	O.D. (in)	I.D. (in)	Top (MD ft)	Bottom (MD ft)	Description	Comments
	Cast Iron Bridge Plug	5.500	0.000	5,280	0		
	Cast Iron Bridge Plug	5.500	0.000	7,791	0		

Cement Plug Summary

Date	No. Sx	O.D. (in)	Top (MD ft)	Bottom (MD ft)	Comments
	175	5.500	0	746	Perf/Squeeze (75 sxs In/101 sxs Out) - Suface/Base of Salt Plug
	87	5.500	2,985	3,356	Perf/Squeeze (37 SXS IN/50 SXS OUT) - Base of Salt
	25	5.500	5,128	5,280	Spot 25 sxs on top of CIBP - Perforations Plug
	25	5.500	6,692	6,844	Current
	25	5.500	7,550	7,790	CLASS C - Current

Perforation Summary

C	Date	Perf. Status	Formation		Comments		
		Open	BONE SPRING				
Top (MD ft)		Bottom (MD ft)		SPF	Shots	Phasing (deg)	Interval Comments
7,841		8,019		0			
C	Date	Perf. Status	Formation		Comments		
	5/13/2024	Squeezed					
Top (MD ft)		Bottom (MD ft)		SPF	Shots	Phasing (deg)	Interval Comments
5,330		5,334					
C	Date	Perf. Status	Formation		Comments		
		Open					
Top (MD ft)		Bottom (MD ft)		SPF	Shots	Phasing (deg)	Interval Comments
5,361		5,372					
6,398		6,406					

Formation Top Summary

Formation Name	Top(TVD ft)	Comments
SALT	2,577	
Delware	3,115	
MANZANITA	4,120	
BRUSHY CANYON	5,300	
BONE SPRING	6,794	
1ST BONE SPRING	7,820	

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 379247

CONDITIONS

Operator: SHACKELFORD OIL CO 11417 W County Rd 33 Midland, TX 79707	OGRID: 20595
	Action Number: 379247
	Action Type: [C-103] NOI Plug & Abandon (C-103F)

CONDITIONS

Created By	Condition	Condition Date
gcordero	Plug as approved by BLM....CBL must be submitted to OCD via OCD Permitting prior to submitting C-103P	8/30/2024