

Hutton GC 1E

Dakota

API # 30-045-24152

T-29N, R-12-W, Sec. 06

San Juan County, New Mexico

Formation Tops


Ojo Alamo	1,050'
Kirtland	1,160'
PC	1,415
Mesaverde	3,705'
Mancos	4,010'
Gallup	5,050'
Dakota	6,020'

Deviation

Depth: 301' - 3/4 degrees
Depth: 1325' - 3/4 degrees
Depth: 1,828' - 1 degrees
Depth: 2,323' - 3/4 degrees
Depth: 2,699' - 1/4 degrees
Depth: 3,200' - 1/4 degrees
Depth: 3,700' - 1/2 degrees
Depth: 4,450' - 1/2 degrees
Depth: 4,950' - 3/4 degrees
Depth: 5,448' - 3/4 degrees
Depth: 5,948' - 1/2 degrees

1.125" x 22' polished rod
 3/4" Rods (30 guided on btm)
 5-1.25" Sinker bars
 2"x1.25"x14' RHAC
 2 stage HVR pump

2-3/8" Tubing to surface
 1.78" F nipple @ 6084'
 2-3/8" EOT @ 6102'

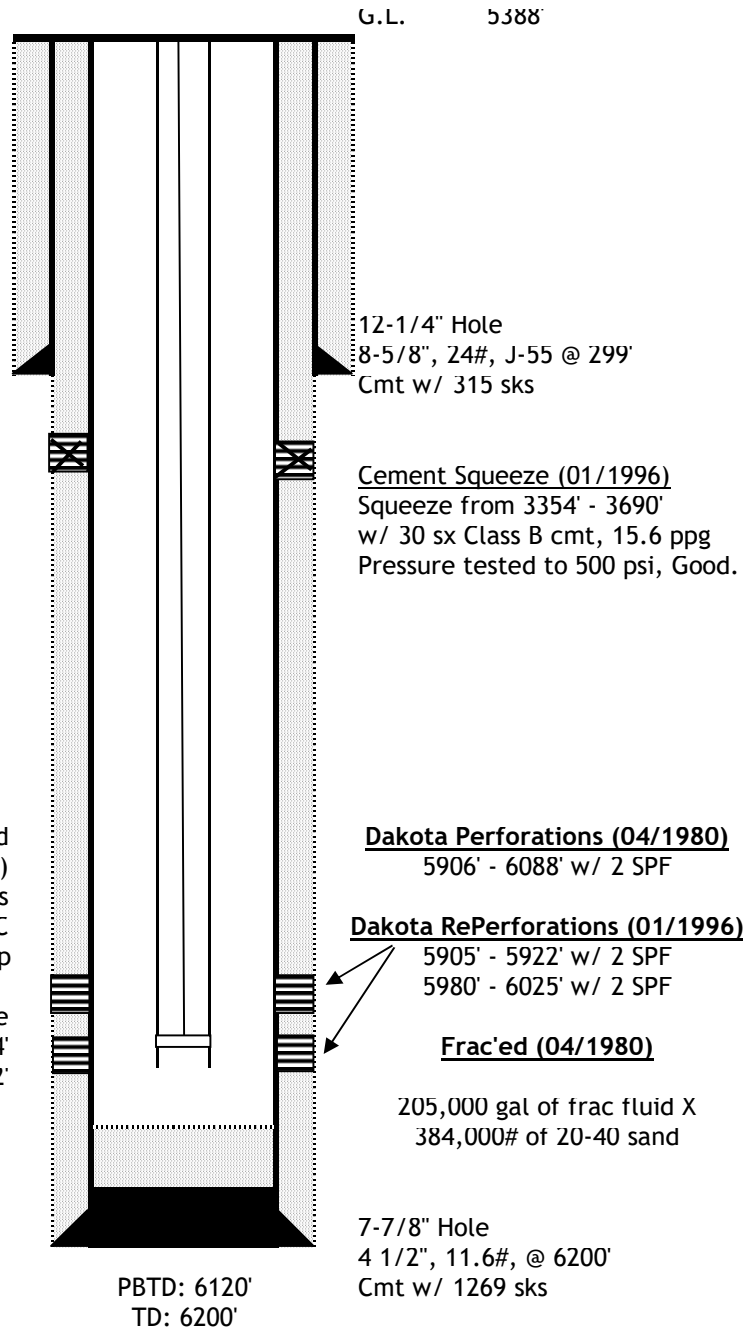

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/oed/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 402953

CONDITIONS

Operator: SIMCOE LLC 1199 Main Ave., Suite 101 Durango, CO 81301	OGRID:
	329736
	Action Number: 402953
Action Type: [UF-WBS] Wellbore Schematic (WELLBORE SCHEMATICS)	

CONDITIONS

Created By	Condition	Condition Date
mkuehling	None	11/27/2024