FAFMSS

U.S. Department of the Interior BUREAU OF LAND MANAGEMENT Sundry Print Report 11/18/2024

Well Name: QPQAS UNIT

Well Location: T18S / R32E / SEC 22 / SESW / 32.7266109 / -103.7552676

County or Parish/State: LEA /

NM

Well Number: 13

Type of Well: INJECTION - ENHANCED Allottee or Tribe Name:

Lease Number: NMNM94190

Unit or CA Name: QUERECHO PLAINS

**Unit or CA Number:** 

QUEEN A U

NMNM91005X

US Well Number: 3002528149

Operator: MEWBOURNE OIL

COMPANY

RECOVERY

# **Notice of Intent**

Sundry ID: 2816597

Type of Submission: Notice of Intent

Type of Action: Plug and Abandonment

Date Sundry Submitted: 10/11/2024

Time Sundry Submitted: 11:25

Date proposed operation will begin: 03/01/2025

Procedure Description: See attached P&A procedure. Current & proposed wellbore schematics. If you have any questions, please call Mo Garcia.

#### **Surface Disturbance**

Is any additional surface disturbance proposed?: No

#### **NOI Attachments**

#### **Procedure Description**

QPQASU\_\_13\_P\_A\_Proposed\_Schematic\_20241011112355.pdf

QPQASU\_\_13\_P\_A\_Actual\_Schematic\_20241011112339.pdf

QPQASU\_\_13\_P\_A\_AFE\_Procedure\_20241011112320.pdf

APPROVAL SUBJECT TO GENERAL REQUIREMENTS AND SPECIAL STIPULATIONS

Well Name: QPQAS UNIT

Well Location: T18S / R32E / SEC 22 / SESW / 32.7266109 / -103.7552676

County or Parish/State: LEA /

NM

Well Number: 13

Type of Well: INJECTION - ENHANCED Allottee or Tribe Name:

RECOVERY

Lease Number: NMNM94190

US Well Number: 3002528149

Unit or CA Name: QUERECHO PLAINS Unit or CA Number:

QUEEN A U

NMNM91005X

Operator: MEWBOURNE OIL COMPANY

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: JACKIE LATHAN

Signed on: OCT 11, 2024 11:24 AM

Name: MEWBOURNE OIL COMPANY

Title: Regulatory

Street Address: PO Box 5270

City: Hobbs

State: NM

Phone: (575) 393-5905

Email address: Jlathan@mewbourne.com

Field

Representative Name: Mo Garcia

Street Address: PO Box 5270

City: Hobbs

State: NM

Zip: 88241

Phone: (575)393-5905

Email address: mgarcia@mewbourne.com

Chicken, Low Cave

	<i>'</i>	,	_					
Form 3160-5 UNITED STATES							APPROVED	
(June 2019) DEPARTMENT OF THE INTERIOR					OMB No. 1004-0137 Expires: October 31, 2021			
BUREAU OF LAND MANAGEMENT				5. Lea	5. Lease Serial No. NMNM94190			
SUNDRY NOTICES AND REPORTS ON WELLS				6. If I	6. If Indian, Allottee or Tribe Name			
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals				an				
	TRIPLICATE - Other instru				Init of CA/Agreement,	Name	and/or No.	
1. Type of Well	THIFLICATE - Other Institu	uctions on pag	e 2	1	QUERECHO PLAINS QUEEN A U/NMNM91005X			
Oil Well Gas V	Well			QPQAS	l Name and No.			
2. Name of Operator MEWBOURNE	OIL COMPANY			9. API	9. API Well No. 3002528149			
3a. Address POBOX 5270, HOBBS	S, NM 88241	3b. Phone No. (575) 393-59		code) 10. Fie	10. Field and Pool or Exploratory Area			
4. Location of Well (Footage, Sec., T.,I	R.,M., or Survey Description)	, ,			QUERCHO PLAINS/QUERCHO PLAINS  11. Country or Parish, State			
SEC 22/T18S/R32E/NMP				LEA/N	•			
12. CHE	ECK THE APPROPRIATE BO	OX(ES) TO IN	DICATE NA	URE OF NOT	TCE, REPORT OR O	THER I	DATA	
TYPE OF SUBMISSION				TYPE OF AC	TION			
✓ Notice of Intent	Acidize	Deep		C100100000	duction (Start/Resume	) [	Water Shut-Off	
processing	Alter Casing		aulic Fractur		lamation	L	Well Integrity	
Subsequent Report	Casing Repair Change Plans	Province	Construction and Abandon		omplete aporarily Abandon	L	Other	
Final Abandonment Notice	Convert to Injection		Back	-	er Disposal			
the Bond under which the work wi completion of the involved operation completed. Final Abandonment Notis ready for final inspection.)  See attached P&A procedure.  If you have any questions, ple	ons. If the operation results in tices must be filed only after Current & proposed wellbo	a multiple con all requirement	pletion or re s, including r	completion in a	new interval a Form	3160-4	must be filed once testing has been	
14. I hereby certify that the foregoing is		nted Typed)	D	Laf				
JACKIE LATHAN / Ph: (575) 393-5905			Title	latory 				
Signature (Electronic Submission)			Date	10/11/2024				
	THE SPACE	FOR FED	ERAL OF	STATE OF	FICE USE			
Approved by		THE STATE OF THE S						
Long Vo	4		Title	Petroleum	Engineer	Date	11/18/2024	
Conditions of approval, if any, are attac certify that the applicant holds legal or of which would entitle the applicant to cor-	equitable title to those rights i	loes not warran n the subject le	or Office	CFO				

Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

#### **GENERAL INSTRUCTIONS**

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

#### SPECIFIC INSTRUCTIONS

Item 4 - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve **hydraulic fracturing operations**, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

# **NOTICES**

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c)and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

**BURDEN HOURS STATEMENT:** Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

# **Additional Information**

# **Location of Well**

 $0. \ SHL: \ SESW \ / \ 330 \ FSL \ / \ 2310 \ FWL \ / \ TWSP: \ 18S \ / \ RANGE: \ 32E \ / \ SECTION: \ 22 \ / \ LAT: \ 32.7266109 \ / \ LONG: \ -103.7552676 \ ( \ TVD: \ 0 \ feet, \ MD: \ 0 \ feet \ )$  BHL: \ SESW \ / \ 330 \ FSL \ / \ 2310 \ FWL \ / \ TWSP: \ 18S \ / \ SECTION: \ / \ LAT: \ 0.0 \ / \ LONG: \ 0.0 \ ( \ TVD: \ 0 \ feet, \ MD: \ 0 \ feet \ )

# Mewbourne Oil Company

#### **COMPLETION PROCEDURE**

Submitted By: Mo Garcia

Wellname: QPQASU #13

Location: 330' FSL & 2310' FWL

Sec 22, T18S, R32E

<u>Lea Co, NM</u>

Date: 10/11/2024

API #: 30-025-28149

Surf Csg: 8 5/8" 24# K55

Set @: 1,203'

Csg Size: 5 1/2" 15.5# K55 Set @ 4,295'

Upper Queen: 3,872'-3,900'

Perfs: Lower Queen: 4,117'-4,145'

Tbg: 2 3/8" 4.7# J55 Salta Lined

Inter Csg: N/A

Set @: N/A

Tbg set @: 3,768'

Well is to be plugged & abandoned.

#### Procedure:


- 1. Notify NMOCD District office 24 hours before beginning work.
- 2. MIRU P&A unit.
- 3. ND WH & NU BOP.
- 4. Release packer & POOH w/ tbg.
- 5. MIRU Wireline Unit. RIH w/ CBL & CCL to confirm TOC @ surface. RD Wireline Unit.
- 6. RIH w/ tbg & 5 1/2" CIBP.
- 7. Set CIBP @ 4,100' (Lower Queen perfs).
- 8. Test csg to 500# for 30 min.
- 9. Circ hole w/ plug mud (MLF).
- 10. POOH & RIH w/ dump bailer.
- 11. Plug #1: Cap CIBP w/ 35' Class C accelerated cement & POOH.
- 12. WOC 4 hrs. RIH w/ tbg & 5 1/2" CIBP & tag top of cement @ 4,065' or higher.
- 13. 4D tbg to 3,850'.
- 14. Set CIBP @ 3,250' (Upper Queen perfs/Top of Queen). 3822
- 15. Test csg to 500# for 30 min.
- 16. Circ hole w/ plug mud (MLF).
- 17. POOH & RIH w/ dump bailer.
- 18. Plug #2: Cap CIBP w/ 35' Class C accelerated cement & POOH.
- 19. WOC 4 hrs. RIH w/ tbg & tag top of cement @ 3,815' or higher.
- 20. LD tbg to 2,585' (Top of Yates/Base of Salt). 2769
- 21. Plug #3: Spot 24 sks Class C cmt (±210'). WOC 4 hrs & tag @ or above 2,375. 2582 (35 Sxs

1416


- 22. LD thg to 1,278' (Surface csg shoe/Top of Salt).
- 23. Plug #4: Spot 2/1 sks Class C cmt (±203'). WOC 4 hrs & tag @ or above ±,075'.
- 24. LD tbg to 550'.
- 25. Plug #5: Spot 56 sks Class C cmt (±550') to surface.
- 26. WOC & confirm wellbore is full.
- 27. Cut off WH & install dryhole marker.
- 28. Clear location & RDMO P&A equipment.

QPQASU#13

<sup>\*\*</sup> Note: Tbg cut @ 4,195' in 1996 @ SN. Fish is below perfs to be isolated.

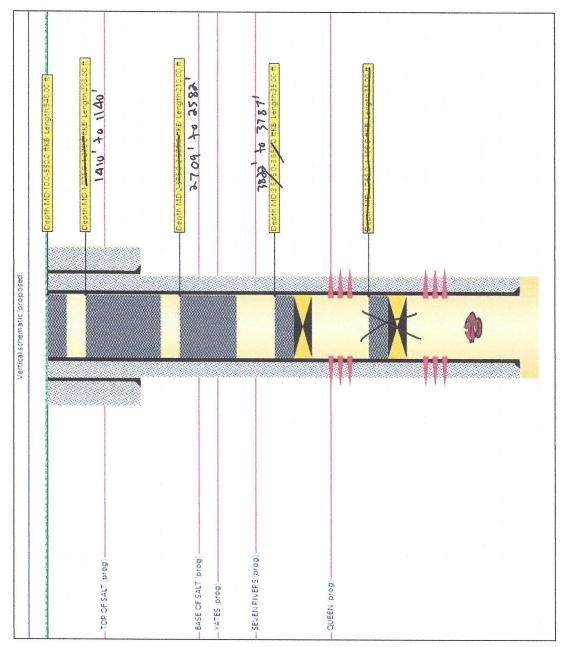

QPQASU #13 API: 30-025-28149 Proposed P&A

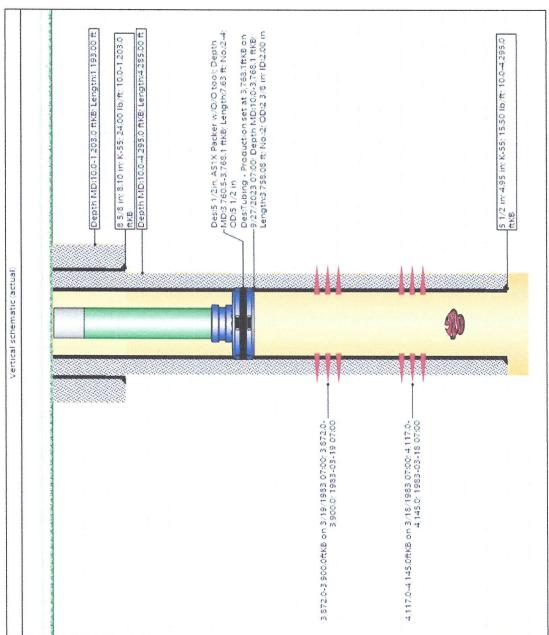

QPQASU #13 API: 30-025-28149 Wellbore

# BUREAU OF LAND MANAGEMENT Carlsbad Field Office 620 East Greene Street Carlsbad, New Mexico 88220 575-234-5972

# Permanent Abandonment of Federal Wells Conditions of Approval (LPC Habitat)

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within <u>ninety (90)</u> days from the approval date of this Notice of Intent to Abandon.

If you are unable to plug the well by the 90<sup>th</sup> day provide this office, prior to the 90<sup>th</sup> day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged. Failure to do so will result in enforcement action.

The rig used for the plugging procedure cannot be released and moved off without the prior approval of the authorized officer. Failure to do so may result in enforcement action.

- 2. <u>Notification:</u> Contact the appropriate BLM office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Eddy County, call 575-361-2822; Lea County, call 575-689-5981.
- 3. <u>Blowout Preventers</u>: A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.
- 4. <u>Mud Requirement:</u> Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of water. Minimum nine (9) pounds per gallon.
- 5. <u>Cement Requirement</u>: Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours for Class C or accelerated cement (calcium chloride) and 6 hours for Class H. Tagging the plug means running in the hole with a string of tubing or drill pipe and placing sufficient weight on the plug to ensure its integrity. Other methods of tagging the plug may be approved by the BLM authorized officer or BLM field representative.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a

bailer is used to cap this plug, 35 feet of cement shall be sufficient. Before pumping or bailing cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

Fluid used to mix the cement in R111Q shall be saturated with the salts common to the section penetrated, and in suitable proportions but not less than 1% and not more than 3% calcium chloride by weight of cement will be considered the desired mixture whenever possible.

6. Below Ground Level Cap (Lesser Prairie-Chicken Habitat): All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The BLM is to be notified BY PHONE (numbers listed in 2. Notifications) a minimum of 4 hours prior to the wellhead being cut off to verify that cement is to surface in the casing and all annuluses. Wellhead cut off shall commence within ten (10) calendar days of the well being plugged. If the cut off cannot be done by the 10<sup>th</sup> day, the BLM is to be contacted with justification to receive an extension for completing the cut off.

Upon the plugging and subsequent abandonment of wells that are located in lesser prairie-chicken habitat, the casings shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The well bore shall then be covered with a metal plate at least ½ inch thick and welded in place. A weep hole shall be left in the plate and/or casing. The following information shall be permanently inscribed on the plate: well name and number, name of operator, lease serial number, surveyed location (quarter-quarter section, section, township and range or other authorized survey designation acceptable to the authorized officer such as metes and bounds).

NMOCD also requires the operator to notify NMOCD when this type of dry hole marker is used. This can be done on the subsequent report of abandonment which is submitted to the BLM after the well is plugged. State that a below ground cap was installed as required in the COA's from the BLM.

- 7. <u>Subsequent Plugging Reporting:</u> Within 30 days after plugging work is completed, file one original and three copies of the Subsequent Report of Abandonment, Form 3160-5 to BLM. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. **Show date well was plugged.**
- 8. <u>Trash:</u> All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Following the submission and approval of the Subsequent Report of Abandonment, surface restoration will be required. See attached reclamation objectives.

# Timing Limitation Stipulation/ Condition of Approval for Lesser Prairie-Chicken:

From March 1<sup>st</sup> through June 15<sup>th</sup> annually, abandonment activities will be allowed except between the hours from 3:00 am and 9:00 am. Normal vehicle use on existing roads will not be restricted



# **United States Department of the Interior**

#### BUREAU OF LAND MANAGEMENT

Carlsbad Field Office 620 E. Greene St. Carlsbad, New Mexico 88220-6292 www.blm.gov/nm



In Reply Refer To: 1310

## **Reclamation Objectives and Procedures**

**Reclamation Objective:** Oil and gas development is one of many uses of the public lands and resources. While development may have a short- or long-term effect on the land, successful reclamation can ensure the effect is not permanent. During the life of the development, all disturbed areas not needed for active support of production operations should undergo "interim" reclamation in order to minimize the environmental impacts of development on other resources and uses. At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land and water are restored.

The long-term objective of final reclamation is to set the course for eventual ecosystem restoration, including the restoration of the natural vegetation community, hydrology, and wildlife habitats. In most cases this means returning the land to a condition approximating or equal to that which existed prior to the disturbance. The final goal of reclamation is to restore the character of the land and water to its pre-disturbance condition. The operator is generally not responsible for achieving full ecological restoration of the site. Instead, the operator must achieve the short-term stability, visual, hydrological, and productivity objectives of the surface management agency and take steps necessary to ensure that long-term objectives will be reached through natural processes.

To achieve these objectives, remove any/all contaminants, scrap/trash, equipment, pipelines and powerlines (Contact service companies, allowing plenty of time to have the risers and power lines and poles removed prior to reclamation, don't wait till the last day and try to get them to remove infrastructure). Strip and remove caliche, contour the location to blend with the surrounding landscape, re-distribute the native soils, provide erosion control as needed, rip (across the slope and seed as specified in the original APD COA. This will apply to well pads, facilities, and access roads. Barricade access road at the starting point. If reserve pits have not reclaimed due to salts or other contaminants, submit a plan for approval, as to how you propose to provide adequate restoration of the pit area.

- 1. The Application for Permit to Drill or Reenter (APD, Form 3160-3), Surface Use Plan of Operations must include adequate measures for stabilization and reclamation of disturbed lands. Oil and Gas operators must plan for reclamation, both interim and final, up front in the APD process as per Onshore Oil and Gas Order No. 1.
- 2. For wells and/or access roads not having an approved plan, or an inadequate plan for surface reclamation (either interim or final reclamation), the operator must submit a proposal describing the procedures for reclamation. For interim reclamation, the appropriate time for submittal would be when filing the Well Completion or Recompletion Report and Log (Form 3160-4). For final reclamation, the appropriate time for submittal would be when filing the Notice of Intent, or the Subsequent Report of Abandonment, Sundry Notices and Reports on Wells (Form 3160-5). Interim reclamation is to be completed within 6 months of well abandonment.
- 3. The operator must file a Subsequent Report Plug and Abandonment (Form 3160-5) following the plugging of a well.
- 4. Previous instruction had you waiting for a BLM specialist to inspect the location and provide you with reclamation requirements. If you have an approved Surface Use Plan of Operation and/or an approved Sundry

Notice, you are free to proceed with reclamation as per approved APD. If you have issues or concerns, contact a BLM specialist to assist you. It would be in your interest to have a BLM specialist look at the location and access road prior to the removal of reclamation equipment to ensure that it meets BLM objectives. Upon conclusion submit a Form 3160-5, Subsequent Report of Reclamation. This will prompt a specialist to inspect the location to verify work was completed as per approved plans.

- 5. The approved Subsequent Report of Reclamation will be your notice that the native soils, contour and seedbed have been reestablished. If the BLM objectives have not been met the operator will be notified and corrective actions may be required.
- 6. It is the responsibility of the operator to monitor these locations and/or access roads until such time as the operator feels that the BLM objective has been met. If after two growing seasons the location and/or access roads are not showing the potential for successful revegetation, additional actions may be needed. When you feel the BLM objectives have been met submit a Final Abandonment Notice (FAN), Form 3160-5, stating that all reclamation requirements have been achieved and the location and/or access road is ready for a final abandonment inspection.
- 7. At this time the BLM specialist will inspect the location and/or access road. If the native soils and contour have been restored, and the revegetation is successful, the FAN will be approved, releasing the operator of any further liability of the location and/or access road. If the location and/or access road have not achieved the objective, you will be notified as to additional work needed or additional time being needed to achieve the objective.

If there are any questions, please feel free to contact any of the following specialists:

Jim Amos

Supervisory Petroleum Engineering Tech/Environmental Protection Specialist 575-234-5909 (Office), 575-361-2648 (Cell)

Arthur Arias Environmental Protection Specialist 575-234-6230

Crisha Morgan Environmental Protection Specialist 575-234-5987

Jose Martinez-Colon Environmental Protection Specialist 575-234-5951

Mark Mattozzi Environmental Protection Specialist 575-234-5713

Robert Duenas Environmental Protection Specialist 575-234-2229

Doris Lauger Martinez Environmental Protection Specialist 575-234-5926

Jaden Johnston Environmental Protection Asst. (Intern) 575-234-6252

Sundry ID	2816597						
						Cement	
Plug Type	Тор	Bottom	Length	Tag	Sacks	Class	Notes
	•		J				
							Spot cement from
Surface Plug	0.00	100.00	100.00	Tag/Verify	56.00	С	550' to surface.
8.625 inch- Shoe Plug	1140.97	1253.00		Tag/Verify			
				<u> </u>			Spot cement from
							1410' to 1140'.
Top of Salt @ 1360	1296.40	1410.00	113.60	Tag/Verify	28.00	С	WOC and Tag.
				base no			
				need to			Spot cement from
Yates @ 2659	2582.41	2709.00	126.59	Tag	25.00	С	2709' to 2582'.
Queen @ 3872	3783.28	3922.00					
				If solid			
				base no			
				need to			
				Tag (CIBP			
				present			
				and/or			
				Mechanic			
				al Integrity			
				Test), If			
				Perf &			
				Sgz then			
				Tag, Leak			
				Test all			
				CIBP if no			
				Open			Set CIBP at 3822'.
				Perforatio			Dump bail 35' on
CIBP Plug	3787.00				4.00	С	top. Leak test CIBP.
Perforations Plug (If No CIBP)	3811.00			Tag/Verify			
Perforations Plug (If No CIBP)	4053.55			Tag/Verify			
5.5 inch- Shoe Plug	4202.05	4345.00	142.95	Tag/Verify			

No more than 2000' is to be allowed between plugs in open hole, and no more than 3000' between plugs in cased hole. Class H > 7500' Class C < 7500'

Fluid used to mix the cement in R111P shall be saturated with the salts common to the section penetrated, and in suitable proportions, but not more than 3% calcium chloride by weight of cement will be considered the desired mixture whenever possible.

Medium, Secretary: Top of salt to surface If no salt take the deepest fresh water or Karst Depth

High, Critical: Bottom of Karst to surface or Deepest fresh water, whichever is greater R111P: 50 Feet from Base of Salt to surface.

Class C: 1.32 ft^3/sx Class H: 1.06 ft^3/sx

Onshore Order 2.III.G Drilling Abandonment Requirements: "All formations bearing usable-quality water, oil, gas, or geothermal resources, and/or a prospectively valuable deposit of minerals shall be protected.

Cave Karst/Potash Cement Requirement:	Low		
8.625 inch- Shoe Plug @ 5.5 inch- Shoe Plug @	1203.00 4295.00		
Perforatons Top @ Perforatons Top @	3872.00 4117.00	Perforations Perforations	3900.00 4145.00
		CIBP @	3822.00

Sante Fe Main Office Phone: (505) 476-3441

General Information Phone: (505) 629-6116

Online Phone Directory https://www.emnrd.nm.gov/ocd/contact-us

# State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

CONDITIONS

Action 404555

#### **CONDITIONS**

Operator:	OGRID:
MEWBOURNE OIL CO	14744
P.O. Box 5270	Action Number:
Hobbs, NM 88241	404555
	Action Type:
	[C-103] NOI Plug & Abandon (C-103F)

#### CONDITIONS

Created By		Condition Date
gcordero	A Cement Bond Log (CBL) is required to be submitted to electronic permitting.	12/6/2024
gcordero	Submit Cement Bond Logs (CBL) prior to submittal of C-103P.	12/6/2024