

Santa Fe Main Office

Phone: (505) 476-3441 Fax: (55) 476-3462

General Information

Phone: (505) 629-6116

Online Phone Directory Visit:

<https://www.emnrd.nm.gov/ocd/contact-us/>State of New Mexico  
Energy, Minerals and Natural ResourcesForm C-103  
Revised July 18, 2013OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

<b>SUNDRY NOTICES AND REPORTS ON WELLS</b> (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.) 1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/>		WELL API NO. <b>30-025-29226</b> 5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/> 6. State Oil & Gas Lease No.
2. Name of Operator <b>SPUR ENERGY PARTNERS LLC on OCD's behalf of Energy Acumen LLC</b>		7. Lease Name or Unit Agreement Name <b>SHELL STATE</b>
3. Address of Operator <b>9655 KATY FREEWAY, SUITE 500, HOUSTON, TX 77024</b>		8. Well Number <b>1</b>
4. Well Location Unit Letter <b>J</b> : <b>1650</b> feet from the <b>SOUTH</b> line and <b>2310</b> feet from the <b>EAST</b> line Section <b>10</b> Township <b>17S</b> Range <b>33E</b> NMPM LEA County		9. OGRID Number <b>328947</b>
11. Elevation (Show whether DR, RKB, RT, GR, etc.) <b>4156.9' GL</b>		10. Pool name or Wildcat <b>MALJAMAR; GRAYBURG-SAN ANDRES</b>

## 12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

## NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐  
 TEMPORARILY ABANDON ☐ CHANGE PLANS ☐  
 PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐  
 DOWNHOLE COMMINGLE ☐  
 CLOSED-LOOP SYSTEM ☐  
 OTHER: ☐

## SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐  
 COMMENCE DRILLING OPNS. ☐ P AND A ☒  
 CASING/CEMENT JOB ☐  
 OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Spur Energy Partners LLC on OCD's behalf pursuant granted by OCD under ACOI-201941, Spur has completed P&A operations.

Please find the post job report and plugged WBD attached for your review.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Sarah Chapman TITLE REGULATORY DIRECTOR DATE 10/10/2024

Type or print name SARAH CHAPMAN E-mail address: SCHAPMAN@SPURENERGY.COM PHONE: 832-930-8613

**For State Use Only**

APPROVED BY: \_\_\_\_\_ TITLE \_\_\_\_\_ DATE \_\_\_\_\_

Conditions of Approval (if any):

DATE	OPS SUMMARY
9/30/2024	ROAD RIG TO LOCATION. SPOT THE RIG. CHECK PRESSURE. CSG 0 TBG 0. SECURE WELL SDFN.
10/1/2024	PSJM. CHECK WH PRESSURE. OPEN WELL TO PIT. 0 PSI ON TBG/CSG. STANDBY TOO WINDY TO RIG UP. RU PULLING UNIT. TOO H W/ RODS. SWITCH OVER TO TBG EQUIPMENT. NU BOP. TOO H W/ TBG. SECURE WELL SDFN.
10/2/2024	PJSM. RU WL. RIH GRJB, TAG HIGH @ 4522'. RD WL. CALL AND WAIT FOR SCRAPER AND DRILL BIT. TIH W/ SCRAPER. TOO H. RU WL. RIH SET CIBP @ 4591'. RU PUMP TRY TO LOAD WELL PUMP 90 BBLS DID NOT LOAD. SECURE WELL SDFN.
10/3/2024	PJSM. RU WL. RIH CBL FROM 4591' TO 800' TOP OF FL. RD WL. TIH. RU PUMP M&P PLUG #1 25 SXS 1.32 YIELD 14.8# TYPE III FROM 3780' - 3680'. TOO H LD 9 JOINTS STAND BACK 10 STANDS. WOC. SECURE WELL SDFN.
10/4/2024	PJSM. CHECK WH PRESSURE OPEN WELL TO PIT. 0 PSI ON TBG/CSG. TIH TAG @ 3550'. TOO H MOVE UP TO 2962'. M&P PLUG 3 30 SXS TYPE III CEMENT 14.8#. WOC. TOO H. TIH TAG PLUG 3 @ 2670'. M&P PLUG 4 30 SXS FROM 1638' TO 1538' 14.8# TYPE III 1.32 YIELD. TOO H WOC. TIH WITH 5.5" PACKER TAG PLUG 4 @ 1530'. TRY TO ISOLATE HIC. UNABLE TO FIND. PLUGGED OFF WITH PLUG 4. TOO H REMOVE PACKER. TIH TEST CSG TO 500#. GOOD TEST. SPOKE WITH NMOCD WAIT FOR ORDERS. SECURE WELL SDFN.
10/7/2024	PJSM. TIH TAG AT 1340'. RU WL. PERF AT 470'. RD WL. TIH. RU PUMP TRY TO ESTABLISH CIRC, NO CIRC. M&P 25 SXS, 10SXS IN 15 SXS OUT. SHUT WELL IN. WOC. TIH TAG AT 240'. TOO H. RU WL PERF AT 200'. RD WL. TIH RU PUMP TRY TO ESTABLISH CIRC, NO CIRC. TOO H. RU WL PERF AT 150'. RD WL. TIH W/ 5.5" PACKER. RU PUMP TRY TO ESTABLISH CIRC, NO CIRC. TOO H REMOVE PACKER. TIH TO 220'. RU PUMP. M&P 25 SXS TO SURFACE. TOO H. SECURE WELL SDFN.
10/8/2024	PJSM. RD RIG. CUT OFF WELLHEAD. TOP OFF CSG WITH 1" HOSE TO SURFACE.

Operator	Energy Acumen LLC
Field	Grayburg-San Andres
Spud Date	6/3/1985

SHELL STATE 1

Sec-Twn-Rng	10-17S-33E
Footage	1650 FSL, 2310 FEL
Survey	32.846508, -103.6500397

Formation (MD)	
ANHYDRITE	1470
SALT	1588
YATES	2772
7 RIVERS	2912
QUEEN	3730
GRAYBURG	4235
SAN ANDRES	4510
YESO	

RKB	
GL	4,157'

Hole Size	12 1/4"
TOC	Surface
Method	circ

Csg Depth	419'
Size	8 5/8"
Weight	24#
Grade	B
Connections	
Cement	300 sx

Highlighted formations require cement plugs per NMOCD P&A COA effective 1/1/24 figures D1 & D2

Hole Size	
TOC	
Method	


Csg Depth	
Size	
Weight	
Grade	
Connections	
Cement	

Hole Size	7 7/8"
TOC	surface
Method	CIRC

Csg Depth	4,752'
Size	5 1/2"
Weight	15.5#
Grade	J55
Connections	
Cement	1800 sxs

Last Update	10/10/2024
By	

PBTD	4,696'
TD MD	4,750'
TD TVD	4,750'

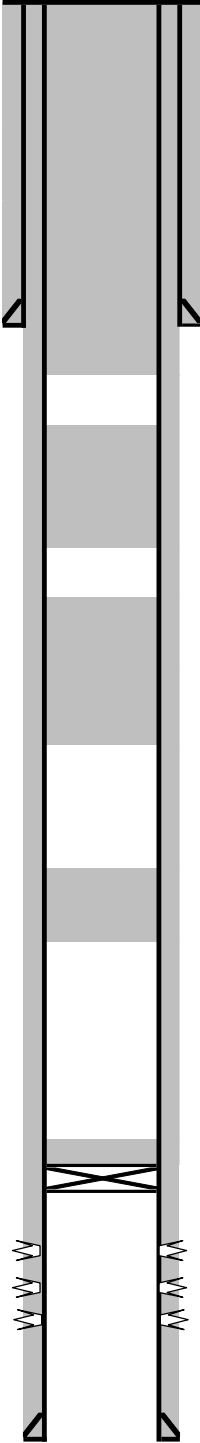

Plug #6: Spot 25 sx Class C Cmt from 220' - 0'

Plug #5: Spot 25 sx Class C Cmt from 470' - 240'

**TOP OF ANHYDRITE 1,470'**

Plug #4: Spot 30 sx Class C Cmt from 1,638' - 1,340'  
**TOP OF SALT 1,588'**

**YATES @ 2,772'**

Plug 3: Spot 35 sx Class C Cmt from 2,962' - 2,670'  
**7 RIVERS @ 2,912'**

**QUEEN @ 3,730'**

Plug #2: Spot 25 sx Class C Cmt from 3,780' - 3,550'

**SAN ANDRES @ 4,510'**

Plug #1: Set CIBP @ 4,591' and spot 25 sx class C Cmt from 4,591' - 4,391'

7/3/1985: Perf 4,638' - 4,652'. Acidize w/ 2,100 gal DS-30 & 5,000 gal gelled 20%



Sante Fe Main Office  
Phone: (505) 476-3441

General Information  
Phone: (505) 629-6116

Online Phone Directory  
<https://www.emnrd.nm.gov/oed/contact-us>

State of New Mexico  
Energy, Minerals and Natural Resources  
Oil Conservation Division  
1220 S. St Francis Dr.  
Santa Fe, NM 87505

CONDITIONS

Action 391651

CONDITIONS

Operator: Spur Energy Partners LLC 9655 Katy Freeway Houston, TX 77024	OGRID: 328947
	Action Number: 391651
	Action Type: [C-103] Sub. Plugging (C-103P)

CONDITIONS

Created By	Condition	Condition Date
loren.diede	None	1/2/2025