U.S. Department of the Interior BUREAU OF LAND MANAGEMENT



Well Name	Well Number	US Well Number	Lease Number	Case Number	Operator
LOST TANK 30-	33H	3002548464	NMNM90587	NMNM90587	OXY USA
LOST TANK 30-	21H	3002547942	NMNM90587	NMNM90587	OXY USA
LOST TANK 30-	22H	3002547543	NMNM90587	NMNM90587	OXY USA
LOST TANK 30-	32H	3002547944	NMNM90587	NMNM90587	OXY USA

Notice of Intent

Sundry ID: 2784236

Type of Submission: Notice of Intent

Type of Action: APD Change

Date Sundry Submitted: 04/10/2024 Time Sundry Submitted: 07:54

Date proposed operation will begin: 05/15/2024

Procedure Description: OXY USA, Inc. respectfully requests approval to amend the subject well AAPDs to change the production cement from 13.2 Class H/Poz slurry to 13.3 ppg to Class C/Poz slurry. See attached bulk drill plan revisions and cement lab results for reference. No new surface disturbance attached to this sundry. SHL is not changing.

NOI Attachments

Procedure Description

Sample_Lab_Report_13.3_Tail_Slurry___Chuck_Smith_MDP1_8_17_Fed_Com_22H_20240410074453.pdf

Lost_Tank_21H__22H__32H__33H_Bulk_Sundry_for_Cement_Design_20240410074433.pdf

Conditions of Approval

Additional

Oxy_Class_H_to_Class_C_POZ_Cement_Change_20240530130443.pdf

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: MELISSA GUIDRY Signed on: APR 10, 2024 07:45 AM

Name: OXY USA INCORPORATED

Title: Advisor Regulatory Sr.

Street Address: 5 GREENWAY PLAZA SUITE 110

City: HOUSTON State: TX

Phone: (713) 497-2481

Email address: MELISSA_GUIDRY@OXY.COM

Field

Representative Name:

Street Address:

City: State: Zip

Phone:

Email address:

BLM Point of Contact

BLM POC Name: KEITH P IMMATTY

BLM POC Title: ENGINEER

BLM POC Phone: 5759884722 BLM POC Email Address: KIMMATTY@BLM.GOV

Disposition: Approved **Disposition Date:** 05/30/2024

Signature: Keith Immatty

Form 3160-5 (June 2019)

UNITED STATES DE

FORM APPROVED
OMB No. 1004-0137
Expires: October 31, 2021

CITIED SIMIES	
PARTMENT OF THE INTERIOR	
REAU OF LAND MANAGEMENT	5. Lease Serial

BUREAU OF LAND MANAGEMENT	5. Lease Serial No. MULTIPLE		
SUNDRY NOTICES AND REPORTS ON W	6. If Indian, Allottee or Tribe Name		
Do not use this form for proposals to drill or to abandoned well. Use Form 3160-3 (APD) for such	MULTIPLE		
SUBMIT IN TRIPLICATE - Other instructions on pag	7. If Unit of CA/Agree	eement, Name and/or No.	
1. Type of Well			
Oil Well Gas Well Other		8. Well Name and No	MULTIPLE
2. Name of Operator OXY USA INCORPORATED		9. API Well No. MUL	TIPLE
3a. Address P.O. BOX 1002, TUPMAN, CA 93276-1002 3b. Phone No. (661) 763-604	(include area code) 46	10. Field and Pool or Exploratory Area MULTIPLE	
4. Location of Well (Footage, Sec., T.,R.,M., or Survey Description) MULTIPLE		11. Country or Parish, State MULTIPLE	
12. CHECK THE APPROPRIATE BOX(ES) TO INI	DICATE NATURE OF NOT	CE, REPORT OR OT	HER DATA
TYPE OF SUBMISSION	TYPE OF AC	ΓΙΟΝ	
Notice of Intent Acidize Deep Alter Casing		uction (Start/Resume)	Water Shut-Off Well Integrity
Subsequent Report Casing Repair New	Construction Reco	omplete porarily Abandon	Other
Final Abandonment Notice Convert to Injection Plug		er Disposal	
is ready for final inspection.) OXY USA, Inc. respectfully requests approval to amend the subject we to 13.3 ppg to Class C/Poz slurry. See attached bulk drill plan revision. No new surface disturbance attached to this sundry. SHL is not chang.	s and cement lab results fo		om 13.2 Class H/Poz slurry
14. I hereby certify that the foregoing is true and correct. Name (<i>Printed/Typed</i>) MELISSA GUIDRY / Ph: (713) 497-2481	Advisor Regulatory	Sr.	
Signature (Electronic Submission)	Date	04/10/2	2024
THE SPACE FOR FED	ERAL OR STATE OF	ICE USE	
Approved by			
KEITH P IMMATTY / Ph: (575) 988-4722 / Approved	ENGINEER Title		05/30/2024 Date
Conditions of approval, if any, are attached. Approval of this notice does not warran certify that the applicant holds legal or equitable title to those rights in the subject lewhich would entitle the applicant to conduct operations thereon.			
Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a crime for an	ny person knowingly and will	fully to make to any d	epartment or agency of the United States

any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

GENERAL INSTRUCTIONS

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

SPECIFIC INSTRUCTIONS

Item 4 - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve **hydraulic fracturing operations**, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c)and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

(Form 3160-5, page 2)

Additional Information

Batch Well Data

LOST TANK 30-19 FEDERAL COM 21H, US Well Number: 3002547942, Case Number: NMNM90587, Lease Number: NMNM90587, Operator: OXY USA INCORPORATED

LOST TANK 30-19 FEDERAL COM 32H, US Well Number: 3002547944, Case Number: NMNM90587, Lease Number: NMNM90587, Operator: OXY USA INCORPORATED

LOST TANK 30-19 FEDERAL COM 33H, US Well Number: 3002548464, Case Number: NMNM90587, Lease Number: NMNM90587, Operator: OXY USA INCORPORATED

LOST TANK 30-19 FEDERAL COM 22H, US Well Number: 3002547543, Case Number: NMNM90587, Lease Number: NMNM90587, Operator: OXY USA INCORPORATED

From: <u>Immatty, Keith P</u>

To: Pelton, Ben R; Walls, Christopher

Cc: Adam, Derek W; Baughman, Travis W; Threadgill, Kevin T; Reeves, Leslie T; Hart, Hunter K

Subject: RE: [EXTERNAL] Oxy NM Production slurries

Date: Friday, February 9, 2024 9:11:00 AM

Reviewed and is OK.

Please plan on doing batch sundries for the wells these apply to. On the sundry please attach a cement properties summary/ spec sheet as well as an additives list.

Regards,

Keith Immatty

From: Pelton, Ben R <Ben_Pelton@oxy.com> Sent: Thursday, February 8, 2024 1:50 PM

To: Immatty, Keith P <kimmatty@blm.gov>; Walls, Christopher <cwalls@blm.gov>

Cc: Adam, Derek W <Derek_Adam@oxy.com>; Baughman, Travis W <Travis_Baughman@oxy.com>; Threadgill, Kevin T <Kevin_Threadgill@oxy.com>; Reeves, Leslie T <Leslie_Reeves@oxy.com>; Hart,

Hunter K <Hunter Hart@oxy.com>

Subject: [EXTERNAL] Oxy NM Production slurries

This email has been received from outside of DOI - Use caution before clicking on links, opening attachments, or responding.

Keith, Chris,

When transitioning from our previous slurry (TXI/SLBD049) due to economic and supply drivers, early attempts were made to utilize API Class H.

However, at these densities, (namely < 14.0 ppg) Class H showed rheological concerns resulting in potential mixing issues, higher equivalent circulating densities (ECD's which increased risk of losses), and downhole instability. Densities >14.0 ppg are sufficient for lower Wolfcamp with high mud weights but most shallower benches require 13.2 ppg or less to avoid breaking down formation. Class C / Pozzolan composition mitigated all of these concerns while achieving target fluid properties associated with Thickening Time, sufficient compressive strength development, Free Fluid, Fluid Loss, etc.

Note: When compared to the Class H / Poz system(s), the Class C / Poz slurry achieved earlier (faster) compressive strength development.

Class H / Poz: 500 psi 13:12 hr:mn Class C / Poz: 500 psi 06:10 hr:mn

Please let us know if you have any questions, would like to discuss on a call or need further information. If approved, we will sundry our production slurries going forward to ensure we cover our bases with the selected cement system in lateral.

Thanks,

Ben Pelton
Drilling Engineer Supervisor, Delaware Basin
Occidental Oil & Gas Corp.
5 Greenway Plaza, Suite 110 | Houston, TX 77046 | GW5 25.131
O: 713-497-2379 | M: 701-690-8645

Ben_Pelton@oxy.com

Laboratory Cement Test Report MIX 2023-3651 – OXY – HP479 – CHUCK SMITH MDP1 8_17 FED COM 022H – Production – 13.3ppg Tail

Service Order: 74499

Date: Dec-22-2023	Casing: 5.5		District: ANM	Reported By	y: Torrance Galvan
				Design Inpu	t By: Denys Teodoro
BHCT / BHST	160 / 160 °F		BHP: 8,100 psi	MD / TVD: 2	21,135.00 / 10,649.00 ft
Composition					
Slurry Density Solid Vol. Fraction Blend Sack	13.30 lb/gal 29.59 % 90.50 lb	Yield Slurry Type Blend Density	1.84 ft³/sk of blend Tail 189.16 lb/ft³	Mix Fluid Mix Water	9.581 gal/sk SackOfBlend 9.551 gal/sk SackOfBlend
Code	Concentratio	n	Component		Lot Number
D903	75.00 % BVOB		Cement		FB 11709
B721	25.00 % BVO	В	Extender		FB 11709
B697	5.00 % BWOE	3	Extender		Bulk
D053	5.00 % BWOE	3	Expanding Agent		L3000
D167A	0.30 % BWOE	3	Fluid loss		PPRC1090-165
D174	3.00 % BWOE	3	Expanding Agent		ZY3A0112A3
D208	0.08 % BWOE	3	Viscosifier		0134196W
D800	1.10 % BWOB		Retarder		1220057
D047	0.020 gal/sk VBWOB		Anti Foam		D009L10L58
D177	0.010 gal/sk VBWOB		Retarder		92989
Rig Water	9.551 gal/sk of blend		Base Fluid		Rig

Surface Rheology					
(rpm)	Up (deg)	Down (deg)	Average (deg)		
300	56	56	56		
200	44	43	44		
100	30	28	29		
60	23	21	22		
30	19	16	18		
6	13	10	12		
3	11	8	10		
10 sec Gel 9 deg - 10 lbf/100ft ²			Oft ²		
10 min Gel	32 deg - 34 lbf/100ft ²				
Bingham P _√	46 cP				
Bingham T _y	12 lbf/100ft²				
Measured Temp	80 °F				
Viscometer S/N: 382 R1B1 F1.0					

Downhole Rheology					
(rpm)	Up (deg)	Down (deg)	Average (deg)		
300	89	89	89		
200	77	67	72		
100	57	43	50		
60	48	33	41		
30	35	24	29		
6	20	14	17		
3	15	12	14		
10 sec Gel 10 deg - 11 lbf/100ft ²			/100ft ²		
10 min Gel	24 deg - 26 lbf/100ft ²				
Bingham P _√	74 cP				
Bingham T _y	20 lbf/100ft ²				
Measured Temp	sured Temp 160 °F				
Viscometer S/N: 382 R1B1 F1.0					

Free Fluid

i icc i iaia	
(0%) 0 / 250 in 2 hrs at 80 °F and 45 deg inclination	
Sedimentation: None	
Test Method: Unknown	
Cylinder Dimensions: 250ml : 35 mm x 245 mm	

Thickening Time

Consistency	Time
KSQR TT	08:00 to 12:00 hr:mn
POD	06:41 hr:mn
30 Bc	07:24 hr:mn
50 Bc	08:19 hr:mn
70 Bc	08:33 hr:mn
Go/No-Go	Motor off at 01:35 for 00:20
Consistometer S/N	327
Set Conditions	Thick (Gelled)

Fluid Loss

API Calculated Fluid Loss 50.00 mL				
25.00 mL collected in 30 mins at 163 °F				
Filter Cake - Height: 1.2 in. Consistency: Hard				
Static press was utilized with temp measured in jacket				
wall				

UCA Compressive Strength

Time	Compressive Strength	Temperature
03:58 hr:mn	50 psi	160 degF
06:10 hr:mn	500 psi	160 degF
24:00 hr:mn	1069 psi	160 degF
48:00 hr:mn	1241 psi	160 degF
72:00 hr:mn	1294 psi	160 degF
Machine S/N:	640	


Comments

All slurries prepared and tested in accordance with RP 10B-2 unless otherwise noted and SLB WIT Laboratory Standard Work Instructions.

Mixability assessment: 00:16 mn:sc to add solids to blender. Vortex quality was good/visible after all solids added.


Liquid additives (if used) are added to the mix water prior to adding dry blend in the blender first at 4000rpm.

Thickening Time Graph

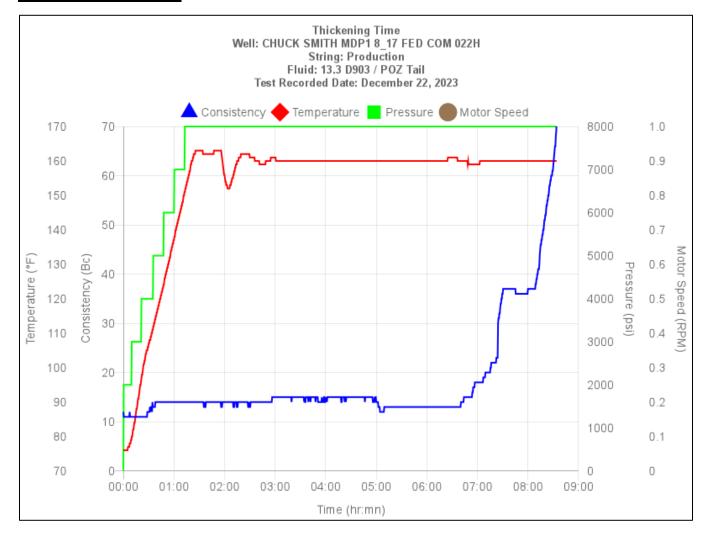

Page 2 of 3

UCA Graph

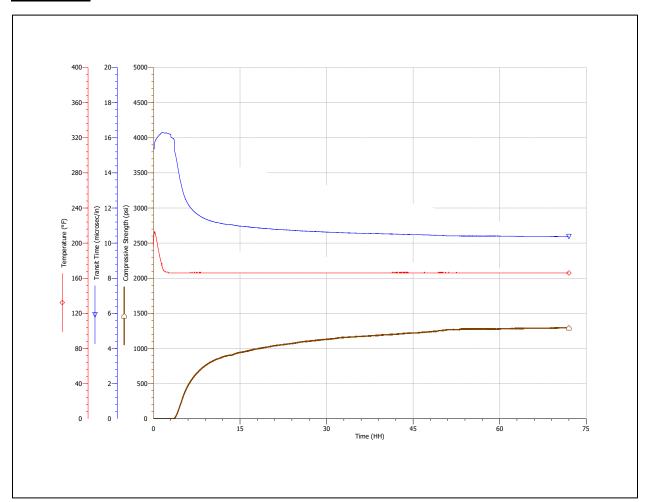

Oxy USA Inc. – SUNDRY Lost Tank 30_19 Fed Com 21H, 22H, 32H, 33H

This is a bulk sundry request for x4 wells in Lea County, Section 19 T22S R32E. The wells related to this sundry request are:

API#	APD#	Well Name
30-025-47942	10400048869	Lost Tank 30_19 Fed Com 21H
30-025-47543	10400048870	Lost Tank 30_19 Fed Com 22H
30-025-47944	10400049588	Lost Tank 30_19 Fed Com 32H
30-025-48464	10400049848	Lost Tank 30_19 Fed Com 33H

1. Summary of Changes

• Update production tail slurry from 13.2 ppg Class H/Poz slurry to 13.3 ppg Class C/Poz slurry

Original Plan as Permitted:

Cementing Program

Section	Stage	Slurry	Sacks	Yield (ft^3/sk)	Density (lb/gal)	Evence	тос	Placement	Description	
Surface	1	Surface - tail	1001	1.33	14.8	100%	-	Circulate	Class C+Accel.	
Intermediate	1	Intermediate 1S - Tail	651	1.65	13.2	5%	7201	Circulate	Class H+Accel., Disper., Salt	
Intermediate	2	Intermediate 2S - Tail BH	2509	1.71	13.3	25%		Bradenhead	Class C+Accel.	
Production	1	Production - Tail	884	1.38	13.2	25%	9114	Circulate	Class H+Ret., Disper., Salt	

<u>Proposed Revised Plan</u> – <u>Changes Highlighted</u>:

Cementing Program

Section	Stage	Slurry	Sacks	Yield (ft^3/sk)	Density (lb/gal)		тос	Placement	Description	
Surface	1	Surface - tail	1001	1.33	14.8	100%	-	Circulate	Class C+Accel.	
Intermediate	1	Intermediate 1S - Tail	651	1.65	13.2	5%	7201	Circulate	Class H+Accel., Disper., Salt	
Intermediate	2	Intermediate 2S - Tail BH	2509	1.71	13.3	25%	-	Bradenhead	Class C+Accel.	
Production	1	Production - Tail	663	1.84	13.3	25%	9114	Circulate	Class C+Ret.	

Sante Fe Main Office Phone: (505) 476-3441 General Information

Phone: (505) 629-6116

Online Phone Directory https://www.emnrd.nm.gov/ocd/contact-us

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

CONDITIONS

Action 349501

CONDITIONS

Operator:	OGRID:
OXY USA INC	16696
P.O. Box 4294	Action Number:
Houston, TX 772104294	349501
	Action Type:
	[C-103] NOI Change of Plans (C-103A)

CONDITIONS

Created By	Condition	Condition Date
pkautz	If cement is not circulated to surface during cementing operations, a Cement Bond Log (CBL) is required.	1/27/2025