Sante Fe Main Office Phone: (505) 476-3441 General Information Phone: (505) 629-6116

Energy, Minerals and Natural Resources Oil Conservation Division Online Phone Directory https://www.emnrd.nm.gov/ocd/contact-us 1220 S. St Francis Dr. **Santa Fe, NM 87505**

Form C-101 August 1, 2011

Permit 380794

Operator Nam Adm	ne and Address iral Permian Ope	erating LLC						2. 00	GRID Number 332762	
200	N. Loraine St and, TX 79701	Ü						3. AP	Number 30-015-561	25
4. Property Cod 3369			5. Property Name War Pigeo	n Fed Com				6. We	ell No. 403H	
				7. Su	face Location					
UL - Lot M	Section 6	Township 245	Range 27E	Lot Idn 7	Feet From 900	N/S Line S	Feet From	200	E/W Line W	County Eddy
				8. Proposed I	Bottom Hole Loca	tion				
UL - Lot P	Section 5	Township 24S	Range 27E	Lot Idn	Feet From 330	N/S Line S	Feet From	100	E/W Line E	County Eddy
				9. Po	ol Information					
PURPLE SAG	E;WOLFCAMP (GAS)							98220	
				Additiona	I Well Information	1				
11. Work Type New	Well	12. Well Typ	pe GAS	13. Cable/Rotary		14. Lease Type State	15.		_evel Elevation 253	
16. Multiple N		17. Propose 1	ed Depth 19080	18. Formation Wolfcamp)	19. Contractor			1/2025	
Depth to Ground	water			Distance from nearest	fresh water well		Dis	tance to n	earest surface water	r

State of New Mexico

 ${f f X}$ We will be using a closed-loop system in lieu of lined pits

21. Proposed Casing and Cement Program

			21111000000 0001115	g and comone i rogram		
Type	Hole Size	Casing Size	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC
Surf	14.75	10.75	45.5	525	501	0
Int1	9.875	7.625	29.7	8358	1441	0
Prod	6.75	5.5	20	19080	954	6358

Casing/Cement Program: Additional Comments

Casing grade for intermediate is HCP-110; casing grade for production is CYP-110

22. Proposed Blowout Prevention Program

Туре	Working Pressure	Test Pressure	Manufacturer
Double Ram	10000	5000	TBD
Annular	5000	5000	TBD

knowledge and be I further certify I h M, if applicable.	elief.	s true and complete to the best of my NMAC and/or 19.15.14.9 (B) NMAC		OIL CONSERVATION	ON DIVISION
Signature:					
Printed Name:	Electronically filed by Traci Cou	rsey	Approved By:	Matthew Gomez	
Title:			Title:		
Email Address:	tcoursey@admiralpermian.com	1	Approved Date:	2/4/2025	Expiration Date: 2/4/2027
Date:	1/8/2025	Phone: 432-653-0189	Conditions of Appr	oval Attached	


<u>C-10</u>	2		End	erav Mii	State of Ne	ew Mexico Iral Resources Dep	artment		ſ	Revised July 9, 2024		
Submit	Electronically	ı		0.		TION DIVISION	artificin		+			
	Permitting	'						Submittal	☑ Initial Su			
								Type:	☐ Amende			
						☐ As Drilled						
1			<u> </u>		WELL LOCATI	ON INFORMATION						
	15- <u>561</u> 2	25	Pool Code 98220			Pool Name PURPLE SAGE	'					
Propert	y Code 33	6930	Property N	ame	WAR PIG	SEON FED COM			Well Numb	er 403H		
OGRID			Operator N	ame						el Elevation		
	33276		<u> </u>			MIAN OPERATING LI				3,253.03'		
8	Surface Owr	ner: 🗹 State	□ Fee □ T	ribal ∐ Fe	ederal	Mineral Owi	ner: 🔽 State	e ∐ Fee L	□ Tribal □ Fe	ederal		
					Surfa	ce Location						
UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Lo	ongitude	County		
LOT 7	6	24 S	27 E		900' FSL	200' FWL	32.2415	34° -1	04.237251°	EDDY		
			<u> </u>	<u> </u>	Bottom	Hole Location		I				
UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Lo	ongitude	County		
Р	5	24 S	27 E		330' FSL	100' FEL	32.2400	98° -1	04.204390°	EDDY		
								I				
Dedicate 1270	ted Acres	Infill or Defin	ing Well	Defining 402H	Well API	Overlapping Spacing	Unit (Y/N)	Consolidat	tion Code			
Order N	Order Numbers.					Well setbacks are u	nder Comm	on Ownersh	nip: □Yes □N	No		
Į.					10.1.0	« D («OD)						
	0+	Township	Dange	1 -4	1	ff Point (KOP)	1 - 454	1	angituda .	County		
UL LOT 7	Section 6	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude 32.2399		ongitude 04.237863°	County		
LOT 7	0	24 S	27 E		330' FSL		32.2399	-11	04.237003	EDDY		
·	0 +	Township	Dange	1 -4	.	ake Point (FTP)	1 -414 - 4 -	1	ongitude	County		
UL LOT 7	Section 6	24 S	Range 27 E	Lot	Ft. from N/S	Ft. from E/W 330' FWL	Latitude 32.2399		•	EDDY		
LOI /	6	24 5	2/ E		330' FSL		32.2399	-11	04.236828°	EDD1		
UL	0	Township	Pongo	1.54		ake Point (LTP)	1 -4:4	11.	ongitudo	County		
P		Township	Range	Lot	Ft. from N/S		Latitude		ongitude	EDDY		
Р	5	24 S	27 E		330' FSL	330' FEL	32.2400	95 -1	04.205134°	EDD1		
11.00		611.16					10			1		
Unitized	d Area or Al	rea of Uniform	interest	Spacing	Unit Type 🔏 Ho	orizontal 🗆 Vertical	Grou	nd Floor Ele	evation:			
				ı								
OPERA	ATOR CER	TIFICATIONS 1				SURVEYOR CERTIFI	CATIONS					
best of n that this in the lai well at th unleased	ny knowledge organization nd including t nis location p d mineral inte	e and belief, and either owns a w he proposed bo ursuant to a con	I, if the well is a vorking interest ttom hole loca atract with an o luntary pooling	a vertical or or unlease tion or has a wner of a w	complete to the directional well, d mineral interest a right to drill this torking interest or or a compulsory	I hereby certify that the w actual surveys made by r correct to the best of my l	ell location shone or under mobelief	y _{supervision}	, and that the s	from field notes of ame is true and		
the cons mineral i the well'	ent of at leas interest in ea	t one lessee or ch tract (in the ta interval will be lo	owner of a wor	king interes	which any part of ulsory pooling		REGULARIS OF	DFESSIONAL	25			
Signatur	·•	Ju J-W	,,,,	ate	1-1-25	Signature and Seal of Pro			Date: 10/24/20	24		
"	e BRIAN V	VOOD	Di	aic		Signature and Sear Of Pro	ภเธออเบกสก อนก	veyUi				
Printed I	Name					Certificate Number	Date of Sun	/ey				
k	orian@p	ermitswe	st.com			12177		10	0/24/2024			
Email Ad												
Note: No	allowable	will be assigne	ed to this con	npletion ur	ntil all interests h	<u>l</u> ave been consolidated c	r a non-stan	dard unit ha	as been appro	ved by the division		

Released to Imaging: 2/4/2025 3:54:47 PM

ACREAGE DEDICATION PLATS

This grid represents a standard section. You may superimpose a non-standard section, or larger area, over this grid. Operators must outline the dedicated acreage in a red box, clearly show the well surface location and bottom hole location, if it is directionally drilled, with the dimensions from the section lines in the cardinal directions. If this is a horizontal wellbore show on this plat the location of the First Take Point and Last Take Point, and the point within the Completed interval (other than the First Take Point or Last Take Point) that is closest to any outer boundary of the tract.

Surveyors shall use the latest United States government survey or dependent resurvey. Well locations will be in reference to the New Mexico Principal Meridian. If the land is not surveyed, contact the OCD Engineering Bureau. Independent subdivision surveys will not be acceptable.

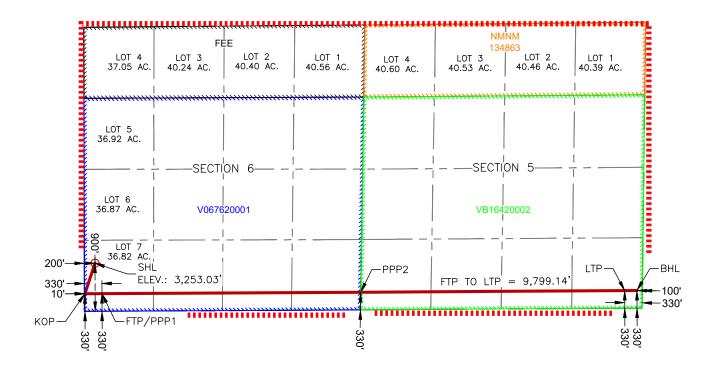

SURFACE HOLE LOCATION 900' FSL & 200' FWL ELEV. = 3,253.03'

NAD 83 X = 571,043.53' NAD 83 Y = 451,616.70' NAD 83 LAT = 32.241534° NAD 83 LONG = -104.237251° KICK-OFF POINT 330' FSL & 10' FWL

NAD 83 X = 570,854.78' NAD 83 Y = 451,045.73' NAD 83 LAT = 32.239965° NAD 83 LONG = -104.237863° FIRST TAKE POINT & PENETRATION POINT 1 330' FSL & 330' FWL

NAD 83 X = 571,174.78' NAD 83 Y = 451,047.37' NAD 83 LAT = 32.239968° NAD 83 LONG = -104.236828° PENETRATION POINT 2 330' FSL & 0' FWL

NAD 83 X = 576,025.37' NAD 83 Y = 451,072.07' NAD 83 LAT = 32.240023° NAD 83 LONG = -104.221139°

LAST TAKE POINT 330' FSL & 330' FEL

NAD 83 X = 580,973.76' NAD 83 Y = 451,103.80' NAD 83 LAT = 32.240095° NAD 83 LONG = -104.205134° BOTTOM HOLE LOCATION 330' FSL & 100' FEL

NAD 83 X = 581,203.79' NAD 83 Y = 451,105.06' NAD 83 LAT = 32.240098° NAD 83 LONG = -104.204390° Sante Fe Main Office Phone: (505) 476-3441 General Information

Phone: (505) 629-6116
Online Phone Directory
https://www.emnrd.nm.gov/ocd/contact-us

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

Form APD Conditions

Permit 380794


PERMIT CONDITIONS OF APPROVAL

Operator Name and Address:	API Number:
Admiral Permian Operating LLC [332762]	30-015-56125
200 N. Loraine St	Well:
Midland, TX 79701	War Pigeon Fed Com #403H

OCD Reviewer	Condition
matthew.gomez	A [C-103] Sub. Drilling (C-103N) is required within (10) days of spud.
matthew.gomez	Notify the OCD 24 hours prior to casing & cement.
	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string.
	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system.
matthew.gomez	Cement is required to circulate on both surface and intermediate1 strings of casing.
matthew.gomez	If cement does not circulate on any string, a Cement Bond Log (CBL) is required for that string of casing.
matthew.gomez	File As Drilled C-102 and a directional Survey with C-104 completion packet.
matthew.gomez	Administrative order required for non-standard spacing unit prior to production.

Admiral Permian Resources
Project: Eddy County, NM (NAD 83 NME)
Site: (War Pigeon) Sec6_T24S_R27E
Well: War Pigeon Fed Com #403H
Wellbore: OWB
Design: Plan #2
Lat: 32° 14' 29.521 N
Long: 104° 14' 14.104 W
Pad GL: 3253.0



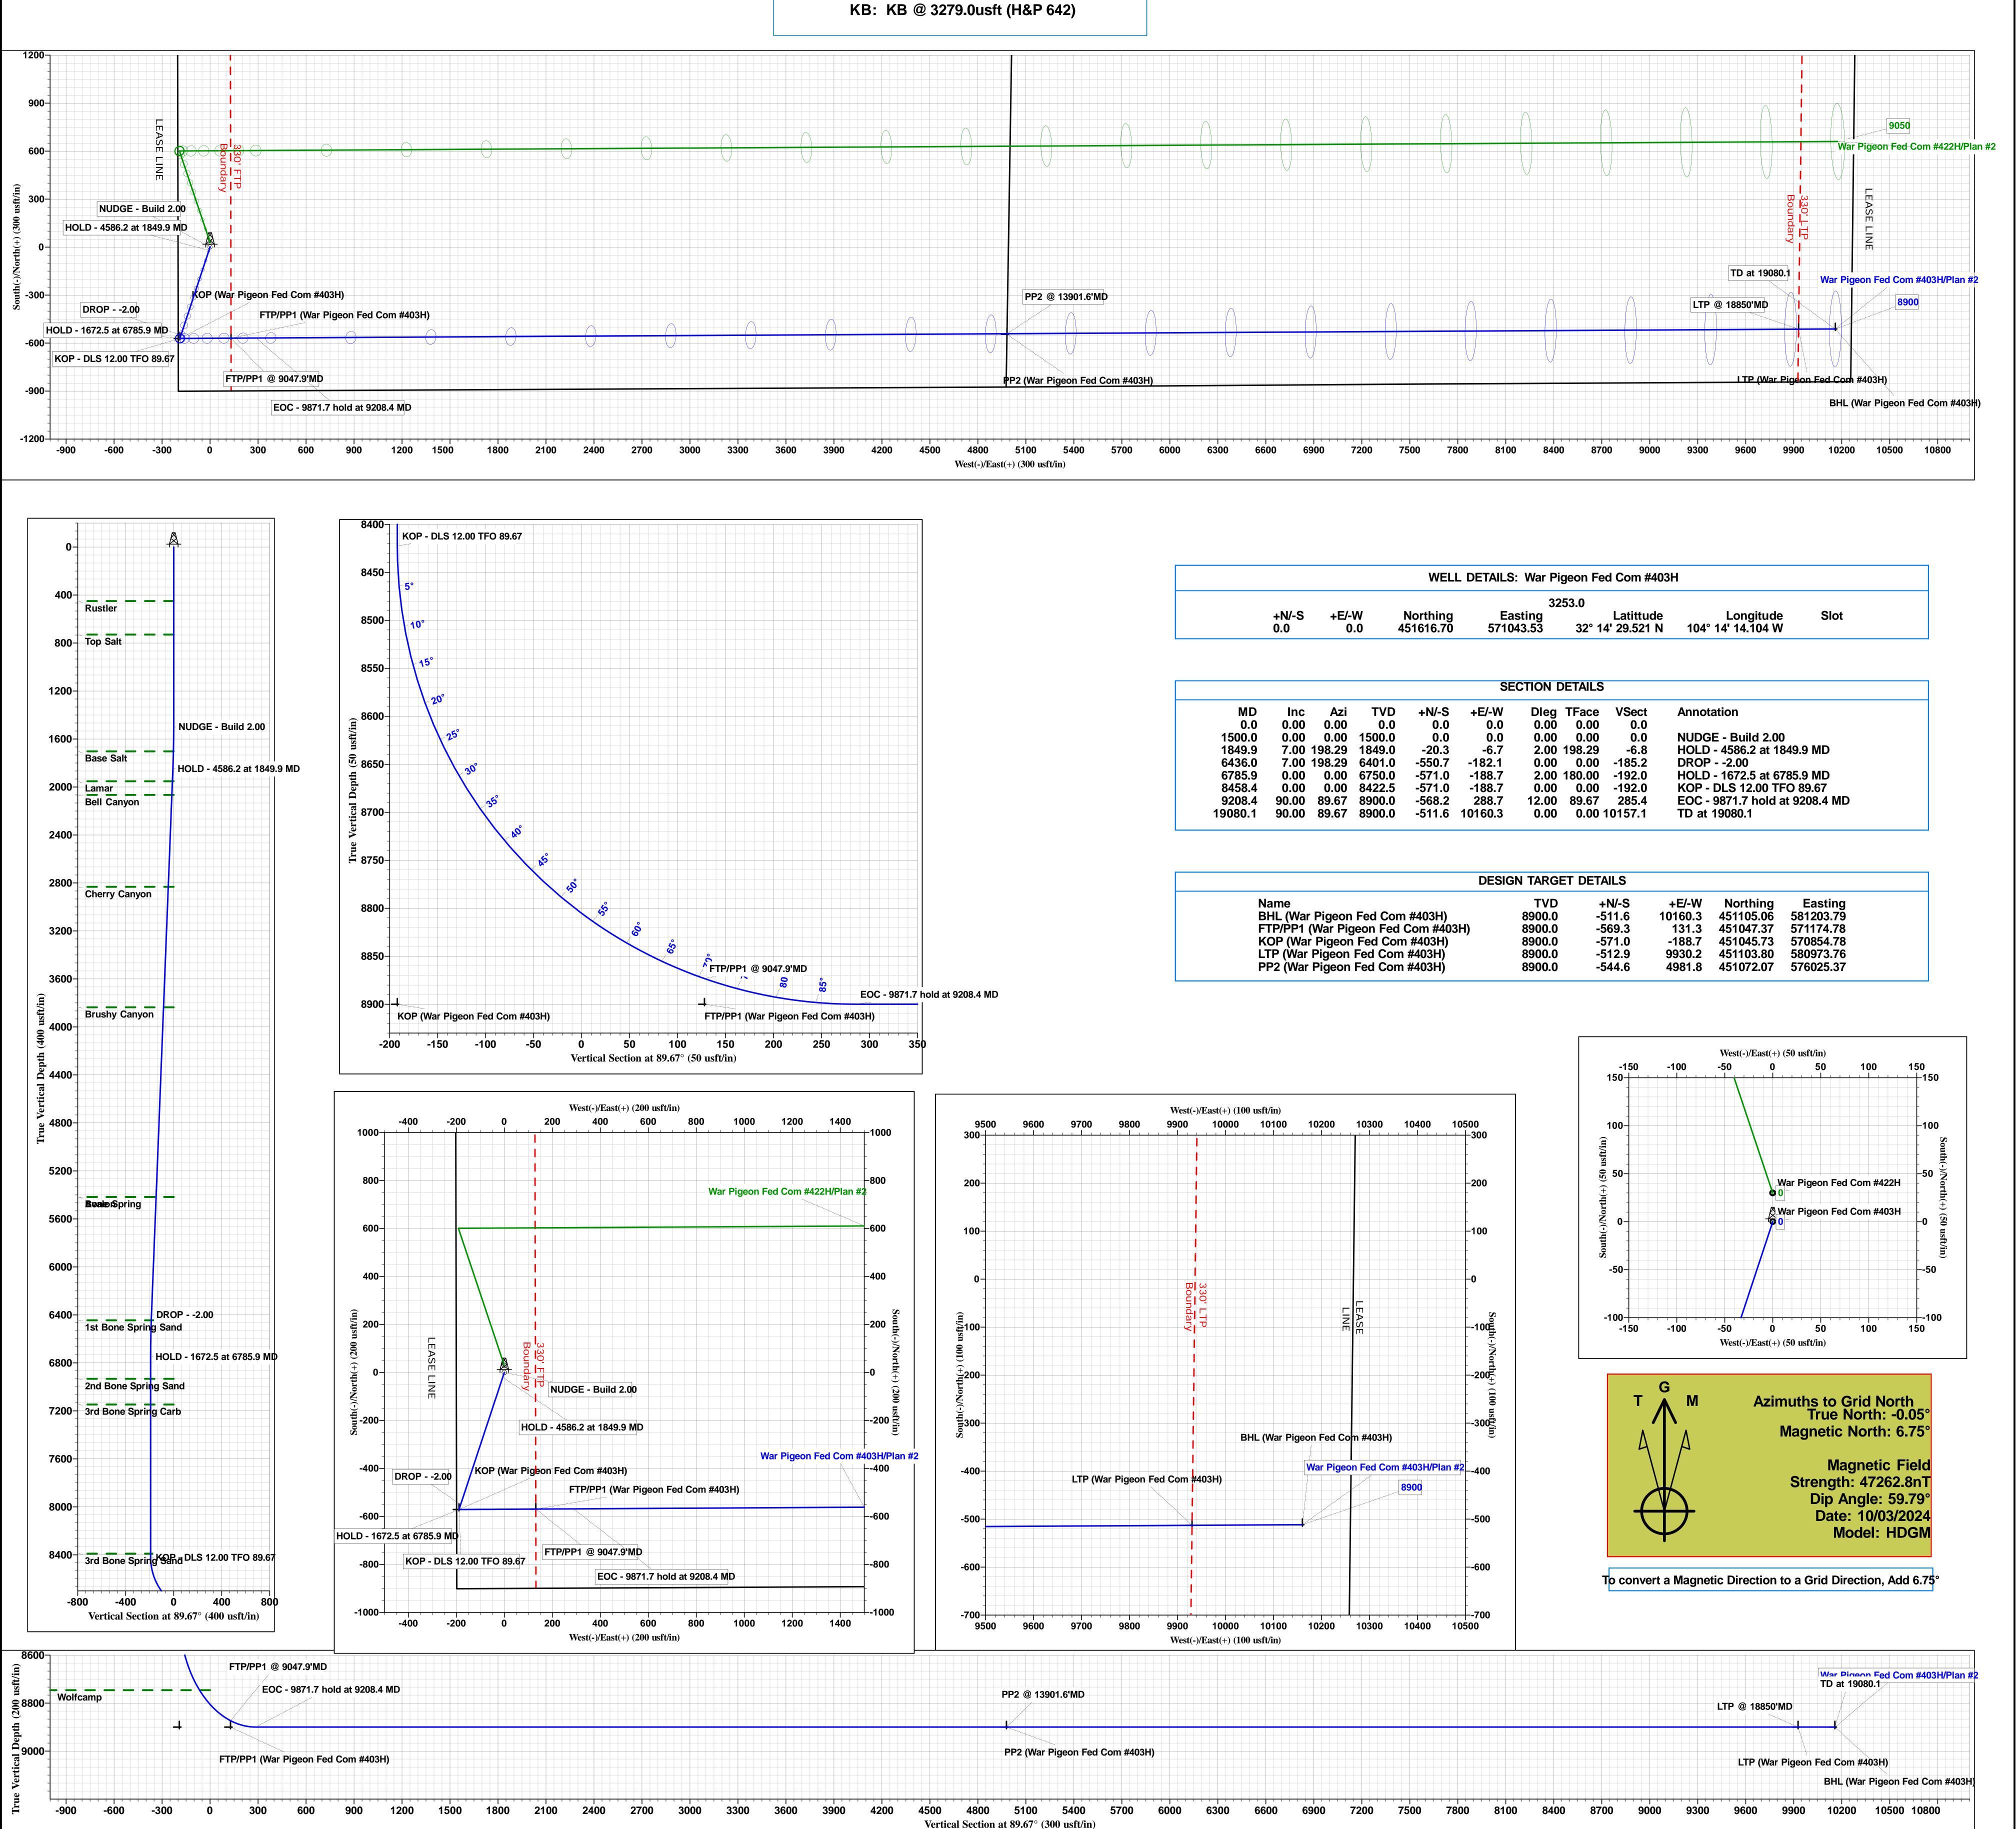





Database: EDM 5000.15 Single User Db Company: Admiral Permian Resources
Project: Eddy County, NM (NAD 83 NME)
Site: (War Pigeon) Sec6_T24S_R27E
Well: War Pigeon Fed Com #403H

Wellbore: OWB
Design: Plan #2

Local Co-ordinate Reference: TVD Reference: MD Reference: North Reference: Survey Calculation Method: Well War Pigeon Fed Com #403H KB @ 3279.0usft (H&P 642) KB @ 3279.0usft (H&P 642) Grid

Minimum Curvature

Project Eddy County, NM (NAD 83 NME)

Map System: US State Plane 1983
Geo Datum: North American Datum 1983
Map Zone: New Mexico Eastern Zone

System Datum: Mean Sea Level

Site (War Pigeon) Sec6_T24S_R27E

Northing: 454,478.30 usft 32° 14′ 57.839 N Site Position: Latitude: From: Мар Easting: 571,036.93 usft Longitude: 104° 14' 14.151 W **Position Uncertainty: Slot Radius:** 13-3/16 " **Grid Convergence:** 0.05° 0.0 usft

Well War Pigeon Fed Com #403H

 Well Position
 +N/-S
 -2,861.6 usft
 Northing:
 451,616.70 usft
 Latitude:
 32° 14′ 29.521 N

 +E/-W
 6.6 usft
 Easting:
 571,043.53 usft
 Longitude:
 104° 14′ 14.104 W

Position Uncertainty 0.0 usft Wellhead Elevation: Ground Level: 3,253.0 usft

Wellbore **OWB** Declination **Field Strength** Magnetics Model Name Sample Date **Dip Angle** (°) (°) (nT) **HDGM** 10/03/24 6.80 59.79 47.262.77285663

Design Plan #2 Audit Notes: Version: Phase: **PLAN** Tie On Depth: 0.0 **Vertical Section:** Depth From (TVD) +N/-S +E/-W Direction (usft) (usft) (usft) (°) 0.0 0.0 0.0 89.67

Plan Sections Vertical Build Measured Dogleg Turn Depth Inclination **Azimuth** Depth +N/-S +E/-W Rate Rate Rate **TFO** (usft) (usft) (usft) (°/100usft) (°/100usft) (°/100usft) (usft) (°) (°) (°) **Target** 0.00 0.0 0.00 0.0 0.0 0.00 0.00 0.00 0.00 0.0 1,500.0 0.00 0.00 1,500.0 0.0 0.0 0.00 0.00 0.00 0.00 -20.3 2.00 1,849.9 7.00 198.29 1,849.0 -6.7 2.00 0.00 198.29 6,436.0 7.00 6,401.0 -550.7 -182.1 0.00 0.00 0.00 0.00 198 29 0.00 6,785.9 6.750.0 -571.0 -188.7 2.00 -2.00 0.00 180.00 0.00 8,458.4 0.00 0.00 8,422.5 -571.0 -188.7 0.00 0.00 0.00 0.00 9,208.4 90.00 89.67 8,900.0 -568.2 288.7 12.00 12.00 11.96 89.67 19,080.1 90.00 89.67 8,900.0 -511.6 10,160.3 0.00 0.00 0.00 0.00 BHL (War Pigeon Fe





Database: EDM 5000.15 Single User Db
Company: Admiral Permian Resources
Project: Eddy County, NM (NAD 83 NME)
Site: (War Pigeon) Sec6_T24S_R27E
Well: War Pigeon Fed Com #403H

Wellbore: OWB
Design: Plan #2

Local Co-ordinate Reference: TVD Reference: MD Reference: North Reference: Survey Calculation Method:

nned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	0.00	0.00	700.0	0.0	0.0	0.0	0.00	0.00	0.00
800.0	0.00	0.00	800.0	0.0	0.0	0.0	0.00	0.00	0.00
900.0	0.00	0.00	900.0	0.0	0.0	0.0	0.00	0.00	0.00
1,000.0	0.00	0.00	1,000.0	0.0	0.0	0.0	0.00	0.00	0.00
1,100.0	0.00	0.00	1,100.0	0.0	0.0	0.0	0.00	0.00	0.00
1,200.0	0.00	0.00	1,200.0	0.0	0.0	0.0	0.00	0.00	0.00
1,300.0	0.00	0.00	1,300.0	0.0	0.0	0.0	0.00	0.00	0.00
1,400.0	0.00	0.00	1,400.0	0.0	0.0	0.0	0.00	0.00	0.00
1,500.0	0.00	0.00	1,500.0	0.0	0.0	0.0	0.00	0.00	0.00
NUDGE - B									
1,600.0	2.00	198.29	1,600.0	-1.7	-0.5	-0.6	2.00	2.00	0.00
1,700.0	4.00	198.29	1,699.8	-6.6	-2.2	-2.2	2.00	2.00	0.00
1,800.0	6.00	198.29	1,799.5	-14.9	-4.9	-5.0	2.00	2.00	0.00
1,849.9	7.00	198.29	1,849.0	-20.3	-6.7	-6.8	2.00	2.00	0.00
HOLD - 458	36.2 at 1849.9 I	MD							
1,900.0	7.00	198.29	1,898.8	-26.1	-8.6	-8.8	0.00	0.00	0.00
2,000.0	7.00	198.29	1,998.0	-37.6	-12.4	-12.7	0.00	0.00	0.00
2,100.0	7.00	198.29	2,097.3	-49.2	-16.3	-16.5	0.00	0.00	0.00
2,200.0	7.00	198.29	2,196.5	-60.8	-20.1	-20.4	0.00	0.00	0.00
2,300.0	7.00	198.29	2,295.8	-72.3	-23.9	-24.3	0.00	0.00	0.00
2,400.0	7.00	198.29	2,395.0	-83.9	-27.7	-28.2	0.00	0.00	0.00
2,500.0	7.00	198.29	2,494.3	-95.5	-31.6	-32.1	0.00	0.00	0.00
2,600.0	7.00	198.29	2,593.5	-107.0	-35.4	-36.0	0.00	0.00	0.00
2,700.0	7.00	198.29	2,692.8	-118.6	-39.2	-39.9	0.00	0.00	0.00
2,800.0	7.00	198.29	2,792.1	-130.2	-43.0	-43.8	0.00	0.00	0.00
2,900.0	7.00	198.29	2,891.3	-141.7	-46.8	-47.7	0.00	0.00	0.00
3,000.0	7.00	198.29	2,990.6	-153.3	-50.7 -54.5	-51.6	0.00	0.00	0.00
3,100.0 3,200.0	7.00 7.00	198.29 198.29	3,089.8 3,189.1	-164.9 -176.4	-54.5 -58.3	-55.4 -59.3	0.00 0.00	0.00 0.00	0.00 0.00
3,300.0	7.00	198.29	3,189.1	-176.4 -188.0	-56.3 -62.1	-59.3 -63.2	0.00	0.00	0.00
•									
3,400.0	7.00	198.29	3,387.6	-199.6	-66.0	-67.1	0.00	0.00	0.00
3,500.0	7.00	198.29	3,486.8	-211.1	-69.8	-71.0	0.00	0.00	0.00
3,600.0	7.00	198.29	3,586.1	-222.7	-73.6	-74.9	0.00	0.00	0.00
3,700.0	7.00	198.29	3,685.4	-234.3	-77.4	-78.8	0.00	0.00	0.00
3,800.0	7.00	198.29	3,784.6	-245.8	-81.3	-82.7	0.00	0.00	0.00
3,900.0	7.00	198.29	3,883.9	-257.4	-85.1	-86.6	0.00	0.00	0.00
4,000.0	7.00	198.29	3,983.1	-269.0	-88.9	-90.5	0.00	0.00	0.00
4,100.0	7.00	198.29	4,082.4	-280.5	-92.7	-94.3	0.00	0.00	0.00
4,200.0	7.00	198.29	4,181.6	-292.1	-96.6	-98.2	0.00	0.00	0.00
4,300.0	7.00	198.29	4,280.9	-303.7	-100.4	-102.1	0.00	0.00	0.00
4,400.0	7.00	198.29	4,380.1	-315.2	-104.2	-106.0	0.00	0.00	0.00
4,500.0	7.00	198.29	4,479.4	-326.8	-104.2	-100.0	0.00	0.00	0.00
4,600.0	7.00	198.29	4,578.6	-338.3	-111.9	-113.8	0.00	0.00	0.00
4,700.0	7.00	198.29	4,677.9	-349.9	-115.7	-117.7	0.00	0.00	0.00
4,800.0	7.00	198.29	4,777.2	-361.5	-119.5	-121.6	0.00	0.00	0.00
4,900.0	7.00	198.29	4,876.4	-373.0	-123.3	-125.5	0.00	0.00	0.00





Database: EDM 5000.15 Single User Db
Company: Admiral Permian Resources
Project: Eddy County, NM (NAD 83 NME)
Site: (War Pigeon) Sec6_T24S_R27E
Well: War Pigeon Fed Com #403H

Wellbore: OWB
Design: Plan #2

Local Co-ordinate Reference: TVD Reference: MD Reference: North Reference: Survey Calculation Method:

Design:	Pian #2								
Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
5,000.0	7.00	198.29	4,975.7	-384.6	-127.1	-129.4	0.00	0.00	0.00
5,100.0	7.00	198.29	5,074.9	-396.2	-131.0	-133.2	0.00	0.00	0.00
5,200.0	7.00	198.29	5,174.2	-407.7	-134.8	-137.1	0.00	0.00	0.00
5,300.0	7.00	198.29	5,273.4	-419.3	-138.6	-141.0	0.00	0.00	0.00
5,400.0	7.00	198.29	5,372.7	-430.9	-142.4	-144.9	0.00	0.00	0.00
5,500.0	7.00	198.29	5,471.9	-442.4	-146.3	-148.8	0.00	0.00	0.00
5,600.0	7.00	198.29	5,571.2	-454.0	-150.1	-152.7	0.00	0.00	0.00
5,700.0	7.00	198.29	5,670.5	-465.6	-153.9	-156.6	0.00	0.00	0.00
5,800.0	7.00	198.29	5,769.7	-477.1	-157.7	-160.5	0.00	0.00	0.00
5,900.0	7.00	198.29	5,869.0	-488.7	-161.6	-164.4	0.00	0.00	0.00
6,000.0	7.00	198.29	5,968.2	-500.3	-165.4	-168.3	0.00	0.00	0.00
6,100.0	7.00	198.29	6,067.5	-511.8	-169.2	-172.1	0.00	0.00	0.00
6,200.0	7.00	198.29	6,166.7	-523.4	-173.0	-176.0	0.00	0.00	0.00
6,300.0	7.00	198.29	6,266.0	-535.0	-176.9	-179.9	0.00	0.00	0.00
6,400.0	7.00	198.29	6,365.2	-546.5	-180.7	-183.8	0.00	0.00	0.00
6,436.0	7.00	198.29	6,401.0	-550.7	-182.1	-185.2	0.00	0.00	0.00
DROP2									
6,500.0	5.72	198.29	6,464.6	-557.4	-184.3	-187.5	2.00	-2.00	0.00
6,600.0	3.72	198.29	6,564.2	-565.2	-186.9	-190.1	2.00	-2.00	0.00
6,700.0	1.72	198.29	6,664.1	-569.7	-188.3	-191.6	2.00	-2.00	0.00
6,785.9	0.00	0.00	6,750.0	-571.0	-188.7	-192.0	2.00	-2.00	188.26
HOLD - 16	72.5 at 6785.9 M	MD	,						
6,800.0	0.00	0.00	6,764.1	-571.0	-188.7	-192.0	0.00	0.00	0.00
6,900.0	0.00	0.00	6,864.1	-571.0	-188.7	-192.0	0.00	0.00	0.00
7,000.0	0.00	0.00	6,964.1	-571.0	-188.7	-192.0	0.00	0.00	0.00
7,100.0	0.00	0.00	7,064.1	-571.0	-188.7	-192.0	0.00	0.00	0.00
7,200.0	0.00	0.00	7,164.1	-571.0	-188.7	-192.0	0.00	0.00	0.00
7,300.0	0.00	0.00	7,264.1	-571.0	-188.7	-192.0	0.00	0.00	0.00
7,400.0	0.00	0.00	7,364.1	-571.0	-188.7	-192.0	0.00	0.00	0.00
7,500.0	0.00	0.00	7,464.1	-571.0	-188.7	-192.0	0.00	0.00	0.00
7,600.0	0.00	0.00	7,564.1	-571.0	-188.7	-192.0	0.00	0.00	0.00
7,700.0	0.00	0.00	7,664.1	-571.0	-188.7	-192.0	0.00	0.00	0.00
7,800.0	0.00	0.00	7,764.1	-571.0	-188.7	-192.0	0.00	0.00	0.00
7,900.0	0.00	0.00	7,864.1	-571.0	-188.7	-192.0	0.00	0.00	0.00
8,000.0	0.00	0.00	7,964.1	-571.0	-188.7	-192.0	0.00	0.00	0.00
8,100.0	0.00	0.00	8,064.1	-571.0	-188.7	-192.0	0.00	0.00	0.00
8,200.0	0.00	0.00	8,164.1	-571.0	-188.7	-192.0	0.00	0.00	0.00
8,300.0	0.00	0.00	8,264.1	-571.0	-188.7	-192.0	0.00	0.00	0.00
8,400.0	0.00	0.00	8,364.1	-571.0	-188.7	-192.0	0.00	0.00	0.00
8,458.4	0.00	0.00	8,422.5	-571.0	-188.7	-192.0	0.00	0.00	0.00
	6 12.00 TFO 89.		0.400.4	E74.0	400.5	404 7	40.00	40.00	0.00
8,475.0	1.99	89.67	8,439.1	-571.0	-188.5	-191.7	12.00	12.00	0.00
8,500.0	4.99	89.67	8,464.1	-571.0	-186.9	-190.2	12.00	12.00	0.00
8,525.0	7.99	89.67	8,488.9	-570.9	-184.1	-187.4	12.00	12.00	0.00
8,550.0	10.99	89.67	8,513.5	-570.9	-180.0	-183.3	12.00	12.00	0.00
8,575.0	13.99	89.67	8,537.9	-570.9	-174.6	-177.9	12.00	12.00	0.00
8,600.0	16.99	89.67	8,562.0	-570.9	-167.9	-171.2	12.00	12.00	0.00
8,625.0	19.99	89.67	8,585.7	-570.8	-160.0	-163.3	12.00	12.00	0.00
8,650.0	22.99	89.67	8,609.0	-570.8	-150.8	-154.1	12.00	12.00	0.00
8,675.0	25.99	89.67	8,631.8	-570.7	-140.5	-143.7	12.00	12.00	0.00
8,700.0	28.99	89.67	8,653.9	-570.6	-128.9	-132.2	12.00	12.00	0.00
8,725.0	31.99	89.67	8,675.5	-570.6	-116.2	-119.5	12.00	12.00	0.00
8,750.0	34.99	89.67	8,696.3	-570.5	-102.4	-105.7	12.00	12.00	0.00





Database: EDM 5000.15 Single User Db
Company: Admiral Permian Resources
Project: Eddy County, NM (NAD 83 NME)
Site: (War Pigeon) Sec6_T24S_R27E
Well: War Pigeon Fed Com #403H

Wellbore: OWB
Design: Plan #2

Local Co-ordinate Reference: TVD Reference: MD Reference: North Reference: Survey Calculation Method:

Design:	Plan #2								
Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
8,775.0 8,800.0 8,825.0 8,850.0	37.99 40.99 43.99 46.99	89.67 89.67 89.67	8,716.4 8,735.7 8,754.1 8,771.7	-570.4 -570.3 -570.2 -570.1	-87.6 -71.7 -54.8 -37.0	-90.9 -75.0 -58.1 -40.2	12.00 12.00 12.00 12.00	12.00 12.00 12.00 12.00	0.00 0.00 0.00 0.00
8,875.0	49.99	89.67	8,788.2	-570.0	-18.2	-21.5	12.00	12.00	0.00
8,900.0	52.99	89.67	8,803.8	-569.9	1.3	-2.0	12.00	12.00	0.00
8,925.0	55.99	89.67	8,818.3	-569.8	21.7	18.4	12.00	12.00	0.00
8,950.0	58.99	89.67	8,831.7	-569.6	42.7	39.5	12.00	12.00	0.00
8,975.0	61.99	89.67	8,844.0	-569.5	64.5	61.2	12.00	12.00	0.00
9,000.0	64.99	89.67	8,855.2	-569.4	86.9	83.6	12.00	12.00	0.00
9,025.0	67.99	89.67	8,865.2	-569.3	109.8	106.5	12.00	12.00	0.00
9,047.9	70.74	89.67	8,873.2	-569.1	131.2	127.9	12.00	12.00	0.00
_	9047.9'MD								
9,050.0	70.99	89.67	8,873.9	-569.1	133.2	129.9	12.00	12.00	0.00
9,075.0	73.99	89.67	8,881.5	-569.0	157.0	153.8	12.00	12.00	0.00
9,100.0 9,125.0 9,150.0 9,175.0 9,200.0	76.99 79.99 82.99 85.99 88.99	89.67 89.67 89.67 89.67	8,887.7 8,892.7 8,896.4 8,898.8 8,899.9	-568.8 -568.7 -568.6 -568.4 -568.3	181.2 205.7 230.5 255.3 280.3	178.0 202.5 227.2 252.1 277.0	12.00 12.00 12.00 12.00 12.00	12.00 12.00 12.00 12.00 12.00	0.00 0.00 0.00 0.00 0.00
9,208.4	90.00	89.67	8,900.0	-568.2	288.7	285.4	12.00	12.00	0.00
	1.7 hold at 9208								
9,300.0	90.00	89.67	8,900.0	-567.7	380.3	377.0	0.00	0.00	0.00
9,400.0	90.00	89.67	8,900.0	-567.1	480.3	477.0	0.00	0.00	0.00
9,500.0	90.00	89.67	8,900.0	-566.6	580.3	577.0	0.00	0.00	0.00
9,600.0	90.00	89.67	8,900.0	-566.0	680.3	677.0	0.00	0.00	0.00
9,700.0	90.00	89.67	8,900.0	-565.4	780.3	777.0	0.00	0.00	0.00
9,800.0	90.00	89.67	8,900.0	-564.8	880.3	877.0	0.00	0.00	0.00
9,900.0	90.00	89.67	8,900.0	-564.3	980.3	977.0	0.00	0.00	0.00
10,000.0	90.00	89.67	8,900.0	-563.7	1,080.3	1,077.0	0.00	0.00	0.00
10,100.0 10,200.0	90.00 90.00	89.67 89.67	8,900.0 8,900.0	-563.1 -562.5	1,180.3 1,280.3	1,177.0 1,277.0	0.00	0.00	0.00 0.00
10,300.0	90.00	89.67	8,900.0	-562.0	1,380.3	1,377.0	0.00	0.00	0.00
10,400.0	90.00	89.67	8,900.0	-561.4	1,480.3	1,477.0	0.00	0.00	0.00
10,500.0	90.00	89.67	8,900.0	-560.8	1,580.3	1,577.0	0.00	0.00	0.00
10,600.0	90.00	89.67	8,900.0	-560.3	1,680.3	1,677.0	0.00	0.00	0.00
10,700.0	90.00	89.67	8,900.0	-559.7	1,780.3	1,777.0	0.00	0.00	0.00
10,800.0	90.00	89.67	8,900.0	-559.1	1,880.3	1,877.0	0.00	0.00	0.00
10,900.0	90.00	89.67	8,900.0	-558.5	1,980.3	1,977.0	0.00	0.00	0.00
11,000.0	90.00	89.67	8,900.0	-558.0	2,080.3	2,077.0	0.00	0.00	0.00
11,100.0	90.00	89.67	8,900.0	-557.4	2,180.3	2,177.0	0.00	0.00	0.00
11,200.0	90.00	89.67	8,900.0	-556.8	2,280.3	2,277.0	0.00	0.00	0.00
11,300.0	90.00	89.67	8,900.0	-556.2	2,380.3	2,377.0	0.00	0.00	0.00
11,400.0	90.00	89.67	8,900.0	-555.7	2,480.3	2,477.0	0.00	0.00	0.00
11,500.0	90.00	89.67	8,900.0	-555.1	2,580.3	2,577.0	0.00	0.00	0.00
11,600.0	90.00	89.67	8,900.0	-554.5	2,680.3	2,677.0	0.00	0.00	0.00
11,700.0	90.00	89.67	8,900.0	-553.9	2,780.3	2,777.0	0.00	0.00	0.00
11,800.0	90.00	89.67	8,900.0	-553.4	2,880.3	2,877.0	0.00	0.00	0.00
11,900.0	90.00	89.67	8,900.0	-552.8	2,980.3	2,977.0	0.00	0.00	0.00
12,000.0	90.00	89.67	8,900.0	-552.2	3,080.3	3,077.0	0.00	0.00	0.00
12,100.0	90.00	89.67	8,900.0	-551.7	3,180.3	3,177.0	0.00	0.00	0.00
12,200.0	90.00	89.67	8,900.0	-551.1	3,280.3	3,277.0	0.00	0.00	0.00
12,300.0	90.00	89.67	8,900.0	-550.5	3,380.3	3,377.0	0.00	0.00	0.00
12,400.0	90.00	89.67	8,900.0	-549.9	3,480.3	3,477.0	0.00	0.00	0.00





Database: EDM 5000.15 Single User Db
Company: Admiral Permian Resources
Project: Eddy County, NM (NAD 83 NME)
Site: (War Pigeon) Sec6_T24S_R27E
Well: War Pigeon Fed Com #403H

Wellbore: OWB
Design: Plan #2

Local Co-ordinate Reference: TVD Reference: MD Reference: North Reference: Survey Calculation Method:

Design:	Plan #2								
Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
12,500.0 12,600.0	90.00 90.00	89.67 89.67	8,900.0 8,900.0	-549.4 -548.8	3,580.3 3,680.3	3,577.0 3,677.0	0.00 0.00	0.00 0.00	0.00 0.00
12,700.0 12,800.0 12,900.0 13,000.0 13,100.0	90.00 90.00 90.00 90.00 90.00	89.67 89.67 89.67 89.67 89.67	8,900.0 8,900.0 8,900.0 8,900.0 8,900.0	-548.2 -547.6 -547.1 -546.5 -545.9	3,780.3 3,880.3 3,980.3 4,080.2 4,180.2	3,777.0 3,877.0 3,977.0 4,077.0 4,177.0	0.00 0.00 0.00 0.00 0.00	0.00 0.00 0.00 0.00 0.00	0.00 0.00 0.00 0.00 0.00
13,200.0 13,300.0 13,400.0 13,500.0 13,600.0	90.00 90.00 90.00 90.00 90.00	89.67 89.67 89.67 89.67 89.67	8,900.0 8,900.0 8,900.0 8,900.0 8,900.0	-545.3 -544.8 -544.2 -543.6 -543.1	4,280.2 4,380.2 4,480.2 4,580.2 4,680.2	4,277.0 4,377.0 4,477.0 4,577.0 4,677.0	0.00 0.00 0.00 0.00 0.00	0.00 0.00 0.00 0.00 0.00	0.00 0.00 0.00 0.00 0.00
13,700.0 13,800.0 13,900.0 13,901.6	90.00 90.00 90.00 90.00	89.67 89.67 89.67 89.67	8,900.0 8,900.0 8,900.0 8,900.0	-542.5 -541.9 -541.3 -541.3	4,780.2 4,880.2 4,980.2 4,981.8	4,777.0 4,877.0 4,977.0 4,978.6	0.00 0.00 0.00 0.00	0.00 0.00 0.00 0.00	0.00 0.00 0.00 0.00
PP2 @ 139 14,000.0	01.6'MD 90.00	89.67	8,900.0	-540.8	5,080.2	5,077.0	0.00	0.00	0.00
14,100.0 14,200.0 14,300.0 14,400.0 14,500.0	90.00 90.00 90.00 90.00 90.00	89.67 89.67 89.67 89.67 89.67	8,900.0 8,900.0 8,900.0 8,900.0 8,900.0	-540.8 -540.2 -539.6 -539.0 -538.5 -537.9	5,080.2 5,180.2 5,280.2 5,380.2 5,480.2 5,580.2	5,077.0 5,177.0 5,277.0 5,377.0 5,477.0 5,577.0	0.00 0.00 0.00 0.00 0.00 0.00	0.00 0.00 0.00 0.00 0.00 0.00	0.00 0.00 0.00 0.00 0.00 0.00
14,600.0 14,700.0 14,800.0 14,900.0 15,000.0	90.00 90.00 90.00 90.00 90.00	89.67 89.67 89.67 89.67 89.67	8,900.0 8,900.0 8,900.0 8,900.0 8,900.0	-537.3 -536.8 -536.2 -535.6 -535.0	5,680.2 5,780.2 5,880.2 5,980.2 6,080.2	5,677.0 5,777.0 5,877.0 5,977.0 6,077.0	0.00 0.00 0.00 0.00 0.00	0.00 0.00 0.00 0.00 0.00	0.00 0.00 0.00 0.00 0.00
15,100.0 15,200.0 15,300.0 15,400.0 15,500.0	90.00 90.00 90.00 90.00 90.00	89.67 89.67 89.67 89.67	8,900.0 8,900.0 8,900.0 8,900.0 8,900.0	-534.5 -533.9 -533.3 -532.7 -532.2	6,180.2 6,280.2 6,380.2 6,480.2 6,580.2	6,177.0 6,277.0 6,377.0 6,477.0 6,577.0	0.00 0.00 0.00 0.00 0.00	0.00 0.00 0.00 0.00 0.00	0.00 0.00 0.00 0.00 0.00
15,600.0 15,700.0 15,800.0 15,900.0 16,000.0	90.00 90.00 90.00 90.00 90.00	89.67 89.67 89.67 89.67	8,900.0 8,900.0 8,900.0 8,900.0 8,900.0	-531.6 -531.0 -530.4 -529.9 -529.3	6,680.2 6,780.2 6,880.2 6,980.2 7,080.2	6,677.0 6,777.0 6,877.0 6,977.0 7,077.0	0.00 0.00 0.00 0.00 0.00	0.00 0.00 0.00 0.00 0.00	0.00 0.00 0.00 0.00 0.00
16,100.0 16,200.0 16,300.0 16,400.0 16,500.0	90.00 90.00 90.00 90.00 90.00	89.67 89.67 89.67 89.67	8,900.0 8,900.0 8,900.0 8,900.0 8,900.0	-528.7 -528.2 -527.6 -527.0 -526.4	7,180.2 7,280.2 7,380.2 7,480.2 7,580.2	7,177.0 7,277.0 7,377.0 7,477.0 7,577.0	0.00 0.00 0.00 0.00 0.00	0.00 0.00 0.00 0.00 0.00	0.00 0.00 0.00 0.00 0.00
16,600.0 16,700.0 16,800.0 16,900.0 17,000.0	90.00 90.00 90.00 90.00 90.00	89.67 89.67 89.67 89.67 89.67	8,900.0 8,900.0 8,900.0 8,900.0 8,900.0	-525.9 -525.3 -524.7 -524.1 -523.6	7,680.2 7,780.2 7,880.2 7,980.2 8,080.2	7,677.0 7,777.0 7,877.0 7,977.0 8,077.0	0.00 0.00 0.00 0.00 0.00	0.00 0.00 0.00 0.00 0.00	0.00 0.00 0.00 0.00 0.00
17,100.0 17,200.0 17,300.0 17,400.0 17,500.0	90.00 90.00 90.00 90.00 90.00	89.67 89.67 89.67 89.67 89.67	8,900.0 8,900.0 8,900.0 8,900.0 8,900.0	-523.0 -522.4 -521.8 -521.3 -520.7	8,180.2 8,280.2 8,380.2 8,480.2 8,580.2	8,177.0 8,277.0 8,377.0 8,477.0 8,577.0	0.00 0.00 0.00 0.00 0.00	0.00 0.00 0.00 0.00 0.00	0.00 0.00 0.00 0.00 0.00





Database: EDM 5000.15 Single User Db
Company: Admiral Permian Resources
Project: Eddy County, NM (NAD 83 NME)
Site: (War Pigeon) Sec6_T24S_R27E
Well: War Pigeon Fed Com #403H

Wellbore: OWB
Design: Plan #2

Local Co-ordinate Reference: TVD Reference: MD Reference: North Reference: Survey Calculation Method:

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
17,600.0 17,700.0 17,800.0 17,900.0 18,000.0 18,100.0 18,200.0 18,300.0 18,400.0 18,500.0 18,700.0 18,800.0	90.00 90.00 90.00 90.00 90.00 90.00 90.00 90.00 90.00 90.00 90.00	89.67 89.67 89.67 89.67 89.67 89.67 89.67 89.67 89.67 89.67 89.67	8,900.0 8,900.0 8,900.0 8,900.0 8,900.0 8,900.0 8,900.0 8,900.0 8,900.0 8,900.0 8,900.0	-520.1 -519.6 -519.0 -518.4 -517.8 -517.3 -516.7 -516.1 -515.5 -515.0 -514.4 -513.8 -513.2	8,680.2 8,780.2 8,880.2 9,080.2 9,180.2 9,280.2 9,380.2 9,580.2 9,680.2 9,780.2 9,880.2	8,677.0 8,777.0 8,877.0 9,077.0 9,177.0 9,277.0 9,377.0 9,477.0 9,577.0 9,777.0	0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.0	0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.0	0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.0
18,850.0 LTP @ 188	90.00 50'MD	89.67	8,900.0	-513.0	9,930.2	9,927.0	0.00	0.00	0.00
18,900.0	90.00	89.67	8,900.0	-512.7	9,980.2	9,977.0	0.00	0.00	0.00
19,000.0 19,080.1	90.00 90.00	89.67 89.67	8,900.0 8,900.0	-512.1 -511.6	10,080.2 10,160.3	10,077.0 10,157.1	0.00 0.00	0.00 0.00	0.00 0.00
TD at 19080	D.1								

Design Targets									
Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
PP2 (War Pigeon Fed - plan misses targe - Point	0.00 t center by 3	0.00 3usft at 139	8,900.0 901.6usft M	-544.6 ID (8900.0 T\	4,981.8 VD, -541.3 N	451,072.07 , 4981.8 E)	576,025.37	32° 14' 24.083 N	104° 13' 16.102 W
LTP (War Pigeon Fed - plan misses targe - Point	0.00 t center by 0	0.00 1usft at 188	8,900.0 850.1usft M	-512.9 ID (8900.0 T\	9,930.2 VD, -513.0 N	451,103.80 , 9930.2 E)	580,973.76	32° 14' 24.343 N	104° 12' 18.484 W
KOP (War Pigeon Fed - plan misses targe - Point		0.00 97.8usft at 8	8,900.0 8831.7usft	-571.0 MD (8758.9 T	-188.7 FVD, -570.2 i	451,045.73 N, -50.1 E)	570,854.78	32° 14′ 23.872 N	104° 14' 16.307 W
BHL (War Pigeon Fed - plan hits target ce - Point	0.00 nter	0.00	8,900.0	-511.6	10,160.3	451,105.06	581,203.79	32° 14' 24.352 N	104° 12' 15.805 W
FTP/PP1 (War Pigeon - plan misses targe - Point		0.00 5.3usft at 90	8,900.0 056.0usft M	-569.3 ID (8875.8 T\	131.2 VD, -569.1 N	451,047.37 , 138.9 E)	571,174.78	32° 14' 23.886 N	104° 14' 12.581 W





Database: EDM 5000.15 Single User Db Company: Admiral Permian Resources
Project: Eddy County, NM (NAD 83 NME)
Site: (War Pigeon) Sec6_T24S_R27E
Well: War Pigeon Fed Com #403H

Wellbore: OWB
Design: Plan #2

Local Co-ordinate Reference: TVD Reference: MD Reference: North Reference:

Survey Calculation Method:

Formations						
	Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)
	450.0	450.0	Rustler			
	730.0	730.0	Top Salt			
	1,703.2	1,703.0	Base Salt			
	1,953.6	1,952.0	Lamar			
	2,068.5	2,066.0	Bell Canyon			
	2,840.2	2,832.0	Cherry Canyon			
	3,851.8	3,836.0	Brushy Canyon			
	5,444.6	5,417.0	Bone Spring			
	5,444.6	5,417.0	Avalon			
	6,480.3	6,445.0	1st Bone Spring Sand			
	6,968.9	6,933.0	2nd Bone Spring Sand			
	7,182.9	7,147.0	3rd Bone Spring Carb			
	8,425.9	8,390.0	3rd Bone Spring Sand			
	8,813.8	8,746.0	Wolfcamp			

Plan Annotations				
Measure Depth (usft)	d Vertical Depth (usft)	Local Co +N/-S (usft)	oordinates +E/-W (usft)	Comment
1,500	0 1,500.0	0.0	0.0	NUDGE - Build 2.00
1,849	9 1,849.0	-20.3	-6.7	HOLD - 4586.2 at 1849.9 MD
6,436	0 6,401.0	-550.7	-182.1	DROP2.00
6,785	9 6,750.0	-571.0	-188.7	HOLD - 1672.5 at 6785.9 MD
8,458	4 8,422.5	-571.0	-188.7	KOP - DLS 12.00 TFO 89.67
9,047	9 8,873.2	-569.1	131.2	FTP/PP1 @ 9047.9'MD
9,208	4 8,900.0	-568.2	288.7	EOC - 9871.7 hold at 9208.4 MD
13,901	6 8,900.0	-541.3	4,981.8	PP2 @ 13901.6'MD
18,850	0 8,900.0	-513.0	9,930.2	LTP @ 18850'MD
19,080	1 8,900.0	-511.6	10,160.3	TD at 19080.1

State of New Mexico Energy, Minerals and Natural Resources Department

Submit Electronically Via E-permitting

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description Effective May 25, 2021

I. Operator: ADMIRAI	PERMIAN O	PERATING, LLC	OGRID: _3	32762		Date:	1 /	1_/_25
II. Type: ☑ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.								
If Other, please describe	::							
III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.								
Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D				Anticipated oduced Water BBL/D
WAR PIGEON FED	30-015-	M-6-24S-27E		200	2,000	0 625		
COM 403H			200 FWL	1				
IV. Central Delivery Point Name: TARGA MIDSTREAM SERVICES (24650) @ COG's BLACK RIVER STATE 4H M-5-24S-27E V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.								
Well Name	API	Spud Date	TD Reached Date	Completion Commencemen		Initial Flow Back Date		First Production Date
WAR PIGEON FED	30-015-	9-1-25	11-1-25	12-1-25		1-1-26		2-1-26
COM 403H								
VI. Separation Equipment: ✓ Attach a complete description of how Operator will size separation equipment to optimize gas capture. VII. Operational Practices: ✓ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC. VIII. Best Management Practices: ✓ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.								

Section 2 – Enhanced Plan EFFECTIVE APRIL 1, 2022

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section. Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area. IX. Anticipated Natural Gas Production: Well API Anticipated Average Anticipated Volume of Natural Natural Gas Rate MCF/D Gas for the First Year MCF X. Natural Gas Gathering System (NGGS): ULSTR of Tie-in **Anticipated Gathering** Available Maximum Daily Capacity Operator System Start Date of System Segment Tie-in XI. Map. \square Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected. XII. Line Capacity. The natural gas gathering system \square will \square will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production. XIII. Line Pressure. Operator \square does \square does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s). ☐ Attach Operator's plan to manage production in response to the increased line pressure. XIV. Confidentiality:
Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

Section 3 - Certifications <u>Effective May 25, 2021</u>

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal: 🗹 Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system: or ☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system. If Operator checks this box, Operator will select one of the following: Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or Venting and Flaring Plan.

Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including: power generation on lease; (a) **(b)** power generation for grid; compression on lease; (c) (d) liquids removal on lease; reinjection for underground storage; (e) **(f)** reinjection for temporary storage; **(g)** reinjection for enhanced oil recovery;

(i) other alternative beneficial uses approved by the division.

fuel cell production; and

(h)

- 1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:
- (a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

Section 4 - Notices

- (b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.
- 2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature:	Billocal
Printed Name:	Brian Wood
Title:	Consultant
E-mail Address:	brian@permitswest.com
Date:	1-1-25
Phone:	505 466-8120
	OIL CONSERVATION DIVISION (Only applicable when submitted as a standalone form)
Approved By:	
Title:	
Approval Date:	
Conditions of Approval:	

VI. SEPARATION EQUIPMENT

Admiral Permian Operating, LLC (Admiral) tentatively plans to install a heater-treater, gas scrubber, separator, flare, vapor recovery unit, vapor recovery pipes for all tanks, and oil and water tanks.

VII. OPERATIONAL PRACTICES

NMAC 19.15.27.8 (A) Venting & Flaring of Natural Gas

1. Admiral will comply NMAC 19.15.27.8 – venting and flaring of gas during drilling, completion, or production that constitutes waste as defined in 19.15.2 is banned.

NMAC 19.15.27.8 (B) Venting & Flaring During Drilling

- 1. Admiral will capture or combust gas if technically feasible during drilling operations using best industry practices.
- 2. A flare stack with a 100% capacity for expected volume will be set on the pad ≥100 feet from the nearest well head and storage tank.
- 3. In an emergency, Admiral will vent gas in order to avoid substantial impact. Admiral will report vented or flared gas to the NMOCD.

NMAC 19.15.27.8 (C) Venting & Flaring During Completion or Recompletion

- 1. Facilities will be built and ready from the first day of flowback
- 2. Test separator will be properly separate gas and liquids. Temporary test separator will be used initially to process volumes. In addition, separator will be tied into flowback tanks which will be tied into the gas processing equipment for sale down a pipeline.
- 3. Should the facility not be ready to process gas, or the gas does not meet quality standards, then storage tanks will be set that are tied into gas busters or a temporary flare to manage all gas. This flare would meet the following requirements:
 - a) An appropriately sized flare stack with an automatic igniter
 - b) Admiral analyzes gas samples twice a week



- c) Admiral flows the gas into a gathering line as soon as the pipeline specifications are met
- d) Admiral provides the NMOCD with pipeline specifications and natural gas data.

NMAC 19.15.27.8 (D) Venting & Flaring During Production Admiral will not vent or flare natural gas except:

- 1. During an emergency or malfunction
- 2. To unload or clean-up liquid holdup in a well to atmospheric pressure, provided
 - a) Admiral does not vent after the well achieves a stabilized rate and pressure
 - b) Admiral will be on-site while unloading liquids by manual purging and take all reasonable actions to achieve a stabilized rate and pressure as soon as possible
 - c) Admiral will optimize the system to minimize gas venting if the well is equipped with a plunger lift or auto control system
 - d) Best management practices will be used during downhole well maintenance.
- 3. During the first year of production from an exploratory well provided
 - a) Admiral receives approval from the NMOCD
 - b) Admiral stays in compliance with NMOCD gas capture requirements
 - c) Admiral submits an updated C-129 form to the NMOCD
- 4. During the following activities unless prohibited
 - a) Gauging or sampling a storage tank or low-pressure production vessel
 - b) Loading out liquids from a storage tank
 - c) Repair and maintenance
 - d) Normal operation of a gas-activated pneumatic controller or pump
 - e) Normal operation of a storage tank but not including venting from a thief hatch
 - f) Normal operation of dehydration units
 - g) Normal operations of compressors, engines, turbines, valves, flanges, & connectors
 - h) During a Braden head, packer leak test, or production test lasting <24 hours
 - i) When natural gas does not meet the gathering line specifications
 - j) Commissioning of lines, equipment, or facilities only for as long as necessary to purge introduced impurities.



NMAC 19.15.27.8 (E) Performance Standards

- Admiral used a safety factor to design the separation and storage equipment.
 The equipment will be routed to a vapor recovery system and uses a flare as back up for startup, shutdown, maintenance, or malfunction of the VRU system.
- 2. Admiral will install a flare that will handle the full facility vapor volume in case the VRU fails. It will have an auto-ignition system.
- 3. Flare stacks will be appropriately sized and designed to ensure proper combustion efficiency
 - a) Flare stacks installed or replaced will be equipped with an automatic ignitor or continuous pilot.
 - b) Previously installed flare stacks will be retrofitted within 18 months of May 25, 2021, with an automatic ignitor, continuous pilot, or technology that alerts Admiral to flare malfunction.
 - c) Flare stacks replaced after May 25, 2021, will be equipped with an automatic ignitor or continuous pilot if at a well or facility with an average production of \leq 60 Mcfd of natural gas.
 - d) Flare stacks will be located >100 feet from well head and storage tanks and securely anchored.
- 4. Admiral will conduct an audio/visual/olfactory inspection on all components for leaks and defects every week.
- 5. Admiral will make and keep records of AVO inspections available to the NMOCD for at least 5 years.
- 6. Admiral may use a remote or automated monitoring technology to detect leaks and releases in lieu of AVO inspections with prior NMOCD approval.
- 7. Facilities will be designed to minimize waste.
- 8. Admiral will resolve emergencies as promptly as possible.

NMAC 19.15.27.8 (F) Measuring or Estimating Vented & Flared Natural Gas

- 1. Admiral will have meters on both the low pressure and high-pressure sides of the flares. Volumes will be recorded in the SCADA system.
- 2. Admiral will install equipment to measure the volume of flared natural gas that has an average production of \geq 60 Mcfd.
- 3. Admiral's measuring equipment will conform to industry standards.
- 4. Measurement system will be designed such that it cannot be bypassed except for inspections and servicing the meters.



- 5. Admiral will estimate the volume of vented or flared gas using a methodology that can be independently verified if metering is not practicable due to low flow rate or pressure.
- 6. Admiral will estimate the volume of vented and flared gas based on the results of an annual GOR test for wells that do not require measuring equipment reported on form C-116.
- 7. Admiral will install measuring equipment whenever the NMOCD determines that metering is necessary.

VIII. Best Management Practices

Admiral will minimize venting during maintenance by:

- 1. Designing and operating system to route storage tank and process equipment emissions to the VRU. If the VRU is inoperable, then vapors will be routed to the flare.
- 2. Scheduling maintenance for multiple tasks to minimize the need for blowdowns.
- 3. After completion of maintenance, gas will be flared until it meets pipeline specifications.

