Received by UCD: 3/17/2025 7:40:30 AM U.S. Department of the Interior BUREAU OF LAND MANAGEMENT		Sundry Print Report 03/17/2025
Well Name: MEYER B-31	Well Location: T20S / R38E / SEC 31 / NESW / 32.5285849 / -103.1903755	County or Parish/State: LEA / NM
Well Number: 05	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM2511	Unit or CA Name:	Unit or CA Number: NMNM104043
US Well Number: 300253496000S1	Operator: MAVERICK PERMIAN LLC	

Notice of Intent

Sundry ID: 2833903

Type of Submission: Notice of Intent

Date Sundry Submitted: 01/27/2025

Date proposed operation will begin: 01/27/2025

Type of Action: Temporary Abandonment Time Sundry Submitted: 07:29 0

Procedure Description: Maverick Permian LLC is requesting approval of the attached TA plan. Maverick Permian is planning to repattern the field in 2026 and this well will be converted to an injector. We will go through all state and federal permitting for UIC permit.

Surface Disturbance

Is any additional surface disturbance proposed?: No

NOI Attachments

Procedure Description

MEYER_B_31_05_TA_Procedure_Submittal_20250205125204.pdf

Received by OCD: 3/17/2025 7:40:30 AM Well Name: MEYER B-31	Well Location: T20S / R38E / SEC 31 / NESW / 32.5285849 / -103.1903755	County or Parish/State: LEAT 2 of 10 NM
Well Number: 05	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM2511	Unit or CA Name:	Unit or CA Number: NMNM104043
US Well Number: 300253496000S1	Operator: MAVERICK PERMIAN LLC	
)

Conditions of Approval

Specialist Review

TA_COA_20250313200517.pdf

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: NICOLE LEE

Signed on: FEB 24, 2025 12:04 PM

Name: MAVERICK PERMIAN LLC

Title: Regulatory Lead

Street Address: 1000 MAIN STREET SUITE 2900

City: HOUSTON

Phone: (713) 437-8097

Email address: NICOLE.LEE@MAVRESOURCES.COM

Field

Representative Name: Street Address:

State:

State: TX

Phone:

City:

Email address:

BLM Point of Contact

BLM POC Name: JONATHON W SHEPARD BLM POC Phone: 5752345972 Disposition: Approved Signature: Jonathon Shepard

BLM POC Title: Petroleum Engineer

Zip:

BLM POC Email Address: jshepard@blm.gov

Disposition Date: 03/13/2025

Received by OCD: 3/17/2025 7:40:30 AM

cectrea by 0 cb. 5					I uge o oj	
Form 3160-5 (June 2019)		UNITED STATE PARTMENT OF THE I EAU OF LAND MAN	NTERIOR	ON	DRM APPROVED MB No. 1004-0137 res: October 31, 2021	
Do no	t use this i	IOTICES AND REPO form for proposals t Use Form 3160-3 (A	6. If Indian, Allottee or Tribe N	ame		
	SUBMIT IN	TRIPLICATE - Other instru	uctions on page 2	7. If Unit of CA/Agreement, Name and/or No.		
1. Type of Well Oil Well	Gas V	Vell Other		8. Well Name and No.		
2. Name of Operator				9. API Well No.		
3a. Address			3b. Phone No. (include area code)	10. Field and Pool or Exploratory Area		
4. Location of Well (Foo	otage, Sec., T.,H	R.,M., or Survey Description))	11. Country or Parish, State		
	12. CHE	CK THE APPROPRIATE B	OX(ES) TO INDICATE NATURE (OF NOTICE, REPORT OR OTH	ER DATA	
TYPE OF SUBM	IISSION		TYPI	E OF ACTION		
Notice of Intent		Acidize	Deepen Hydraulic Fracturing	Production (Start/Resume) Reclamation	Water Shut-Off Well Integrity	
Subsequent Repo	ort	Casing Repair Change Plans	New Construction Plug and Abandon	Recomplete Temporarily Abandon	Other	
Final Abandonme	ent Notice	Convert to Injection	Plug Back	Water Disposal		
the proposal is to de the Bond under whic completion of the in	epen directiona ch the work wil wolved operation andonment No	Illy or recomplete horizontal be perfonned or provide th ons. If the operation results in	ly, give subsurface locations and me e Bond No. on file with BLM/BIA. n a multiple completion or recomple	asured and true vertical depths of Required subsequent reports mus ption in a new interval, a Form 31	k and approximate duration thereof. If f all pertinent markers and zones. Attach t be filed within 30 days following 60-4 must be filed once testing has been e operator has detennined that the site	

14. I hereby certify that the foregoing is true and correct. Name (<i>Printed/Typed</i>)							
	Title						
Simpler	Data						
Signature	Date						
THE SPACE FOR FEDE	THE SPACE FOR FEDERAL OR STATE OFICE USE						
Approved by							
	Title	Date					
Conditions of approval, if any, are attached. Approval of this notice does not warrant certify that the applicant holds legal or equitable title to those rights in the subject leave which would entitle the applicant to conduct operations thereon.							
Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a crime for an any false, fictitious or fraudulent statements or representations as to any matter within		villfully to make to any department or agency of the U	United States				

(Instructions on page 2)

GENERAL INSTRUCTIONS

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

SPECIFIC INSTRUCTIONS

Item 4 - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve **hydraulic fracturing operations**, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c)and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

Additional Information

Location of Well

0. SHL: NESW / 2310 FSL / 1850 FWL / TWSP: 20S / RANGE: 38E / SECTION: 31 / LAT: 32.5285849 / LONG: -103.1903755 (TVD: 0 feet, MD: 0 feet) BHL: NESW / 2310 FSL / 1850 FWL / TWSP: 20S / SECTION: / LAT: 0.0 / LONG: 0.0 (TVD: 0 feet, MD: 0 feet)

1




1111 Bagby Street • Suite 1600 Houston • Texas • 77002 713-437-8000

MEYER B 31-05 TA Procedure

- 1. MIRU WOR & equipment.
- 2. Lock out/tag out pumping unit. Kill well if necessary.
- 3. Unlatch rods. LD horse head.
- 4. PU rods to verify if pump will unseat.
- 5. If severe paraffin encountered, use hot oil unit to pump hot lease salt water down tubing to wash rods.
- 6. TOOH, visually inspecting, verifying count, and kicking out any rods with visible damage or pitting.
- 7. Send insert pump to pump shop.
- 8. ND WH. NU BOP's.
- 9. Release TAC. Scan tubing out of hole and note condition of tubing and BHA.
- 10. Set CIBP within 25' of top perf at 7,543'.
- 11. Dump bail 35' of cement on top of plug.
- 12. TIH to tag top of cement. POOH with tubing.
- 13. Perform pressure test to verify integrity.
- 14. RDMO WOR & equipment.

.

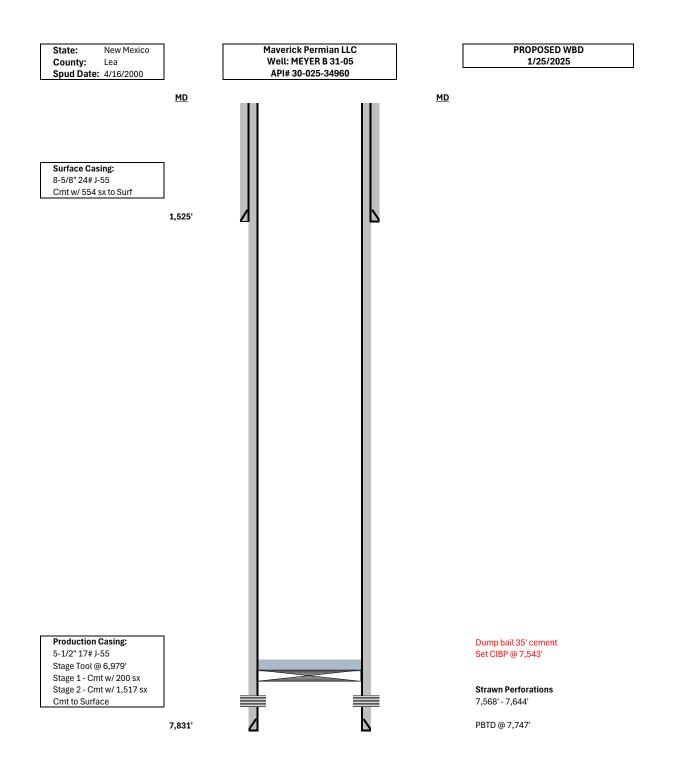

MAVERICK

MEYER B-31 05 Wellbore Diagram

Well Header				
API # 3002534960	NEW MEXICO	County LEA	District PERMIAN CONVENTIONAL	
		Region RG_SE_NEW_MEXICO	Area A_NM_SCATTERED	Total Depth (ftKB) 7,831.0

Wellbore Sectio	ons				A (D) ((T)			Vertical, MAIN HOLE, 1/26/2025 8:44:17 AM
SURFAC	ection Des		e (in) Act Top (ftKB)	Act Top (TVD) (ftKB) Act	Act Btm (TV Btm (ftKB) (ftKB) 1,525.0	D) Start Date End Date 4/16/2000 4/17/2000	MD	Vertical schematic (actual)
PROD1			7 7/8 1,525.0		7,831.0	4/18/2000 4/29/2000	(ftKB)	
Casing Strings			•		•	• •		
Casing String: S Casing Description	Run Dat	te OE	(in) OD Nom Max	(ID (in) ID Nom 8.10 8.097	Min (inWt/Len (Ib/ft) Stri	ng Grade Length (ft) Top (ftKB) Set Depth (TV 55 1,514.00 11.0	- 6.9 1	1
Surface	Joints in	2000 00:00 8				Btm (TVD)	- 9.8	
Item Des Surface Casing	Tally 0	OD (in) ID (i 8 5/8 8.	n) Wt (lb/ft) 0 097 24.00 J-55	irade Len (ft) 1,514.0	Qty Top (ftK 0 1	B) Btm (ftKB) Top (TVD) (ftKB) (ftKB) ' 11.0 1,525.0		
Casing String: F							- 11.2 -	
Casing Description Production	Run Dal 4/30/2		(in) OD Nom Max 1/2 5 1/2	(ID (in) ID Nom 4.87 4.872	Min (inWt/Len (Ib/ft) Strin 17.00 J-5	5 7,821.00 10.0	1 	Cement;
Item Des	Joints in Tally	OD (in) ID (i		irade Len (ft)	Qty Top (ftK	B) Btm (ftKB) Top (TVD) (ftKB) (ftKB)		11.0-1,525.0;
PRODUCITON CASING	0	5 1/2 4.	872 17.00 J-58	6,969.0	0 1	0.0 6,979.0	- 1,524.9	Surface; 8 5/8; 24.00; J-55; 1,525.0
Stage tool	0		872 17.00 J-55				- 2.408.1	
PRODUCTION CASING	0	5 1/2 4.	872 17.00 J-55	763.0	0 6,98	31.0 7,744.0	2,400.1	^^^^ Cement;
Float Collar	0		872 17.00 J-55				- 4,958.0 -	11.0-7,832.0;
Float Shoe Cement	0	5 1/2 4.	872 17.00 J-58	85.0	0 7,74	16.0 7,831.0		
Surface Casing	Cement						- 6,979.0 -	
Cementing Start Date 4/18/2000 00:00		Cementi 4/18/2	ng End Date 000 00:00		^{ng} rface, 1,525.0ftKB		- 6,981.0	
Stg #	Pump Start Date		Pump End Date	Top (ftKB)	Btm (ftKB 11.0 1,5) Top (TVD) (ftKB) Btm (TVD) (ftKB) 525.0		
Production Cas	ing Cement				11.0	520.0	- 7,419.0	
Cementing Start Date 4/30/2000 00:00		Cement 4/30/2	ing End Date 000 00:00	Stri	ng oduction, 7,831.0ft	KB	7,426.8	
Stg #	Pump Start Date		Pump End Date	Top (ftKB)	Btm (ftKB			
Cement Plug					7,0	552.0	- 7,488.8 -	
Cementing Start Date 5/1/2000 00:00		Cementi 5/1/20	ing End Date 00 00:00	Stri	ng		- 7,492.1 -	
Stg #	Pump Start Date	5, 1,20	Pump End Date	Top (ftKB)	Btm (ftKB		- ,,es2.1 -	
1 Tubing Strings				7,1	47.0 7,8	332.0	- 7,558.1 -	
Set Depth: 7,722				New MeRD (*)	D Mana Min Prin an av			HARDY STRAWN;NORTH;
Run Job REPAIR DOWN					2.28 6.50	L-80 Top (ftKB) Set Depth (T Len (ft) 10.0 7,712.00	- 7,567.9 -	7,568.0-7,644.0; Rerf; 7,568.0-7,574.0;
FAILURE, 1/23/2 00:00	2008						- 7,574.1 -	76.00 5/17/2000
Item I	Dee	Len (ft) C	ID (in) ID (in)	Wt (lb/ft) Grade	Tally Jts Run Tally Len (1	t) Top (ftKB) Btm (ftKB) (ftKB) (ftKB)		
Tubing	Des	7,409.00	2 7/8 2.44	6.50 L-80	Run Tally Len (1	10.0 7,419.0	- 7,583.0 -	
Marker Sub Tubing		8.00 62.00	2 7/8 2.44 2 7/8 2.44	6.50 L-80 6.50 L-80	0	7,419.0 7,427.0 7,427.0 7,489.0	- 7,585.0 -	
Anchor 5 1/2 X 2	2 7/8		4.995 2.44	30.00 TAC	0	7,489.0 7,492.0		
Tubing		194.00	2 7/8 2.44	6.50 L-80	0	7,492.0 7,686.0		Perf; 7,592.0-7,606.0;
Endura Joint Seating Nipple		30.00 1.00	2 7/8 2.44 2 7/8 2.28	6.50 L-80 SN	0	7,686.0 7,716.0 7,716.0 7,717.0		5/17/2000
SOPMA		5.00	2 7/8 2.28	SOPMA	0	7,717.0 7,722.0		
Rod Strings Set Depth: 7,718	8.0						7,609.9	
Rod Description Rod	Set Depth I	Run Date Ru 2/1/2008 R	IN Job	DD (in) Wt (lb/ft) Strin 3/4 1.63 SP	g Grade Top (ftKB)Set D CL 7.0	epth Set Depth String Components Strainer, Rod Insert Pump	- 7,611.9 -	
100	0	D	OWNHOLE	AP		(25-125-RHBC-24-6), Pump Handling Sub, Sinker Bar,	- 7,611.9 -	
			AILURE, 23/2008 00:00			Guided Centrilizer Sub, Sinker	7,628.0	
						Bar, Guided Centrilizer Sub, Sinker Bar, Guided Centrilizer		Perf; 7,628.0-7,644.0;
						Sub, Sinker Bar, Guided Centrilizer Sub, Sinker Bar,	- 7,637.1 -	5/17/2000
						Sucker Rod, Sucker Rod, Sucker Rod, Polished rod	7,639.1	
Length (ft) 26.00	OD Nominal (in) 1 1/2	Quantity	ID (in)	Weight/Length (lb/ft)	Grade	Top Depth (ftKB) 7.0 33.0		
Length (ft)	OD Nominal (in)	Quantity	ID (in)	Weight/Length (lb/ft)		Top Depth (ftKB) Bottom Depth (ftKB)	- 7,644.0 -	
2,375.00 Length (ft)	OD Nominal (in)	95 Quantity	ID (in)	2.90 Weight/Length (lb/ft)	SPCL APP Grade	33.0 2,408.0 Top Depth (ftKB) Bottom Depth (ftKB)	- 7,664.0	
2,550.00 Length (ft)	7/8 OD Nominal (in)	102 Quantity	ID (in)	2.22 Weight/Length (lb/ft)	SPCL APP Grade	2,408.0 4,958.0 Top Depth (ftKB) Bottom Depth (ftKB)		
2,600.00 Length (ft)	3/4 OD Nominal (in)	104 Quantity	ID (in)	1.63 Weight/Length (lb/ft)	SPCL APP Grade	4,958.0 7,558.0 Top Depth (ftKB) Bottom Depth (ftKB)	- 7,666.0 -	
25.00	1 1/2 OD Nominal (in)	1			ĸ	7,558.0 7,583.0	7,686.0	
Length (ft) 2.00	7/8	Quantity 1	ID (in)	Weight/Length (Ib/ft)	Grade SPCL APP	7,583.0 7,585.0	- 0.88 <i>0</i> , -	
Length (ft) 25.00	OD Nominal (in) 1 1/2	Quantity 1	ID (in)	Weight/Length (lb/ft)	Grade K	Top Depth (ftKB) Bottom Depth (ftKB) 7,585.0 7,610.0	- 7,690.9 -	
Length (ft) 2.00	OD Nominal (in) 7/8	Quantity 1	ID (in)	Weight/Length (lb/ft)	Grade SPCL APP	Top Depth (ftKB) Bottom Depth (ftKB) 7,610.0 7,612.0		
Length (ft) 25.00	OD Nominal (in) 1 1/2	Quantity	ID (in)	Weight/Length (Ib/ft)	Grade K	Top Depth (ftKB) 7,612.0 7,637.0	7,692.9	
Length (ft)	OD Nominal (in)	Quantity	ID (in)	Weight/Length (lb/ft)		Top Depth (ftKB) Bottom Depth (ftKB)	- 7,715.9 -	
2.00 Length (ft)	7/8 OD Nominal (in)	1 Quantity	ID (in)	Weight/Length (lb/ft)	SPCL APP Grade	7,637.0 7,639.0 Top Depth (ftKB) Bottom Depth (ftKB)		
25.00 Length (ft)	1 1/2 OD Nominal (in)	1 Quantity	ID (in)	Weight/Length (lb/ft)	K Grade	7,639.0 7,664.0 Top Depth (ftKB) Bottom Depth (ftKB)	- 7,716.9 -	
2.00 Length (ft)	7/8 OD Nominal (in)	1 Quantity	ID (in)	Weight/Length (Ib/ft)	SPCL APP Grade	7,664.0 7,666.0 Top Depth (ftKB) Bottom Depth (ftKB)	- 7,717.8 -	
25.00	1 1/2	1			к	7,666.0 7,691.0	- 1,/1/.8 -	析司。 4; Tubing -
Length (ft) 2.00	OD Nominal (in) 7/8	Quantity 1	ID (in)	Weight/Length (lb/ft)	Grade SPCL APP	Top Depth (ftKB) Bottom Depth (ftKB) 7,691.0 7,693.0		Production; 2 7/8;
Length (ft) 24.00	OD Nominal (in) 1 1/4	Quantity 1	ID (in)	Weight/Length (lb/ft)	Grade	Top Depth (ftKB) Bottom Depth (ftKB) 7,693.0 7,717.0		2.28; 10.0; 7,722.0
Length (ft) 1.00	OD Nominal (in) 1 1/4	Quantity 1	ID (in)	Weight/Length (lb/ft)	Grade	Top Depth (ftKB) Bottom Depth (ftKB) 7,717.0 7,718.0	_ 7,744.1 _	
Perforations			•		•		- 7,746.1 -	
Date		Top (ftKB)	Btm (ftKB)	Top (TVD) (ftKB)	Btm (TVD) (ftKB)	Shot Dens (shots/ft) Calculated Shot Total Btm - Top (ft)		Cement Plug;
5/17/2000 00:00 5/17/2000 00:00		7568 7592	7574 7606			4.0 25 6 4.0 57 14	- 7,747.0 -	7,747.0-7,832.0;
5/17/2000 00:00		7628	7644			4.0 65 16	- 7,831.0 -	Production; 5 1/2;
Deviation Surve	eys		Description		Job			17.00; J-55; 7,831.0
			Main Hole				- 7,832.0 -	
Incoi	a. 1/1/10	025 10.	00.16 41	r				L
v imagin	13: 4/4/2	<i>043 10</i> :	09:46 AM					

BUREAU OF LAND MANAGEMENT

Carlsbad Field Office 620 East Greene Street Carlsbad, New Mexico 88220 575-234-5972

Conditions of Approval for Temporary Abandonment of Wells

Definition: A temporarily abandoned well is a completion that is not capable of production in paying quantities, but which may have future value. Pursuant to 43 CFR 3162.3-4 (c), no well may be temporarily abandoned for more than 30 days without the prior approval of the authorized officer.

- 1. TA status will be effective for a period of up to one year from the date of sundry approval and can be renewed annually thereafter per IM NM-2016-017.
- 2. A bridge plug (CIBP) must be installed 50 to 100 feet above any open perforations/open hole/kick off point. The CIBP must be capped with either a minimum of 25 sacks of cement if placed with tubing or 35 feet of cement if placed with a bailer. The top of the cement must be verified by tagging.
- 3. The wellbore must be filled with corrosion inhibited fluid and pressure tested to 500 psi. The casing shall be capable of holding this pressure for at least 30 minutes. If the well does not pass the casing integrity test, then the operator shall, within 30 days, submit a procedure to either repair the casing or to plug and abandon the well.
- 4. Contact the appropriate BLM office at least 24 hours prior to the scheduled Casing Integrity Test. For wells in Eddy County, 575-361-2822; Lea County 575-393-3612.
- 5. All downhole production/injection equipment (tubing, rods, etc.) shall be removed from the casing if it is not isolated by a packer.
- 6. A bradenhead test must be conducted. If the test indicates a problem, a remedial plan and time frame for remediation shall be submitted within ninety (90) days of the test.
- 7. Submit a subsequent Sundry Notice (Form 3160-5) with the following information:
 - a. A well bore diagram with all perforations, CIBP's, and tops of cement on CIBP's.
 - b. A description of the temporary abandonment procedure.
 - c. A clear copy or the original of the pressure test chart.

Sante Fe Main Office Phone: (505) 476-3441

General Information Phone: (505) 629-6116

Online Phone Directory https://www.emnrd.nm.gov/ocd/contact-us

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

CONDITIONS

Operator:	OGRID:	
Maverick Permian LLC	331199	
1000 Main Street, Suite 2900	Action Number:	
Houston, TX 77002	442835	
	Action Type:	
	[C-103] NOI Temporary Abandonment (C-103I)	

C	CONDITIONS					
	Created By		Condition Date			
ſ	gcordero	Passing MIT test in accordance with 19.15.26.11 or 19.15.25.12-14 NMAC will be required at time of work.	4/4/2025			

CONDITIONS

Page 10 of 10

Action 442835