U.S. Department of the Interior BUREAU OF LAND MANAGEMENT		Sundry Print Repor
Well Name: RED HILLS NORTH UNIT	Well Location: T25S / R34E / SEC 7 / SWNE / 32.146828 / -103.506232	County or Parish/State: LEA / NM
Well Number: 702	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM108499	Unit or CA Name:	Unit or CA Number:
<b>US Well Number:</b> 3002532246	<b>Operator:</b> EOG RESOURCES INCORPORATED	

### **Notice of Intent**

Sundry ID: 2845304

Type of Submission: Notice of Intent

Date Sundry Submitted: 04/03/2025

Date proposed operation will begin: 04/17/2025

Type of Action: Plug and Abandonment Time Sundry Submitted: 11:24

**Procedure Description:** EOG PROPOSES TO P/A THIS WELLBORE USING THE ATTACHED PROCEDURE. CURRENT AND PROPOSED WELLBORE ATTACHED.

### **Surface Disturbance**

Is any additional surface disturbance proposed?: No

### **NOI Attachments**

#### **Procedure Description**

RHNU\_\_702\_Current\_WBD\_20250403112228.pdf

RHNU\_\_702\_PA\_Procedure\_20250403112228.pdf

RHNU\_\_702\_Proposed\_WBD\_20250403112228.pdf

R	eceived by OCD: 5/12/2025 1:36:37 PM Well Name: RED HILLS NORTH UNIT	Well Location: T25S / R34E / SEC 7 / SWNE / 32.146828 / -103.506232	County or Parish/State: LEA
	Well Number: 702	Type of Well: OIL WELL	Allottee or Tribe Name:
	Lease Number: NMNM108499	Unit or CA Name:	Unit or CA Number:
	<b>US Well Number:</b> 3002532246	<b>Operator:</b> EOG RESOURCES INCORPORATED	

### **Conditions of Approval**

#### **Specialist Review**

Red\_Hills\_North\_Unit\_702\_Sundry\_ID\_2845304\_P\_A\_20250509144540.pdf

State: TX

State:

### **Operator**

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

**Operator Electronic Signature: ALVINO GARCIA** 

VINO GARCIA Signed on: APR 03, 2025 11:24 AM

Name: EOG RESOURCES INCORPORATED

Title: Regulatory Specialist

Street Address: 5509 CHAMPIONS BLVD

City: MIDLAND

Phone: (432) 236-2924

Email address: ALVINO\_GARCIA@EOGRESOURCES.COM

Field

Representative Name: Street Address: City: Phone: Email address:

### **BLM Point of Contact**

BLM POC Name: LONG VO BLM POC Phone: 5759885402 Disposition: Approved Signature: Long Vo BLM POC Title: Petroleum Engineer BLM POC Email Address: LVO@BLM.GOV Disposition Date: 05/09/2025

Zip:

### Received by OCD: 5/12/2025 1:36:37 PM

cectrea by 0 cb. 5		50.57 ¥ 11¥			ruge o oj i
Form 3160-5 (June 2019) UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT		FORM APPROVED OMB No. 1004-0137 Expires: October 31, 2021 5. Lease Serial No.			
Do not	t use this i		DRTS ON WELLS to drill or to re-enter an PD) for such proposals.	6. If Indian, Allottee or Tribe N	ame
	SUBMIT IN	TRIPLICATE - Other instru	uctions on page 2	7. If Unit of CA/Agreement, Na	ame and/or No.
1. Type of Well	Gas V	Vell Other		8. Well Name and No.	
2. Name of Operator				9. API Well No.	
3a. Address			3b. Phone No. (include area code)	10. Field and Pool or Explorato	ry Area
4. Location of Well (Foo	otage, Sec., T.,I	R.,M., or Survey Description)		11. Country or Parish, State	
	12. CHE	CK THE APPROPRIATE B	OX(ES) TO INDICATE NATURE (	OF NOTICE, REPORT OR OTH	ER DATA
TYPE OF SUBM	ISSION		TYPI	E OF ACTION	
Notice of Intent		Acidize	Deepen Hydraulic Fracturing	Production (Start/Resume) Reclamation	Water Shut-Off Well Integrity
Subsequent Repo	rt	Casing Repair Change Plans	New Construction           Plug and Abandon	Recomplete	Other
Final Abandonme	ent Notice	Convert to Injection	Plug Back	Water Disposal	
the proposal is to de the Bond under whic completion of the in	epen directiona the work will volved operation andonment No	Illy or recomplete horizontal be perfonned or provide thors. If the operation results in	ly, give subsurface locations and me e Bond No. on file with BLM/BIA. n a multiple completion or recomple	asured and true vertical depths of Required subsequent reports mus ption in a new interval, a Form 31	k and approximate duration thereof. If f all pertinent markers and zones. Attach t be filed within 30 days following 60-4 must be filed once testing has been e operator has detennined that the site

14. I hereby certify that the foregoing is true and correct. Name ( <i>Printed/Typed</i> )		
	Title	
Signature	Date	
THE SPACE FOR FEDE	RAL OR STATE OF	ICE USE
Approved by		
	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant of certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		
Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a crime for any any false, fictitious or fraudulent statements or representations as to any matter within		fully to make to any department or agency of the United States

#### **GENERAL INSTRUCTIONS**

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

#### SPECIFIC INSTRUCTIONS

*Item 4* - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

*Item 13:* Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve **hydraulic fracturing operations**, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

#### NOTICES

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c)and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.


The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

**BURDEN HOURS STATEMENT:** Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

## **Additional Information**

### Location of Well

0. SHL: SWNE / 1980 FNL / 1780 FEL / TWSP: 25S / RANGE: 34E / SECTION: 7 / LAT: 32.146828 / LONG: -103.506232 (TVD: 0 feet, MD: 0 feet ) BHL: SWNE / 1980 FNL / 1780 FEL / TWSP: 25S / SECTION: / LAT: 32.146828 / LONG: 103.506232 (TVD: 0 feet, MD: 0 feet )

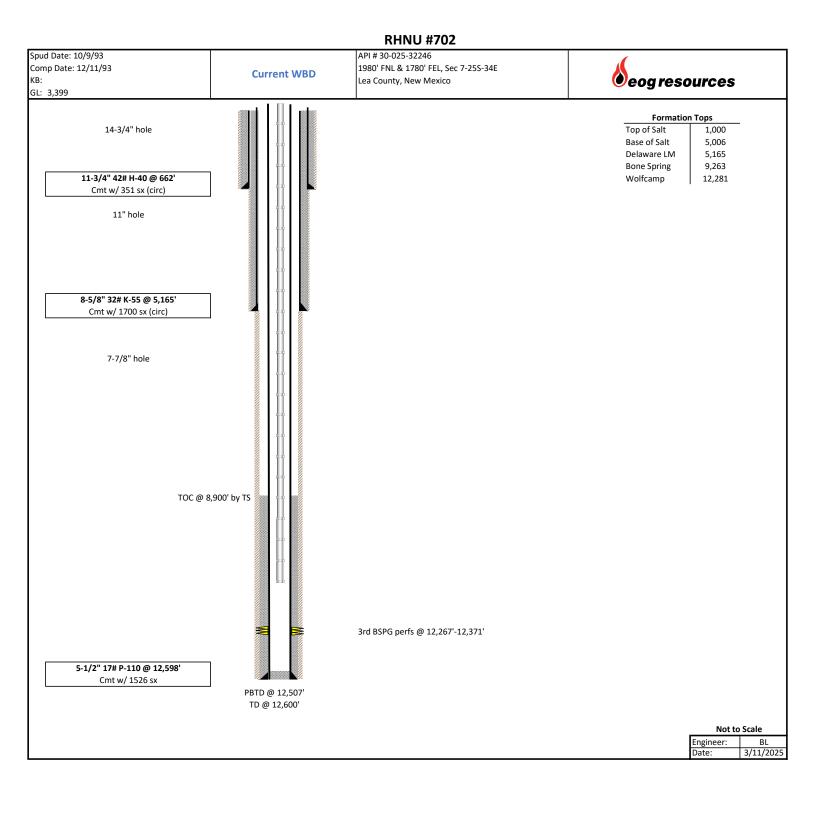



### RHNU #702 API # 30-025-32246 1980' FNL & 1780' FEL – Sec. 7-25S-34E Lea County, New Mexico

#### P&A Procedure AFE # 185418

#### **Executive Summary:**

P&A wellbore, cutoff wellhead and install dry hole marker.

<b>TD:</b> 12,600'	<b>PBTD:</b> 12,507'	<b>GR:</b> 3,399'	KB:
Surface Casing:	113/" 12# at 662' Com	ented with 351 sx. Cem	ont circulated
Intermediate Casing:			
U	-	nented with 1,700 sx. Ce	
Production Casing:	•	,	e sx. TOC at 8,900' by TS.
Producing Interval:	3 <sup>rd</sup> Bone Spring perfs a	t 12,267′-12,371′	

#### **P&A Procedure:**

- 1. MIRU well service unit and all necessary safety equipment. ND WH and NU BOP.
- 2. POOH laying down 2<sup>%</sup> tubing and rod pump BHA.
- 3. MIRU WL to make GR/JB run to 25' below planned CIBP setting depth. POOH.
- **4. Plug #1:** RU WL to RIH with CIBP, set CIBP at 12,200' and tag to verify CIBP set. POOH. Then RIH to dump bail 35' cement on top of CIBP. POOH to WOC.
- 5. RU WL to RIH to run RCBL from ~12,000'-surface to verify TOC for 5½" casing. Previous Temp Survey indicated TOC at ~8,900'.
- 6. Plug #2: Pick up 2<sup>7</sup>/<sub>8</sub>" string for P&A ops and TIH to tag TOC on top of CIBP. Circulate plugging mud, then pick up to 9,313' and spot 25 sx class "H" cement from 9,313'-9,123' (this will cover top of Bone Spring). Pick up and reverse clean and POOH, no tag required.

Note: If RCBL finds TOC for 5½" csg below 9,313' then this plug needs to be perf/sqz'd and tag'd.

- **7.** Plug #3: RU WL to RIH and perf 5½" casing at 6,200'. POOH w/ WL. TIH with tubing to spot/sqz 50 sx class "H" cement inside and outside 5½" csg from 6,200'-6,040' (this is a spacer plug). Pick up, reverse clean and POOH to WOC.
- **8.** Plug #4: RU WL to RIH and tag TOC then perf 5½" casing at 5,215'. POOH w/ WL. TIH with tubing to spot/sqz 80 sx class "C" cement inside and outside 5½" csg from 5,215'-4,905' (this will cover top of Delaware, 8%" csg shoe and Base of Salt). Pick up, reverse clean and POOH to WOC.
- **9.** Plug #5: RU WL to RIH to tag TOC, then perf 5½" casing at 2,000'. POOH w/ WL. TIH with tubing to spot/sqz 30 sx class "C" cement inside and outside 5½" csg from 2,000'-1,880' (this is a spacer plug). Pick up, reverse clean and POOH to WOC.




- **10.** Plug #6: RU WL to RIH to tag TOC, then perf 5½" casing at 1,050'. POOH w/ WL. TIH with tubing to spot/sqz 30 sx class "C" cement inside and outside 5½" csg from 1,050'-940' (this will cover Top of Salt). Pick up, reverse clean and POOH to WOC.
- **11.** Plug #7: RU WL to RIH to tag TOC, then perf 5½" casing at 712'. POOH w/ WL. TIH with tubing to spot/sqz 25 sx class "C" cement inside and outside 5½" csg from 712'-612' (this will cover 11¾" csg shoe). Pick up, reverse clean and POOH to WOC.
- **12.** Plug #8: RU WL to RIH to tag TOC, then perf 5½" csg at 150'. POOH w/ WL. Circulate 40 sx class "C" cement inside and outside 5½" csg from 150'-surface (surface plug).
- **13.** Cutoff WH, verify cement to surface on all casing strings and top off as necessary.
- 14. RDMO well service unit, install dry hole marker and clean location.

**Production Engineer:** 

Bie A Satur Date: 3/11/2025

Brice A. Letcher, P.E.

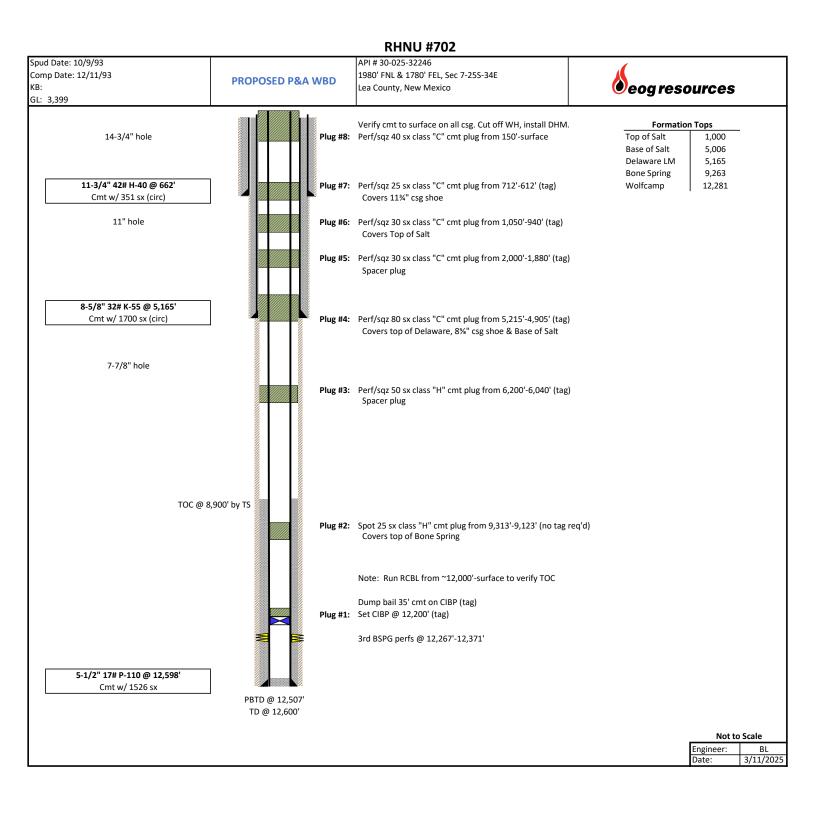

Received by UCD S/12/2025 1:36:37 PM U.S. Department of the Interior BUREAU OF LAND MANAGEMENT		Sundry Print Report
Well Name: RED HILLS NORTH UNIT	Well Location: T25S / R34E / SEC 7 / SWNE / 32.146828 / -103.506232	County or Parish/State: LEA / NM
Well Number: 702	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM108499	Unit or CA Name:	Unit or CA Number:
US Well Number: 3002532246	<b>Operator:</b> EOG RESOURCES INCORPORATED	

### **Notice of Intent**

Sundry ID: 2845304

Type of Submission: Notice of Intent

Date Sundry Submitted: 04/03/2025

Date proposed operation will begin: 04/17/2025

Type of Action: Plug and Abandonment Time Sundry Submitted: 11:24

**Procedure Description:** EOG PROPOSES TO P/A THIS WELLBORE USING THE ATTACHED PROCEDURE. CURRENT AND PROPOSED WELLBORE ATTACHED.

### **Surface Disturbance**

Is any additional surface disturbance proposed?: No

### **NOI Attachments**

#### **Procedure Description**

RHNU\_\_702\_Current\_WBD\_20250403112228.pdf

RHNU\_\_702\_PA\_Procedure\_20250403112228.pdf

RHNU\_\_702\_Proposed\_WBD\_20250403112228.pdf

APPROVAL SUBJECT TO GENERAL REQUIREMENTS AND SPECIAL STIPULATIONS ATTACHED

Received by OCD: 5/12/2025 1:36:37 PM Well Name: RED HILLS NORTH UNIT	Well Location: T25S / R34E / SEC 7 / SWNE / 32.146828 / -103.506232	County or Parish/State: Les 11 of 2 NM
Well Number: 702	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM108499	Unit or CA Name:	Unit or CA Number:
<b>US Well Number:</b> 3002532246	<b>Operator:</b> EOG RESOURCES INCORPORATED	

### Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

**Operator Electronic Signature: ALVINO GARCIA** 

Signed on: APR 03, 2025 11:24 AM

Name: EOG RESOURCES INCORPORATED

Title: Regulatory Specialist

Street Address: 5509 CHAMPIONS BLVD

City: MIDLAND

State: TX

Phone: (432) 236-2924

Email address: ALVINO\_GARCIA@EOGRESOURCES.COM

Field

Representative Name: Street Address: City: Phone: Email address:

State:

Zip:

APPROVED by Long Vo Petroleum Engineer Carlsbad Field Office 575-988-50402 LVO@BLM.GOV

#### OCD: 5/12/2025 1:36:37 PM R 1 h

eceived by OCD: 5/12/2025 1	:36:37 PM			<b>Page 12 of 2</b>			
Form 3160-5 (June 2019) DE	DEPARTMENT OF THE INTERIOR		FORM APPROVED OMB No. 1004-0137 Expires: October 31, 2021				
BUR	REAU OF LAND MANA	AGEMENT	5. Lease Serial No.				
Do not use this		ORTS ON WELLS o drill or to re-enter an PD) for such proposals.	6. If Indian, Allottee or Tribe Name				
SUBMIT IN	TRIPLICATE - Other instru	ictions on page 2	7. If Unit of CA/Agreement, Name a	nd/or No.			
1. Type of Well Gas	Well Other		8. Well Name and No.				
2. Name of Operator			9. API Well No.				
3a. Address		3b. Phone No. (include area code)	10. Field and Pool or Exploratory Ar	ea			
4. Location of Well (Footage, Sec., T.,	R.,M., or Survey Description)		11. Country or Parish, State				
12. CHI	ECK THE APPROPRIATE BO	OX(ES) TO INDICATE NATURE	OF NOTICE, REPORT OR OTHER D	ATA			
TYPE OF SUBMISSION		ТҮР	E OF ACTION				
Notice of Intent	Acidize	Deepen Hydraulic Fracturing	Production (Start/Resume)	] Water Shut-Off ] Well Integrity			
Subsequent Report	Casing Repair	New Construction Plug and Abandon	Recomplete	Other			
Final Abandonment Notice	Convert to Injection	Plug Back	Water Disposal				
the proposal is to deepen direction the Bond under which the work wi completion of the involved operati	ally or recomplete horizontall ill be perfonned or provide the ions. If the operation results in	y, give subsurface locations and me Bond No. on file with BLM/BIA. a multiple completion or recompl	starting date of any proposed work and easured and true vertical depths of all p Required subsequent reports must be fi etion in a new interval, a Form 3160-4 ation, have been completed and the ope	ertinent markers and zones. Attach led within 30 days following must be filed once testing has been			

14. I hereby certify that the foregoing is true and correct. Name (Printed/Typed)					
T	litle				
Signature	Date				
THE SPACE FOR FEDER	RAL OR STATE OFICE USE				
Approved by Long Vo Z	Petroleum Engineer	5-9-2025 Date			
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.					
Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a crime for any any false, fictitious or fraudulent statements or representations as to any matter within		department or agency of the United States			

(Instructions on page 2)

#### **GENERAL INSTRUCTIONS**

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

#### SPECIFIC INSTRUCTIONS

*Item 4* - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

*Item 13:* Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve **hydraulic fracturing operations**, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

#### NOTICES

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c)and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.


The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

**BURDEN HOURS STATEMENT:** Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

### **Additional Information**

### Location of Well

0. SHL: SWNE / 1980 FNL / 1780 FEL / TWSP: 25S / RANGE: 34E / SECTION: 7 / LAT: 32.146828 / LONG: -103.506232 (TVD: 0 feet, MD: 0 feet ) BHL: SWNE / 1980 FNL / 1780 FEL / TWSP: 25S / SECTION: / LAT: 32.146828 / LONG: 103.506232 (TVD: 0 feet, MD: 0 feet )

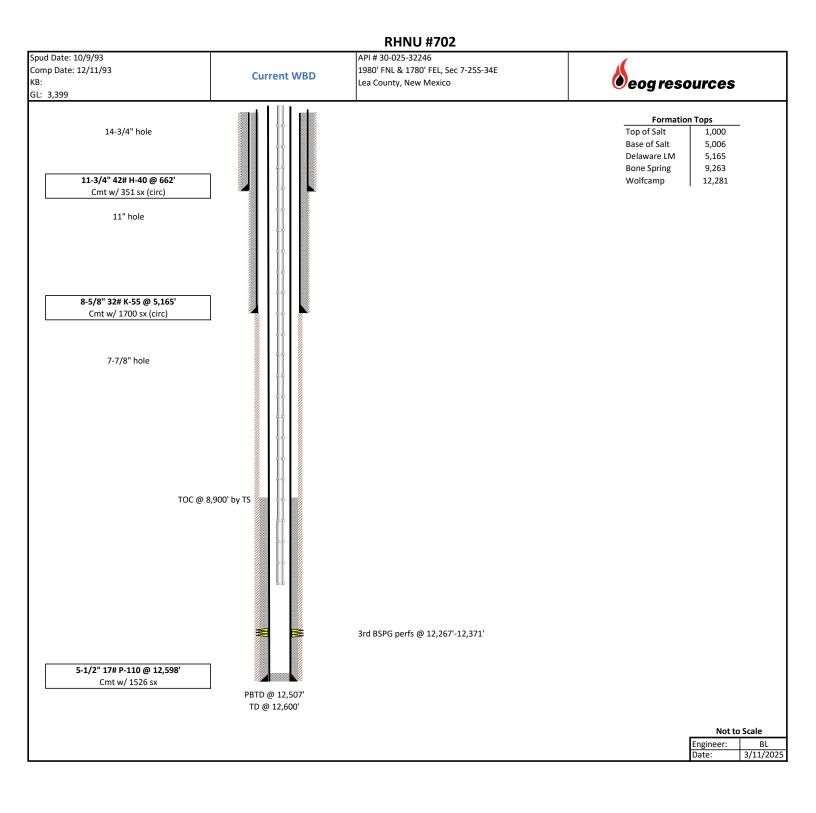



### RHNU #702 API # 30-025-32246 1980' FNL & 1780' FEL – Sec. 7-25S-34E Lea County, New Mexico

#### P&A Procedure AFE # 185418

#### **Executive Summary:**

P&A wellbore, cutoff wellhead and install dry hole marker.

<b>TD:</b> 12,600'	<b>PBTD:</b> 12,507'	<b>GR:</b> 3,399'	KB:		
Surface Casing:	11¾" 42# at 662'. Cem	ented with 351 sx. Ceme	ent circulated.		
Intermediate Casing:	8%" 32# at 5,165'. Cemented with 1,700 sx. Cement circulated.				
Production Casing:	5½" 17# P-110 at 12,59	98'. Cemented with 1,52	6 sx. TOC at 8,900' by TS.		
Producing Interval:	3 <sup>rd</sup> Bone Spring perfs a	t 12,267'-12,371'			

#### **P&A Procedure:**

- 1. MIRU well service unit and all necessary safety equipment. ND WH and NU BOP.
- 2. POOH laying down 2<sup>%</sup> tubing and rod pump BHA.
- 3. MIRU WL to make GR/JB run to 25' below planned CIBP setting depth. POOH.
- **4. Plug #1:** RU WL to RIH with CIBP, set CIBP at 12,200' and tag to verify CIBP set. POOH. Then RIH to dump bail 35' cement on top of CIBP. POOH to WOC.
- 5. RU WL to RIH to run RCBL from ~12,000'-surface to verify TOC for 5½" casing. Previous Temp Survey indicated TOC at ~8,900'.
- Plug #2: Pick up 2<sup>3</sup>/<sub>8</sub>" string for P&A ops and TIH to tag TOC on top of CIBP. Circulate plugging mud, then pick up to 9,313' and spot 25 sx class "H" cement from 9,313'-9,123' (this will cover top of Bone Spring). Pick up and reverse clean and POOH, no tag required.
   Note: If RCBL finds TOC for 5<sup>1</sup>/<sub>2</sub>" csg below 9,313' then this plug needs to be perf/sqz'd and tag'd.
- **7. Plug #3:** RU WL to RIH and perf 5½" casing at 6,200'. POOH w/ WL. TIH with tubing to spot/sqz 50 sx class "H" cement inside and outside 5½" csg from 6,200'-6,040' (this is a spacer plug). Pick up, reverse clean and POOH to WOC.
- Plug #4: RU WL to RIH and tag TOC then perf 5½" casing at 5,347'. POOH w/ WL. TIH with tubing to spot/sqz 80 sx class "C" cement inside and outside 5½" csg from 5347' to 5063' (this will cover top of Delaware, 8½" csg shoe and Base of Salt). Pick up, reverse clean and POOH to WOC.
- **9.** Plug #5: RU WL to RIH to tag TOC, then perf 5½" casing at 3640'. POOH w/ WL. TIH with tubing to spot/sqz 33 sx class "C" cement inside and outside 5½" csg from 3640' to 3504' (Base of Salt). Pick up, reverse clean and POOH to WOC.




- Plug #6: RU WL to RIH to tag TOC, then perf 5½" casing at 1615'. POOH w/ WL. TIH with tubing to spot/sqz 158 sx class "C" cement inside and outside 5½" csg from 1615'-940' (this will cover Top of Salt). Pick up, reverse clean and POOH to WOC.
- **11.** Plug #7: RU WL to RIH to tag TOC, then perf 5½" casing at 712'. POOH w/ WL. TIH with tubing to spot/sqz 26 sx class "C" cement inside and outside 5½" csg from 712'-605' (this will cover 11¾" csg shoe). Pick up, reverse clean and POOH to WOC.
- **12.** Plug #8: RU WL to RIH to tag TOC, then perf 5½" csg at 150'. POOH w/ WL. Circulate 40 sx class "C" cement inside and outside 5½" csg from 150'-surface (surface plug).
- **13.** Cutoff WH, verify cement to surface on all casing strings and top off as necessary.
- **14.** RDMO well service unit, install dry hole marker and clean location.

**Production Engineer:** 

Bis A Satur Date: 3/11/2025

Brice A. Letcher, P.E

**REVISED** 1:06 pm, May 09, 2025

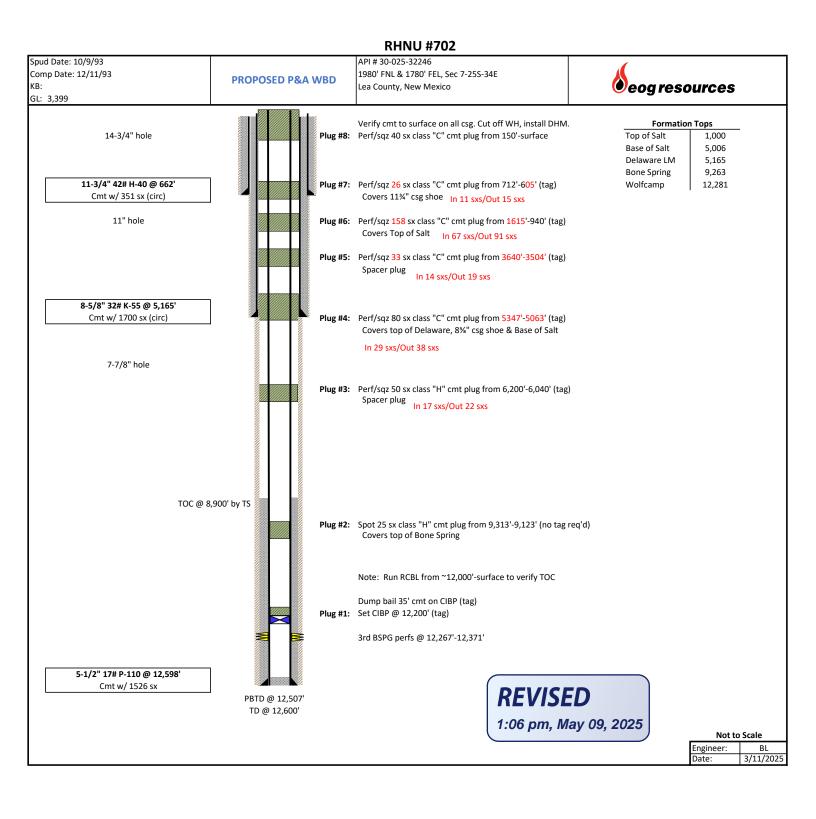

### BUREAU OF LAND MANAGEMENT Carlsbad Field Office 620 East Greene Street Carlsbad, New Mexico 88220 575-234-5972

### Permanent Abandonment of Federal Wells Conditions of Approval (LPC Habitat)

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within <u>ninety (90)</u> days from the approval date of this Notice of Intent to Abandon.

If you are unable to plug the well by the 90<sup>th</sup> day provide this office, prior to the 90<sup>th</sup> day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged. Failure to do so will result in enforcement action.

The rig used for the plugging procedure cannot be released and moved off without the prior approval of the authorized officer. Failure to do so may result in enforcement action.

2. <u>Notification:</u> Contact the appropriate BLM office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Lea County, call 575-689-5981. Eddy County, please email notifications to: <u>BLM NM CFO PluggingNotifications@BLM.GOV</u>. The Eddy County inspector on call phone, 575-361-2822, will remain active as a secondary contact.

3. <u>Blowout Preventers</u>: A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.

4. <u>Mud Requirement:</u> Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of water. Minimum nine (9) pounds per gallon.

5. <u>Cement Requirement</u>: Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours for Class C or accelerated cement (calcium chloride) and 6 hours for Class H. Tagging the plug means running in the hole with a string of tubing or drill pipe and placing sufficient weight on the plug to ensure its integrity. Other methods of tagging the plug may be approved by the BLM authorized officer or BLM field representative.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient. Before pumping or bailing cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

Fluid used to mix the cement in R111Q shall be saturated with the salts common to the section penetrated, and in suitable proportions but not less than 1% and not more than 3% calcium chloride by weight of cement will be considered the desired mixture whenever possible.

6. <u>Below Ground Level Cap (Lesser Prairie-Chicken Habitat)</u>: All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). **The BLM is to be notified** *BY PHONE* (numbers listed in 2. Notifications) a minimum of 4 hours prior to the wellhead being cut off to verify that cement is to surface in the casing and all annuluses. Wellhead cut off shall commence within ten (10) calendar days of the well being plugged. If the cut off cannot be done by the 14<sup>th</sup> day, the BLM is to be contacted with justification to receive an extension for completing the cut off.

Upon the plugging and subsequent abandonment of wells that are located in lesser prairie-chicken habitat, the casings shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The well bore shall then be covered with a metal plate at least <sup>1</sup>/<sub>4</sub> inch thick and welded in place. A weep hole shall be left in the plate and/or casing. The following information shall be permanently inscribed on the plate: well name and number, name of operator, lease serial number, surveyed location (quarter-quarter section, section, township and range or other authorized survey designation acceptable to the authorized officer such as metes and bounds).

NMOCD also requires the operator to notify NMOCD when this type of dry hole marker is used. This can be done on the subsequent report of abandonment which is submitted to the BLM after the well is plugged. State that a below ground cap was installed as required in the COA's from the BLM.

7. <u>Subsequent Plugging Reporting</u>: Within 30 days after plugging work is completed, file one original and three copies of the Subsequent Report of Abandonment, Form 3160-5 to BLM. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. <u>Show date well was plugged.</u>

8. <u>Trash:</u> All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Following the submission and approval of the Subsequent Report of Abandonment, surface restoration will be required. See attached reclamation objectives.

### **Timing Limitation Stipulation/ Condition of Approval for Lesser Prairie-Chicken:**

From March 1<sup>st</sup> through June 15<sup>th</sup> annually, abandonment activities will be allowed except between the hours from 3:00 am and 9:00 am. Normal vehicle use on existing roads will not be restricted.



# **United States Department of the Interior**

BUREAU OF LAND MANAGEMENT Carlsbad Field Office 620 E. Greene St. Carlsbad, New Mexico 88220-6292 www.blm.gov/nm



In Reply Refer To: 1310

#### **Reclamation Objectives and Procedures**

**Reclamation Objective:** Oil and gas development is one of many uses of the public lands and resources. While development may have a short- or long-term effect on the land, successful reclamation can ensure the effect is not permanent. During the life of the development, all disturbed areas not needed for active support of production operations should undergo "interim" reclamation in order to minimize the environmental impacts of development on other resources and uses. At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land and water are restored.

The long-term objective of final reclamation is to set the course for eventual ecosystem restoration, including the restoration of the natural vegetation community, hydrology, and wildlife habitats. In most cases this means returning the land to a condition approximating or equal to that which existed prior to the disturbance. The final goal of reclamation is to restore the character of the land and water to its pre-disturbance condition. The operator is generally not responsible for achieving full ecological restoration of the site. Instead, the operator must achieve the short-term stability, visual, hydrological, and productivity objectives of the surface management agency and take steps necessary to ensure that long-term objectives will be reached through natural processes.

To achieve these objectives, remove any/all contaminants, scrap/trash, equipment, pipelines and powerlines (Contact service companies, allowing plenty of time to have the risers and power lines and poles removed prior to reclamation, don't wait till the last day and try to get them to remove infrastructure). Strip and remove caliche, contour the location to blend with the surrounding landscape, re-distribute the native soils, provide erosion control as needed, rip (across the slope and seed as specified in the original APD COA. This will apply to well pads, facilities, and access roads. Barricade access road at the starting point. If reserve pits have not reclaimed due to salts or other contaminants, submit a plan for approval, as to how you propose to provide adequate restoration of the pit area.

The Application for Permit to Drill or Reenter (APD, Form 3160-3), Surface Use Plan of Operations must include adequate measures for stabilization and reclamation of disturbed lands. Oil and Gas operators must plan for reclamation, both interim and final, up front in the APD process as per Onshore Oil and Gas Order No. 1.

For wells and/or access roads not having an approved plan, or an inadequate plan for surface reclamation (either interim or final reclamation), the operator must submit a proposal describing the procedures for reclamation. For interim reclamation, the appropriate time for submittal would be when filing the Well Completion or Recompletion Report and Log (Form 3160-4). For final reclamation, the appropriate time for submittal would be when filing the Notice of Intent, or the Subsequent Report of Abandonment, Sundry Notices and Reports on Wells (Form 3160-5). Interim reclamation is to be completed within 6 months of well abandonment.

The operator must file a Subsequent Report Plug and Abandonment (Form 3160-5) following the plugging of a well.

Previous instruction had you waiting for a BLM specialist to inspect the location and provide you with reclamation requirements. If you have an approved Surface Use Plan of Operation and/or an approved Sundry Notice, you are free to proceed with reclamation as per approved APD. If you have issues or concerns, contact a BLM specialist to assist you. It would be in your interest to have a BLM specialist look at the location and access road prior to the removal of reclamation equipment to ensure that it meets BLM objectives. Upon conclusion submit a Form 3160-5, Subsequent Report of Reclamation. This will prompt a specialist to inspect the location to verify work was completed as per approved plans.

The approved Subsequent Report of Reclamation will be your notice that the native soils, contour and seedbed have been reestablished. If the BLM objectives have not been met the operator will be notified and corrective actions may be required.

It is the responsibility of the operator to monitor these locations and/or access roads until such time as the operator feels that the BLM objective has been met. If after two growing seasons the location and/or access roads are not showing the potential for successful revegetation, additional actions may be needed. When you feel the BLM objectives have been met submit a Final Abandonment Notice (FAN), Form 3160-5, stating that all reclamation requirements have been achieved and the location and/or access road is ready for a final abandonment inspection.

At this time the BLM specialist will inspect the location and/or access road. If the native soils and contour have been restored, and the revegetation is successful, the FAN will be approved, releasing the operator of any further liability of the location and/or access road. If the location and/or access road have not achieved the objective, you will be notified as to additional work needed or additional time being needed to achieve the objective.

If there are any questions, please feel free to contact any of the following specialists:

Jim Amos Supervisory Petroleum Engineering Tech/Environmental Protection Specialist 575-234-5909 (Office), 575-361-2648 (Cell)

Arthur Arias Environmental Protection Specialist 575-234-6230

Crisha Morgan Environmental Protection Specialist 575-234-5987

Jose Martinez-Colon Environmental Protection Specialist 575-234-5951

Angela Mohle Environmental Protection Specialist 575-234-2229

Robert Duenas Environmental Protection Specialist 575-234-2229 Terry Gregston Environmental Protection/HAZMAT Specialist 575-234-5958

•

Тор	Bottom	Length	Тад	Sacks	Cement Class	Notes
		-		36.00	с	Perf and squeeze from 150' to surface.
						Perf and squeeze from 712' to 605'. WOC and Tag. (Ir
605.38	712.00	106.62	Tag/Verify	26.00	С	11 sxs/Out 15 sxs
1499.35	1615.00	115.65	Tag/Verify	158.00	с	Perf and squeeze from 1615' to 940 WOC and Tag. (Ir 67 sxs/out 91 sxs
						Perf and squeeze from 3640' to 350 WOC and Tag. (Ir
				33.00	С	14 sxs/Out 19 sxs
5063.35	5215.00	151.65	I ag/Verify			
5194.03	5347.00		present and/or Mechanic al Integrity Test), If Perf & Sqz then Tag, Leak Test all CIBP if no Open Perforatio		С	Perf and squeeze from 5347' to 506 WOC and Tag. (Ir 29 sxs/Out 38 sxs
			present and/or Mechanic			Perf and squeeze from 6200' to 603
			Perforatio			WOC and Tag. (I
	0.00 605.38 1499.35 3504.10 5063.35	0.00 100.00 605.38 712.00 1499.35 1615.00 3504.10 3640.00 5063.35 5215.00	0.00       100.00       100.00         605.38       712.00       106.62         1499.35       1615.00       115.65         3504.10       3640.00       135.90         5063.35       5215.00       151.65         5063.35       5215.00       151.65         5194.03       5347.00       152.97	0.00         100.00         100.00         Tag/Verify           605.38         712.00         106.62         Tag/Verify           1499.35         1615.00         115.65         Tag/Verify           3504.10         3640.00         135.90         Tag/Verify           5063.35         5215.00         151.65         Tag/Verify           5063.35         5215.00         151.65         Tag/Verify           73504.10         3640.00         135.90         Tag/Verify           5063.35         5215.00         151.65         Tag/Verify           73604.10         3640.00         135.90         Tag/Verify           7404         740         740         740           7404         740         740         740           7404         740         740         740           7404         740         740         740           7404         740         740         740           7404         740         740         740           7404         740         740         740           7404         740         740         740           7404         740         740         740           74	Open         Open         Open         Open           0.00         100.00         100.00         Tag/Verify         36.00           605.38         712.00         106.62         Tag/Verify         26.00           1499.35         1615.00         115.65         Tag/Verify         158.00           3504.10         3640.00         135.90         Tag/Verify         33.00           5063.35         5215.00         151.65         Tag/Verify         33.00           5063.35         5215.00         151.65         Tag/Verify         33.00           7300         151.65         Tag/Verify         33.00           7300         151.65         Tag/Verify         33.00           7300         151.65         Tag/Verify         33.00           7300         151.65         Tag/Verify         33.00           7400         7400         151.65         Tag/Verify           7400         7400         7400         7400           7400         7400         7400         7400           7400         7400         752.97         757.00           75194.03         5347.00         152.97         757.00           75194.03         5347.00 </td <td>TopBottomLengthTagSacksClass0.00100.00100.00Tag/Verify36.00C605.38712.00106.62Tag/Verify26.00C1499.351615.00115.65Tag/Verify158.00C3504.103640.00135.90Tag/Verify33.00C5063.355215.00151.65Tag/Verify33.00C5063.355215.00151.65Tag/Verify33.00C1499.363640.00135.90Tag/Verify33.00C5063.355215.00151.65Tag/Verify33.00C1499.363640.00135.90Tag/Verify33.00C15063.355215.00151.65Tag/Verify158.00C15063.355215.00151.65Tag/Verify158.00C15063.355215.00151.65Tag/Verify158.00C15063.355215.00151.65Tag/Verify158.00F15063.355215.00151.65Tag/Verify158.01F15063.355215.00152.97F8F1507.055347.00152.97ns67.00C1508.15FFFFF1508.15FFFFF1509.16FFFFF1509.17FFFFF1509.16FFFFF<tr< td=""></tr<></td>	TopBottomLengthTagSacksClass0.00100.00100.00Tag/Verify36.00C605.38712.00106.62Tag/Verify26.00C1499.351615.00115.65Tag/Verify158.00C3504.103640.00135.90Tag/Verify33.00C5063.355215.00151.65Tag/Verify33.00C5063.355215.00151.65Tag/Verify33.00C1499.363640.00135.90Tag/Verify33.00C5063.355215.00151.65Tag/Verify33.00C1499.363640.00135.90Tag/Verify33.00C15063.355215.00151.65Tag/Verify158.00C15063.355215.00151.65Tag/Verify158.00C15063.355215.00151.65Tag/Verify158.00C15063.355215.00151.65Tag/Verify158.00F15063.355215.00151.65Tag/Verify158.01F15063.355215.00152.97F8F1507.055347.00152.97ns67.00C1508.15FFFFF1508.15FFFFF1509.16FFFFF1509.17FFFFF1509.16FFFFF <tr< td=""></tr<>

•

							1
				If solid base no need to Tag (CIBP present and/or Mechanic al Integrity Test), If Perf & Sqz then Tag, Leak Test all CIBP if no Open Perforatio			Const comment form
Bonesprings @ 9263	9120.37	9313.00	192.63		25.00	н	Spot cement from 9313' to 9120'.
							Set CIBP at 12200'. Dump bail 35'. Leak
Perforations Plug (If No CIBP)	12117.10	12340.00	222.90	Tag/Verify	5.00	Н	test CIBP.
	10165.00	12200.00		base no need to Tag (CIBP			
CIBP Plug Perforations Plug (If No CIBP)	12165.00 12197.29	12200.00 12421.00	35.00 223.71				
Wolfcamp @ 12386	12197.29	12421.00		base no	1		
5.5 inch- Shoe Plug	12422.02	12648.00	225.00	Tag/Verify			
o.o mon- onde riug	12422.02	12040.00	220.90	i ag, voiny			

No more than 2000' is to be allowed between plugs in open hole, and no more than 3000' between plugs in cased hole. Class H >7500' Class C<7500'

Fluid used to mix the cement in R111P shall be saturated with the salts common to the section penetrated, and in suitable proportions, but not more than 3% calcium chloride by weight of cement will be considered the desired mixture whenever possible.

Medium, Secretary: Top of salt to surface If no salt take the deepest fresh water or Karst Depth

High, Critical: Bottom of Karst to surface or Deepest fresh water, whichever is greater R111P: 50 Feet from Base of Salt to surface.

Class C: 1.32 ft<sup>3</sup>/sx Class H: 1.06 ft<sup>3</sup>/sx

Onshore Order 2.III.G Drilling Abandonment Requirements: "All formations bearing usable-quality water, oil, gas, or geothermal resources, and/or a prospectively valuable deposit of minerals shall be protected.

Cave Karst/Potash Cement Requirement:	Low		
11.75 inch- Shoe Plug @	662.00		
8.625 inch- Shoe Plug @	5165.00		
5.5 inch- Shoe Plug @	12598.00	TOC @	8900.00
Perforatons Top @ Perforatons Top @	12350.00 12267.00	Bottom @ Bottom @	12371.00 12290.00

CIBP @ 12200.00

Sante Fe Main Office Phone: (505) 476-3441

General Information Phone: (505) 629-6116

Online Phone Directory https://www.emnrd.nm.gov/ocd/contact-us

# **State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division** 1220 S. St Francis Dr. Santa Fe, NM 87505

CONDITIONS

Operator:	OGRID:
EOG RESOURCES INC	7377
5509 Champions Drive	Action Number:
Midland, TX 79706	461021
	Action Type:
	[C-103] NOI Plug & Abandon (C-103F)
CONDITIONS	

CONDITIONS

Created By		Condition Date
gcordero	A Cement Bond Log (CBL) is required to be submitted to electronic permitting.	5/14/2025
gcordero	Submit Cement Bond Logs (CBL) prior to submittal of C-103P.	5/14/2025
gcordero	Run CBL to Surface	5/14/2025

CONDITIONS

Action 461021