

1625 N. French Dr., Hobbs, NM 88240

State of New Mexico
Energy, Minerals & Natural ResourcesForm C-104
Revised August 1, 2011District I

811 S. First St., Artesia, NM 88210

District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Submit one copy to appropriate District Office

☐ AMENDED REPORT**I. REQUEST FOR ALLOWABLE AND AUTHORIZATION TO TRANSPORT**

¹ Operator name and Address OXY USA INC. P.O. BOX 50250 MIDLAND, TX 79710		² OGRID Number: 16696
		³ Reason for Filing Code/ Effective Date: NW - 04/29/2024
⁴ API Number 30 – 015-47188	⁵ Pool Name PIERCE CROSSING; BONE SPRING, EAST	⁶ Pool Code 96473
⁷ Property Code: 328290	⁸ Property Name: HEADS CC 9-4 FEDERAL COM	⁹ Well Number: 21H

II. ¹⁰ Surface Location

Ul or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South Line	Feet from the	East/West line	County
C	16	24S	29E		780	NORTH	1504	WEST	EDDY

¹¹ Bottom Hole Location

FTP- 389' FSL 859' FWL LTP- 197' FNL 788' FWL

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
D	4	24S	29E		23	NORTH	791	WEST	EDDY
¹² Lse Code F	¹³ Producing Method Code : F		¹⁴ Gas Connection Date: 05/01/24		¹⁵ C-129 Permit Number		¹⁶ C-129 Effective Date		¹⁷ C-129 Expiration Date

III. Oil and Gas Transporters

¹⁸ Transporter OGRID	¹⁹ Transporter Name and Address	²⁰ O/G/W
214754	LPC CRUDE OIL, INC.	O
151618	ENTERPRISE FIELD SERVICES LLC	G

IV. Well Completion Data

²¹ Spud Date 02/03/24	²² Ready Date 04/29/2024	²³ TD 19756'M 9074'V	²⁴ PBTD 19710'M 9074'V	²⁵ Perforations 9552-19582'	²⁶ DHC, MC
²⁷ Hole Size		²⁸ Casing & Tubing Size		²⁹ Depth Set	³⁰ Sacks Cement
14-3/4"		10-3/4"		540'	839
9-7/8"		7.827"		8510'	1958
6-3/4"		5-1/2"		8286'-19736'	574

V. Well Test Data

³¹ Date New Oil 05/01/24	³² Gas Delivery Date 05/01/24	³³ Test Date 05/13/24	³⁴ Test Length 24 HRS	³⁵ Tbg. Pressure	³⁶ Csg. Pressure 955
³⁷ Choke Size 75	³⁸ Oil 3898	³⁹ Water 2984	⁴⁰ Gas 5780		⁴¹ Test Method F

⁴² I hereby certify that the rules of the Oil Conservation Division have been complied with and that the information given above is true and complete to the best of my knowledge and belief.



Signature:

Printed name: JANA MENDIOLA

Title: REGULATORY ADVISOR

E-mail Address:

Janalyn_mendiola@oxy.com

Date:

07/25/2024

Phone:

422-695-5036

OIL CONSERVATION DIVISION

Approved by:

PATRICIA MARTINEZ

Title: PETROLEUM SPECIALIST

Approval Date: 5/16/2025

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720

District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170

District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

☒ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number		² Pool Code		³ Pool Name	
30-015-47188		96473		PIERCE CROSSING; BONE SPRING, EAST	
⁴ Property Code		⁵ Property Name			⁶ Well Number
328290		HEADS CC 9_4 FED COM			21H
⁷ OGRID No.		⁸ Operator Name			⁹ Elevation
16696		OXY USA INC.			2928.0

¹⁰Surface Location

UL or lot no. C	Section 16	Township 24S	Range 29E	Lot Idn	Feet from the 780	North/South line NORTH	Feet from the 1504	East/West line WEST	County EDDY
--------------------	---------------	-----------------	--------------	---------	----------------------	---------------------------	-----------------------	------------------------	----------------

¹¹ Bottom Hole Location If Different From Surface

UL or lot no. 4	Section 4	Township 24S	Range 29E	Lot Idn	Feet from the 23	North/South line NORTH	Feet from the 791	East/West line WEST	County EDDY
¹² Dedicated Acres 1280		¹³ Joint or Infill		¹⁴ Consolidation Code		¹⁵ Order No. R-21776			

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

NAD 83 (SURFACE HOLE LOCATION)	NAD 83 (AS-DRILLED KOP)	NAD 83 (AS-DRILLED FTP)
LATITUDE = 32°13'21.79" (32.222719°)	LATITUDE = 32°13'26.33" (32.223981°)	LATITUDE = 32°13'33.33" (32.225926°)
LONGITUDE = -103°59'35.44" (-103.993178°)	LONGITUDE = -103°59'43.28" (-103.995355°)	LONGITUDE = -103°59'42.94" (-103.995260°)
NAD 27 (SURFACE HOLE LOCATION)	NAD 27 (AS-DRILLED KOP)	NAD 27 (AS-DRILLED FTP)
LATITUDE = 32°13'21.35" (32.222596°)	LATITUDE = 32°13'25.89" (32.223858°)	LATITUDE = 32°13'32.89" (32.225803°)
LONGITUDE = -103°59'33.68" (-103.992689°)	LONGITUDE = -103°59'41.52" (-103.994866°)	LONGITUDE = -103°59'41.18" (-103.994771°)
STATE PLANE NAD 83 (N.M. EAST)	STATE PLANE NAD 83 (N.M. EAST)	STATE PLANE NAD 83 (N.M. EAST)
N: 444925.52' E: 646526.06'	N: 445382.48' E: 645851.60'	N: 446090.13' E: 645878.56'
STATE PLANE NAD 27 (N.M. EAST)	STATE PLANE NAD 27 (N.M. EAST)	STATE PLANE NAD 27 (N.M. EAST)
N: 444866.58' E: 605342.19'	N: 445323.52' E: 604667.74'	N: 446031.16' E: 604694.73'
NAD 83 (AS-DRILLED LPP)	NAD 83 (AS-DRILLED LTP)	NAD 83 (AS-DRILLED BHL)
LATITUDE = 32°14'08.90" (32.235805°)	LATITUDE = 32°15'12.56" (32.253490°)	LATITUDE = 32°15'14.28" (32.253968°)
LONGITUDE = -103°59'43.88" (-103.995521°)	LONGITUDE = -103°59'43.96" (-103.995546°)	LONGITUDE = -103°59'43.94" (-103.995538°)
NAD 27 (AS-DRILLED LPP)	NAD 27 (AS-DRILLED LTP)	NAD 27 (AS-DRILLED BHL)
LATITUDE = 32°14'08.46" (32.235682°)	LATITUDE = 32°15'12.12" (32.253367°)	LATITUDE = 32°15'13.84" (32.253845°)
LONGITUDE = -103°59'42.11" (-103.995032°)	LONGITUDE = -103°59'42.20" (-103.995055°)	LONGITUDE = -103°59'42.17" (-103.995048°)
STATE PLANE NAD 83 (N.M. EAST)	STATE PLANE NAD 83 (N.M. EAST)	STATE PLANE NAD 83 (N.M. EAST)
N: 449683.66' E: 645786.60'	N: 456117.05' E: 645758.81'	N: 456291.01' E: 645760.65'
STATE PLANE NAD 27 (N.M. EAST)	STATE PLANE NAD 27 (N.M. EAST)	STATE PLANE NAD 27 (N.M. EAST)
N: 449624.62' E: 604602.85'	N: 456057.88' E: 604575.22'	N: 456231.84' E: 604577.07'

17 OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Jana Mendiola 07/25/24

Signature _____
Date _____

JANA MENDIOLA

Printed Name _____

janalyn_mendiola@oxy.com

E-mail Address

18 SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.


July 05, 2023

Date of Survey

Signature and Seal of Professional Surveyor:



Certificate Number:

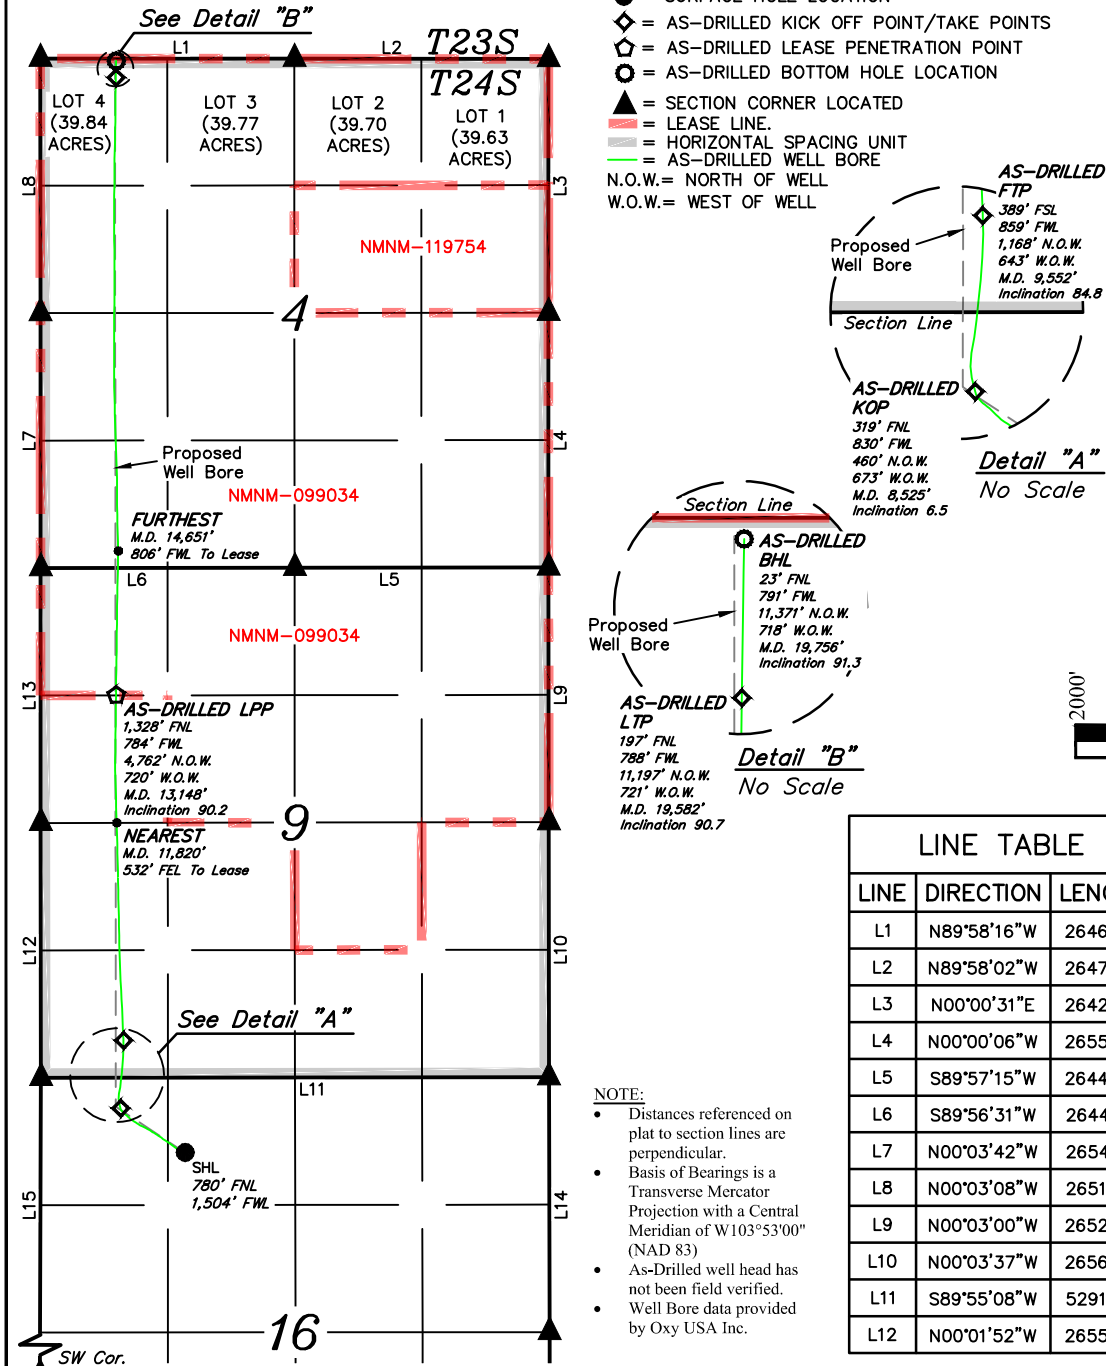

NOTE:

- Distances referenced on plat to section lines are perpendicular.
- Basis of Bearings is a Transverse Mercator Projection with a Central Meridian of W103°53'00" (NAD 83)
- As-Drilled well head has not been field verified.
- Well Bore data provided by Oxy USA Inc.

LINE TABLE		
LINE	DIRECTION	LENGTH
L1	N89°58'16"W	2646.59'
L2	N89°58'02"W	2647.47'
L3	N00°00'31"E	2642.67'
L4	N00°00'06"W	2655.05'
L5	S89°57'15"W	2644.28'
L6	S89°56'31"W	2644.18'
L7	N00°03'42"W	2654.14'
L8	N00°03'08"W	2651.24'
L9	N00°03'00"W	2652.59'
L10	N00°03'37"W	2656.24'
L11	S89°55'08"W	5291.92'
L12	N00°01'52"W	2655.89'

LINE TABLE		
LINE	DIRECTION	LENGTH
L13	N00°00'17"W	2655.63'
L14	N00°08'44"W	2654.77'
L15	N00°09'55"E	5303.34'

APPROXIMATE WELL BORE MEASURED DEPTH DISTANCE FROM FTP TO LTP	
TRACT	DISTANCE
FEE	3,595.62'
NMNM 099034	6,434.38'
TOTAL	10,030.00'

OXY - Delaware Basin

Eddy County, NM (NAD27 - NM E 3001)

Heads Pad

Heads CC 9 4 Fed Com 21H

OH


Design: OH

Standard Survey Report

15 March, 2024





Project: Eddy County, NM (NAD27 - NM E 3001
Site: Heads Pad
Well: Heads CC 9 4 Fed Com 21H
Wellbore: OH
Design: OH
Lat: 32.222596
Long: -103.992689
GL: 2928.00
KB: HP 267 @ 2953.00usft



WELL DETAILS: Heads CC 9 4 Fed Com 21H						
+N/-S	+E/-W	Northing	Easting	Latitude	Longitude	
0.00	0.00	444866.58	605342.19	32.222596	-103.992689	

TD @ 19756 MD, 9073.86 TVD, 11365.26 N/S, -765.12 E/W

ANNOTATIONS		
MD	TVD	Annotation
603.00	602.96	First AEP Svy
19720.00	9074.68	Last AEP Svy
19756.00	9073.86	Projection to BHL

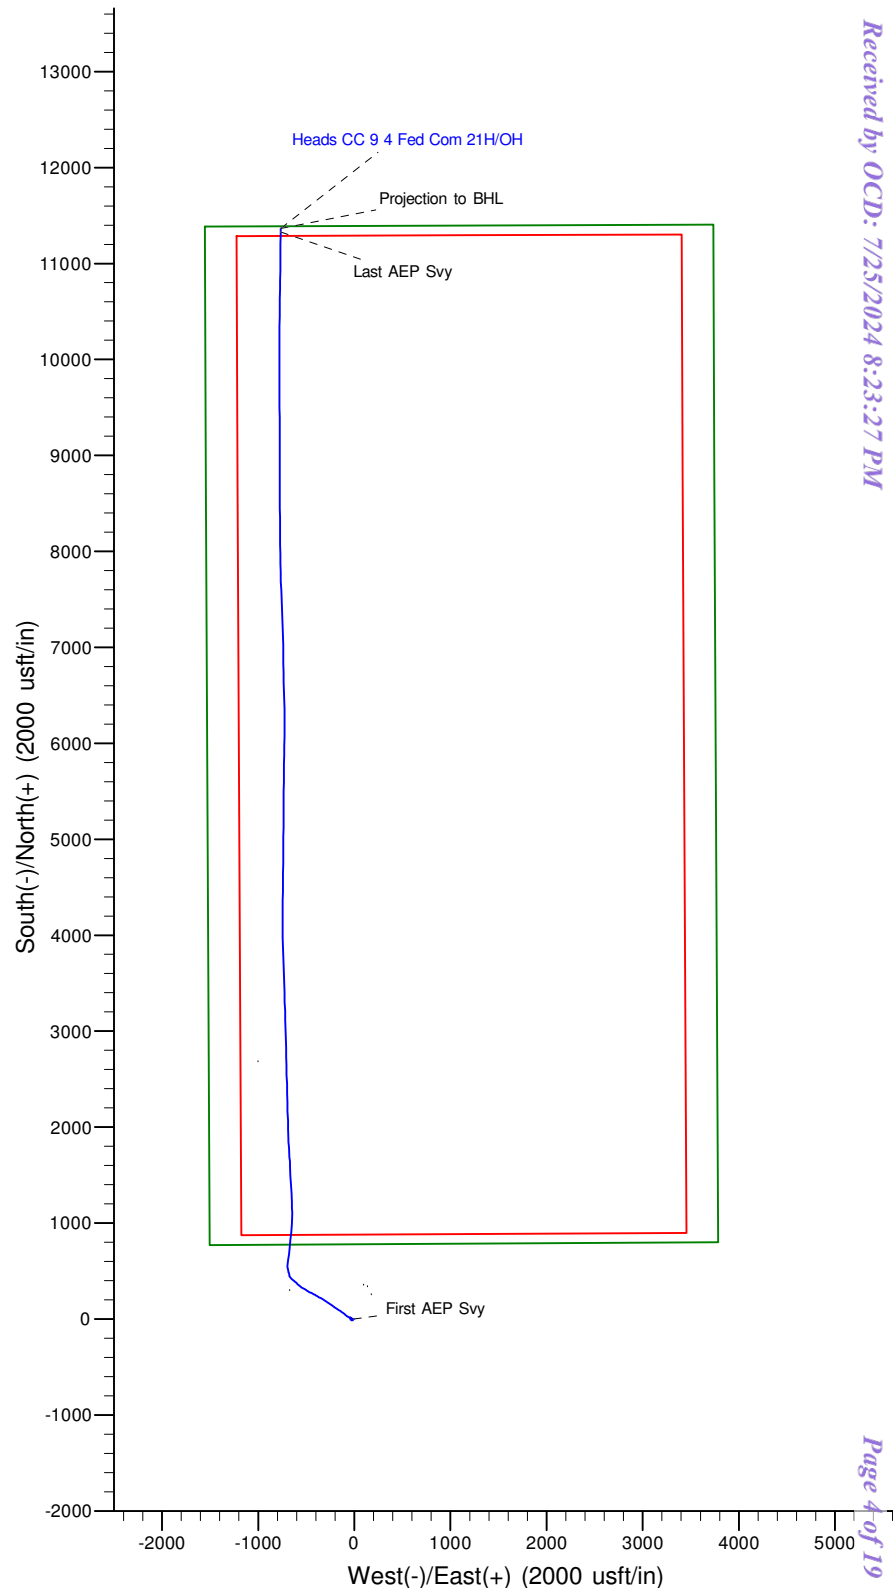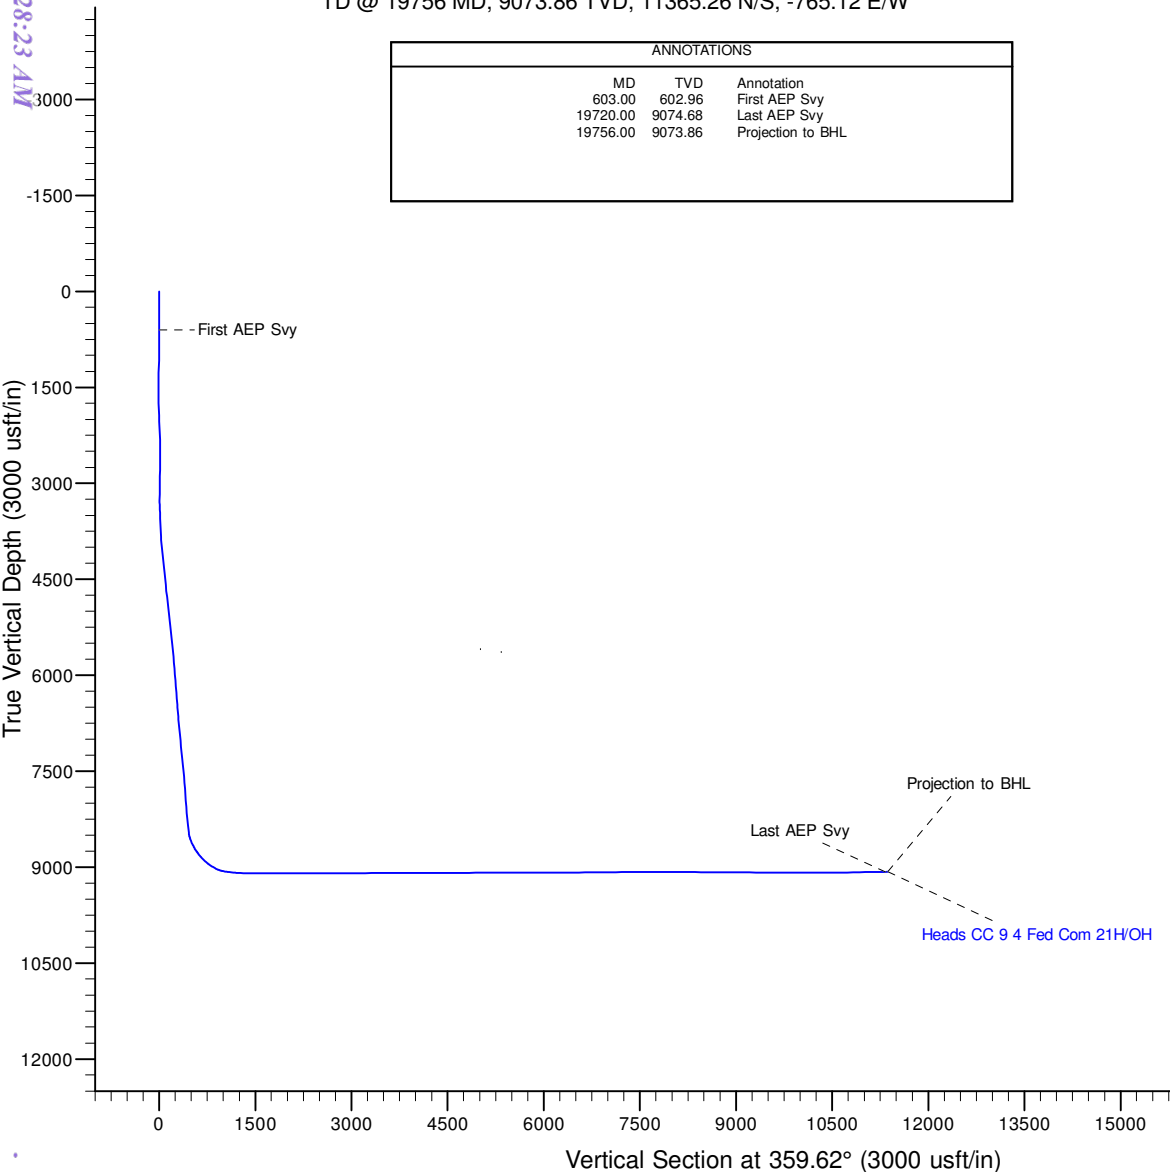

Survey Report

Company:	OXY - Delaware Basin	Local Co-ordinate Reference:	Well Heads CC 9 4 Fed Com 21H
Project:	Eddy County, NM (NAD27 - NM E 3001)	TVD Reference:	HP 267 @ 2953.00usft
Site:	Heads Pad	MD Reference:	HP 267 @ 2953.00usft
Well:	Heads CC 9 4 Fed Com 21H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	OH	Database:	Fhartmann

Project	Eddy County, NM (NAD27 - NM E 3001)		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Site	Heads Pad				
Site Position:		Northing:	444,866.58 usft	Latitude:	32.222596
From:	Map	Easting:	605,342.19 usft	Longitude:	-103.992690
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16 "		

Well	Heads CC 9 4 Fed Com 21H					
Well Position	+N/-S	0.00 usft	Northing:	444,866.58 usft	Latitude:	32.222596
	+E/-W	0.00 usft	Easting:	605,342.19 usft	Longitude:	-103.992690
Position Uncertainty		1.79 usft	Wellhead Elevation:	usft	Ground Level:	2,928.00 usft
Grid Convergence:		0.18 °				

Wellbore	OH				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	HRGM	2/11/2024	6.56	59.80	47,376.41850771

Design	OH				
Audit Notes:					
Version:	1.0	Phase:	ACTUAL	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)	
	0.00	0.00	0.00		359.62

Survey Program	Date	3/15/2024			
From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description	
11.00	492.00	Surface (OH)	B004Mb_MWD+HRGM+SAC	OWSG MWD + HRGM + Sag Correction	
603.00	19,756.00	MWD (OH)	SQC_C705a_MWD+IFR1+S.	OWSG MWD + IFR1 + Sag + FDIR Correction	

Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
11.00	0.00	0.00	11.00	0.00	0.00	0.00	0.00	0.00	0.00	
170.00	0.58	294.58	170.00	0.33	-0.73	0.34	0.36	0.36	0.00	
256.00	0.83	280.46	255.99	0.63	-1.74	0.64	0.35	0.29	-16.42	
350.00	0.90	279.95	349.98	0.88	-3.14	0.90	0.07	0.07	-0.54	
442.00	0.86	272.67	441.97	1.04	-4.54	1.07	0.13	-0.04	-7.91	
492.00	0.82	273.12	491.96	1.07	-5.27	1.11	0.08	-0.08	0.90	
603.00	0.50	235.46	602.96	0.84	-6.46	0.89	0.47	-0.29	-33.93	
First AEP Svy										

Survey Report

Company:	OXY - Delaware Basin	Local Co-ordinate Reference:	Well Heads CC 9 4 Fed Com 21H
Project:	Eddy County, NM (NAD27 - NM E 3001)	TVD Reference:	HP 267 @ 2953.00usft
Site:	Heads Pad	MD Reference:	HP 267 @ 2953.00usft
Well:	Heads CC 9 4 Fed Com 21H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	OH	Database:	Fhartmann

Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
699.00	0.56	222.53	698.95	0.26	-7.12	0.31	0.14	0.06	-13.47
795.00	0.77	217.22	794.95	-0.60	-7.83	-0.55	0.23	0.22	-5.53
891.00	0.66	239.58	890.94	-1.39	-8.70	-1.34	0.31	-0.11	23.29
987.00	1.10	224.57	986.93	-2.33	-9.82	-2.26	0.51	0.46	-15.64
1,082.00	1.65	228.79	1,081.90	-3.88	-11.49	-3.80	0.59	0.58	4.44
1,178.00	2.04	229.67	1,177.85	-5.90	-13.83	-5.81	0.41	0.41	0.92
1,273.00	2.14	228.58	1,272.79	-8.16	-16.45	-8.06	0.11	0.11	-1.15
1,369.00	2.11	224.98	1,368.72	-10.60	-19.05	-10.47	0.14	-0.03	-3.75
1,464.00	2.18	265.56	1,463.66	-11.98	-22.08	-11.83	1.57	0.07	42.72
1,559.00	2.43	279.89	1,558.58	-11.77	-25.87	-11.60	0.66	0.26	15.08
1,654.00	2.19	282.50	1,653.51	-11.03	-29.63	-10.84	0.28	-0.25	2.75
1,749.00	2.47	316.59	1,748.43	-9.15	-32.80	-8.94	1.46	0.29	35.88
1,844.00	2.69	327.64	1,843.34	-5.78	-35.40	-5.55	0.57	0.23	11.63
1,940.00	2.60	327.91	1,939.23	-2.04	-37.77	-1.78	0.09	-0.09	0.28
2,035.00	2.51	331.75	2,034.14	1.62	-39.90	1.89	0.20	-0.09	4.04
2,130.00	2.27	339.28	2,129.06	5.22	-41.55	5.49	0.42	-0.25	7.93
2,225.00	1.58	358.97	2,224.00	8.28	-42.24	8.56	1.00	-0.73	20.73
2,320.00	1.66	7.02	2,318.97	10.96	-42.09	11.24	0.25	0.08	8.47
2,415.00	1.21	29.10	2,413.94	13.20	-41.43	13.48	0.74	-0.47	23.24
2,511.00	1.23	75.12	2,509.92	14.35	-39.95	14.62	0.99	0.02	47.94
2,606.00	1.71	108.67	2,604.89	14.16	-37.62	14.41	1.02	0.51	35.32
2,701.00	2.07	115.60	2,699.84	12.96	-34.73	13.20	0.45	0.38	7.29
2,796.00	1.66	117.59	2,794.79	11.59	-31.96	11.80	0.44	-0.43	2.09
2,891.00	1.33	114.65	2,889.75	10.49	-29.74	10.69	0.36	-0.35	-3.09
2,986.00	1.33	112.89	2,984.73	9.60	-27.72	9.78	0.04	0.00	-1.85
3,081.00	1.38	111.71	3,079.70	8.75	-25.64	8.92	0.06	0.05	-1.24
3,176.00	0.54	163.69	3,174.69	7.90	-24.45	8.06	1.19	-0.88	54.72
3,271.00	1.59	275.18	3,269.68	7.59	-25.64	7.75	1.95	1.11	117.36
3,366.00	4.26	293.46	3,364.54	9.11	-30.19	9.31	2.94	2.81	19.24
3,461.00	5.33	294.94	3,459.21	12.37	-37.43	12.62	1.13	1.13	1.56
3,557.00	5.35	294.51	3,554.79	16.11	-45.54	16.41	0.05	0.02	-0.45
3,652.00	5.46	294.89	3,649.37	19.85	-53.67	20.21	0.12	0.12	0.40
3,747.00	5.55	294.08	3,743.93	23.63	-61.97	24.04	0.13	0.09	-0.85
3,842.00	6.46	302.44	3,838.41	28.37	-70.67	28.84	1.33	0.96	8.80
3,937.00	7.46	309.14	3,932.71	35.13	-79.97	35.66	1.35	1.05	7.05
4,032.00	8.97	305.80	4,026.74	43.35	-90.76	43.95	1.67	1.59	-3.52
4,127.00	10.04	306.38	4,120.43	52.60	-103.43	53.28	1.13	1.13	0.61
4,223.00	10.10	307.06	4,214.95	62.63	-116.89	63.41	0.14	0.06	0.71
4,318.00	10.05	306.96	4,308.49	72.64	-130.16	73.50	0.06	-0.05	-0.11
4,412.00	9.97	305.93	4,401.06	82.34	-143.30	83.29	0.21	-0.09	-1.10
4,507.00	9.91	304.93	4,494.63	91.85	-156.66	92.89	0.19	-0.06	-1.05
4,603.00	10.13	303.51	4,589.17	101.24	-170.47	102.37	0.34	0.23	-1.48
4,698.00	11.02	302.95	4,682.55	110.79	-185.06	112.02	0.94	0.94	-0.59

Survey Report

Company:	OXY - Delaware Basin	Local Co-ordinate Reference:	Well Heads CC 9 4 Fed Com 21H
Project:	Eddy County, NM (NAD27 - NM E 3001)	TVD Reference:	HP 267 @ 2953.00usft
Site:	Heads Pad	MD Reference:	HP 267 @ 2953.00usft
Well:	Heads CC 9 4 Fed Com 21H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	OH	Database:	Fhartmann

Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
4,793.00	11.33	304.25	4,775.75	120.98	-200.39	122.31	0.42	0.33	1.37	
4,888.00	11.41	304.47	4,868.89	131.55	-215.85	132.98	0.10	0.08	0.23	
4,983.00	11.49	304.64	4,962.00	142.25	-231.38	143.78	0.09	0.08	0.18	
5,078.00	11.39	304.38	5,055.11	152.93	-246.91	154.56	0.12	-0.11	-0.27	
5,173.00	11.46	303.80	5,148.23	163.47	-262.49	165.21	0.14	0.07	-0.61	
5,268.00	11.25	303.85	5,241.37	173.88	-278.03	175.73	0.22	-0.22	0.05	
5,363.00	11.15	303.24	5,334.56	184.08	-293.41	186.02	0.16	-0.11	-0.64	
5,458.00	10.61	302.43	5,427.85	193.81	-308.48	195.85	0.59	-0.57	-0.85	
5,553.00	10.49	302.12	5,521.24	203.10	-323.18	205.23	0.14	-0.13	-0.33	
5,648.00	10.32	301.41	5,614.68	212.13	-337.77	214.36	0.22	-0.18	-0.75	
5,743.00	10.06	300.46	5,708.18	220.77	-352.18	223.10	0.33	-0.27	-1.00	
5,838.00	9.75	299.86	5,801.77	228.98	-366.31	231.40	0.34	-0.33	-0.63	
5,933.00	9.77	299.56	5,895.39	236.96	-380.30	239.48	0.06	0.02	-0.32	
6,028.00	9.69	299.24	5,989.02	244.84	-394.29	247.45	0.10	-0.08	-0.34	
6,123.00	9.37	298.04	6,082.71	252.38	-408.09	255.09	0.40	-0.34	-1.26	
6,218.00	9.08	297.01	6,176.48	259.42	-421.59	262.21	0.35	-0.31	-1.08	
6,314.00	8.81	296.13	6,271.32	266.10	-434.94	268.98	0.32	-0.28	-0.92	
6,409.00	8.57	294.90	6,365.23	272.29	-447.89	275.25	0.32	-0.25	-1.29	
6,504.00	8.53	293.86	6,459.17	278.12	-460.76	281.17	0.17	-0.04	-1.09	
6,598.00	9.68	300.22	6,551.99	284.91	-473.96	288.05	1.62	1.22	6.77	
6,694.00	9.87	303.37	6,646.59	293.50	-487.81	296.73	0.59	0.20	3.28	
6,789.00	10.88	302.58	6,740.04	302.81	-502.16	306.13	1.07	1.06	-0.83	
6,884.00	10.60	302.36	6,833.38	312.31	-517.10	315.74	0.30	-0.29	-0.23	
6,979.00	9.53	300.28	6,926.91	320.96	-531.27	324.47	1.19	-1.13	-2.19	
7,074.00	9.06	303.29	7,020.67	329.03	-544.32	332.63	0.71	-0.49	3.17	
7,169.00	9.21	302.16	7,114.46	337.18	-557.00	340.87	0.25	0.16	-1.19	
7,265.00	9.43	311.03	7,209.20	346.43	-569.44	350.20	1.51	0.23	9.24	
7,360.00	8.39	312.67	7,303.05	356.24	-580.41	360.08	1.13	-1.09	1.73	
7,455.00	7.79	313.21	7,397.11	365.34	-590.20	369.25	0.64	-0.63	0.57	
7,550.00	7.14	315.36	7,491.30	373.95	-599.04	377.92	0.74	-0.68	2.26	
7,646.00	6.78	313.79	7,586.59	382.12	-607.32	386.14	0.42	-0.38	-1.64	
7,741.00	7.35	310.75	7,680.87	389.97	-615.97	394.04	0.72	0.60	-3.20	
7,836.00	7.08	306.85	7,775.12	397.44	-625.26	401.58	0.59	-0.28	-4.11	
7,931.00	6.78	307.28	7,869.42	404.35	-634.41	408.55	0.32	-0.32	0.45	
8,026.00	6.56	310.90	7,963.78	411.30	-642.97	415.56	0.50	-0.23	3.81	
8,122.00	6.03	317.97	8,059.20	418.64	-650.49	422.94	0.98	-0.55	7.36	
8,217.00	6.71	317.36	8,153.62	426.43	-657.59	430.78	0.72	0.72	-0.64	
8,312.00	6.83	319.89	8,247.96	434.83	-664.99	439.23	0.34	0.13	2.66	
8,407.00	6.44	335.08	8,342.33	443.98	-670.88	448.42	1.89	-0.41	15.99	
8,445.00	6.63	346.40	8,380.08	448.05	-672.29	452.50	3.42	0.50	29.79	
8,525.00	6.51	346.39	8,459.56	456.95	-674.44	461.41	0.15	-0.15	-0.01	
8,620.00	19.88	345.63	8,551.84	477.92	-679.74	482.42	14.07	14.07	-0.80	
8,715.00	25.03	347.04	8,639.61	513.18	-688.27	517.73	5.45	5.42	1.48	
8,810.00	31.70	356.56	8,723.20	557.75	-694.28	562.34	8.46	7.02	10.02	

Survey Report

Company:	OXY - Delaware Basin	Local Co-ordinate Reference:	Well Heads CC 9 4 Fed Com 21H
Project:	Eddy County, NM (NAD27 - NM E 3001)	TVD Reference:	HP 267 @ 2953.00usft
Site:	Heads Pad	MD Reference:	HP 267 @ 2953.00usft
Well:	Heads CC 9 4 Fed Com 21H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	OH	Database:	Fhartmann

Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
8,906.00	38.09	11.45	8,802.04	612.11	-689.90	616.67	11.05	6.66	15.51
9,001.00	46.00	8.32	8,872.54	674.74	-679.12	679.23	8.61	8.33	-3.29
9,096.00	49.60	5.08	8,936.35	744.61	-670.97	749.05	4.55	3.79	-3.41
9,191.00	59.43	7.31	8,991.43	821.40	-662.54	825.78	10.52	10.35	2.35
9,286.00	65.42	3.52	9,035.40	905.18	-654.68	909.51	7.23	6.31	-3.99
9,381.00	78.99	4.49	9,064.37	995.20	-648.35	999.48	14.32	14.28	1.02
9,477.00	83.56	359.23	9,078.94	1,089.98	-645.30	1,094.24	7.21	4.76	-5.48
9,572.00	85.15	357.45	9,088.28	1,184.48	-648.04	1,188.75	2.51	1.67	-1.87
9,602.00	86.25	357.35	9,090.53	1,214.36	-649.39	1,218.64	3.68	3.67	-0.33
9,697.00	88.24	357.35	9,095.10	1,309.15	-653.78	1,313.45	2.09	2.09	0.00
9,792.00	90.04	357.31	9,096.52	1,404.03	-658.21	1,408.36	1.90	1.89	-0.04
9,887.00	89.99	357.52	9,096.50	1,498.93	-662.49	1,503.29	0.23	-0.05	0.22
9,982.00	89.94	357.46	9,096.56	1,593.84	-666.65	1,598.23	0.08	-0.05	-0.06
10,077.00	89.85	355.88	9,096.73	1,688.68	-672.17	1,693.10	1.67	-0.09	-1.66
10,173.00	90.04	356.17	9,096.82	1,784.45	-678.82	1,788.91	0.36	0.20	0.30
10,268.00	90.05	358.38	9,096.75	1,879.33	-683.34	1,883.82	2.33	0.01	2.33
10,363.00	90.09	358.12	9,096.63	1,974.29	-686.24	1,978.80	0.28	0.04	-0.27
10,458.00	90.11	357.98	9,096.47	2,069.23	-689.47	2,073.76	0.15	0.02	-0.15
10,553.00	90.01	358.60	9,096.37	2,164.19	-692.31	2,168.73	0.66	-0.11	0.65
10,648.00	90.03	358.81	9,096.33	2,259.17	-694.46	2,263.72	0.22	0.02	0.22
10,743.00	90.00	358.41	9,096.31	2,354.14	-696.76	2,358.71	0.42	-0.03	-0.42
10,839.00	89.93	358.25	9,096.37	2,450.10	-699.56	2,454.68	0.18	-0.07	-0.17
10,934.00	90.08	358.43	9,096.36	2,545.06	-702.31	2,549.66	0.25	0.16	0.19
11,029.00	90.02	358.52	9,096.28	2,640.02	-704.84	2,644.64	0.11	-0.06	0.09
11,124.00	90.05	358.62	9,096.22	2,734.99	-707.21	2,739.62	0.11	0.03	0.11
11,219.00	90.08	358.57	9,096.11	2,829.96	-709.54	2,834.61	0.06	0.03	-0.05
11,315.00	90.09	358.53	9,095.97	2,925.93	-711.97	2,930.59	0.04	0.01	-0.04
11,410.00	90.17	358.37	9,095.75	3,020.90	-714.54	3,025.57	0.19	0.08	-0.17
11,505.00	90.20	358.37	9,095.45	3,115.86	-717.24	3,120.55	0.03	0.03	0.00
11,600.00	90.29	358.61	9,095.04	3,210.83	-719.74	3,215.53	0.27	0.09	0.25
11,696.00	90.11	358.41	9,094.71	3,306.79	-722.24	3,311.51	0.28	-0.19	-0.21
11,792.00	90.19	358.00	9,094.45	3,402.74	-725.25	3,407.48	0.44	0.08	-0.43
11,888.00	90.20	357.90	9,094.13	3,498.68	-728.68	3,503.44	0.10	0.01	-0.10
11,984.00	90.22	358.31	9,093.78	3,594.63	-731.85	3,599.40	0.43	0.02	0.43
12,080.00	90.21	358.17	9,093.42	3,690.58	-734.80	3,695.38	0.15	-0.01	-0.15
12,175.00	90.13	358.09	9,093.13	3,785.53	-737.90	3,790.34	0.12	-0.08	-0.08
12,271.00	90.17	358.29	9,092.88	3,881.48	-740.93	3,886.31	0.21	0.04	0.21
12,367.00	90.18	359.07	9,092.59	3,977.46	-743.15	3,982.30	0.81	0.01	0.81
12,463.00	90.08	0.02	9,092.37	4,073.45	-743.91	4,078.30	1.00	-0.10	0.99
12,558.00	90.05	0.08	9,092.26	4,168.45	-743.83	4,173.29	0.07	-0.03	0.06
12,653.00	90.04	0.52	9,092.19	4,263.45	-743.33	4,268.29	0.46	-0.01	0.46
12,748.00	90.43	0.61	9,091.80	4,358.45	-742.39	4,363.27	0.42	0.41	0.09
12,843.00	90.34	0.28	9,091.16	4,453.44	-741.65	4,458.26	0.36	-0.09	-0.35

Survey Report

Company:	OXY - Delaware Basin	Local Co-ordinate Reference:	Well Heads CC 9 4 Fed Com 21H
Project:	Eddy County, NM (NAD27 - NM E 3001)	TVD Reference:	HP 267 @ 2953.00usft
Site:	Heads Pad	MD Reference:	HP 267 @ 2953.00usft
Well:	Heads CC 9 4 Fed Com 21H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	OH	Database:	Fhartmann

Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
12,939.00	90.37	0.39	9,090.57	4,549.44	-741.09	4,554.25	0.12	0.03	0.11	
13,033.00	90.37	0.48	9,089.96	4,643.43	-740.38	4,648.24	0.10	0.00	0.10	
13,129.00	90.19	0.53	9,089.49	4,739.43	-739.53	4,744.23	0.19	-0.19	0.05	
13,224.00	90.26	0.67	9,089.12	4,834.42	-738.54	4,839.21	0.16	0.07	0.15	
13,319.00	90.27	0.72	9,088.68	4,929.41	-737.39	4,934.20	0.05	0.01	0.05	
13,414.00	90.35	0.68	9,088.16	5,024.40	-736.22	5,029.18	0.09	0.08	-0.04	
13,509.00	90.27	0.63	9,087.65	5,119.40	-735.14	5,124.16	0.10	-0.08	-0.05	
13,604.00	90.17	0.13	9,087.28	5,214.39	-734.51	5,219.15	0.54	-0.11	-0.53	
13,699.00	90.30	0.29	9,086.89	5,309.39	-734.16	5,314.15	0.22	0.14	0.17	
13,794.00	90.33	0.65	9,086.37	5,404.39	-733.38	5,409.13	0.38	0.03	0.38	
13,890.00	90.30	0.64	9,085.84	5,500.38	-732.30	5,505.12	0.03	-0.03	-0.01	
13,985.00	90.26	0.25	9,085.38	5,595.38	-731.56	5,600.11	0.41	-0.04	-0.41	
14,080.00	90.37	0.56	9,084.86	5,690.37	-730.89	5,695.09	0.35	0.12	0.33	
14,175.00	90.39	0.38	9,084.23	5,785.37	-730.11	5,790.08	0.19	0.02	-0.19	
14,270.00	89.93	1.08	9,083.96	5,880.36	-728.90	5,885.06	0.88	-0.48	0.74	
14,365.00	89.53	1.99	9,084.41	5,975.32	-726.36	5,980.01	1.05	-0.42	0.96	
14,460.00	90.14	1.06	9,084.68	6,070.29	-723.83	6,074.95	1.17	0.64	-0.98	
14,555.00	89.41	0.14	9,085.06	6,165.28	-722.83	6,169.94	1.24	-0.77	-0.97	
14,651.00	90.55	359.30	9,085.09	6,261.28	-723.30	6,265.93	1.48	1.19	-0.88	
14,746.00	90.54	358.36	9,084.19	6,356.25	-725.24	6,360.92	0.99	-0.01	-0.99	
14,841.00	90.19	357.64	9,083.58	6,451.19	-728.56	6,455.88	0.84	-0.37	-0.76	
14,936.00	90.43	358.52	9,083.07	6,546.13	-731.74	6,550.84	0.96	0.25	0.93	
15,031.00	90.19	359.46	9,082.55	6,641.12	-733.42	6,645.83	1.02	-0.25	0.99	
15,127.00	90.30	358.95	9,082.14	6,737.11	-734.75	6,741.83	0.54	0.11	-0.53	
15,222.00	90.27	359.09	9,081.67	6,832.09	-736.37	6,836.82	0.15	-0.03	0.15	
15,317.00	90.29	359.64	9,081.21	6,927.08	-737.43	6,931.82	0.58	0.02	0.58	
15,412.00	90.28	358.62	9,080.73	7,022.07	-738.87	7,026.82	1.07	-0.01	-1.07	
15,508.00	90.39	358.25	9,080.17	7,118.03	-741.49	7,122.79	0.40	0.11	-0.39	
15,603.00	90.25	358.00	9,079.64	7,212.98	-744.60	7,217.76	0.30	-0.15	-0.26	
15,698.00	90.34	357.77	9,079.15	7,307.91	-748.10	7,312.71	0.26	0.09	-0.24	
15,793.00	90.18	357.63	9,078.72	7,402.84	-751.92	7,407.66	0.22	-0.17	-0.15	
15,888.00	90.60	358.16	9,078.08	7,497.77	-755.41	7,502.61	0.71	0.44	0.56	
15,983.00	89.92	357.99	9,077.64	7,592.71	-758.60	7,597.58	0.74	-0.72	-0.18	
16,079.00	89.94	357.70	9,077.76	7,688.65	-762.21	7,693.53	0.30	0.02	-0.30	
16,174.00	89.84	358.23	9,077.94	7,783.59	-765.58	7,788.49	0.57	-0.11	0.56	
16,269.00	89.73	358.65	9,078.30	7,878.55	-768.17	7,883.47	0.46	-0.12	0.44	
16,364.00	89.69	359.24	9,078.78	7,973.53	-769.92	7,978.46	0.62	-0.04	0.62	
16,460.00	89.64	359.81	9,079.34	8,069.53	-770.71	8,074.46	0.60	-0.05	0.59	
16,554.00	89.97	359.77	9,079.66	8,163.53	-771.06	8,168.46	0.35	0.35	-0.04	
16,649.00	90.04	359.73	9,079.65	8,258.52	-771.47	8,263.46	0.08	0.07	-0.04	
16,744.00	89.69	359.82	9,079.88	8,353.52	-771.84	8,358.46	0.38	-0.37	0.09	
16,839.00	90.00	359.56	9,080.13	8,448.52	-772.36	8,453.46	0.43	0.33	-0.27	
16,934.00	89.88	0.29	9,080.23	8,543.52	-772.48	8,548.46	0.78	-0.13	0.77	

Survey Report

Company:	OXY - Delaware Basin	Local Co-ordinate Reference:	Well Heads CC 9 4 Fed Com 21H
Project:	Eddy County, NM (NAD27 - NM E 3001)	TVD Reference:	HP 267 @ 2953.00usft
Site:	Heads Pad	MD Reference:	HP 267 @ 2953.00usft
Well:	Heads CC 9 4 Fed Com 21H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	OH	Database:	Fhartmann

Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
17,029.00	89.73	359.63	9,080.56	8,638.52	-772.55	8,643.45	0.71	-0.16	-0.69	
17,124.00	89.87	359.90	9,080.89	8,733.52	-772.94	8,738.45	0.32	0.15	0.28	
17,219.00	89.79	0.08	9,081.17	8,828.52	-772.95	8,833.45	0.21	-0.08	0.19	
17,315.00	89.93	0.06	9,081.41	8,924.52	-772.84	8,929.45	0.15	0.15	-0.02	
17,409.00	89.73	0.38	9,081.68	9,018.52	-772.48	9,023.44	0.40	-0.21	0.34	
17,504.00	89.80	0.16	9,082.07	9,113.51	-772.03	9,118.43	0.24	0.07	-0.23	
17,599.00	89.66	359.64	9,082.52	9,208.51	-772.19	9,213.43	0.57	-0.15	-0.55	
17,694.00	89.65	359.32	9,083.09	9,303.51	-773.06	9,308.43	0.34	-0.01	-0.34	
17,789.00	89.80	359.10	9,083.55	9,398.50	-774.37	9,403.43	0.28	0.16	-0.23	
17,885.00	89.67	358.76	9,083.99	9,494.48	-776.16	9,499.42	0.38	-0.14	-0.35	
17,980.00	89.90	359.96	9,084.35	9,589.47	-777.22	9,594.41	1.29	0.24	1.26	
18,075.00	89.89	359.66	9,084.52	9,684.47	-777.53	9,689.41	0.32	-0.01	-0.32	
18,170.00	89.80	359.48	9,084.78	9,779.47	-778.25	9,784.41	0.21	-0.09	-0.19	
18,265.00	89.62	359.56	9,085.26	9,874.46	-779.04	9,879.41	0.21	-0.19	0.08	
18,359.00	89.78	0.74	9,085.75	9,968.46	-778.80	9,973.40	1.27	0.17	1.26	
18,454.00	89.80	0.85	9,086.10	10,063.45	-777.48	10,068.38	0.12	0.02	0.12	
18,550.00	89.81	0.02	9,086.43	10,159.44	-776.75	10,164.37	0.86	0.01	-0.86	
18,645.00	89.71	359.72	9,086.83	10,254.44	-776.97	10,259.37	0.33	-0.11	-0.32	
18,740.00	89.81	0.60	9,087.23	10,349.44	-776.70	10,354.36	0.93	0.11	0.93	
18,835.00	90.06	1.18	9,087.33	10,444.43	-775.23	10,449.34	0.66	0.26	0.61	
18,930.00	90.82	0.96	9,086.60	10,539.41	-773.45	10,544.31	0.83	0.80	-0.23	
19,026.00	90.67	0.67	9,085.36	10,635.39	-772.09	10,640.28	0.34	-0.16	-0.30	
19,121.00	90.72	0.56	9,084.20	10,730.38	-771.07	10,735.26	0.13	0.05	-0.12	
19,216.00	90.78	0.29	9,082.96	10,825.37	-770.36	10,830.24	0.29	0.06	-0.28	
19,311.00	90.93	0.19	9,081.54	10,920.36	-769.96	10,925.22	0.19	0.16	-0.11	
19,406.00	91.27	0.80	9,079.72	11,015.33	-769.14	11,020.19	0.74	0.36	0.64	
19,501.00	90.80	0.77	9,078.00	11,110.31	-767.84	11,115.16	0.50	-0.49	-0.03	
19,597.00	90.71	0.47	9,076.74	11,206.30	-766.80	11,211.13	0.33	-0.09	-0.31	
19,692.00	91.07	0.66	9,075.26	11,301.28	-765.87	11,306.11	0.43	0.38	0.20	
19,720.00	91.31	0.67	9,074.68	11,329.27	-765.54	11,334.10	0.86	0.86	0.04	
Last AEP Svy										
19,756.00	91.31	0.67	9,073.86	11,365.26	-765.12	11,370.08	0.00	0.00	0.00	
Projection to BHL										

Design Annotations					
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates			
		+N/-S (usft)	+E/-W (usft)	Comment	
603.00	602.96	0.84	-6.46	First AEP Svy	
19,720.00	9,074.68	11,329.27	-765.54	Last AEP Svy	
19,756.00	9,073.86	11,365.26	-765.12	Projection to BHL	

Survey Report

Company:	OXY - Delaware Basin	Local Co-ordinate Reference:	Well Heads CC 9 4 Fed Com 21H
Project:	Eddy County, NM (NAD27 - NM E 3001)	TVD Reference:	HP 267 @ 2953.00usft
Site:	Heads Pad	MD Reference:	HP 267 @ 2953.00usft
Well:	Heads CC 9 4 Fed Com 21H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	OH	Database:	Fhartmann

Checked By:	_____	Approved By:	_____	Date:	_____
-------------	-------	--------------	-------	-------	-------

Well Name: HEADS CC 9-4 FEDERAL COM

Well Location: T24S / R29E / SEC 16 / NWSW / 32.228574 / -103.994479

County or Parish/State: EDDY / NM

Well Number: 21H

Type of Well: OIL WELL

Allottee or Tribe Name:

Lease Number: NMNM99034

Unit or CA Name:

Unit or CA Number:

US Well Number: 3001547188

Operator: OXY USA INCORPORATED

Subsequent Report

Sundry ID: 2788590

Type of Submission: Subsequent Report

Date Sundry Submitted: 05/06/2024

Date Operation Actually Began: 03/21/2024

Type of Action: Workover Operations

Time Sundry Submitted: 01:03

Actual Procedure: RUPU 03/21/24, RIH & clean out to PBTD @ 19710', pressure test casing to 6000# for 30 min, good test. RIH & perf @ 9552-19582' Total 1200 holes. Frac in 40 stages w/ 463718BBL Produced Water + 841BBL Brackish Water (> 1,000 mg/l TDS and 10,000 mg/l TDS) w/ 27728972# sand, RD Frac 04/15/24. Well ready to produce 04/29/24. OXY USA Inc. requests a tubing exception while continuing to flow back this well. The estimated date of tubing install is 07/31/2024.

Well Name: HEADS CC 9-4 FEDERAL COM	Well Location: T24S / R29E / SEC 16 / NWSW / 32.228574 / -103.994479	County or Parish/State: EDDY / NM
Well Number: 21H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM99034	Unit or CA Name:	Unit or CA Number:
US Well Number: 3001547188	Operator: OXY USA INCORPORATED	

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: JANA MENDIOLA	Signed on: MAY 06, 2024 01:02 PM
Name: OXY USA INCORPORATED	
Title: Regulatory Advisor	
Street Address: 1600 GEHRIG DR	
City: MIDLAND	State: TX
Phone: (432) 685-5936	
Email address: Janalyn_mendiola@oxy.com	

Field

Representative Name:		
Street Address:		
City:	State:	Zip:
Phone:		
Email address:		

BLM Point of Contact

BLM POC Name: JONATHON W SHEPARD	BLM POC Title: Petroleum Engineer
BLM POC Phone: 5752345972	BLM POC Email Address: jshepard@blm.gov
Disposition: Accepted	Disposition Date: 05/15/2024
Signature: Jonathon Shepard	

Submit To Appropriate District Office Two Copies <u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 <u>District II</u> 811 S. First St., Artesia, NM 88210 <u>District III</u> 1000 Rio Brazos Rd., Aztec, NM 87410 <u>District IV</u> 1220 S. St. Francis Dr., Santa Fe, NM 87505		State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505				Form C-105 Revised April 3, 2017				
WELL COMPLETION OR RECOMPLETION REPORT AND LOG										
4. Reason for filing: ☒ COMPLETION REPORT (Fill in boxes #1 through #31 for State and Fee wells only) ☐ C-144 CLOSURE ATTACHMENT (Fill in boxes #1 through #9, #15 Date Rig Released and #32 and/or #33; attach this and the plat to the C-144 closure report in accordance with 19.15.17.13.K NMAC)						5. Lease Name or Unit Agreement Name HEADS CC 9-4 FEDERAL COM		6. Well Number: 21H		
7. Type of Completion: ☒ NEW WELL ☐ WORKOVER ☐ DEEPENING ☐ PLUGBACK ☐ DIFFERENT RESERVOIR ☐ OTHER										
8. Name of Operator: OXY USA INC.						9. OGRID: 16696				
10. Address of Operator: P.O. BOX 50250 MIDLAND, TX 79710						11. Pool name or Wildcat PIERCE CROSSING; BONE SPRING, EAST				
12. Location	Unit Ltr	Section	Township	Range	Lot	Feet from the	N/S Line	Feet from the	E/W Line	County
Surface:	C	16	24S	29E		780	NORTH	1504	WEST	EDDY
BH:	D	4	24S	29E	4	23	NORTH	791	WEST	EDDY
13. Date Spudded 02/03/24		14. Date T.D. Reached 03/13/2024		15. Date Rig Released 03/16/2024		16. Date Completed (Ready to Produce) 04/29/2024		17. Elevations (DF and RKB, RT, GR, etc.) 2928' GL		
18. Total Measured Depth of Well 19756'M 9074'V				19. Plug Back Measured Depth 19710'M 9074'V		20. Was Directional Survey Made? YES		21. Type Electric and Other Logs Run CBL		
22. Producing Interval(s), of this completion - Top, Bottom, Name 9552-19582' 3 RD BONE SPRING										
23. CASING RECORD (Report all strings set in well)										
CASING SIZE		WEIGHT LB./FT.		DEPTH SET		HOLE SIZE		CEMENTING RECORD		AMOUNT PULLED
10.75" J55		45.5		540'		14.75"		839sx-surf circ		
7.827" P110S		39.3		8510'		9.875"		1958sx-surf		
5.5" P110 CY liner		20		8286'-19736'		6.75"		574sx-TOC@8286'		
24. LINER RECORD										
SIZE	TOP	BOTTOM		SACKS CEMENT	SCREEN		25. TUBING RECORD			
							SIZE	DEPTH SET		PACKER SET
26. Perforation record (interval, size, and number) 9552-19582' Total 1200 holes, Hole Size=0.41						27. ACID, SHOT, FRACTURE, CEMENT, SQUEEZE, ETC.				
						DEPTH INTERVAL		AMOUNT AND KIND MATERIAL USED		
						9552-19582'		463718BBL Produced Water + 841BBL Brackish Water (> 1,000 mg/l TDS and 10,000 mg/l TDS) w/ 27728972# sand		
28. PRODUCTION										
Date First Production 05/01/2024		Production Method (<i>Flowing, gas lift, pumping - Size and type pump</i>) Flowing				Well Status (<i>Prod. or Shut-in</i>) Prod.				
Date of Test 05/13/2024	Hours Tested 24 hrs.	Choke Size 75	Prod'n For Test Period	Oil - Bbl 3898	Gas - MCF 5780	Water - Bbl. 2984	Gas - Oil Ratio 1483			
Flow Tubing Press.	Casing Pressure 955	Calculated 24- Hour Rate	Oil - Bbl. 3898	Gas - MCF 5780	Water - Bbl. 2984	Oil Gravity - API - (<i>Corr.</i>)				
29. Disposition of Gas (<i>Sold, used for fuel, vented, etc.</i>) SOLD								30. Test Witnessed By		
31. List Attachments WBD, C-104, As-Drilled C-102, Final Directional Survey, Completion Sundry C-103										
32. If a temporary pit was used at the well, attach a plat with the location of the temporary pit.								33. Rig Release Date:		
34. If an on-site burial was used at the well, report the exact location of the on-site burial:										
Latitude _____ Longitude _____ NAD83										
I hereby certify that the information shown on both sides of this form is true and complete to the best of my knowledge and belief										
Printed										
Signature: <u>Jana Mendiola</u> Name: <u>Jana Mendiola</u> Title: <u>Regulatory Advisor</u> Date: <u>07/25/2024</u>										
E-mail Address: <u>janalyn_mendiola@oxy.com</u>										

This form is to be filed with the appropriate District Office of the Division not later than 20 days after the completion of any newly-drilled or deepened well and not later than 60 days after completion of closure. When submitted as a completion report, this shall be accompanied by one copy of all electrical and radio-activity logs run on the well and a summary of all special tests conducted, including drill stem tests. All depths reported shall be measured depths. In the case of directionally drilled wells, true vertical depths shall also be reported. For multiple completions, items 11, 12 and 26-31 shall be reported for each zone.

Southeastern New Mexico		Northwestern New Mexico	
T. Rustler 133'	T. Bell Canyon 2924'	T. Ojo Alamo	T. Penn A"
T. Salado 606'	T. Strawn	T. Kirtland	T. Penn. "B"
T. Castile 1287'	T. Atoka	T. Fruitland	T. Penn. "C"
T. Delaware 2858'	T. Miss	T. Pictured Cliffs	T. Penn. "D"
T. Cherry Canyon 3770'	T. Devonian	T. Cliff House	T. Leadville
T. Brushy Canyon 5017'	T. Silurian	T. Menefee	T. Madison
T. Grayburg	T. Montoya	T. Point Lookout	T. Elbert
T. San Andres	T. Simpson	T. Mancos	T. McCracken
T. Glorieta	T. McKee	T. Gallup	T. Ignacio Otzte
T. Paddock	T. Ellenburger	Base Greenhorn	T. Granite
T. Blinebry	T. Gr. Wash	T. Dakota	
T. Tubb	T. Delaware Sand	T. Morrison	
T. Drinkard	T. Bone Spring 6589'	T. Todilto	
T. Abo	T. 1st Bone Spring 7601'	T. Entrada	
T. Wolfcamp	T. 2nd Bone Spring 8480'	T. Wingate	
T. Penn	T. 3rd Bone Spring 8810'	T. Chinle	
T. Cisco (Bough C)	T.	T. Permian	

No. 1, from.....to.....

No. 2, from.....to.....

No. 3, from.....to.....

No. 4, from.....to.....

Include data on rate of water inflow and elevation to which water rose in hole.


No. 1, from.....to.....feet.....
 No. 2, from.....to.....feet.....
 No. 3, from.....to.....feet.....

From	To	Thickness In Feet	Lithology

(Attach additional sheets if necessary)

From	To	Thickness In Feet	Lithology

OXY USA Inc.
HEADS CC 9-4 FEDERAL COM 21H
API No. 30-015-47188

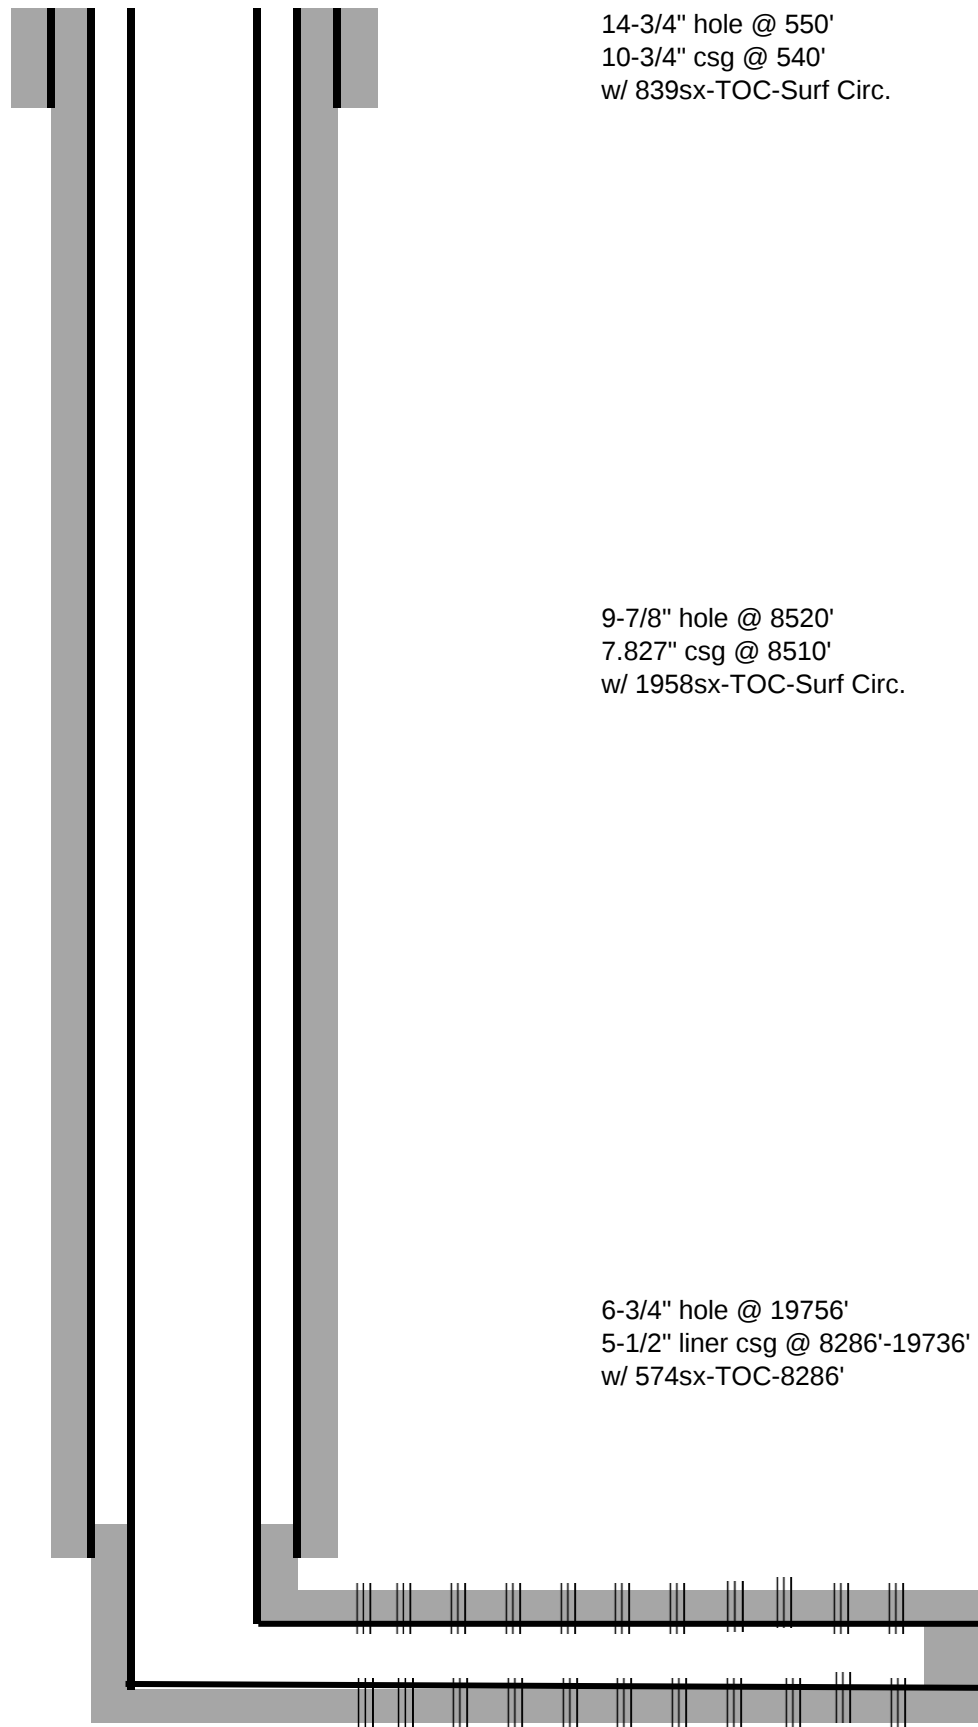

Perfs @ 9552-19582'

TD- 19756'M 9074'V

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

ACKNOWLEDGMENTS

Action 367514

ACKNOWLEDGMENTS

Operator: OXY USA INC P.O. Box 4294 Houston, TX 772104294	OGRID: 16696
	Action Number: 367514
	Action Type: [C-104] Completion Packet (C-104C)

ACKNOWLEDGMENTS

☒	I hereby certify that the required Water Use Report has been, or will be, submitted for this wells completion.
☒	I hereby certify that the required FracFocus disclosure has been, or will be, submitted for this wells completion.

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 367514

CONDITIONS

Operator: OXY USA INC P.O. Box 4294 Houston, TX 772104294	OGRID: 16696
	Action Number: 367514
	Action Type: [C-104] Completion Packet (C-104C)

CONDITIONS

Created By	Condition	Condition Date
plmartinez	File 3160-4 Completion Report within 10 days of BLM approval.	5/16/2025