Form C-103 of 36 Received by OCD 18 8/21/2025 9:09:54 AM State of New Mexico Phone: (505) 476-3441 Revised July 18, 2013 Energy, Minerals and Natural Resources General Information WELL API NO. Phone: (505) 629-6116 05-067-10060/30-045-38410 OIL CONSERVATION DIVISION Online Phone Directory Visit: 5. Indicate Type of Lease https://www.emnrd.nm.gov/ocd/contact-us/ 1220 South St. Francis Dr. FEE X STATE Santa Fe, NM 87505 6. State Oil & Gas Lease No. SUNDRY NOTICES AND REPORTS ON WELLS 7. Lease Name or Unit Agreement Name (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH Allison Unit PROPOSALS.) 8. Well Number 630H 1. Type of Well: Oil Well Gas Well X Other 2. Name of Operator 9. OGRID Number Hilcorp Energy Company 372171 10. Pool name or Wildcat 3. Address of Operator 382 Road 3100, Aztec, NM 87410 Mancos 4. Well Location Unit Letter F (LOT 3) : 538' feet from the North feet from the West line and 1560' Township 32N **NMPM** County San Juan Section Range 07W

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

SUBSECUENT REPORT OF

11. Elevation (Show whether DR, RKB, RT, GR, etc.) 6352' GL

NOTICE OF INTENTION TO:

NOTICE OF INTENTION		DEQUEITI ILLI OITI OI .
PERFORM REMEDIAL WORK PLUG AND	ABANDON 🗌 REMEDIAL WORK	
TEMPORARILY ABANDON CHANGE F	PLANS COMMENCE DRIL	LING OPNS. P AND A
PULL OR ALTER CASING MULTIPLE	COMPL CASING/CEMENT	JOB 🔲
DOWNHOLE COMMINGLE		
CLOSED-LOOP SYSTEM		
OTHER: X APD Change of	Plans OTHER:	
13. Describe proposed or completed operation	ons. (Clearly state all pertinent details, and	give pertinent dates, including estimated date
	LE 19.15.7.14 NMAC. For Multiple Con	
proposed completion or recompletion.	•	
		ds are split into 2 separate rows, and will now be lined up in a
single line. Please see the attached revised plat, techni	cal plans and directional plans.	
	7	
Spud Date:	Rig Release Date:	
1		
	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	11 1' 0
I hereby certify that the information above is true	and complete to the best of my knowledge	and belief.
110		
All which		D
SIGNATURE AWWELL	TITLE Operations/Regulatory Tech Sr.	DATE 8/21/2025
Type or print name Amanda Walker	E-mail address: mwalker@hilcorp.com	PHONE: 346-237-2177
For State Use Only		
APPROVED BY:	TITLE	DATE

Conditions of Approval (if any):

Received by OCD: 8/21/2025 9:09:54 AM

FORM 4 Rev 03/22

State of Colorado **Energy & Carbon Management Commission**



			Daga 2	of 36
DE	ET	OE 1	ES 2	oy 30
Docu	ment N	lumbe	r:	

1120 Lincoln Street, Suite 801, Denver, Colorado 80203 Phone: (303) 894-2100 Fax: (303) 894-2109

SUNDRY NOTICE

This form is required for reports, updates, and requests as specified in the ECMC rules. It is also used to request changes to some aspects of approved permits for Wells and Oil and Gas Locations.

DE	ET	OE	ES	ĺ		
Document Number:						
<u>404316840</u>						
Date Received:						
	08/1	5/2025	<u>i</u>			

	ntact Name Amanda Walker
Name of Operator: HILCORP ENERGY COMPANY	Phone: (346) 237-2177
Address: P O BOX 61229	Fax: ()
City: HOUSTON State: TX Zip: 77208	Email: mwalker@hilcorp.com
FORM 4 SUBMITTED FOR:	
Facility Type: WELL	
API Number : 05- 067 10060 00 ID Number:	489729
Name: Allison Unit Number: 630H	
Location QtrQtr: L1 Section: 20 Township: 32N Rang	e: 6W Meridian: N
County: LA PLATA Field Name: IGNACIO B	LANCO
Oil & Gas Location(s) and Oil & Gas Development Plan (OGDP) Information	
Location(s)	
No Location	
OGDP(s)	
No OGDP	
WELL LOCATION CHANCE OF AC PUBL COC PEROPT	
WELL LOCATION CHANGE OR AS-BUILT GPS REPORT See Change of Location for Well *	As Built CBS I section Beneat with Survey
 Change of Location for Well * As-Built GPS Location Report Well Location Change requires a new Plat. 	As-Built GPS Location Report with Survey
·	of Surface Location and As Built Reports.
Latitude 36.998582 Longitude -107.521284	of duriace Education and As Built Reports.
	easurement Date: 07/10/2025
Well Ground Elevation: 6352 feet (Required for change of Surface Loca	
	,
WELL LOCATION CHANGE	
Well plan is: HORIZONTAL (Vertical, Directional, Horizontal)	FNL/FSL FEL/FWL
Change of Surface Footage From:	554 FNL 1635 FWL
Change of Surface Footage To:	538 FSL 1560 FWL
Current Surface Location From QtrQtr L1 Sec 20	Twp 32N Range 6W Meridian N
New Surface Location To QtrQtr L1 Sec 20	Twp 32N Range 6W Meridian N
Change of Top of Productive Zone Footage From :	649 FSL 1297 FEL
Change of Top of Productive Zone Footage To :	249 FSL 2134 FEL **
Current Top of Productive Zone Location Sec 20	Twp 32N Range 6W
New Top of Productive Zone Location Sec 20	Twp 32N Range 6W

ceived by OCD: 8/21/2025 9:0 Change of Base of Productive	79:54 AM Zone Footage	From:			FSL			FEL	Pa	ge 3
Change of Base of Productive	Zone Footage	То:		201	FSL	663		FEL	**	
Current Base of Productive Z	one Location	Sec		Twp		Range				
lew Base of Productive Zone	Location	Sec	22	Twp 32	2N	Range	6W			
Change of Bottomhole Footag	e From :			613	FSL	1737	-	FEL		
Change of Bottomhole Footag	e To :			201	FSL	522	Ti	FEL	**	
Current Bottomhole Location	Sec	22 Twp	32N	Range	6W	** attac	h devi	ated dr	illing pla	an
New Bottomhole Location	Sec	22 Twp	32N	Range	6W					
SAFETY SETBACK INFORMATION	Re	equired for change	of Surface Lo	cation.						
Distance from Well to nearest:				INSTRUCT	IONS:					
Buildi	ng: 528	n Feet			II distances					
Building U	nit: 858	_ ₀ Feet			80 for distar - nearest bu	•			est	
Public Ro	ad: 528	_ 0 Feet		Building is	a Building l					
Above Ground Uti	lity: 5280	 0 Feet		both. - Building	Unit – as de	fined in 100) Series	Rules.		
Railro	ad: 5280	 0 Feet								
Property Li	ne: 86	_ 5 Feet								
Enter the minimum dista unit permitted or comple If NO:		-		Completed 2	Zone of an	offset Wel	l withi	n the sa	ame	
Enter the minimum distance	e from the Com	pleted Zone of this	Well to the Le	ase Line of t	he describ	ed lease:			Feet	
Enter the minimum distance							roduci	ng fron		
the same lease and permit				Feet		•				
Exception Location	·									
	proval of a Rule	401 a Evantion I	agatian antar	the Bule or	ongoing or	dar numba	r and	ottoob t	·ho	
If this Well requires the appearance Exception Location Reque	-	•	ocation, enter	ale Nule UI	spacing of	aei numbe	anu	unaull	10	
LOCATION CHANGE COI	MMENTS									
HANGE OR ADD OBJECTI	<u>VE FORMATI</u>	ON AND/OR SPA	ACING UNIT	•						
		1		1					1	
Objective Formation	Formation Code	Spacing Order Number	<u>Unit</u> <u>Acreage</u>	<u>Unit (</u>	Configurat	ion	Add	Modify	No Change	Delet

RULE 502 VA	RIANCE			
Order Number:				
Description:				
REMOVE FR	OM SURFACE BONI	D Signed surface use agr	eement is a req	uired attachment
CHANGE NA	ME OR NUMBER O	WELL, FACILITY, OIL &	GAS LOCATIO	N, OR OGDP
From: Nam	e ALLISON UNIT	Number	630H	Effective Date:
To: Nam	ne	Number		
ABANDON PE	RMIT: Permit can only on will be conducted t	be abandoned if the permitt o verify site status.	ed operation ha	as NOT been conducted.
WELL:Aba	ndon Application for Per	mit-to-Drill (Form2) – Well API	Number	has not been drilled.
PIT: Aband	on Earthen Pit Permit (F	Form 15) – ECMC Pit Facility I	Number	has not been constructed (Permitted
and constru	ucted pit requires closur	e per Rule 911)		
CENTRAL	ZED E&P WASTE MAN	IAGEMENT FACILITY: Abando	on Centralized Ea	&P Waste Management Facility Permit
(Form 28) -	- Facility ID Number	has not been cons	tructed (Constru	cted facility requires closure per Rule 907)
OIL & GAS LO	CATION ID Number:			
Abando future.	on Oil & Gas Location A	ssessment (Form 2A) – Location	on has not been	constructed and site will not be used in the
Keep C	Oil & Gas Location Asse	, ,		his site will be used in the future.
Surface distur	bance from Oil and G	, ,	expiration date. T	his site will be used in the future.
Surface distur REQUEST FO DIGITAL WE DOCUMENTS	bance from Oil and Ga DR WELL RECORDS LL LOG UPLOAD S SUBMITTED P	ssment (Form 2A) active until eas Operations must be reclain GONFIDENTIALITY (Rule surpose of Submission:	expiration date. T med per Rule 10 e 206.c.(1))	his site will be used in the future.
Surface distur REQUEST FOR DIGITAL WE DOCUMENTS COMPLIANCE	bance from Oil and Ga DR WELL RECORDS LL LOG UPLOAD S SUBMITTED P	ssment (Form 2A) active until eas Operations must be reclains CONFIDENTIALITY (Rule	expiration date. T med per Rule 10 e 206.c.(1))	This site will be used in the future.
Surface distur REQUEST FOR DIGITAL WE DOCUMENTS COMPLIANCE AMATION	bance from Oil and Ga DR WELL RECORDS LL LOG UPLOAD S SUBMITTED PO E with CONDITION	ssment (Form 2A) active until eas Operations must be reclain GONFIDENTIALITY (Rule surpose of Submission:	expiration date. T med per Rule 10 e 206.c.(1))	This site will be used in the future.
Surface distur REQUEST FOR DIGITAL WE DOCUMENTS COMPLIANCE AMATION TERIM RECL	bance from Oil and Ga DR WELL RECORDS LL LOG UPLOAD S SUBMITTED E with CONDITION	ssment (Form 2A) active until eas Operations must be reclained as CONFIDENTIALITY (Rule surpose of Submission: OF APPROVAL (COA) on	expiration date. T med per Rule 10 e 206.c.(1))	This site will be used in the future.
Surface distur REQUEST FOR DIGITAL WE DOCUMENTS COMPLIANCE AMATION TERIM RECLANT RECIDITION RECLANT RECIDITION RECLANT PER RULE 1003.	bance from Oil and Ga DR WELL RECORDS LL LOG UPLOAD S SUBMITTED E with CONDITION AMATION ation will commence ap	as Operations must be reclained to the confidence of Submission: OF APPROVAL (COA) on Approximately Deprint Sundry Notice reporting interpretable of Submission:	expiration date. To med per Rule 10 e 206.c.(1)) Form NO:	This site will be used in the future.
Surface distur REQUEST FOR DIGITAL WE DOCUMENTS COMPLIANCE AMATION TERIM RECLAINMENT RECLAIMENT REC	DR WELL RECORDS LL LOG UPLOAD S SUBMITTED E with CONDITION AMATION ation will commence ap e.(3) operator shall submit vegetation reaches 80 ation complete, site reache(3) describe interim re	as Operations must be reclained to the control of t	expiration date. To med per Rule 10 e 206.c.(1)) Form NO:	This site will be used in the future. 2003 and Rule 1004. Document Number:
Surface distur REQUEST FOR DIGITAL WE DOCUMENTS COMPLIANCE AMATION TERIM RECLAIN RECLAIN RECLAIN RECLAIN PER Rule 1003, inspection wheeler Rule 1003 location photography in the rectangle	DR WELL RECORDS LL LOG UPLOAD S SUBMITTED E with CONDITION AMATION ation will commence ap e.(3) operator shall submit regraphs.	as Operations must be reclained to the control of t	expiration date. To med per Rule 10 a 206.c.(1)) Form NO: terim reclamation ents below or pro-	This site will be used in the future. 2003 and Rule 1004. Document Number: in is complete and site is ready for
Surface distur REQUEST FO DIGITAL WE DOCUMENTS COMPLIANC AMATION TERIM RECLA Interim Reclam Per Rule 1003 inspection whee Interim reclama Per Rule 1003 location photog Field inspection	bance from Oil and Ga DR WELL RECORDS LL LOG UPLOAD S SUBMITTED E with CONDITION AMATION ation will commence ap e.(3) operator shall sub n vegetation reaches 80 ation complete, site reache(3) describe interim regraphs. on will be conducted to	as Operations must be reclained to the compose of Submission: OF APPROVAL (COA) on Operations must be reclained to the compose of Submission: OF APPROVAL (COA) on Operation to the composition of the	expiration date. To med per Rule 10 a 206.c.(1)) Form NO: terim reclamation ents below or pro-	This site will be used in the future. 2003 and Rule 1004. Document Number: in is complete and site is ready for
Surface distur REQUEST FOR DIGITAL WE DOCUMENTS COMPLIANCE AMATION TERIM RECLAINTERIM RECLAINTER	bance from Oil and Ga DR WELL RECORDS LL LOG UPLOAD S SUBMITTED E with CONDITION AMATION ation will commence ap e.(3) operator shall sub n vegetation reaches 80 ation complete, site reache(3) describe interim regraphs. on will be conducted to	as Operations must be reclained CONFIDENTIALITY (Rules are considered to the confidered to the confide	expiration date. To med per Rule 10 a 206.c.(1)) Form NO: terim reclamation ents below or pro-	This site will be used in the future. 2003 and Rule 1004. Document Number: in is complete and site is ready for
Surface distur REQUEST FOR DIGITAL WE DOCUMENTS COMPLIANCE AMATION TERIM RECLAMATION TERIM RECLAMATION TERIM RECLAMATION TERIM RECLAMATION Interim reclamate Per Rule 1003 location photogonic Field inspection NAL RECLAMATION Final Reclamate Per Rule 1004.	DR WELL RECORDS LL LOG UPLOAD S SUBMITTED E with CONDITION AMATION ation will commence ap e.(3) operator shall sub n vegetation reaches 80 ation complete, site reac e(3) describe interim re graphs. bn will be conducted to ATION ion will commence approaches	as Operations must be reclained to CONFIDENTIALITY (Rule curpose of Submission: OF APPROVAL (COA) on Operations must be reclained to the curpose of Submission: OF APPROVAL (COA) on Operation curpose of Submission: Operation curpose of Submission: Operation curpose of Submission: Operation curpose of Submission: Operations must be reclained to curpose of Submission: Operations of Submission: Operat	expiration date. To med per Rule 10 a 206.c.(1)) Form NO: terim reclamation ents below or pro-	This site will be used in the future. 2003 and Rule 1004. Document Number: in is complete and site is ready for
Surface distur REQUEST FO DIGITAL WE DOCUMENTS COMPLIANC AMATION TERIM RECLA Interim Reclam Per Rule 1003 inspection whee Interim reclama Per Rule 1003 location photog Field inspection NAL RECLAMA Final Reclamate Per Rule 1004 when vegetation	DR WELL RECORDS LL LOG UPLOAD S SUBMITTED E with CONDITION AMATION ation will commence ape.(3) operator shall submit vegetation reaches 80 ation complete, site reacte(3) describe interim regraphs. but will be conducted to ATION ion will commence applic.(4) operator shall submit reaches 80% coverage	as Operations must be reclained to CONFIDENTIALITY (Rule curpose of Submission: OF APPROVAL (COA) on Operations must be reclained to the curpose of Submission: OF APPROVAL (COA) on Operation curpose of Submission: OF APPROVAL (COA) on Operation curpose of Submission: Ope	expiration date. To med per Rule 10 206.c.(1)) Form NO: erim reclamation ents below or pro- inpliance	This site will be used in the future. 2003 and Rule 1004. Document Number: In is complete and site is ready for evide as an attachment and attach required
Surface disture REQUEST FOR DIGITAL WE DOCUMENTS COMPLIANCE AMATION TERIM RECLAMINATION TERIM RECLAMINATION INTERIM RECLAMINATION INTERIM RECLAMINATION INTERIM RECLAMINATION INTERIM RECLAMINATION FIELD INSPECTION NAL RECLAMINATION FINAL RECLAMINA	DR WELL RECORDS LL LOG UPLOAD S SUBMITTED E with CONDITION AMATION ation will commence ape.(3) operator shall submit vegetation reaches 80 ation complete, site reacte(3) describe interim regraphs. but will be conducted to ATION ion will commence approaches 80% coverage on complete, site ready le as an attachment.	as Operations must be reclained to CONFIDENTIALITY (Rule curpose of Submission: OF APPROVAL (COA) on Operations must be reclained to the curpose of Submission: OF APPROVAL (COA) on Operation curpose of Submission: OF APPROVAL (COA) on Operation curpose of Submission: Ope	expiration date. To med per Rule 10 206.c.(1)) Form NO: erim reclamation ents below or pro inpliance al reclamation is c(4) describe final	This site will be used in the future. 2003 and Rule 1004. Document Number: in is complete and site is ready for evide as an attachment and attach required complete and site is ready for inspection

<i>eceiv</i> Com	ned by OCD: 8/21/2025 9:09:54 AM ments:	Page 5 of 3
ENG	INEERING AND ENVIRONMENTAL WORK	
	REPORT OF TEMPORARY ABANDONMENT	
	Describe the method used to ensure that the Well is closed to the atmosphere and the Operator's plans for future operation Well in the COMMENTS box below as required by Rule 434.b.(1).	of the
	REQUEST FOR TEMPORARY ABANDONMENT EXCEEDING 6 MONTHS	
	State the reason for the extension request and explain the Operator's plans for future operation of the Well in the COMMEN below as required by Rule 434.b.(3).	ITS box
	Date well temporarily abandoned	
	Has Production Equipment been removed from site?	
	Mechanical Integrity Test (MIT) required. Date of last MIT	
ΓECI	HNICAL ENGINEERING AND ENVIRONMENTAL WORK	
	Details of work must be described in full in the COMMENTS below or provided as an attachment.	
>	NOTICE OF INTENT/REQUEST FOR APPROVAL Approximate Start Date 10/01/2025	
	SUBSEQUENT REPORT Date of Activity	
	Bradenhead Plan	
>	Change Drilling Plan Repair Well Beneficial Reuse of E&P	Waste
	Gross Interval Change	
	Underground Injection Control	
	Request approval of Reuse and Recycling Plan per Rule 905.a.(3). (Reuse and Recycling Plan must be attached.)	
	Request approval of Alternative Sampling Plan per Rule 909.j.(6). for this Pit. (Alternative Sampling Program must be attach	ed.)
	Other	
	Request that an existing produced water sample from the same formation be used per Rule 909.j.(6) to meet the requirement Rule 909.j.(1)-(5) for this Well.	nts of
	Pit ID Pit Name	
	(No Sample Provided)	
	Subsequent well operations with heavy equipment (Rule 312)	
	(No Well Provided)	
CON	MMENTS:	
GAS	<u>CAPTURE</u>	
√EN7	ΓING AND FLARING:	
	Operation type: Operational phase requiring venting/flaring:	
	Reason for venting/flaring:	
	Describe Other reason for venting/flaring:	
Γ		

Date Run: 8/20/2025 Doc [#404316840] Released to Imaging: 9/9/2025 1:26:13 PM

						npacts to pub used to mini					nvironment, and
Total volu	me of gas	vented or fla	ared:		mcf	I	estima	ated]	me	asured
Total dura	tion of em	ission event	:		hours		conse	cutive]	cun	nulative
		esentative ger on the Re			– m 43 to crea	te a Sample	Site Faci	lity ID:	# for this Lo	ocation	n. Reference the Form
	ole Site Fa		ated i offic	s tab.							
S CAPTUR	ΕΡΙΔΝ	_		_							
		connect to	a gathering	line or b	eneficially u	se the gas; ir	nclude ar	nticipa	ted timeline	e:	
			99								
A Gas Ca	nture Plan	that meets	the require	ments of	Rule 903.e	is attached					
ASING PROC	•	THAT HIGHE			11410 000.0	io attaorioa.					
asing Type	Size of Hole	Size of Casing	<u>Grade</u>	Wt/Ft	Csg/Liner Top	Setting Depth	Sacks Cmt	<u>Cmt</u>	Btm Cn		
JRF	17+1/2	13+3/8	J55	54.5	0	700	705	70	00 0)	
Т	12+1/4	9+5/8	L80	43.5	0	6301	615	63	01 C)	
D	8+1/2	5+1/2	P110	20	0	19291	2724	192	291 500	00	
TENTIAL FI	OW AND	CONFINING	G FORMAT	<u>IONS</u>							
ne Type	Forn /Haz	nation ard	<u>Top</u> <u>M.D.</u>	<u>Tc</u> T.V.I				TDS I	Data Sourc	e Co	<u>omment</u>
oundwater	San	Jose	0		0 84	848	C	-500	JSGS	Po	ssible Water
oundwater	Naci	miento	848	84	18 210	9 2084	C	-500	JSGS	Po	ssible Water
oundwater	Ojo <i>i</i>	Alamo	2109	208	217	'6 2150	501-	1000	JSGS	Po	ssible Water
nfining Layer	Kirtla	and	2176	215	50 261	6 2581	1001-1	0000	JSGS	Ga	as & Water
drocarbon	Fruit	land	2616	258	31 299	2950	1001-1	0000	JSGS	Ga	as & Water
drocarbon	Pictu	red Cliffs	2992	295	50 352	20 3467				Ро	ssible Gas
nfining Layer	Lewi	s Shale	3520	346	67 498	4900			JSGS	No	one
drocarbon	Cliffh	nouse	4981	490	00 536	53 5274		ı	JSGS	Po	essible Gas & Water
nfining Layer	Men	efee	5363	527	74 554	8 5455		ı	JSGS	No	one
drocarbon	Poin	t Lookout	5548	545	55 607	7 5974		ı	JSGS	Ga	as
drocarbon	Man	cos	6077	597	74 627	7 6174		-	JSGS	Ga	as
S REPORTI	NG		<u>l</u>			l	1				
Intentiona	l release o	of H2S gas	due to Ups	et Cond	lition or ma	Ifunction.					
Intent to to	emporarily	y abandon v	well with p	otential	H2S concei	ntration >10	0 ppm.				
	this sect	ion are inte	nded to do					ociate	d with the	colle	ction of a Gas Sample
as Analysis	Report m	ust be attac	ched.								
2S Concentr	ation:	in pp	om (parts pe	er million)	Date of	f Measur	ement	or Sample	Colle	ction
			m (parto pe	J. 1111111011	,	Date	Wicasul		or cample	. 00116	
escription o	t Sample	ronn.									

ceived by OCD: 8/21/2	2025 9:09:54 AM				Page
bsolute Open Flow Po	tential in CFI	PD (cubic feet per day)			
	Potential and Duration (If to opened for servicing oper		nosphere, identify the	duration in which the container or	
istance to nearest occ	upied residence, school, c	church, park, school bus s	top, place of business	s, or other areas where the	
	be expected to frequent:		.,.		
stance to nearest Fed	leral, State, County, or mu	inicipal road or highway o	wned and principally	maintained for public	
se:	-	- •			
OMMENTS:					
L & GAS LOCATION I	<u>UPDATEŞ</u>				
GDP ID	OGDP Name				
TE EQUIPMENT LIST			_		
				and a national	
	type of major equipment				
Wells	Oil Tanks	Condensate Tanks	Water Tanks	Buried Produced Water Vaults	_
Drilling Pits	Production Pits	Special Purpose Pits	Multi-Well Pits	Modular Large Volume Tank	
Pump Jacks	Separators	Injection Pumps	Heater-Treaters	Gas Compressors	
Gas or Diesel Motors	Electric Motors	Electric Generators	Fuel Tanks	LACT Unit	
Dehydrator Units Meter/Sales Building	Vapor Recovery Unit ————————————————————————————————————	VOC Combustor Var	Flare oor Recovery Towers	Enclosed Combustion Devices	
				_	
THER PERMANENT E	QUIPMENT UPDATES				
THER TEMPORARY E	EQUIPMENT UPDATES				
U TUDAL AND CAFE	TV 05TD 4 OV UDD 4 TE0				
JLIUKAL AND SAFE	TY SETBACK UPDATES	•			
THER LOCATION CH	ANGES AND UPDATES				
Provide a description of	f other changes or update	s to technical information	for this Location:		
OTENTIAL OGDP UPI	DATES				
	TO AN APPROVED OGI				
YOU OULD OUR INDEA		J1			

This Sundry Form 4 is being submitted pursuant to Rule 301.c to propose changes to an approved Oil and Gas Development Plan.


eceived by OCD Check all be	: 8/21/2025 9:09:5 exes that pertain to	the type(s) of changes bei	ing proposed for this OGDP:		Page 8 of
	il and Gas Location		Add Drilling and Spacing L	Jnit(s)	
Amend	d Oil and Gas Locat	tion(s)	Amend Drilling and Spacin	g Unit(s)	
Remov	ve Oil and Gas Loca	ation(s)	Remove Drilling and Spaci	ing Unit(s)	
Oil and	d Gas Location atta	chment or plan updates	Amend the lands subject to	o the OGDP	
Other					
	d description of the	changes being proposed f	for this OGDP. Attach supporting	documentation such as	s maps if
necessary.					
		Operator Best	t Management Practic	<u>es</u>	
No BMP/C	OA Type	Description			
Operator Com	ments:				
SHL is in NM	. BHL is in CO. SHI	L is Sec 12, T32N, R07W	UL F LOT 3		
Signed:			st of my knowledge, true, correct, a Print Name: Amanda V	Valker	
Title: Regula	tory Tech Sr.	Email: mwalk	er@hilcorp.com	Date: _	8/15/2025
Based on the infonereby approved		erein, this Sundry Notice (Form 4) complies with ECMC Rul	es and applicable order	rs and is
ECMC Approved	: Wang, Jian		_	Date: 8/20/2025	
		CONDITIONS O	F APPROVAL, IF ANY	LIST	
COA Type		<u>Description</u>			
			nanges to the approved Form 2 Form 2 COA still apply.	2 and must be display	ed with the
		border of unit). Operat physically isolated and operator will (1) report completed interval (2)	e the unit (522' FEL, Sec. 22.6) tor will ensure the wellbore beyond is not completed. In the Operative from the section describe how the wellbore beyond (3) certify that none of the wellbore.	yond the unit boundar rator Comments on the lines of the bottom on yond the unit boundar	ry setback is ne Form 5A the f the ry setback is
2 COAs		· · · · · · · · · · · · · · · · · · ·			
		Gene	eral Comments		
User Group	Comment				Comment Date
Engineer	Offset well evalu	ation has no changes to	o form 2 COA.		08/20/2025

Total: 1 comment(s)

ATT	1	ЦМ	EN	TI	TPI
AII	$A \cup$	ПІ	ICIN		ıə ı


	······································
Att Doc Num	<u>Name</u>
404316840	SUNDRY NOTICE APPROVED-LOC-SFTY-STBK-MNRL-STBK-OBJ-DRLG-CSG
404317068	DIRECTIONAL DATA
404317071	OPERATIONS SUMMARY
404317073	WELL LOCATION PLAT
404323704	FORM 4 SUBMITTED
Total Attach: 5 Files	

Date Run: 8/20/2025 Doc [#404316840] Released to Imaging: 9/9/2025 1:26:13 PM HILCORP ENERGY COMPANY: ALLISON UNIT #630H
SURFACE LOCATION: 538' FNL & 1560' FWL
SECTION 12, T-32-N, R-7-W, N.M.P.M., SAN JUAN COUNTY, NEW MEXICO. ELEVATION: 6352'
BOTTOM HOLE LOCATION: 201' FSL, 522' FEL
SECTION 22, T-32-N, R-6-W, N.M.P.M., LA PLATA COUNTY, COLORADO.

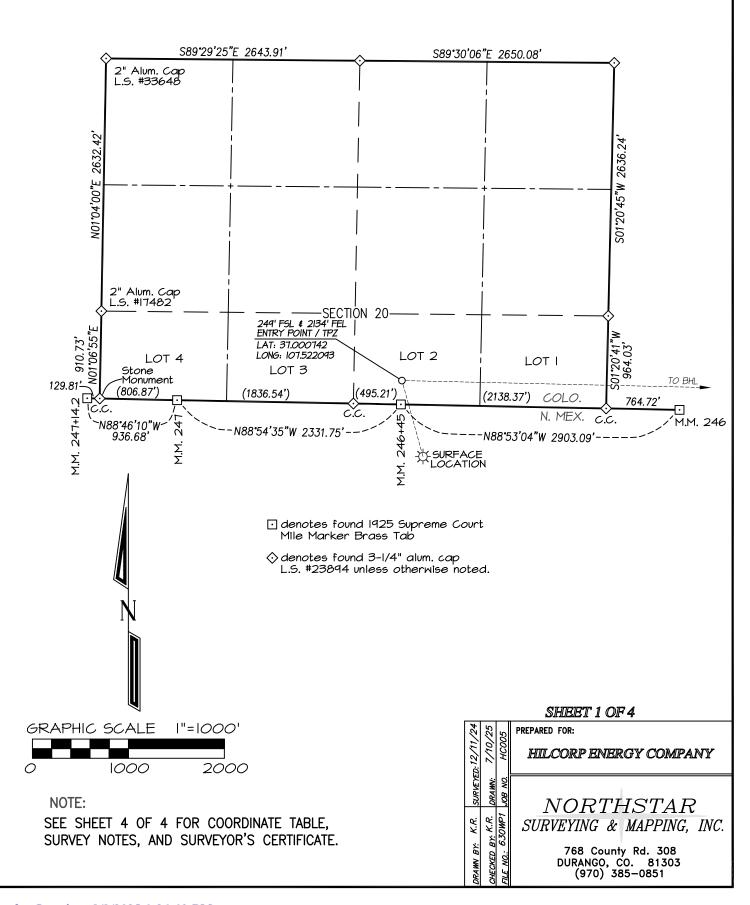


HILCORP ENERGY COMPANY: ALLISON UNIT #630H
SURFACE LOCATION: 538' FNL & 1560' FWL
SECTION 12, T-32-N, R-7-W, N.M.P.M., SAN JUAN COUNTY, NEW MEXICO. ELEVATION: 6352'
BOTTOM HOLE LOCATION: 201' FSL, 522' FEL

SECTION 22, T-32-N, R-6-W, N.M.P.M., LA PLATA COUNTY, COLORADO.

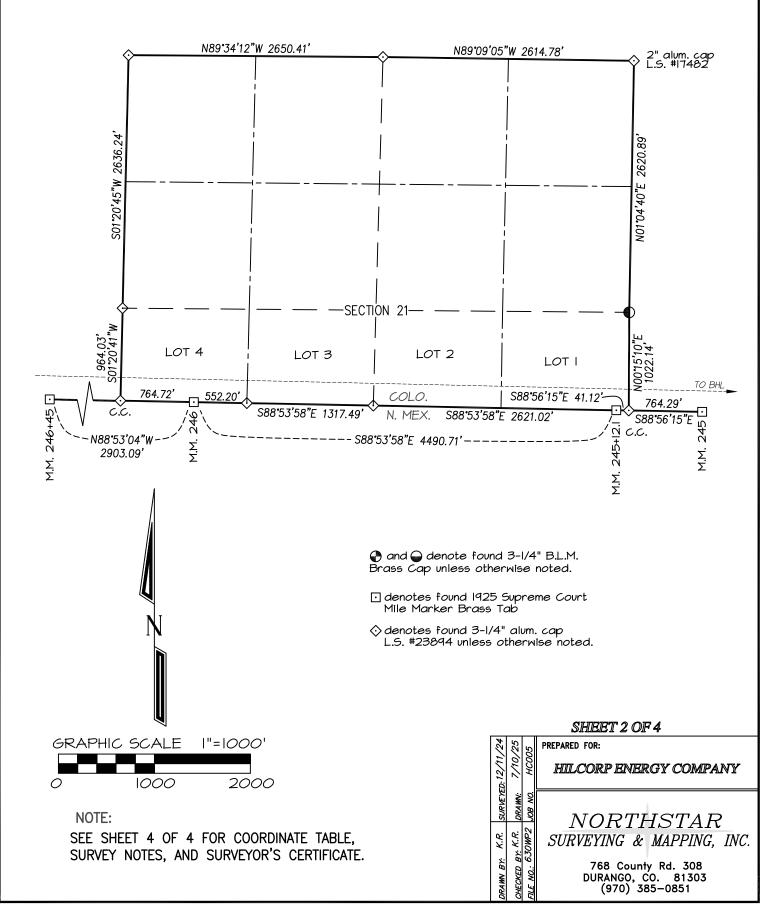

HIILCORP ENERGY COMPANY: ALLISON UNIT #630H SURFACE LOCATION: 538' FNL & 1560' FWL SECTION 12, T-32-N, R-7-W, N.M.P.M., SAN JUAN COUNTY, NEW MEXICO. ELEVATION: 6352' BOTTOM HOLE LOCATION: 201' FSL, 522' FBL

SECTION 22, T-32-N, R-6-W, N.M.P.M., LA PLATA COUNTY, COLORADO.

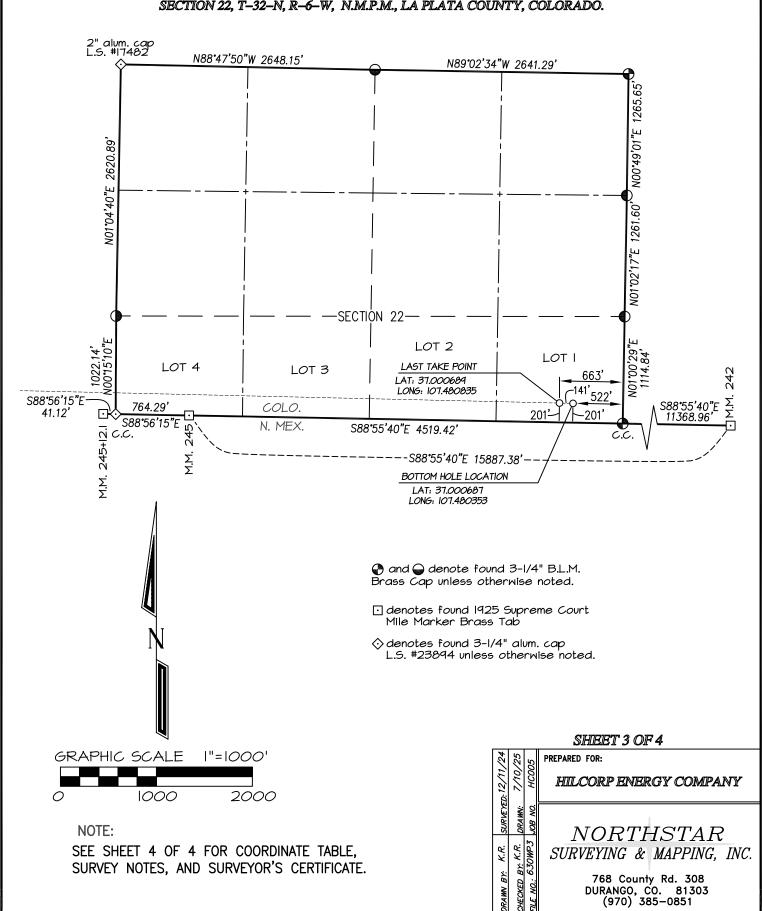

HIILCORP ENERGY COMPANY: ALLISON UNIT #630H SURFACE LOCATION: 538' FNL & 1560' FWL SECTION 12, T–32–N, R–7–W, N.M.P.M., SAN JUAN COUNTY, NEW MEXICO. BLEVATION: 6352' BOTTOM HOLE LOCATION: 201' FSL, 522' FBL SECTION 22, T-32-N, R-6-W, N.M.P.M., LA PLATA COUNTY, COLORADO.

ALLISON UNIT #630H	CSZ NAD '83	NAD '83	TIES	SEC/TWP/RNG
SURFACE HOLE LOCATION	N(Y) = 1,127,245.14'	LAT: 36.998582°N	538' FNL	SECTION 12 (N. MEX.)
	E(X) = 2,409,724.53'	LONG: 107.521284°W	1560' FWL	T-32-N, R-7-W
FIRST TAKE POINT	N (Y) = 1,128,036.60'	LAT: 37.000742°N	249' FSL	SECTION 20 (COLO.)
	E (X) = 2,409,505.47'	LONG: 107.522093°W	2134' FEL	T-32-N, R-6-W
LAST TAKE POINT	N (Y) = 1,127,759.05'	LAT: 37.000689°N	201' FSL	SECTION 22 (COLO.)
	E (X) = 2,421,551.25'	LONG: 107.480835°W	663' FEL	T-32-N, R-6-W
BOTTOM HOLE LOCATION	N (Y) = 1,127,755.60'	LAT: 37.000687°N	201' FSL	SECTION 22 (COLO.)
	E (X) = 2,421,692.07'	LONG: 107.480353°W	522' FEL	T-32-N, R-6-W

NOTES:

- 1. WELL LOCATION FOOTAGE CALLS MEASURED PERPENDICULAR TO SECTION LINES.
- 2. WELL GPS OBSERVATION PERFORMED BY JASON EDWARDS ON 12/11/24 - PDOP VALUE = 1.7
- 3. BEARINGS & DISTANCE SHOWN ARE FIELD MEASURED UNLESS OTHERWISE NOTED.
- 4. ALL MEASURED DISTANCES SHOWN ARE GRID DISTANCE WITH NO SCALE FACTOR APPLIED.
- 5. BEARINGS ARE BASED ON THE NORTH AMERICAN DATUM OF 1983, COLORADO SOUTH STATE PLANE COORDINATE SYSTEM, ZONE 0503.
- 6. ELEVATION IS BASED ON THE NORTH AMERICAN VERTICAL DATUM OF 1988 (GEOID18).



I, KENNETH E. REA, A REGISTERED PROFESSIONAL LAND SURVEYOR IN THE STATE OF COLORADO, DO HEREBY CERTIFY THAT THE WELL LOCATION SHOWN ON THIS PLAT IS ACCURATELY PLOTTED FROM FIELD NOTES OF ACTUAL SURVEYS MADE UNDER MY DIRECT SUPERVISION, AND THAT THIS PLAT IS NOT A LAND SURVEY PLAT OR IMPROVEMENT SURVEY PLAT, AND THAT IT IS NOT TO BE RELIED UPON FOR THE ESTABLISHMENT OF FENCE, BUILDING, OR OTHER FUTURE IMPROVEMENT LINES.

א לונט א ההמומותונים

			SHIBET 4 OF 4
124	/25	35	PREPARED FOR:
0:12/11,	101/2	нсос	HILCORP ENERGY COMPANY
SURVEYED:	×.	ŏ.	4
SUR	DRA	ВОГ	NORTHSTAR
6.	3.	474	SURVEYING & MAPPING, INC.
\ <u>`</u>	9 X. A	5301	Bonvillina a min i nia, nio.
V BY:	GB)	9	768 County Rd. 308
RAWN	HEC	1E /	DURANGO, CO. 81303 (970) 385-0851

C-102 Submit Electronically Via OCD Permitting

State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION

	Revised July 9, 2024					
0 1 111 1	☐ Initial Submittal					
Submittal Type	⊠ Amended Report					
	☐ As Drilled					

					WELL	LOCATION I	NFORM	MATION				
API Number 05-067-10060 /30-045-38410 Pool Code 97232				32	Pool Name BASIN MANCOS							
Property Code Property Name Al				ALLISON U	ALLISON UNIT Well Number 630H							
OGRID No. 372171 Operator Name HILCORP EN					ILCORP ENERGY	COMPANY Ground Level Elevation 6352			352 '			
Surface	Owner:	☐ State	⊠ Fee □	Tribal	☐ Federal	М	ineral Ow	ner: □ State 🏻 Fee		Tribal □ Federal		
						Surface Loca	ation					
UL F	Section 12	Township 32N	Range 7W	Lot 3	Feet from N/S Line 538' NORTH	Feet from E/W Line 1560' WE		Latitude 36.998582	°N	Longitude -107.52128	34 °W	County SAN JUAN (NM)
						Bottom Hole L	ocatio	n		1		
UL I	Section 22	Township 32N	Range 6W	Lot 1	Feet from N/S Line 201' SOUTH	Feet from E/W Line 522' EA		Latitude 37.000687	°N	Longitude -107.48035	53 °W	County LA PLATA (CO)
			Pen	etrated S	pacing Unit:							
	ed Acres 3.60	S/2	2 (aka l	_OTS :	& 21, T32N, R6W 1—4), S/2 NW/4, Lon 22, T32N, R6W	Infill or Defining				verlapping Spacing Unit Consoli		dation Code
Order 1	Numbers					W	ell setbac	cks are under Common Own	nershi	p: 🛛 Yes [] No	
						Kick Off Poin	t (KOF	 ⊃)				
UL	Section	Township	Range	Lot	Feet from N/S Line	Feet from E/W Line	•	Latitude		Longitude		County
F	12	32N	7W	3	538' NORTH	1560' WE	ST	36.998582	°N	-107.52128	34 °W	SAN JUAN (NM)
	•				F	irst Take Poi	nt (F	TP)				
UL	Section	Township	Range	Lot	Feet from N/S Line	Feet from E/W Line		Latitude		Longitude		County
J	20	32N	6W	2	249' SOUTH	2134' EA	ST	37.000742	°N	-107.52209	93 °W	LA PLATA (CO)
Last Take Point (LTP)												
UL	Section	Township	Range	Lot	Feet from N/S Line	Feet from E/W Line		Latitude		Longitude		County
I	22	32N	6W	1	201' SOUTH	663' EA	ST	37.000689	°N	-107.48083	35 °W	LA PLATA (CO)
Unitize		Area of Un ISON UN	iform Inter NIT	est	Spacing Unit Type	rizontal 🗆 Ve	ertical	☐ Directiona]	l	Ground Floor Elevat	ion	
		0.	PERATO	PR CEF	RTIFICATION			SURVEYOR CERTIFICATION				

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and, if the well is a vertical or directional well, that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of a working interest or unleased mineral interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

If this well is a horizontal well, I further certify that this organization has received the consent of at least one lessee or owner of a working interest or unleased mineral interest in each tract (in the target pool or formation) in which any part of the well's completed interval will be located or obtained a compulsory pooling order from the division.

Marker	8/1/2025
Signature	Date
Amanda Walker	
Printed Name	
mwalker@hilcorp.com	

E-mail Address

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.



JASON C. EDWARDS

Signature and Seal of Professional Surveyor


Certificate Number 15269

Date of Survey DECEMBER 11, 2024

538' FNL & 1560' FWL, SECTION 12, SAN JUAN COUNTY, NEW MEXICO CORP ENERGY COMPANY ELEVATION: 6352' R7W, NMIPM

	HORIZONTAL SCALE	"=60'	C/L	VER	VERTICAL SCALE	LE 1"=30'
A-A						
6362			 	 		
6352			_			
6342'			 	 		
			C/L			
B-B			 	 		
6362			 <u>.</u>	 		
6352						
6342			· · · · ·			
			C/L			
C-C				 		
6362'			 	 		
6352			_			
6342'			-			

CONTRACTOR SHOULD CONTACT ONE-CALL FOR LOCATION OF ANY MARKED OR UNMARKED UNDERGROUND UTILITIES OR PIPELINES ON WELLPAD AND/OR ACCESS ROAD AT LEAST TWO WORKING DAYS PRIOR TO CONSTRUCTION. EDWARDS SURVEYING, INC. IS NOT LIABLE FOR LOCATION OF UNDERGROUND UTILITIES OR PIPELINES.

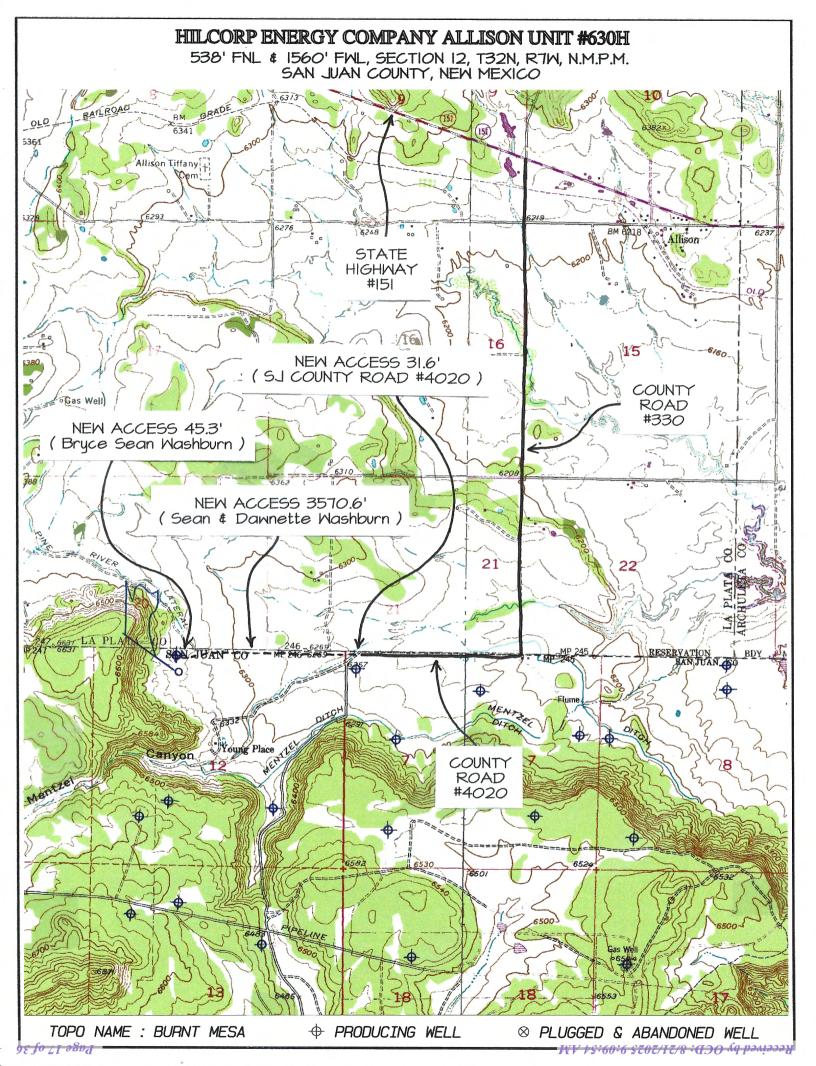

<u>Directions from Intersection of State Hwy 172 & State Hwy 151 in Ignacio, CO</u>

to Hilcorp Energy Company Allison Unit #630H

538' FNL & 1560' FWL, Section 12, T32N, R7W, N.M.P.M., San Juan County, NM

Latitude 36.998582°N Longitude -107.521284°W Datum: NAD1983

From the intersection of State Hwy 172 & State Hwy 151 in Ignacio, CO, travel Easterly on State Hwy 151 for 12.0 miles to County Road #330:

Go Right (Southerly) on County Road #330 for 1.9 miles to County Road #4020;

Go Right (Westerly) on County Road #4020 for 0.6 miles to new access on right-hand side which continues for 3647.5' to Hilcorp Allison Unit #630H existing wellpad.

La Plata County, CO

Allison Unit 630H



Technical Drilling Plan (Rev. 2)

Hilcorp Energy Company proposes to drill and complete the referenced horizontal well targeting the Mancos formation.

Note: This technical drilling plan will be adjusted based upon actual conditions.

1. Location

Date:	July 22, 2025	Pool:	Basin Mancos
Well Name:	Allison Unit 630H	Ground Elevation (ft. MSL):	6,350'
Surface Hole Location:	36.998577° N, -107.520677° W	Total Measured Depth (ft.)	19,291'
Bottom Hole Location:	37.000682° N, -107.479748° W	County, State:	La Plata County, CO

Note: All geographic coordinates on the drilling tech plan and the directional drilling plan refer to NAD 27 geodetic coordinate system. All depths on the drilling tech plan and the directional drilling plan are referenced from an estimated RKB datum of 25' above ground level.

2. Geological Markers

Anticipated formation tops with comments of any possible water, gas or oil shows are indicated below:

Formation	Depth (ft. TVD RKB)	Remarks
Ojo Alamo	2,084	Possible Water
Kirtland	2,150	Gas & Water
Fruitland	2,581	Gas & Water
Pictured Cliffs	2,950	Possible Gas
Lewis Shale	3,467	None
Cliffhouse	4,900	Possible Gas & Water
Menefee	5,274	None
Point Lookout	5,455	Gas
Mancos	5,974	Gas

Allison Unit 630H



3. Pressure Control Equipment

A. BOP Equipment

See Appendix A for BOP equipment and choke manifold diagram.

- BOP equipment will be nippled up on top of the wellhead after surface casing is set and cemented.
- Pressure control configurations will be designed to meet the minimum 5M standards.
- All equipment will have 5M pressure rating at a minimum.
- A rotating head will be installed on top of the annular as seen in the attached diagram.

B. BOP Pressure Testing

- For all BOP pressure testing, a BOP test unit with a chart recorder and a BOP test plug will be utilized.
- All tests and inspections will be recorded and logged with time and results.
- A full BOP pressure test will be conducted when initially installed for the first well on the pad or if a seal subject to test pressure is broken, following related repairs, and at a minimum in 30-day intervals.
- A BOPE shell pressure test only will be conducted for subsequent wells on the pad when seals subject to pressure have not been broken, repaired, and fall within the 30-day interval of the first full test.
- The New Mexico Oil & Gas Conservation Division and the BLM will be notified 24 hours in advance of pressure testing BOPE.
- The BOPE will be tested to 250 psi (Low) for 5 minutes and 5,000 psi (High) for 10 minutes.

C. BOP Function Testing

- Annular preventors will be functionally tested at least once per week.
- Pipe and blind rams will be function tested each trip.

D. Casing Pressure Testing

- Surface casing will be pressure tested to 600 psi for 30 minutes.
- Intermediate casing will be pressure tested to 1,500 psi for 30 minutes.

La Plata County, CO

Allison Unit 630H



4. Casing Program

A. Proposed Casing Program:

		Prop	osed Casing D	esign			
Casing String	Hole Size	Casing (size/weight/grade)	Top Depth (MD/TVD)	Shoe Depth (MD/TVD)	Collapse	Burst	Tensile
Surface	17-1/2"	13-3/8"-54.5#-J55 (or equiv)-LTC/BTC	0'	700′/700′	1,130 psi	2,730 psi	514 klbs
Intermediate	12-1/4"	9-5/8"-43.5#-L80 (or equiv)-LTC/BTC	0'	6,301′/6,193′	3,810 psi	6,330 psi	737 klbs
Production	8-1/2"	5-1/2"-20.0#-P110 (or equiv)-LTC/BTC	0'	19,291′/6,814′	11,080 psi	12,360 psi	548 klbs

	Proposed Casing Design Safety Factors										
Casing String	Burst Design SF	Collapse Design SF	Joint Tensile Design SF	Connection Tensile Design SF							
Surface	8.3	4.4	25.9	27.6							
Intermediate	1.7	1.2	4.4	3.6							
Production	3.0	3.1	2.0	1.7							

B. Casing Design Parameters & Calculations:

- Designed for full wellbore evacuation.
- Mud Weights used for calculations:
 - o Surface = 9.0 ppg
 - o Intermediate = 11.5 ppg
 - o Production = 12.0 ppg
- Minimum Acceptable Safety Factors:

o Burst: 1.15o Collapse: 1.15o Tensile: 1.50

Casing Safety Factor Calculations:

$$Casing \ Burst \ Safety \ Factor = \frac{Casing \ Burst \ Rating(psi)}{Maximum \ Mud \ Weight \ (ppg) \times TVD(ft) \times 0.052}$$

$$Casing \ Collapse \ Safety \ Factor = Hydrostatic \ of \ Mud \ Weight \ in \ Annulus(psi) - \left[TVD \ of \ Casing \ Shoe \ (ft) \times 0.10 \frac{psi}{ft}\right]$$

$$Tensile \ Safety \ Factor = \frac{Tensile \ Rating \ of \ Casing \ String \ (lbs)}{Measured \ Depth \ of \ Casing(ft) \times Casing \ Weight \ \frac{lb}{ft} \times Drilling Fluid \ Bouyancy \ Factor}$$

Production Casing Notes:

- Production casing will be run from surface to TD.
- If the 8-1/2" hole is not drilled to the planned measured depth, casing setting depth will be adjusted accordingly.
- A toe initiation sliding sleeve will be installed at the toe of the production casing.

La Plata County, CO

Allison Unit 630H



5. Proposed Centralizer Program:

	Proposed Centralizer Program					
Casing String	Centralizers & Placement					
Surface Casing	1 centralizer per joint on bottom 3 joints.					
Intermediate Casina	1 centralizer per joint in shoe track.					
Intermediate Casing	1 centralizer every 3 rd joint to surface.					
Production Casing	Centralizers determined by hole conditions from TD to top of cement.					

6. Proposed Cement Program:

	Proposed Cement Design									
Interval	Depth	Lead/Tail	Volume	Sacks	Excess	Slurry	Density	Planned		
	(ft. MD)		(ft ³)		(%)		(ppg)	TOC		
Surface	700′	Lead	973 ft ³	705	100%	Class G Cement Yield: 1.38 ft ³ /sk	14.6	Surface		
		Slurry Additives	s: CaCl (1%), Ce	llo Flake (0.	25 lb/sk), CD-:	2 (0.2%)				
		Lead	1,937 ft ³	378	25%	ASTM Type IL Yield: 5.12 ft ³ /sk	9.5	Surface		
Intermediate	6,301′		Slurry Additives: FL-24 (0.5%), FL-66 (0.5%), IntegraGuard GW-86 (0.2%), IntegraSeal PHENO (2.0 lb/sk), IntegraSeal PO (0.25 lb/sk), LW-5E (50.0%), R-3 (0.4%), S-8 Silica Flour (35.0%), XCem-311 (0.3%)							
Intermediate	0,301	Tail	509 ft ³	237	25%	ASTM Type IL Yield: 2.15 ft ³ /sk	12.5	5,000′		
		Slurry Additives: A-10 (5.0%), A-2 (1.0 lb/sk), IntegraSeal PHENO (1.0 lb/sk), IntegraSeal POLI (0.5 lb/sk), R-7C (0.3%), StaticFree (0.01%), XCem-311 (0.3%)								
Production	19,291′	Lead	358 ft ³	228	25%	ASTM Type IL Yield: 1.57 ft ³ /sk	12.0	5,000′		
		Slurry Additives: AEXT-1012 (60.0%), FL-66 (0.3%), GW-86 (0.2%), IntegraSeal PHENO (2.0 lb/sk), IntegraSe KCI (3.0%), R-3 (0.55%), STATIC FREE (0.01 lb/sk), XCem-311 (0.3%)						li (0.25 lb/sk),		
		Tail	3,694 ft ³	2,496	25%	Class G Yield: 1.48 ft³/sk	14.0	6,400′		
		Slurry Additives POLI (0.25 lb/sl	,			6 (0.3%), GW-86 (0.1%), IntegraSeal PHE	NO (1.0 lb/sk),	IntegraSeal		

Cement Program Notes:

- The cement slurry additives may be adjusted to accommodate required pump and compressive test times.
- Actual cement volumes will be determined and may be adjusted onsite based on well conditions.
- For the intermediate hole section, a 2-stage or 3-stage cement job may be performed if hole conditions dictate. If needed, the stage tool will be placed appropriately as conditions indicate.
- Cement will be circulated to surface on surface and intermediate casing sections to protect water bearing zones.
- A minimum of 8 hours of wait on cement time will be observed on each hole section to allow adequate time for cement to achieve a minimum of 500 psi of compressive strength. The BOP will not be nippled down, the wellhead will not be installed, the casing will not be tested and the prior casing shoe will not be drilled out until adequate wait on cement time has been observed (8 hours or time to reach 500 psi compressive strength).



7. Drilling Fluids Program

A. Proposed Drilling Fluids Program:

		Prop	oosed Drilling F	luids Program	
Interval	Fluid Type	Density	Fluid Loss	Invert Ratio	Depth
		(ppg)	(mL/30 min)	(%Diesel / %Brine)	(ft. MD)
Surface	Water/Gel	8.3 – 9.2	NC	N/A	0' - 700'
Intermediate	LSND / Gel	8.4 – 10.0	<6	N/A	700′ – 6,301′
Production	Oil Base Mud	10.0 – 12.0	6 – 8	70/30 – 75/25	6,301′ – 19,291′

Drilling Fluids Notes:

- In the 8-1/2" production section, oil base mud will be utilized which will be an invert mud. The base fluid will be diesel. Brine fluid will be CaCl₂ or KCl.
- Lost circulation material may be added to the mud systems to manage fluid losses as hole conditions dictate.
- The well will be drilled utilizing a closed-loop circulating system. Drill cuttings for all hole sections will be transported to an approved disposal site.
- Estimated total volume of drill cuttings for disposal: 1,936 bbls (10,871 ft³).

8. Estimated Pressures & Drilling Hazards

A. Estimated Pressures

- Estimated Reservoir Pressure of Mancos Shale target: 4,000 4,200 psi
- No over-pressured intervals expected (aside from Mancos Shale target).
- There is production from the Fruitland Coal, Mesa Verde and Pictured Cliffs formations in offset wells in the area, which could result in these formations being depleted.

B. Water Flows

• Water flows are possible in the intermediate section. Water flows will be mitigated with increased mud weight.

C. Lost Circulation

• Lost circulation is possible in the intermediate section. Losses will be mitigated by utilizing LCM in the mud system.

D. Hydrogen Sulfide

No hydrogen sulfide is expected to be encountered based on nearby well production.

La Plata County, CO

Allison Unit 630H



9. Pilot Hole

No pilot hole is planned for this wellbore.

10. Testing, Logging, Coring

- A. Mud Logging
- Mud loggers will collect formation samples every 30'-90' from intermediate casing shoe to TD of the well.
- B. MWD
- Measurement while drilling tools will be utilized on all sections of the well to measure and record inclination and azimuth.
- C. LWD
- Logging while drilling tools (gamma ray) will be utilized while drilling the production section from the intermediate casing shoe to the production hole section TD to assist in staying in the desired production formation interval while drilling the horizontal section.
- D. Open Hole Logging
- None
- E. Coring
- None
- F. Cased Hole Logging
- The 9-5/8" intermediate casing will be cemented to surface to protect water bearing zones. If cement is not circulated to surface on the intermediate cement job, a cement bod log will be run to verify top of cement.

11. Directional Drilling Plan

- The directional drilling plan and plot are attached.
- The directional plan is built from geologic targets from offset wells and lease boundaries. The production hole section will be landed and drilled horizontally within the target formation utilizing LWD tools to steer the wellbore. On-site adjustments to the directional plan will be made as formation and wellbore dictate.

La Plata County, CO

Allison Unit 630H



12. Completion

A. Pressure Testing

- A pressure test of the 5-1/2" production casing will be conducted to the maximum anticipated frac pressure for 30 minutes.
- Pressure will be cycled to shift the toe sleeve open.

B. Stimulation


- The well will be stimulated with sand and water. The number of stages and amount of proppant used will be adjusted based on actual lateral length and real-time pumping conditions during the stimulation.
- Individual stages will be perforated on wireline and isolated using frac plugs or dissolvable frac plugs.
- Upon completion of the stimulation operation, frac plugs will be drilled out and the stimulation fluid will be flowed back.

*NOTE: Although this horizontal well may be drilled past the applicable setbacks, an unorthodox location application is not required because the completed interval in this well, as defined by 19.15.16.7 8(1) NMAC, will be entirely within the applicable setbacks. This approach complies with all applicable rules, including 19.15.16.14 A(3) NMAC, 19.15.16.14 8(2) NMAC, 19.15.16.15 8(2)NMAC, and 19.15.16.15 8(4) NMAC.



Appendix A

13-5/8" 5M BOP & 5M Choke Manifold Configuration

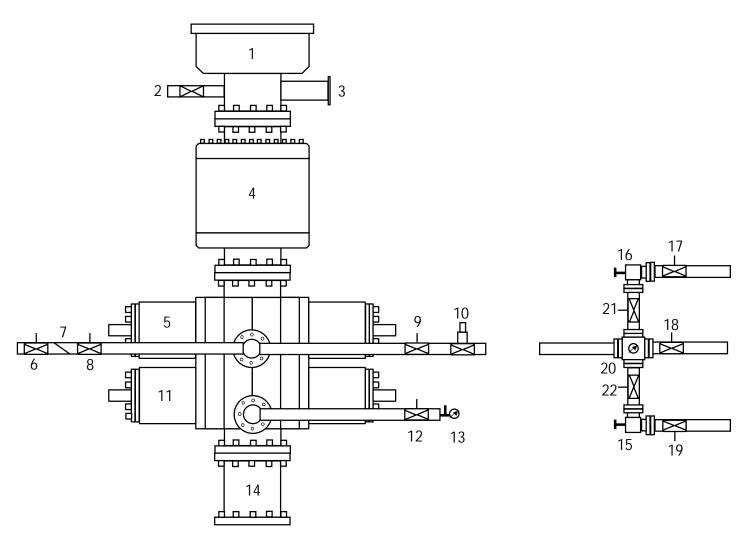

1	Rotating Head	12	Manual Isolation Valve
2	Fill-Up Line	13	Needle Valve & Pressure Gauge
3	Flow Line	14	Spacer Spool (if needed)
4	5M Annular Preventer	15	Manual Choke
5	5M Pipe Rams	16	Hydraulicly Operated Choke
6	Manual Isolation Valve	17	Manual Isolation Valve
7	Check Valve	18	Manual Isolation Valve
8	Manual Isolation Valve	19	Manual Isolation Valve
9	Manual Isolation Valve	20	Valve Block & Pressure Gauge
10	High Closing Ratio Valve	21	Manual Isolation Valve
11	5M Blind Rams	22	Manual Isolation Valve

CASING DETAILS

Name

13 3/8"

MD

700.00

Allison Unit 630H ОН Plan #2

GL 6350' & RKB 25.1' @ 6375.10ft (Nabors B29) Northing 2182901.53 Easting 591302.24 Latitude Longitude 36.998577 -107.520677

PROJECT DETAILS: San Juan, NM NAD27 Geodetic System: US State Plane 1927 (Exact solution)
Datum: NAD 1927 (NADCON CONUS)
Ellipsoid: Clarke 1866

9900

10800


11700

Zone: New Mexico West 3003

02 System Datum: Mean Sea Level

PLAN DETAILS		

MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	VSect	Annotation
0.00	0.00	0.000	0.00	0.00	0.00	0.00	0.00	
750.00	0.00	0.000	750.00	0.00	0.00	0.00	0.00	Start Build 2.50
1314.79	14.12	319.981	1309.09	53.03	-44.52	2.50	-41.03	Start 3641.85 hold at 1314.79 MD
4956.64	14.12	319.981	4840.91	733.40	-615.82	0.00	-567.45	Start Drop -2.50
5521.42	0.00	0.000	5400.00	786.43	-660.34	2.50	-608.48	Start 813.86 hold at 5521.42 MD
6335.28	0.00	0.000	6213.86	786.43	-660.34	0.00	-608.48	Start DLS 9.53 TFO 90.00
7279.29	89.98	90.000	6815.00	786.43	-59.46	9.53	-8.84	Start DLS 0.00 TFO 89.35
19290.84	89.98	90.166	6820.00	769.03	11952.07	0.00	11976.79	TD at 19290.84



TVD

12600

13500

700.00

Created By: Janie Collins

Azimuths to True North Magnetic North: 8.58°

> Magnetic Field Strength: 49353.9nT Dip Angle: 63.33° Date: 5/30/2024 Model: HDGM2024

> > Size

13.37

15300

14400

DESIGN	TARGET	DETAILS.	

Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
AU 630H LP Rev3	6815.00	786.43	-59.46	2183687.76	591240.20	37.000737	-107.520881
AU 630H BHL Rev1	6820.00	769.03	11952.07	2183709.80	603251.70	37.000682	-107.479748

900

1800

2700

3600

4500

5400


6300

7200

8100

Vertical Section at 86.319° (1800 ft/in)

9000

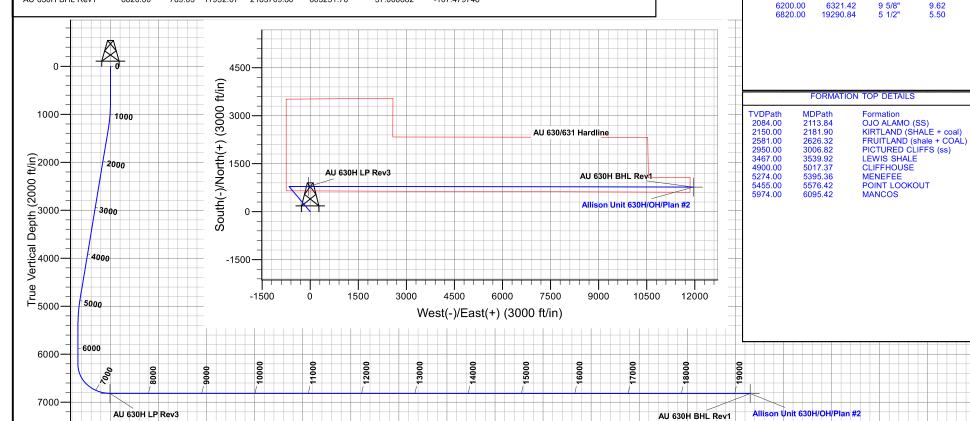



Hilcorp Energy - San Juan Basin

San Juan, NM NAD27 Allison Unit 611H Pad Allison Unit 630H - Slot 02

OH

Plan: Plan #2

Standard Planning Report

28 March, 2025





TVD Reference:

North Reference:

Planning Report



Hilcorp

Database: edm

Company: Hilcorp Energy - San Juan Basin **Local Co-ordinate Reference:**

Survey Calculation Method:

Well Allison Unit 630H - Slot 02 GL 6350' & RKB 25.1' @ 6375.10ft (Nabors

MD Reference:

GL 6350' & RKB 25.1' @ 6375.10ft (Nabors

B29) True

Minimum Curvature

Project:

Project

San Juan, NM NAD27

Allison Unit 611H Pad Site: Well: Allison Unit 630H

Wellbore: ОН Design: Plan #2

San Juan, NM NAD27

Map System: US State Plane 1927 (Exact solution) NAD 1927 (NADCON CONUS) Geo Datum:

New Mexico West 3003 Map Zone:

System Datum:

Mean Sea Level

Allison Unit 611H Pad Site

Northing: 2,182,981.63 usft Site Position: Latitude: 36.998797 From: Lat/Long Easting: 591,305.19 usft Longitude: -107.520666

0.00 ft Slot Radius: 13.20 in **Position Uncertainty:**

Well Allison Unit 630H - Slot 02

Well Position +N/-S 0.00 ft 2,182,901.53 usft Latitude: 36.998577 Northing: 591,302.24 usft +E/-W 0.00 ft Easting: Longitude: -107.520677

Position Uncertainty 0.00 ft Wellhead Elevation: **Ground Level:** 6,350.00 ft

Grid Convergence: 0.19°

Wellbore ОН Sample Date Declination Dip Angle Field Strength Magnetics **Model Name**

(nT) (°) (°) 5/30/2024 63.33 49.353.90000000 HDGM2024 8.58

Design Plan #2

Audit Notes:

PLAN 0.00 Version: Phase: Tie On Depth:

Vertical Section: +N/-S Depth From (TVD) +E/-W Direction (ft) (ft) (ft) (°) 0.00 0.00 0.00 86.319

Plan Survey Tool Program Date 3/26/2025

Depth From Depth To

(ft) (ft) Survey (Wellbore) **Tool Name** Remarks

0.00 19,290.84 Plan #2 (OH) MWD+HDGM

OWSG MWD + HDGM



Planning Report



Database: Company:

Hilcorp

edm

Hilcorp Energy - San Juan Basin

San Juan, NM NAD27

Project:

Allison Unit 611H Pad Site: Allison Unit 630H Well:

Wellbore: ОН Design: Plan #2 Local Co-ordinate Reference:

Survey Calculation Method:

TVD Reference:

MD Reference:

North Reference:

Well Allison Unit 630H - Slot 02

GL 6350' & RKB 25.1' @ 6375.10ft (Nabors

GL 6350' & RKB 25.1' @ 6375.10ft (Nabors

B29) True

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.000	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
750.00	0.00	0.000	750.00	0.00	0.00	0.00	0.00	0.00	0.00	
1,314.79	14.12	319.981	1,309.09	53.03	-44.52	2.50	2.50	0.00	319.98	
4,956.64	14.12	319.981	4,840.91	733.40	-615.82	0.00	0.00	0.00	0.00	
5,521.42	0.00	0.000	5,400.00	786.43	-660.34	2.50	-2.50	0.00	180.00	
6,335.28	0.00	0.000	6,213.86	786.43	-660.34	0.00	0.00	0.00	0.00	
7,279.29	89.98	90.000	6,815.00	786.43	-59.46	9.53	9.53	9.53	90.00	AU 630H LP Rev3
19,290.84	89.98	90.166	6,820.00	769.03	11,952.07	0.00	0.00	0.00	89.35	AU 630H BHL Rev

Planning Report



Database: Company: edm

Hilcorp Energy - San Juan Basin

Project: San Juan, NM NAD27

Site: Allison Unit 611H Pad
Well: Allison Unit 630H

Wellbore: OH
Design: Plan #2

Local Co-ordinate Reference:

TVD Reference:

MD Reference:

North Reference:

Survey Calculation Method:

Well Allison Unit 630H - Slot 02

GL 6350' & RKB 25.1' @ 6375.10ft (Nabors

B29)

GL 6350' & RKB 25.1' @ 6375.10ft (Nabors

B29) True

anned Survey									
Measured Depth	Inclination	Azimuth	Vertical Depth	+N/-S	+E/-W	Vertical Section	Dogleg Rate	Build Rate	Turn Rate
(ft)	(°)	(°)	(ft)	(ft)	(ft)	(ft)	(°/100usft)	(°/100usft)	(°/100usft)
0.00	0.00	0.000	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.000	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.000	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.000	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.000	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.000	500.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.000	600.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.000	700.00	0.00	0.00	0.00	0.00	0.00	0.00
750.00	0.00	0.000	750.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	1.25	319.981	800.00	0.42	-0.35	-0.32	2.50	2.50	0.00
000.00	0.75	240.004	000.00	2.70	2.40	0.04	2.50	0.50	0.00
900.00	3.75	319.981	899.89	3.76	-3.16	-2.91	2.50	2.50	0.00
1,000.00	6.25	319.981	999.50	10.43	-8.76	-8.07	2.50	2.50	0.00
1,100.00	8.75	319.981	1,098.64	20.43	-17.15	-15.81	2.50	2.50	0.00
1,200.00	11.25	319.981	1,197.11	33.72	-28.32	-26.09	2.50	2.50	0.00
1,300.00	13.75	319.981	1,294.74	50.30	-42.23	-38.92	2.50	2.50	0.00
1,314.79	14.12	319.981	1,309.09	53.03	-44.52	-41.03	2.50	2.50	0.00
1,400.00	14.12	319.981	1,391.73	68.95	-57.89	-53.35	0.00	0.00	0.00
1,500.00	14.12	319.981	1,488.71	87.63	-73.58	-67.80	0.00	0.00	0.00
1,600.00	14.12	319.981	1,585.68	106.31	-89.27	-82.25	0.00	0.00	0.00
1,700.00	14.12	319.981	1,682.66	124.99	-104.95	-96.71	0.00	0.00	0.00
.,									
1,800.00	14.12	319.981	1,779.64	143.67	-120.64	-111.16	0.00	0.00	0.00
1,900.00	14.12	319.981	1,876.62	162.36	-136.33	-125.62	0.00	0.00	0.00
2,000.00	14.12	319.981	1,973.60	181.04	-152.01	-140.07	0.00	0.00	0.00
2,100.00	14.12	319.981	2,070.58	199.72	-167.70	-154.53	0.00	0.00	0.00
2,200.00	14.12	319.981	2,167.56	218.40	-183.39	-168.98	0.00	0.00	0.00
2,200.00	14.12	319.901	2,107.50	210.40	-103.39	-100.90	0.00	0.00	0.00
2,300.00	14.12	319.981	2,264.54	237.09	-199.07	-183.44	0.00	0.00	0.00
2,400.00	14.12	319.981	2,361.51	255.77	-214.76	-197.89	0.00	0.00	0.00
2,500.00	14.12	319.981	2,458.49	274.45	-230.45	-212.35	0.00	0.00	0.00
2,600.00	14.12	319.981	2,555.47	293.13	-246.13	-226.80	0.00	0.00	0.00
2,700.00	14.12	319.981	2,652.45	311.81	-261.82	-241.26	0.00	0.00	0.00
2,800.00	14.12	319.981	2,749.43	330.50	-277.51	-255.71	0.00	0.00	0.00
2,900.00	14.12	319.981	2,846.41	349.18	-293.19	-270.17	0.00	0.00	0.00
3,000.00	14.12	319.981	2,943.39	367.86	-308.88	-284.62	0.00	0.00	0.00
						-204.02 -299.08			
3,100.00	14.12	319.981	3,040.37	386.54	-324.57		0.00	0.00	0.00
3,200.00	14.12	319.981	3,137.35	405.23	-340.25	-313.53	0.00	0.00	0.00
3,300.00	14.12	319.981	3,234.32	423.91	-355.94	-327.99	0.00	0.00	0.00
	14.12	319.981	3,331.30	442.59	-371.63	-342.44	0.00	0.00	
3,400.00									0.00
3,500.00	14.12	319.981	3,428.28	461.27	-387.32	-356.90	0.00	0.00	0.00
3,600.00	14.12	319.981	3,525.26	479.95	-403.00	-371.35	0.00	0.00	0.00
3,700.00	14.12	319.981	3,622.24	498.64	-418.69	-385.81	0.00	0.00	0.00
	11 10	210 001		517.32	424.20	-400.26	0.00	0.00	0.00
3,800.00	14.12	319.981	3,719.22		-434.38		0.00	0.00	0.00
3,900.00	14.12	319.981	3,816.20	536.00	-450.06	-414.72	0.00	0.00	0.00
4,000.00	14.12	319.981	3,913.18	554.68	-465.75	-429.17	0.00	0.00	0.00
4,100.00	14.12	319.981	4,010.16	573.37	-481.44	-443.63	0.00	0.00	0.00
4,200.00	14.12	319.981	4,107.13	592.05	-497.12	-458.08	0.00	0.00	0.00
4,300.00	14.12	319.981	4,204.11	610.73	-512.81	-472.54	0.00	0.00	0.00
4,400.00	14.12	319.981	4,301.09	629.41	-528.50	-486.99	0.00	0.00	0.00
4,500.00	14.12	319.981	4,398.07	648.09	-544.18	-501.45	0.00	0.00	0.00
4,600.00	14.12	319.981	4,495.05	666.78	-559.87	-515.90	0.00	0.00	0.00
4,700.00	14.12	319.981	4,592.03	685.46	-575.56	-530.36	0.00	0.00	0.00
4,800.00	14.12	319.981	4,689.01	704.14	-591.24	-544.81	0.00	0.00	0.00
4,900.00	14.12	319.981	4,785.99	722.82	-606.93	-559.27	0.00	0.00	0.00





Database: Company:

Hilcorp

edm

Hilcorp Energy - San Juan Basin

Project:

San Juan, NM NAD27

Site: Allison Unit 611H Pad
Well: Allison Unit 630H

Wellbore: OH
Design: Plan #2

Local Co-ordinate Reference:

TVD Reference:

MD Reference:

North Reference:

Survey Calculation Method:

Well Allison Unit 630H - Slot 02

GL 6350' & RKB 25.1' @ 6375.10ft (Nabors

B29)

GL 6350' & RKB 25.1' @ 6375.10ft (Nabors

B29) True

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
4,956.64	14.12	319.981	4,840.91	733.40	-615.82	-567.45	0.00	0.00	0.00
5,000.00 5,100.00	13.04 10.54	319.981 319.981	4,883.06 4,980.95	741.20 756.84	-622.36 -635.49	-573.49 -585.59	2.50 2.50	-2.50 -2.50	0.00 0.00
5,200.00	8.04	319.981	5,079.63	769.20	-645.87	-595.15	2.50	-2.50	0.00
5,300.00	5.54	319.981	5,178.92	778.24	-653.47	-602.15	2.50	-2.50	0.00
5,400.00	3.04	319.981	5,278.63	783.97	-658.27	-606.58	2.50	-2.50	0.00
5,500.00	0.54	319.981	5,378.58	786.35	-660.28	-608.42	2.50	-2.50	0.00
5,521.42	0.00	0.000	5,400.00	786.43	-660.34	-608.48	2.50	-2.50	0.00
5,600.00	0.00	0.000	5,478.58	786.43	-660.34	-608.48	0.00	0.00	0.00
5,700.00	0.00	0.000	5,578.58	786.43	-660.34	-608.48	0.00	0.00	0.00
5,800.00	0.00	0.000	5,678.58	786.43	-660.34	-608.48	0.00	0.00	0.00
5,900.00	0.00	0.000	5,778.58	786.43	-660.34	-608.48	0.00	0.00	0.00
6,000.00	0.00	0.000	5,878.58	786.43	-660.34	-608.48	0.00	0.00	0.00
6,100.00	0.00	0.000	5,978.58	786.43	-660.34	-608.48	0.00	0.00	0.00
6,200.00	0.00	0.000	6,078.58	786.43	-660.34	-608.48	0.00	0.00	0.00
6,300.00	0.00	0.000	6,178.58	786.43	-660.34	-608.48	0.00	0.00	0.00
6,335.28	0.00	0.000	6,213.86	786.43	-660.34	-608.48	0.00	0.00	0.00
6,400.00	6.17	90.000	6,278.45	786.43	-656.86	-605.01	9.53	9.53	0.00
6,500.00	15.70	90.000	6,376.52	786.43	-637.91	-586.10	9.53	9.53	0.00
6,600.00	25.23	90.000	6,470.10	786.43	-602.99	-551.25	9.53	9.53	0.00
6,700.00	34.76	90.000	6,556.61	786.43	-553.05	-501.42	9.53	9.53	0.00
6,800.00	44.29	90.000	6,633.65	786.43	-489.48	-437.98	9.53	9.53	0.00
6,900.00	53.82	90.000	6,699.11	786.43	-414.03	-362.68	9.53	9.53	0.00
7,000.00	63.36	90.000	6,751.16	786.43	-328.79	-277.61	9.53	9.53	0.00
7,100.00	72.89	90.000	6,788.38	786.43	-236.09	-185.11	9.53	9.53	0.00
7,200.00	82.42	90.000	6,809.74	786.43	-138.52	-87.74	9.53	9.53	0.00
7,279.29	89.98	90.000	6,815.00	786.43	-59.46	-8.84	9.53	9.53	0.00
7,300.00	89.98	90.000	6,815.01	786.43	-38.75	11.82	0.00	0.00	0.00
7,400.00	89.98	90.002	6,815.05	786.43	61.25	111.62	0.00	0.00	0.00
7,500.00	89.98	90.003	6,815.10	786.42	161.25	211.41	0.00	0.00	0.00
7,600.00	89.98	90.004	6,815.14	786.42	261.25	311.20	0.00	0.00	0.00
7,700.00	89.98	90.006	6,815.18	786.41	361.25	411.00	0.00	0.00	0.00
7,800.00	89.98	90.007	6,815.23	786.40	461.25	510.79	0.00	0.00	0.00
7,900.00	89.98	90.009	6,815.27	786.38	561.25	610.58	0.00	0.00	0.00
8,000.00	89.98	90.010	6,815.31	786.37	661.25	710.38	0.00	0.00	0.00
8,100.00	89.98	90.011	6,815.35	786.35	761.25	810.17	0.00	0.00	0.00
8,200.00	89.98	90.013	6,815.40	786.33	861.25	909.96	0.00	0.00	0.00
8,300.00	89.98	90.014	6,815.44	786.31	961.25	1,009.75	0.00	0.00	0.00
8,400.00	89.98	90.015	6,815.48	786.28	1,061.25	1,109.54	0.00	0.00	0.00
8,500.00	89.98	90.017	6,815.53	786.25	1,161.25	1,209.34	0.00	0.00	0.00
8,600.00	89.98	90.018	6,815.57	786.22	1,261.25	1,309.13	0.00	0.00	0.00
8,700.00	89.98	90.020	6,815.61	786.19	1,361.25	1,408.92	0.00	0.00	0.00
8,800.00	89.98	90.021	6,815.65	786.15	1,461.25	1,508.71	0.00	0.00	0.00
8,900.00	89.98	90.022	6,815.70	786.11	1,561.25	1,608.50	0.00	0.00	0.00
9,000.00	89.98	90.024	6,815.74	786.07	1,661.25	1,708.29	0.00	0.00	0.00
9,100.00	89.98	90.025	6,815.78	786.03	1,761.25	1,808.08	0.00	0.00	0.00
9,200.00	89.98	90.027	6,815.83	785.99	1,861.25	1,907.87	0.00	0.00	0.00
9,300.00	89.98	90.028	6,815.87	785.94	1,961.25	2,007.66	0.00	0.00	0.00
9,400.00	89.98	90.029	6,815.91	785.89	2,061.25	2,107.46	0.00	0.00	0.00
9,500.00	89.98	90.031	6,815.95	785.84	2,161.25	2,207.25	0.00	0.00	0.00
9,600.00	89.98	90.032	6,816.00	785.78	2,261.25	2,307.04	0.00	0.00	0.00
9,700.00	89.98	90.033	6,816.04	785.72	2,361.25	2,406.83	0.00	0.00	0.00





Database: Company:

Hilcorp

edm

Hilcorp Energy - San Juan Basin

Project:

San Juan, NM NAD27

Site: Allison Unit 611H Pad
Well: Allison Unit 630H

Wellbore: OH
Design: Plan #2

Local Co-ordinate Reference:

TVD Reference:

MD Reference:

North Reference:

Survey Calculation Method:

Well Allison Unit 630H - Slot 02

GL 6350' & RKB 25.1' @ 6375.10ft (Nabors

B29)

GL 6350' & RKB 25.1' @ 6375.10ft (Nabors

B29) True

lanned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
9,800.00	89.98	90.035	6,816.08	785.67	2,461.25	2,506.62	0.00	0.00	0.00
9,900.00	89.98	90.036	6,816.12	785.60	2,561.25	2,606.41	0.00	0.00	0.00
10,000.00	89.98	90.038	6,816.17	785.54	2,661.25	2,706.19	0.00	0.00	0.00
10,100.00	89.98	90.039	6,816.21	785.47	2,761.25	2,805.98	0.00	0.00	0.00
10,200.00	89.98	90.040	6,816.25	785.40	2,861.25	2,905.77	0.00	0.00	0.00
10,300.00	89.98	90.042	6,816.29	785.33	2,961.25	3,005.56	0.00	0.00	0.00
10,400.00	89.98	90.043	6,816.34	785.26	3,061.25	3,105.35	0.00	0.00	0.00
10,500.00	89.98	90.045	6,816.38	785.18	3,161.25	3,205.14	0.00	0.00	0.00
10,600.00	89.98	90.046	6,816.42	785.10	3,261.25	3,304.93	0.00	0.00	0.00
10,700.00	89.98	90.047	6,816.46	785.02	3,361.25	3,404.72	0.00	0.00	0.00
10,800.00	89.98	90.049	6,816.51	784.94	3,461.25	3,504.50	0.00	0.00	0.00
10,900.00	89.98	90.050	6,816.55	784.85	3,561.25	3,604.29	0.00	0.00	0.00
11,000.00	89.98	90.051	6,816.59	784.76	3,661.25	3,704.08	0.00	0.00	0.00
11,100.00	89.98	90.053	6,816.63	784.67	3,761.25	3,803.87	0.00	0.00	0.00
11,200.00	89.98	90.054	6,816.68	784.58	3,861.25	3,903.66	0.00	0.00	0.00
11,300.00	89.98	90.056	6,816.72	784.48	3,961.25	4,003.44	0.00	0.00	0.00
11,400.00	89.98	90.057	6,816.76	784.38	4,061.25	4,103.23	0.00	0.00	0.00
11,500.00	89.98	90.058	6,816.80	784.28	4,161.25	4,203.02	0.00	0.00	0.00
11,600.00	89.98	90.060	6,816.84	784.18	4,261.25	4,302.80	0.00	0.00	0.00
11,700.00	89.98	90.061	6,816.89	784.07	4,361.25	4,402.59	0.00	0.00	0.00
11,800.00	89.98	90.062	6,816.93	783.97	4,461.25	4,502.38	0.00	0.00	0.00
11,900.00	89.98	90.064	6,816.97	783.86	4,561.25	4,602.16	0.00	0.00	0.00
12,000.00	89.98	90.065	6,817.01	783.74	4,661.25	4,701.95	0.00	0.00	0.00
12,100.00	89.98	90.067	6,817.05	783.63	4,761.25	4,801.74	0.00	0.00	0.00
12,200.00	89.98	90.068	6,817.10	783.51	4,861.25	4,901.52	0.00	0.00	0.00
12,300.00	89.98	90.069	6,817.14	783.39	4,961.25	5,001.31	0.00	0.00	0.00
12,400.00	89.98	90.071	6,817.18	783.27	5,061.25	5,101.09	0.00	0.00	0.00
12,500.00	89.98	90.072	6,817.22	783.14	5,161.25	5,200.88	0.00	0.00	0.00
12,600.00	89.98	90.074	6,817.26	783.02	5,261.25	5,300.67	0.00	0.00	0.00
12,700.00	89.98	90.075	6,817.31	782.89	5,361.25	5,400.45	0.00	0.00	0.00
12,800.00	89.98	90.076	6,817.35	782.76	5,461.25	5,500.24	0.00	0.00	0.00
12,900.00	89.98	90.078	6,817.39	782.62	5,561.25	5,600.02	0.00	0.00	0.00
13,000.00	89.98	90.079	6,817.43	782.48	5,661.25	5,699.81	0.00	0.00	0.00
13,100.00	89.98	90.080	6,817.47	782.34	5,761.25	5,799.59	0.00	0.00	0.00
13,200.00	89.98	90.082	6,817.51	782.20	5,861.24	5,899.37	0.00	0.00	0.00
13,300.00	89.98	90.083	6,817.56	782.06	5,961.24	5,999.16	0.00	0.00	0.00
13,400.00	89.98	90.085	6,817.60	781.91	6,061.24	6,098.94	0.00	0.00	0.00
13,500.00	89.98	90.086	6.817.64	781.76	6,161.24	6,198.73	0.00	0.00	0.00
13,600.00	89.98	90.087	6,817.68	781.61	6,261.24	6,298.51	0.00	0.00	0.00
13,700.00	89.98	90.089	6,817.72	781.46	6,361.24	6,398.29	0.00	0.00	0.00
13,800.00	89.98	90.090	6,817.76	781.30	6,461.24	6,498.08	0.00	0.00	0.00
13,900.00	89.98	90.092	6,817.80	781.14	6,561.24	6,597.86	0.00	0.00	0.00
14,000.00	89.98	90.093	6,817.85	780.98	6,661.24	6,697.64	0.00	0.00	0.00
14,100.00	89.98	90.094	6,817.89	780.82	6,761.24	6,797.43	0.00	0.00	0.00
14,200.00	89.98	90.096	6,817.93	780.65	6,861.24	6,897.21	0.00	0.00	0.00
14,300.00	89.98	90.097	6,817.97	780.49	6,961.24	6,996.99	0.00	0.00	0.00
14,400.00	89.98	90.098	6,818.01	780.32	7,061.24	7,096.78	0.00	0.00	0.00
14,500.00	89.98	90.100	6,818.05	780.14	7,161.24	7,196.56	0.00	0.00	0.00
14,600.00	89.98	90.101	6,818.09	779.97	7,261.24	7,296.34	0.00	0.00	0.00
14,700.00	89.98	90.103	6,818.14	779.79	7,361.24	7,396.12	0.00	0.00	0.00
14,800.00	89.98	90.104	6,818.18	779.61	7,461.24	7,495.90	0.00	0.00	0.00
		90.105	6,818.22			7,595.69	0.00	0.00	0.00

Planning Report



Hilcorp

Database: edm

Company: Hilcorp Energy - San Juan Basin

Project: San Juan, NM NAD27

Site: Allison Unit 611H Pad
Well: Allison Unit 630H

Wellbore: OH
Design: Plan #2

Local Co-ordinate Reference:

TVD Reference:

MD Reference:

North Reference:

Survey Calculation Method:

Well Allison Unit 630H - Slot 02

GL 6350' & RKB 25.1' @ 6375.10ft (Nabors

B29)

GL 6350' & RKB 25.1' @ 6375.10ft (Nabors

B29) True

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
15,000.00	89.98	90.107	6,818.26	779.24	7,661.24	7,695.47	0.00	0.00	0.00
15,100.00	89.98	90.108	6,818.30	779.05	7,761.24	7,795.25	0.00	0.00	0.00
15,200.00	89.98	90.109	6,818.34	778.86	7,861.24	7,895.03	0.00	0.00	0.00
15,300.00	89.98	90.111	6,818.38	778.67	7,961.24	7,994.81	0.00	0.00	0.00
15,400.00	89.98	90.112	6,818.42	778.48	8,061.24	8,094.59	0.00	0.00	0.00
15,500.00	89.98	90.114	6,818.46	778.28	8,161.24	8,194.37	0.00	0.00	0.00
15,600.00	89.98	90.115	6,818.51	778.08	8,261.24	8,294.15	0.00	0.00	0.00
15,700.00	89.98	90.116	6,818.55	777.88	8,361.24	8,393.93	0.00	0.00	0.00
15,800.00	89.98	90.118	6,818.59	777.67	8,461.24	8,493.71	0.00	0.00	0.00
15,900.00	89.98	90.119	6,818.63	777.47	8,561.24	8,593.49	0.00	0.00	0.00
16,000.00	89.98	90.121	6,818.67	777.26	8,661.24	8,693.27	0.00	0.00	0.00
16,100.00	89.98	90.122	6,818.71	777.05	8,761.24	8,793.05	0.00	0.00	0.00
16,200.00	89.98	90.123	6,818.75	776.83	8,861.24	8,892.83	0.00	0.00	0.00
16,300.00	89.98	90.125	6,818.79	776.62	8,961.24	8,992.61	0.00	0.00	0.00
16,400.00	89.98	90.126	6,818.83	776.40	9,061.24	9,092.39	0.00	0.00	0.00
16,500.00	89.98	90.127	6,818.87	776.18	9,161.24	9,192.17	0.00	0.00	0.00
16,600.00	89.98	90.129	6,818.91	775.95	9,261.24	9,291.95	0.00	0.00	0.00
16,700.00	89.98	90.130	6,818.95	775.73	9,361.24	9,391.73	0.00	0.00	0.00
16,800.00	89.98	90.132	6,819.00	775.50	9,461.24	9,491.51	0.00	0.00	0.00
16,900.00	89.98	90.133	6,819.04	775.27	9,561.24	9,591.29	0.00	0.00	0.00
17,000.00	89.98	90.134	6,819.08	775.03	9,661.24	9,691.07	0.00	0.00	0.00
17,100.00	89.98	90.136	6,819.12	774.80	9,761.24	9,790.84	0.00	0.00	0.00
17,200.00	89.98	90.137	6,819.16	774.56	9,861.24	9,890.62	0.00	0.00	0.00
17,300.00	89.98	90.139	6,819.20	774.32	9,961.24	9,990.40	0.00	0.00	0.00
17,400.00	89.98	90.140	6,819.24	774.07	10,061.24	10,090.18	0.00	0.00	0.00
17,500.00	89.98	90.141	6,819.28	773.83	10,161.24	10,189.96	0.00	0.00	0.00
17,600.00	89.98	90.143	6,819.32	773.58	10,261.24	10,289.73	0.00	0.00	0.00
17,700.00	89.98	90.144	6,819.36	773.33	10,361.24	10,389.51	0.00	0.00	0.00
17,800.00	89.98	90.145	6,819.40	773.08	10,461.24	10,489.29	0.00	0.00	0.00
17,900.00	89.98	90.147	6,819.44	772.82	10,561.24	10,589.06	0.00	0.00	0.00
18,000.00	89.98	90.148	6,819.48	772.57	10,661.23	10,688.84	0.00	0.00	0.00
18,100.00	89.98	90.150	6,819.52	772.31	10,761.23	10,788.62	0.00	0.00	0.00
18,200.00	89.98	90.151	6,819.56	772.04	10,861.23	10,888.39	0.00	0.00	0.00
18,300.00	89.98	90.152	6,819.60	771.78	10,961.23	10,988.17	0.00	0.00	0.00
18,400.00	89.98	90.154	6,819.64	771.51	11,061.23	11,087.95	0.00	0.00	0.00
18,500.00	89.98	90.155	6,819.68	771.24	11,161.23	11,187.72	0.00	0.00	0.00
18,600.00	89.98	90.157	6,819.72	770.97	11,261.23	11,287.50	0.00	0.00	0.00
18,700.00	89.98	90.158	6,819.76	770.70	11,361.23	11,387.27	0.00	0.00	0.00
18,800.00	89.98	90.159	6,819.80	770.42	11,461.23	11,487.05	0.00	0.00	0.00
18,900.00	89.98	90.161	6,819.84	770.14	11,561.23	11,586.82	0.00	0.00	0.00
19,000.00	89.98	90.162	6,819.88	769.86	11,661.23	11,686.60	0.00	0.00	0.00
19,100.00	89.98	90.163	6,819.92	769.57	11,761.23	11,786.37	0.00	0.00	0.00
19,200.00	89.98	90.165	6,819.96	769.29	11,861.23	11,886.15	0.00	0.00	0.00
19,290.84	89.98	90.166	6,820.00	769.03	11,952.07	11,976.79	0.00	0.00	0.00



Planning Report

TVD Reference:



-107.479748

Database: Company:

Hilcorp

edm

Hilcorp Energy - San Juan Basin

Local Co-ordinate Reference:

Survey Calculation Method:

Well Allison Unit 630H - Slot 02

37.000682

GL 6350' & RKB 25.1' @ 6375.10ft (Nabors

603,251.70

B29)

MD Reference: GL 6350' & RKB 25.1' @ 6375.10ft (Nabors

North Reference: B2

2,183,709.80

B29)

True
Minimum Curvature

Project:

San Juan, NM NAD27

0.00

0.000

Site: Allison Unit 611H Pad
Well: Allison Unit 630H

Wellbore: OH
Design: Plan #2

AU 630H BHL Rev1

- plan hits target center

Design Targets Target Name - hit/miss target Dip Angle Dip Dir. TVD +N/-S +E/-W Northing Easting - Shape (°) (°) (ft) (ft) (ft) (usft) (usft) Latitude Longitude AU 630H LP Rev3 0.00 0.000 -107.520881 6,815.00 786.43 -59.46 2,183,687.76 591,240.20 37.000737 - plan hits target center - Point

11,952.07

- Point

Casing Points

769.03

6,820.00

Vertical Measured Casing Hole Depth Depth Diameter Diameter (ft) (in) (ft) (in) Name 700.00 700.00 13 3/8" 13.37 17.50 6,321.42 6,200.00 9 5/8" 9.62 12.25 19,290.84 6,820.00 5 1/2" 5.50 8.50

Formations							
	Measured Depth (ft)	Vertical Depth (ft)	Name	Lithology	Dip (°)	Dip Direction (°)	
	2,113.84	2,084.00	OJO ALAMO (SS)		0.00	0.000	
	2,181.90	2,150.00	KIRTLAND (SHALE + coal)		0.00	0.000	
	2,626.32	2,581.00	FRUITLAND (shale + COAL)		0.00	0.000	
	3,006.82	2,950.00	PICTURED CLIFFS (ss)		0.00	0.000	
	3,539.92	3,467.00	LEWIS SHALE		0.00	0.000	
	5,017.37	4,900.00	CLIFFHOUSE		0.00	0.000	
	5,395.36	5,274.00	MENEFEE		0.00	0.000	
	5,576.42	5,455.00	POINT LOOKOUT		0.00	0.000	
	6,095.42	5,974.00	MANCOS		0.00	0.000	

Sante Fe Main Office Phone: (505) 476-3441

General Information Phone: (505) 629-6116

Online Phone Directory https://www.emnrd.nm.gov/ocd/contact-us

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

CONDITIONS

Action 498073

CONDITIONS

Operator:	OGRID:
HILCORP ENERGY COMPANY	372171
1111 Travis Street	Action Number:
Houston, TX 77002	498073
	Action Type:
	[C-103] NOI Change of Plans (C-103A)

CONDITIONS

Created By	Condition	Condition Date
ward.rikala	No additives containing PFAS chemicals will be added to the drilling fluids or completion fluids used during drilling, completions, or recompletions operations.	9/9/2025
ward.rikala	Any previous COA's not addressed within the updated COA's still apply.	9/9/2025