

Form 3160-3
(June 2015)FORM APPROVED
OMB No. 1004-0137
Expires: January 31, 2018

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of work: ☒ DRILL ☐ REENTER 1b. Type of Well: ☒ Oil Well ☐ Gas Well ☐ Other 1c. Type of Completion: ☐ Hydraulic Fracturing ☐ Single Zone ☒ Multiple Zone		5. Lease Serial No. NMNM126971 6. If Indian, Allottee or Tribe Name 7. If Unit or CA Agreement, Name and No. 8. Lease Name and Well No. RAIDER FEDERAL COM 103H 9. API Well No. 30-025-55242
2. Name of Operator CENTENNIAL RESOURCE PRODUCTION LLC 3a. Address 300 N MARIENFIELD STREET SUITE 1000, MIDLAND, TX 3b. Phone No. (include area code) (432) 695-4222		10. Field and Pool, or Exploratory Red Hills/Bone Spring, North 11. Sec., T. R. M. or Blk. and Survey or Area SEC 21/T24S/R34E/NMP
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface SWSE / 355 FSL / 1700 FEL / LAT 32.19677 / LONG -103.471866 At proposed prod. zone NWNE / 100 FNL / 1428 FEL / LAT 32.224528 / LONG -103.470996		12. County or Parish LEA 13. State NM
14. Distance in miles and direction from nearest town or post office* 20 miles		15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 355 feet 16. No of acres in lease 17. Spacing Unit dedicated to this well 320.0
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 30 feet 19. Proposed Depth 9357 feet / 19533 feet 20. BLM/BIA Bond No. in file FED:		21. Elevations (Show whether DF, KDB, RT, GL, etc.) 3500 feet 22. Approximate date work will start* 07/11/2023 23. Estimated duration 25 days
24. Attachments		

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

- | | |
|---|---|
| 1. Well plat certified by a registered surveyor.
2. A Drilling Plan.
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
5. Operator certification.
6. Such other site specific information and/or plans as may be requested by the BLM. |
|---|---|

25. Signature (Electronic Submission) Title Sr Regulatory Analyst	Name (Printed/Typed) MEGHAN TWELE / Ph: (432) 695-4222	Date 09/28/2022
Approved by (Signature) (Electronic Submission) Title Assistant Field Manager Lands & Minerals	Name (Printed/Typed) CODY LAYTON / Ph: (575) 234-5959	Date 06/02/2023
Office Carlsbad Field Office		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
 Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

*(Instructions on page 2)



INSTRUCTIONS

GENERAL: This form is designed for submitting proposals to perform certain well operations, as indicated on Federal and Indian lands and leases for action by appropriate Federal agencies, pursuant to applicable Federal laws and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from local Federal offices.

ITEM I: If the proposal is to redrill to the same reservoir at a different subsurface location or to a new reservoir, use this form with appropriate notations. Consult applicable Federal regulations concerning subsequent work proposals or reports on the well.

ITEM 4: Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local Federal offices for specific instructions.

ITEM 14: Needed only when location of well cannot readily be found by road from the land or lease description. A plat, or plats, separate or on the reverse side, showing the roads to, and the surveyed location of, the well, and any other required information, should be furnished when required by Federal agency offices.

ITEMS 15 AND 18: If well is to be, or has been directionally drilled, give distances for subsurface location of hole in any present or objective productive zone.

ITEM 22: Consult applicable Federal regulations, or appropriate officials, concerning approval of the proposal before operations are started.

ITEM 24: If the proposal will involve hydraulic fracturing operations, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The Privacy Act of 1974 and regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 25 U.S.C. 396; 43 CFR 3160

PRINCIPAL PURPOSES: The information will be used to: (1) process and evaluate your application for a permit to drill a new oil, gas, or service well or to reenter a plugged and abandoned well; and (2) document, for administrative use, information for the management, disposal and use of National Resource Lands and resources including (a) analyzing your proposal to discover and extract the Federal or Indian resources encountered; (b) reviewing procedures and equipment and the projected impact on the land involved; and (c) evaluating the effects of the proposed operation on the surface and subsurface water and other environmental impacts.

ROUTINE USE: Information from the record and/or the record will be transferred to appropriate Federal, State, and local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecution, in connection with congressional inquiries and for regulatory responsibilities.

EFFECT OF NOT PROVIDING INFORMATION: Filing of this application and disclosure of the information is mandatory only if you elect to initiate a drilling or reentry operation on an oil and gas lease.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM connects this information to an evaluation of the technical, safety, and environmental factors involved with drilling for oil and/or gas on Federal and Indian oil and gas leases. This information will be used to analyze and approve applications. Response to this request is mandatory only if the operator elects to initiate drilling or reentry operations on an oil and gas lease. The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Connection Clearance Officer (WO-630), 1849 C Street, N.W., Mail Stop 401 LS, Washington, D.C. 20240.

Additional Operator Remarks

Location of Well

0. SHL: SWSE / 355 FSL / 1700 FEL / TWSP: 24S / RANGE: 34E / SECTION: 21 / LAT: 32.19677 / LONG: -103.471866 (TVD: 0 feet, MD: 0 feet)

PPP: SWSE / 0 FSL / 1423 FEL / TWSP: 24S / RANGE: 34E / SECTION: 16 / LAT: 32.196071 / LONG: -103.47383 (TVD: 9357 feet, MD: 14836 feet)

PPP: SWSE / 100 FSL / 1428 FEL / TWSP: 24S / RANGE: 34E / SECTION: 21 / LAT: 32.196068 / LONG: -103.470986 (TVD: 9357 feet, MD: 9657 feet)

BHL: NWNE / 100 FNL / 1428 FEL / TWSP: 24S / RANGE: 34E / SECTION: 16 / LAT: 32.224528 / LONG: -103.470996 (TVD: 9357 feet, MD: 19533 feet)

BLM Point of Contact

Name: GAVIN MICKWEE

Title: Land Law Examiner

Phone: (575) 234-5972

Email: GMICKWEE@BLM.GOV

CONFIDENTIAL

Review and Appeal Rights

A person contesting a decision shall request a State Director review. This request must be filed within 20 working days of receipt of the Notice with the appropriate State Director (see 43 CFR 3165.3). The State Director review decision may be appealed to the Interior Board of Land Appeals, 801 North Quincy Street, Suite 300, Arlington, VA 22203 (see 43 CFR 3165.4). Contact the above listed Bureau of Land Management office for further information.

CONFIDENTIAL

C-102 Submit Electronically Via OCD Permitting	State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION	Revised July 9, 2024	
		Submittal Type:	☒ Initial Submittal
			☐ Amended Report
			☐ As Drilled

WELL LOCATION INFORMATION

API Number 30-025-55242	Pool Code [96434]	Pool Name RED HILLS; BONE SPRING, NORTH
Property Code 318010	Property Name RAIDER FEDERAL COM	Well Number 103H
OGRID No. 372165	Operator Name PERMIAN RESOURCES OPERATING, LLC	Ground Level Elevation 3500.80'
Surface Owner: ☐ State ☐ Fee ☐ Tribal ☒ Federal		Mineral Owner: ☒ State ☐ Fee ☐ Tribal ☒ Federal

Surface Location

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
O	21	24-S	34-E		355' S	1700' E	32.19677	-103.47187	LEA

Bottom Hole Location

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
B	16	24-S	34-E		100' N	1428' E	32.22453	-103.47093	LEA

Dedicated Acres 320	Infill or Defining Well INFILL	Defining Well API 30-025-46300	Overlapping Spacing Unit (Y/N) Y	Consolidation Code C
Order Numbers. C-8312057			Well setbacks are under Common Ownership: ☐ Yes ☒ No	

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
O	21	24-S	34-E		355' S	1700' E	32.19677	-103.47187	LEA




First Take Point (FTP)

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
O	21	24-S	34-E		100' S	1428' E	32.19607	-103.47099	LEA

Last Take Point (LTP)


UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
B	16	24-S	34-E		100' N	1428' E	32.22453	-103.47093	LEA

Unitized Area or Area of Uniform Interest	Spacing Unit Type ☒ Horizontal ☐ Vertical	Ground Floor Elevation: 3530.80'
---	--	-------------------------------------

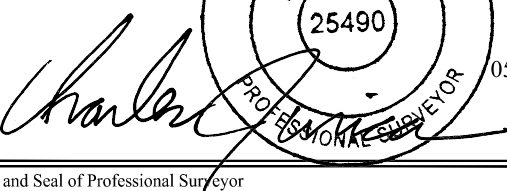OPERATOR CERTIFICATIONS <i>I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and, if the well is a vertical or directional well, that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of a working interest or unleased mineral interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.</i> <i>If this well is a horizontal well, I further certify that this organization has received the consent of at least one lessee or owner of a working interest or unleased mineral interest in each tract (in the target pool or formation) in which any part of the well's completed interval will be located or obtained a compulsory pooling order from the division.</i> Signature:  Date: 5/14/2025 Printed Name: Ashley Brown Email Address: ashley.brown@permianres.com		SURVEYOR CERTIFICATIONS <i>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my beliefs.</i>  Signature and Seal of Professional Surveyor:  Certificate Number: _____ Date of Survey: _____	
--	--	--	--

Note: No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

Surveyors shall use the latest United States government survey or dependent resurvey. Well locations will be in reference to the New Mexico Principal Meridian. If the land is not surveyed, contact the OCD Engineering Bureau. Independent subdivision surveys will not be acceptable.



HSU COORDINATE TABLE		
POINT	N: (83)	E: (83)
A	446575.96	806797.75
B	446587.96	808108.78
C	443955.07	808130.98
D	441313.98	808153.17
E	438672.88	808175.12
F	436034.18	808198.64
G	436025.02	806880.18
H	438664.07	806857.23
I	441304.71	806834.26
J	443945.38	806815.97



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Drilling Plan Data Report

04/15/2025

APD ID: 10400088403

Submission Date: 09/28/2022

Highlighted data
reflects the most
recent changes

Operator Name: CENTENNIAL RESOURCE PRODUCTION LLC

Well Name: RAIDER FEDERAL COM

Well Number: 103H

Well Type: OIL WELL

Well Work Type: Drill

[Show Final Text](#)

Section 1 - Geologic Formations

Formation ID	Formation Name	Elevation	True Vertical	Measured Depth	Lithologies	Mineral Resources	Producing Formatio
10989586	LAMAR	3524	5340	5340	SANDSTONE	NONE	N
10989587	BELL CANYON	-1861	5385	5385	SANDSTONE	NATURAL GAS, OIL	N
10989588	CHERRY CANYON	-2780	6304	6304	SANDSTONE	NATURAL GAS, OIL	N
10989589	BRUSHY CANYON	-4274	7798	7798	SANDSTONE	NATURAL GAS, OIL	N
10989590	BONE SPRING LIME	-5637	9161	9161	OTHER : Carbonate	NATURAL GAS, OIL	N
10989591	AVALON SAND	-5703	9227	9227	SHALE	CO2, NATURAL GAS, OIL	Y
10989592	BONE SPRING 1ST	-6713	10237	10237	SANDSTONE	NATURAL GAS, OIL	N
10989593	BONE SPRING 2ND	-7276	10800	10800	OTHER, SHALE : Carbonate	NATURAL GAS, OIL	Y

Section 2 - Blowout Prevention

Pressure Rating (PSI): 5M

Rating Depth: 9356

Equipment: The BOP and related equipment will meet or exceed the requirements of a 5M-psi system as set forth in On Shore Order No. 2. See attached BOP Schematic. A. Casinghead: 13 5/8 5,000 psi SOW x 13 5,000 psi WP Intermediate Spool: 13 5,000 psi WP x 11 5,000 psi WP Tubinghead: 11 5,000 psi WP x 7 1/16" 15,000 psi WP B. Minimum Specified Pressure Control Equipment Annular preventer One Pipe ram, One blind ram Drilling spool, or blowout preventer with 2 side outlets. Choke side will be a 3-inch minimum diameter, kill line shall be at least 2-inch diameter 3 inch diameter choke line 2 3 inch choke line valves 2 inch kill line 2 chokes with 1 remotely controlled from rig floor (see Figure 2) 2 2 inch kill line valves and a check valve Upper kelly cock valve with handle available When the expected pressures approach working pressure of the system, 1 remote kill line tested to stack pressure (which shall run to the outer edge of the substructure and be unobstructed) Lower kelly cock valve with handle available Safety valve(s) and subs to fit all drill string connections in use Inside BOP or float sub available Pressure gauge on choke manifold All BOPE connections subjected to well pressure shall be flanged, welded, or clamped Fill-up line above the uppermost preventer. C. Auxiliary Equipment Audio and visual mud monitoring equipment shall be placed to detect volume changes indicating loss or gain of circulating fluid volume. (OOS 1, III.C.2) Gas Buster will be used below intermediate casing setting depth. Upper and lower kelly cocks with handles, safety valve and subs to fit all drill string connections and a pressure gauge installed on choke manifold.

Requesting Variance? YES

Operator Name: CENTENNIAL RESOURCE PRODUCTION LLC**Well Name:** RAIDER FEDERAL COM**Well Number:** 103H**Variance request:** Flex hose, well control and offline cement variances, see attachments in section 8.

Testing Procedure: The BOP test shall be performed before drilling out each section and will occur at a minimum: a. when initially installed b. whenever any seal subject to test pressure is broken c. following related repairs d. at 30 day intervals e. checked daily as to mechanical operating conditions. The ram type preventer(s) will be tested using a test plug to 250 psi (low) and 5,000 psi (high) (casinghead WP) with a test plug upon its installation onto the 13 surface casing. If a test plug is not used, the ram type preventer(s) shall be tested to 70% of the minimum internal yield pressure of the casing. The annular type preventer(s) shall be tested to 50% of its working pressure. Pressure will be maintained for at least 10 minutes or until provisions of the test are met, whichever is longer. A Sundry Notice (Form 3160 5), along with a copy of the BOP test report, shall be submitted to the local BLM office within 5 working days following the test. If the bleed line is connected into the buffer tank (header), all BOP equipment including the buffer tank and associated valves will be rated at the required BOP pressure. The BLM office will be provided with a minimum of four (4) hours notice of BOP testing to allow witnessing. The BOP Configuration, choke manifold layout, and accumulator system, will be in compliance with Onshore Order 2 for a 5,000 psi system. A remote accumulator will be used. Pressures, capacities, and specific placement and use of the manual and/or hydraulic controls, accumulator controls, bleed lines, etc., will be identified at the time of the BLM witnessed BOP test. Any remote controls will be capable of both opening and closing all preventers and shall be readily accessible

Choke Diagram Attachment:

10M_Choke_Manifold_20220921134231.pdf

BOP Diagram Attachment:

BOP_Schematic_CoFlex_Choke_5K_20220921134241.pdf

CDEV_Well_Control_Plan_Bonesprings_20210901163333_20220927111541.pdf

Section 3 - Casing

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	CONDUCTOR	26	20.0	NEW	API	N	0	120	0	120	3500	3380	120	H-40	94	OTHER - WELD						
2	SURFACE	17.5	13.375	NEW	API	N	0	1325	0	1325	3500	2175	1325	J-55	54.5	OTHER - BTC	1.73	4.17	DRY	11.81	DRY	11.81
3	INTERMEDIATE	12.25	9.625	NEW	API	N	0	5365	0	5365	3461	-1865	5365	J-55	40	LT&C	1.3	1.42	DRY	2.42	DRY	2.94
4	PRODUCTION	8.75	5.5	NEW	API	N	0	8906	0	8879	3461	-5379	8906	OTHER	20	OTHER - TCBC-HT	2.41	2.74	DRY	3.61	DRY	3.61
5	PRODUCTION	8.5	5.5	NEW	API	N	8929	19533	8879	9356	-8879	-5856	10604	OTHER	20	OTHER - TCBC-HT	2.29	2.6	DRY	67.19	DRY	67.19

Casing Attachments

Operator Name: CENTENNIAL RESOURCE PRODUCTION LLC**Well Name:** RAIDER FEDERAL COM**Well Number:** 103H**Casing Attachments****Casing ID:** 1 **String** CONDUCTOR**Inspection Document:****Spec Document:****Tapered String Spec:****Casing Design Assumptions and Worksheet(s):****Casing ID:** 2 **String** SURFACE**Inspection Document:****Spec Document:****Tapered String Spec:****Casing Design Assumptions and Worksheet(s):**

CASING_ASSUMPTIONS_WORKSHEET_20220921134816.pdf

Casing ID: 3 **String** INTERMEDIATE**Inspection Document:****Spec Document:****Tapered String Spec:****Casing Design Assumptions and Worksheet(s):**

CASING_ASSUMPTIONS_WORKSHEET_20220921134515.pdf

Operator Name: CENTENNIAL RESOURCE PRODUCTION LLC**Well Name:** RAIDER FEDERAL COM**Well Number:** 103H**Casing Attachments****Casing ID:** 4 **String** PRODUCTION**Inspection Document:****Spec Document:****Tapered String Spec:****Casing Design Assumptions and Worksheet(s):**

CASING_ASSUMPTIONS_WORKSHEET_20220921134619.pdf

Technical_Data_Sheet_HIS_TCBC_HT_5.5_20__P110RY_20220921134626.pdf

Casing ID: 5 **String** PRODUCTION**Inspection Document:****Spec Document:****Tapered String Spec:****Casing Design Assumptions and Worksheet(s):**

CASING_ASSUMPTIONS_WORKSHEET_20220921134759.pdf

Technical_Data_Sheet_HIS_TCBC_HT_5.5_20__P110RY_20220921134804.pdf

Section 4 - Cement

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
CONDUCTOR	Lead		0	120	121	1.49	12.9	181		Grout	Bentonite 4% BWOC, Cellophane #sx, CaCl2 2% BWOC

SURFACE	Lead		0	825	250	1.8	13.5	1146	100	Class C Premium	Premium Gel Bentonite 4%, C-45 Econolite 0.25%,
---------	------	--	---	-----	-----	-----	------	------	-----	-----------------	---

Operator Name: CENTENNIAL RESOURCE PRODUCTION LLC

Well Name: RAIDER FEDERAL COM

Well Number: 103H

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
											Phenoseal 0.25#/sk, CaCl 1%, Defoamer C-41P 0.75%
SURFACE	Tail		825	1325	445	1.34	14.8	695	100	Class C Premium	C-45 Econolite 0.10%, CaCl 1.0%
INTERMEDIATE	Lead		0	4865	665	3.42	10.7	3178	100	TXI Lightweight	Salt 1.77/sk, C-45 Econolite 2.25%, STE 6.00%, Citric Acid 0.18%, C-19 0.10%, CSA-1000 0.20%, C-530P 0.30%, CTB-15 LCM 7#/sk, Gyp Seal 8#/sk
INTERMEDIATE	Tail		4865	5365	210	1.34	14.8	188	20	Class C Premium	C-45 Econolite 0.10%, Citric acid 0.05%, C503P 0.25%
PRODUCTION	Lead		0	8906	874	3.41	10.6	2981	30	TXI Lightweight	Salt 8.98#/sk, STE 6.00%, Citric acid 0.20%, CSA-1000 0.23%, C47B 0.10%, C-503P 0.30%
PRODUCTION	Tail		8906	1953 3	2454	1.24	14.2	3043	25	50:25:25 Class H: Poz: CPO18	Citric acid 0.03%, CSA-1000 0.05%, C47B 0.25%, C-503P 0.30%
PRODUCTION	Lead		0	8906	874	3.41	10.6	2981	30	TXI Lightweight	Salt 8.98#/sk, STE 6.00%, Citric acid 0.20%, CSA-1000 0.23%, C47B 0.10%, C-503P 0.30%
PRODUCTION	Tail		8906	1953 3	2454	1.24	14.2	3043	25	50:25:25 Class H: Poz: CPO18	Citric acid 0.03%, CSA-1000 0.05%, C47B 0.25%, C-503P 0.30%

Operator Name: CENTENNIAL RESOURCE PRODUCTION LLC**Well Name:** RAIDER FEDERAL COM**Well Number:** 103H**Section 5 - Circulating Medium****Mud System Type:** Closed**Will an air or gas system be Used?** NO**Description of the equipment for the circulating system in accordance with 43 CFR 3172:****Diagram of the equipment for the circulating system in accordance with 43 CFR 3172:**

Describe what will be on location to control well or mitigate other conditions: Sufficient quantities of mud materials will be on the well site at all times for the purpose of assuring well control and maintaining wellbore integrity. Surface interval will employ fresh water mud. The intermediate hole will utilize a diesel emulsified brine fluid to inhibit salt washout and prevent severe fluid losses. The production hole will employ oil base fluid to inhibit formation reactivity and of the appropriate density to maintain well control.

Describe the mud monitoring system utilized: Centrifuge separation system. Open tank monitoring with EDR will be used for drilling fluids and return volumes. Open tank monitoring will be used for cement and cuttings return volumes. Mud properties will be monitored at least every 24 hours using industry accepted mud check practices.

Circulating Medium Table

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	PH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
0	1325	OTHER : FW	8.6	9.5							
1325	5365	OTHER : Brine	9	10							
0	1953 3	OTHER : Brine/OBM	8.8	10							

Section 6 - Test, Logging, Coring**List of production tests including testing procedures, equipment and safety measures:**

Will utilize MWD/LWD (Gamma ray logging) from intermediate hole to TD of the well.

List of open and cased hole logs run in the well:

GAMMA RAY LOG,DIRECTIONAL SURVEY,

Coring operation description for the well:

N/A

Operator Name: CENTENNIAL RESOURCE PRODUCTION LLC**Well Name:** RAIDER FEDERAL COM**Well Number:** 103H

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 4865**Anticipated Surface Pressure:** 2806**Anticipated Bottom Hole Temperature(F):** 170**Anticipated abnormal pressures, temperatures, or potential geologic hazards?** NO**Describe:****Contingency Plans geohazards description:****Contingency Plans geohazards****Hydrogen Sulfide drilling operations plan required?** YES**Hydrogen sulfide drilling operations**

H2S_Contingency_Plan_Raider_Fed_Com_102H___103H_20220921135636.pdf

Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:

Raider_Federal_Com_103H___Plan_1_8_17_22_AC_Report_20220928105934.pdf

Raider_Federal_Com_103H___Plan_1_8_17_22_20220928105939.pdf

Other proposed operations facets description:**Other proposed operations facets attachment:**

CDEV_Multi_Bowl_Procedure_Raider_Fed_Com_103H_20220928110248.pdf

Raider_Fed_Com_103H_Batch_Setting___Aug_2022_20220928110255.pdf

Raider_Fed_Com_103H_Geoprolog_20220928110329.pdf

Raider_Fed_Com_103H_WBD___Proposed_20220928110411.pdf

Other Variance attachment:


CDEV_Well_Control_Plan_Bonesprings_20210901163333_20220927111349.pdf

Raider_Fed_Com_103H_Offline_Cementing_Procedure___Aug_2022_20220928110501.pdf

Flex_Hose_Variance_Request___Raider_Fed_Com_103H_20220928110509.pdf



H&P Rig

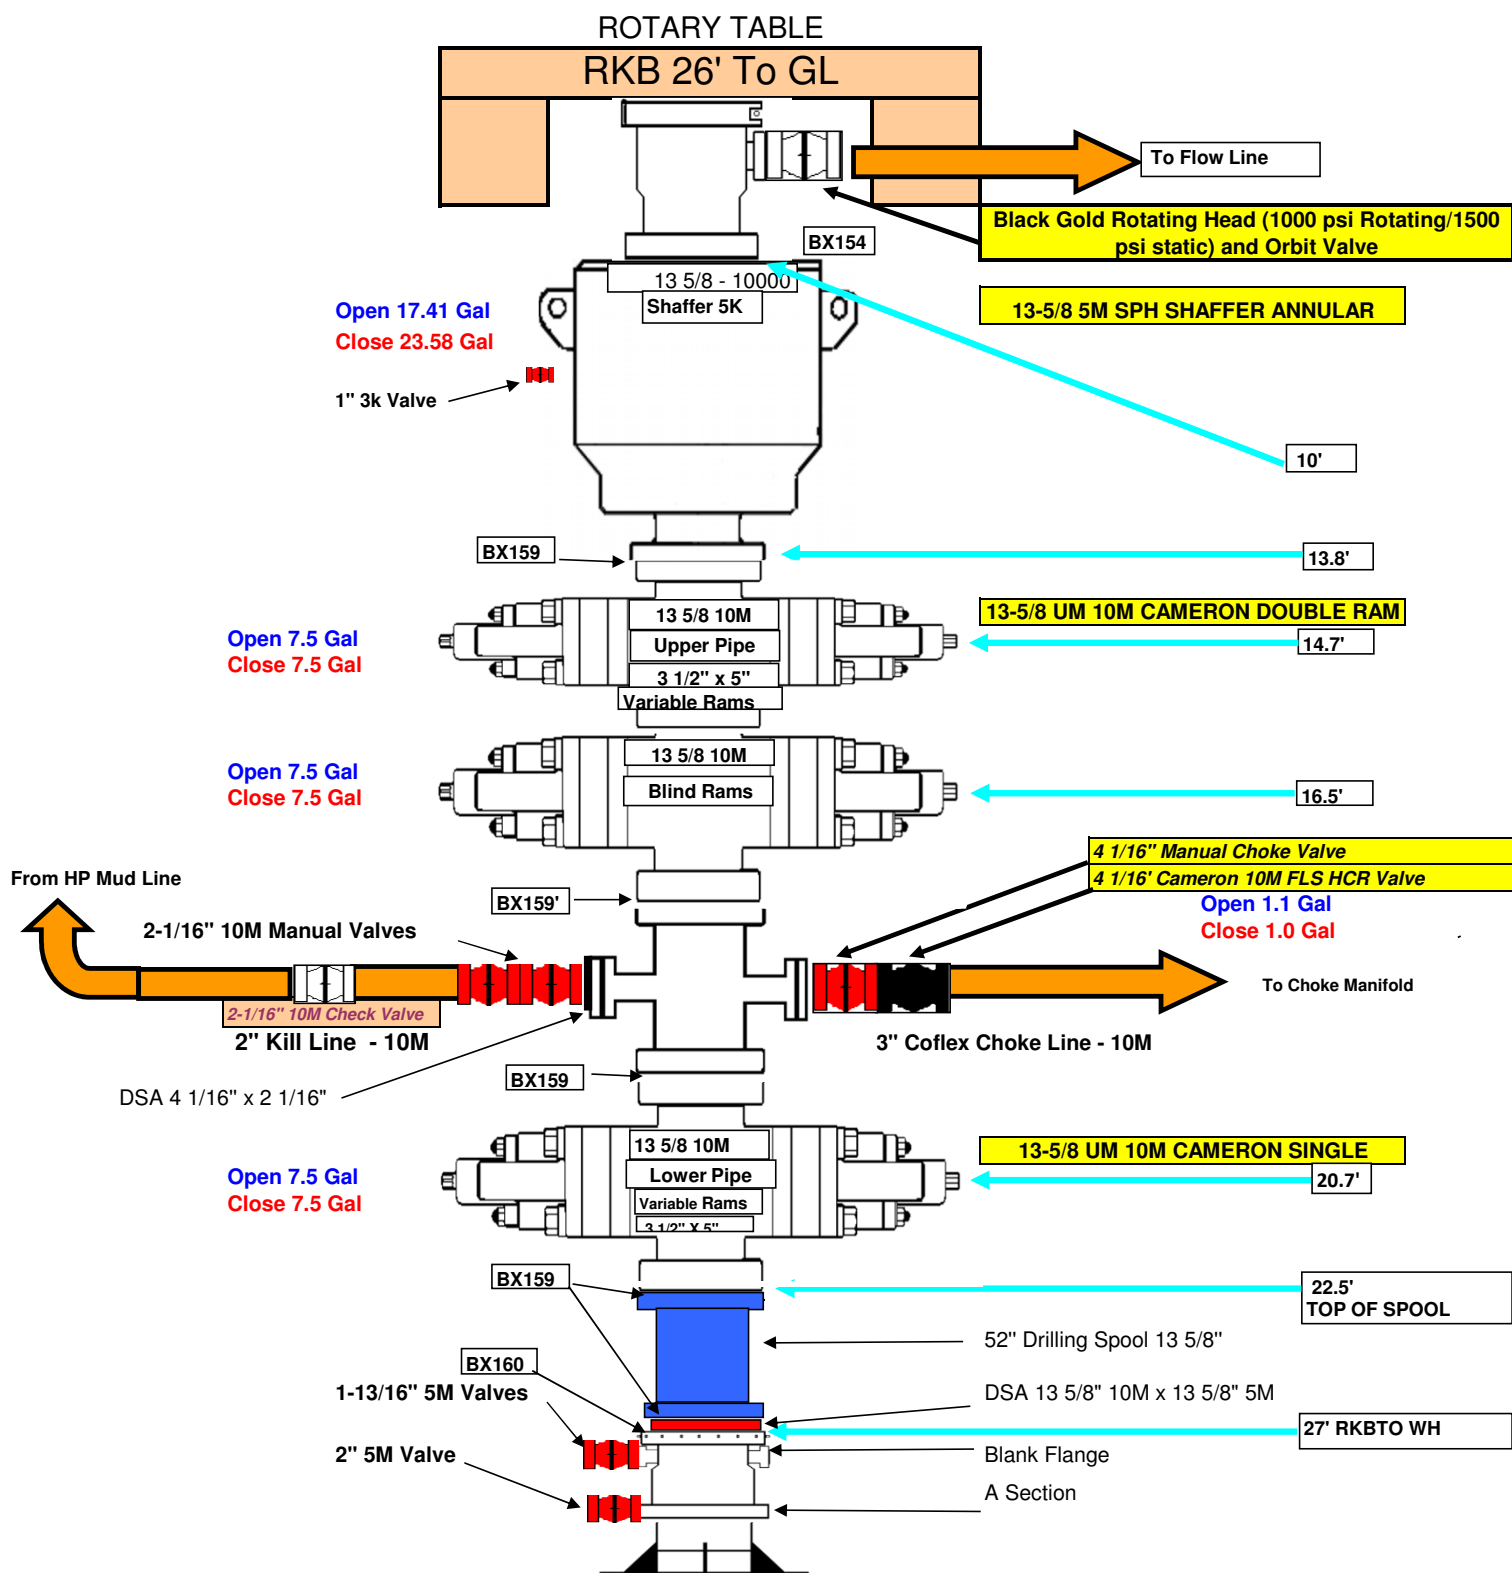

Centennial Resource Development - Well Control Plan

A. Component and Preventer Compatibility Table

Component	OD (inches)	Preventer	RWP
Drillpipe	5	Upper VBR: 3.5 – 5.5 Lower VBR: 3.5 – 5.5	10M
Heavyweight Drillpipe	5	Upper VBR: 3.5 – 5.5 Lower VBR: 3.5 – 5.5	10M
Drill collars and MWD tools	6 ¾	Annular	5M
Mud Motor	6 ¾	Annular	5M
Production Casing	5-1/2	Upper VBR: 3.5 – 5.5 Lower VBR: 3.5 – 5.5	10M
All	0 – 13 5/8	Annular	5M
Open-hole	-	Blind rams	10M

VBR = Variable Bore Rams

RWP = Rated Working Pressure

MWD = Measurement While Drilling (directional tools)

B. Well Control Procedures

I. General Procedures While Drilling:

1. Sound alarm (alert crew).
2. Space out drill-string.
3. Shut down pumps and stop rotary.
4. Open HCR
5. Shut-in well – utilizing upper VBRs.
6. Close choke
7. Confirm shut-in.
8. Notify rig manager and Centennial company representative.
9. Call Centennial drilling engineer
10. Read and record
 - I. Shut-in drillpipe pressure (SIDPP) and shut-in casing pressure (SCIP).
 - II. Pit gain
 - III. Time
11. Regroup, identify forward plan

II. General Procedure While Tripping

1. Sound alarm (alert crew).
2. Stab full opening safety valve and close
3. Space out drillstring.
4. Open HCR
5. Shut-in well – utilizing upper VBRs
6. Close choke
7. Confirm shut-in.
8. Notify rig manager and Centennial company representative.
9. Call Centennial drilling engineer
10. Read and record:
 - I. SIDPP AND SICP
 - II. Pit gain
 - III. Time
11. Regroup and identify forward plan.

III. General Procedure While Running Casing

1. Sound alarm (alert crew)
2. Stab full opening safety valve and close
3. Space out string.
4. Open HCR
5. Shut-in well – utilizing upper VBRs.
6. Close choke
7. Confirm shut-in.
8. Notify rig manager and Centennial company representative.
9. Call Centennial drilling engineer
10. Read and record:
 - I. SIDPP AND SICP
 - II. Pit gain
 - III. Time
11. Regroup and identify forward plan.

IV. General Procedure With No Pipe In Hole (Open Hole)

1. Sound alarm (alert crew)
2. Open HCR
3. Shut-in with blind rams
4. Close choke
5. Confirm shut-in
6. Notify rig manager and Centennial company representative.
7. Call Centennial drilling engineer
8. Read and record:
 - I. SIDPP AND SICP
 - II. Pit gain
 - III. Time
9. Regroup and identify forward plan.

V. General Procedures While Pulling BHA Thru BOP Stack**1. Prior to pulling last joint of drillpipe thru stack:**

- I. Perform flow check, if flowing
 - a. Sound alarm, alert crew
 - b. Stab full opening safety valve and close
 - c. Space out drillstring with tool joint just beneath the upper pipe ram.
 - d. Open HCR
 - e. Shut-in utilizing upper VBRs
 - f. Close choke
 - g. Confirm shut-in
 - h. Notify rig manager and Centennial company representative.
 - i. Call Centennial drilling engineer
 - j. Read and record:
 - i. SIDPP and SICP
 - ii. Pit gain
 - iii. Time
- II. Regroup and identify forward plan

2. With BHA in the BOP stack and compatible ram preventer and pipe combo immediately available:

- a. Sound alarm, alert crew
- b. Stab full opening safety valve and close
- c. Space out drillstring with tool joint just beneath the upper pipe ram.
- d. Open HCR
- e. Shut-in utilizing upper VBRs
- f. Close choke
- g. Confirm shut-in
- h. Notify rig manager and Centennial company representative.
- i. Call Centennial drilling engineer
- j. Read and record:
 - i. SIDPP and SICP
 - ii. Pit gain
 - iii. Time
- II. Regroup and identify forward plan

3. With BHA in the BOP stack and no compatible ram preventer and pipe combo immediately available:

- I. Sound alarm, alert crew.
- II. If possible to pick up high enough, pull string clear of the stack and follow Open Hole (III) scenario.
- III. If impossible to pick up high enough to pull the string clear of the stack:
 - a. Stab crossover, make up one joint/stand of drill pipe and full opening safety valve and close.
 - b. Space out drillstring with tool joint just beneath the upper pipe ram.
 - c. Open HCR
 - d. Shut-in utilizing upper VBRs.
 - e. Close choke
 - f. Confirm shut-in
 - g. Notify rig manager and Centennial company representative.
 - h. Call Centennial drilling engineer
 - i. Read and record:
 - i. SIDPP and SICP
 - ii. Pit gain
 - iii. Time
- IV. Regroup and identify forward plan.

**** If annular is used to shut-in well and pressure builds to OR is expected to get to 50% of RWP, confirm space-out and swap to upper VBRs for shut-in.**

CASING ASSUMPTIONS WORKSHEET:Centralizer Program:

Surface: - 3 welded bow spring centralizers, one on each of the bottom 3 joints, plus one on the shoe joint (4 minimum)
 - No Cement baskets will be run

Production: - 1 welded bow spring centralizer on a stop ring 6' above float shoe
 - 1 centralizer every other joint to the top of the tail cement
 - 1 centralizer every 4 joints to 500' below the top of the lead cement
 - The actual number and placement of centralizers will be determined from hole deviation and potential production zones. Centralizers will be run for maximum practical standoff and through all potential productive zones.

- All casing strings below the conductor shall be tested, prior to drilling out the casing shoe, to 0.22 psi/ft of casing string length or 1500 psi, whichever is greater, but not to exceed 70% of the internal yield pressure of the casing. If pressure declines more than 10 percent in 30 minutes, corrective action will be taken.

No freshly hard banded pipe will be rotated in the surface casing

- CENTENNIAL RESOURCE DEVELOPMENT will not employ an air-drill rig for the surface casing. The casing shoe will be tested by drilling 5'-10' out from under the shoe and pressure testing to the maximum expected mud weight equivalent as shown in the mud program listed in the drilling plan.

CASING ASSUMPTIONS WORKSHEET:Centralizer Program:

Surface: - 3 welded bow spring centralizers, one on each of the bottom 3 joints, plus one on the shoe joint (4 minimum)
 - No Cement baskets will be run

Production: - 1 welded bow spring centralizer on a stop ring 6' above float shoe
 - 1 centralizer every other joint to the top of the tail cement
 - 1 centralizer every 4 joints to 500' below the top of the lead cement
 - The actual number and placement of centralizers will be determined from hole deviation and potential production zones. Centralizers will be run for maximum practical standoff and through all potential productive zones.

- All casing strings below the conductor shall be tested, prior to drilling out the casing shoe, to 0.22 psi/ft of casing string length or 1500 psi, whichever is greater, but not to exceed 70% of the internal yield pressure of the casing. If pressure declines more than 10 percent in 30 minutes, corrective action will be taken.

No freshly hard banded pipe will be rotated in the surface casing

- CENTENNIAL RESOURCE DEVELOPMENT will not employ an air-drill rig for the surface casing. The casing shoe will be tested by drilling 5'-10' out from under the shoe and pressure testing to the maximum expected mud weight equivalent as shown in the mud program listed in the drilling plan.



Size	5.5
Grade	P110 RY
Weight	20

TCBC-HT


SeAH Steel

Coupling and Pipe Dimensions (in)						
	Outer Diameter	Inner Diameter	Coupling Length	Make-up Loss	Wall Thickness	Drift Diameter
Coupling	6.300	5.383				
Pipe		4.778	8.250	4.125	0.361	4.653
Pin		4.778				

Torque Values (ft-lbs)				
Field End Make-Up			Max. Working Torque ^{1.}	Yield Torque
Minimum	Optimum ^{2.}	Maximum		
10,000	13,500	18,500	22,250	25,200


Yield Stress (x1000 lbs.)	
Tensile	Compressive
100%	100%

Maximum Pressure (psi)	
Internal	External
100%	100%

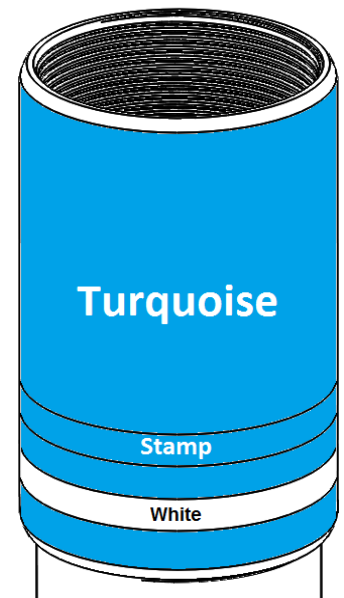

^{1.} Max. Working Torque value is not to be exceeded during operation.

^{2.} If Optimum Torque does not meet the Base of Triangle Stamp, M/U to the Base of Triangle.

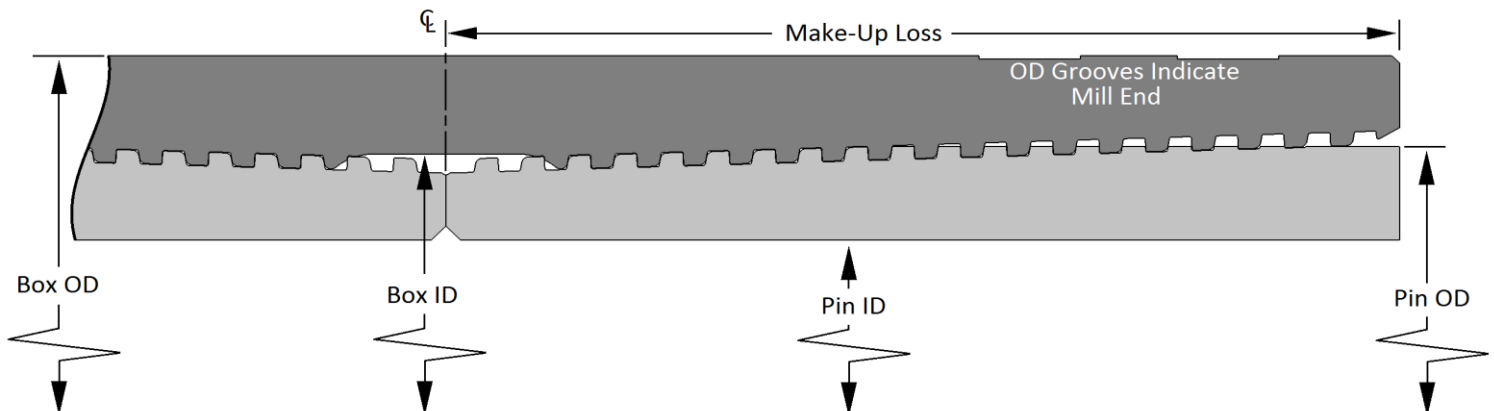

*Data are for information purposes only. Though HIS has made efforts to ensure accuracy, HIS makes no warranty for loss or damage due to its use.

Released to Imaging: 9/22/2025 1:18:34 PM

Rev 0

19996 Hickory Twig Way Spring, TX 77388

Phone: (281) 602-7550

Fax: (281) 602-7557



5.5" 20# .361" P-110 Restricted Yield (RY)

Dimensions (Nominal)

Outside Diameter	5.500	in.
Wall	0.361	in.
Inside Diameter	4.778	in.
Drift	4.653	in.
Weight, T&C	20.000	lbs/ft
Weight, PE	19.830	lbs/ft


Performance Properties (Minimum)

Minimum Yield Strength	110000	psi
Maximum Yield Strength	125000	psi
Collapse, PE	11100	psi
Internal Yield Pressure		
PE	12630	psi
LTC	12360	psi
BTC	12360	psi
Yield Strength, Pipe Body	641	1000 lbs
Joint Strength		
LTC	548	1000 lbs
BTC	667	1000 lbs

Note: SeAH Steel has produced this specification sheet for general information only. SeAH does not assume liability or responsibility for any loss or injury resulting from the use of information or data contained herein. All applications for the material described are at the customer's own risk and responsibility.

Raider Fed Com 103H**Centennial Drilling Plan for 3-Casing String Bone Springs Formation****13-3/8" x 9-5/8" x 5-1/2" Casing Design**

1. Drill 17-1/2" surface hole to Total Depth with Rig and perform wellbore cleanup cycles.
2. Run and land 13-3/8" casing to Depth.
3. Cement 13-3/8" casing – cement to surface.
4. Cut / Dress Conductor and 13-3/8" casing as needed, weld on Multi-bowl system with baseplate supported by 20" conductor.
5. Test Weld to 70% of 13-3/8" casing collapse. Place nightcap with Pressure Gauge on wellhead and test seals to 70% of Casing Collapse.
6. Bleed Pressure if necessary and remove nightcap. Nipple up and test BOPE with test plug per Onshore Order 2.
7. Test casing per COA WOC timing (.22 psi/ft or 1500 psi whichever is greater) - not to exceed 70% casing burst. Cement must have achieved 500psi compressive strength prior to test.
8. Install wear bushing then drill out 13-3/8" shoe-track plus 20' and conduct FIT to minimum of the MW equivalent anticipated to control the formation pressure to the next casing point.
9. Drill 12-1/4" Intermediate hole to 9-5/8" casing point. (Base Capitan Reef).
10. Remove wear bushing then run and land 9-5/8" Intermediate Casing with mandrel hanger in wellhead.
11. Cement 9-5/8 casing – cement to surface.
12. Washout stack then run wash tool in wellhead and wash hanger and pack-off setting area.
13. Install pack-off and test to 5000 psi for 15 minutes.
 - a. Test casing per COA WOC timing (.22 psi/ft or 1500 psi whichever is greater) - not to exceed 70% casing burst. Cement must have achieved 500psi compressive strength prior to test.
14. Install wear bushing then drill out 9-5/8" shoe-track plus 20' and conduct FIT to minimum MW equivalent to control the formation pressure to TD of well.
15. Drill 8-3/4" Vertical hole to KOP – Trip out for Curve BHA.
16. Drill 8-3/4" Curve, landing in production interval – Trip for Lateral BHA.
17. Drill 7-7/8" Lateral to Permitted BHL, perform cleanup cycles and trip out to run 5-1/2" Production Casing.
18. Remove wear bushing then run 5-1/2" production casing to TD landing casing mandrel in wellhead.
19. Cement 5-1/2" Production string to surface.
20. Run in with wash tool and wash wellhead area – install pack-off and test to 5000psi for 15 minutes.
21. Install BPV in 5-1/2" mandrel hanger – Nipple down BOPE and install nightcap.
22. Test nightcap void to 5000psi for 30 minutes.

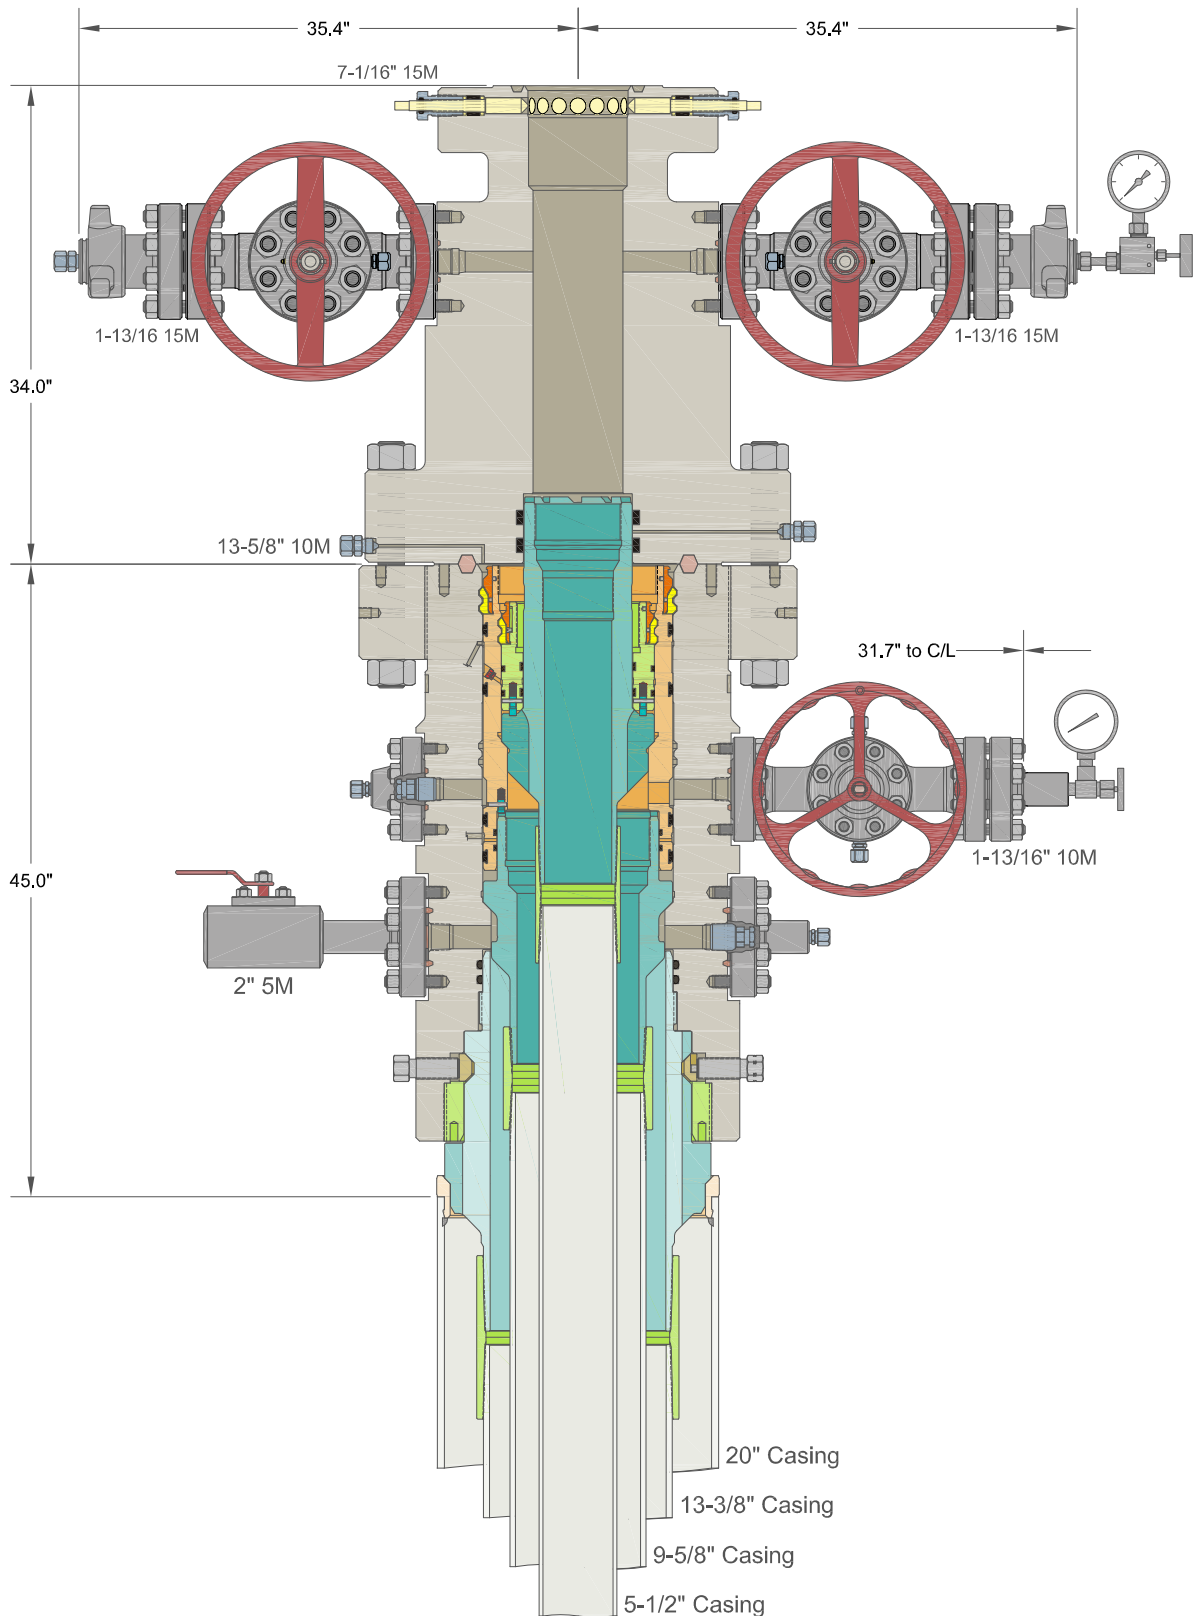

INFORMATION CONTAINED HEREIN IS THE PROPERTY OF CACTUS WELLHEAD, LLC. REPRODUCTION, DISCLOSURE, OR USE THEREOF IS PERMISSIBLE ONLY AS PROVIDED BY CONTRACT OR AS EXPRESSLY AUTHORIZED BY CACTUS WELLHEAD, LLC.

ALL DIMENSIONS APPROXIMATE

CACTUS WELLHEAD LLC

CENTENNIAL RESOURCE DEVELOPMENT
LEE CO, NM

20" x 13-3/8" x 9-5/8" x 5-1/2" 10M MBU-3T-CFL-R-DBLO System
With 13-5/8" 10M x 7-1/16" 15M CTH-DBLHPS Tubing Head,
20" Landing Ring & Pin Down Mandrel Casing Hangers

DRAWN	DLE	10JUN20
APPRV		
DRAWING NO.		HBE0000338

Centennial Resource Development New Mexico Multi-Well Pad Drilling Batch Setting Procedures

13-3/8" Surface Casing - CRD intends to Batch set all 13-3/8" casing to a depth approved in the APD. 17-1/2" Surface Holes will be batch drilled by a rig. Appropriate notifications will be made prior to spudding the well, running and cementing casing and prior to skidding to the rig to the next well on pad.

1. Drill 17-1/2" Surface hole to Approved Depth with Rig and perform wellbore cleanup cycles. Trip out and rack back drilling BHA.
2. Run and land 13-3/8" 54.5# J55 BTC casing [see Illustration 1-1 Below](#) to depth approved in APD.
3. Set packoff and test to 5k psi
4. Offline Cement
5. Install nightcap with Pressure Gauge on wellhead. Nightcap is shown on final wellhead Stack up [Illustration #2-2 page 3](#).
6. Skid Rig to adjacent well to drill Surface hole.
7. Surface casing test will be performed by the rig in order to allow ample time for Cement to develop 500psi compressive strength. Casing test to 0.22 psi/ft or 1500 psi whichever is greater - not to exceed 70% casing burst.

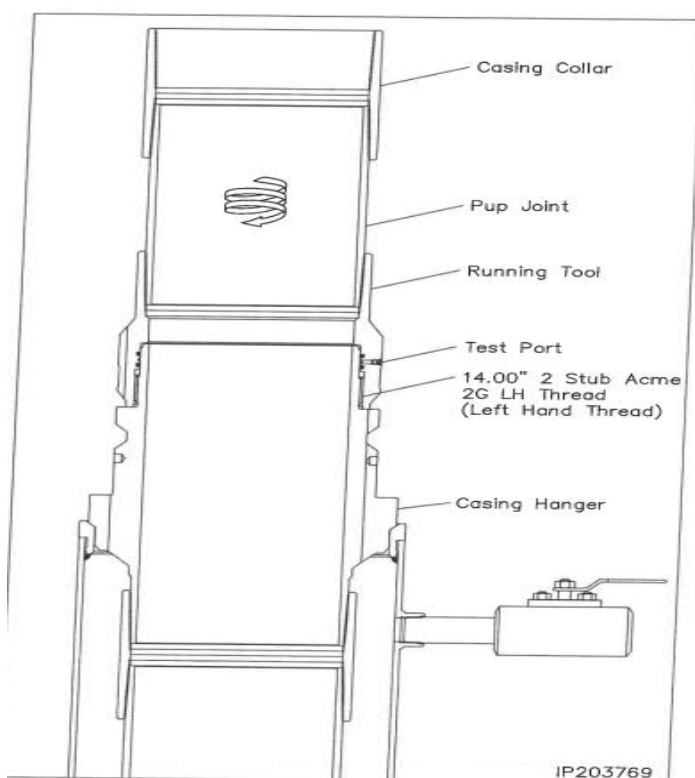


Illustration 1-1

Intermediate Casing – CRD intends to Batch set all intermediate casing strings to a depth approved in the APD, typically set into Lamar. 12-1/4" Intermediate Holes will be batch drilled by the rig. Appropriate notifications will be made prior Testing BOPE, and prior to running/cementing all casing strings.

1. Rig will remove the nightcap and install and test BOPE.
2. Test Surface casing per COA WOC timing (.22 psi/ft or 1500 psi whichever is greater) - not to exceed 70% casing burst. Cement must have achieved 500psi compressive strength prior to test.
3. Install wear bushing then drill out 13-3/8" shoe-track plus 20' and conduct FIT to minimum of the MW equivalent anticipated to control the formation pressure to the next casing point.
4. Drill Intermediate hole to approved casing point. Trip out of hole with BHA to run Casing.
5. Remove wear bushing then run and land Intermediate Casing with mandrel hanger in wellhead.
6. Cement casing to surface with floats holding.
7. Washout stack then run wash tool in wellhead and wash hanger and pack-off setting area.
8. Install pack-off and test void to 5,000 psi for 15 minutes. Nightcap shown on final wellhead stack up [illustration 2-2 on page 3](#).
9. Test casing per COA WOC timing (.22 psi/ft or 1500 psi whichever is greater) - not to exceed 70% casing burst. Cement must have achieved 500psi compressive strength prior to test.
10. Install nightcap – skid rig to adjacent well to drill Intermediate hole.

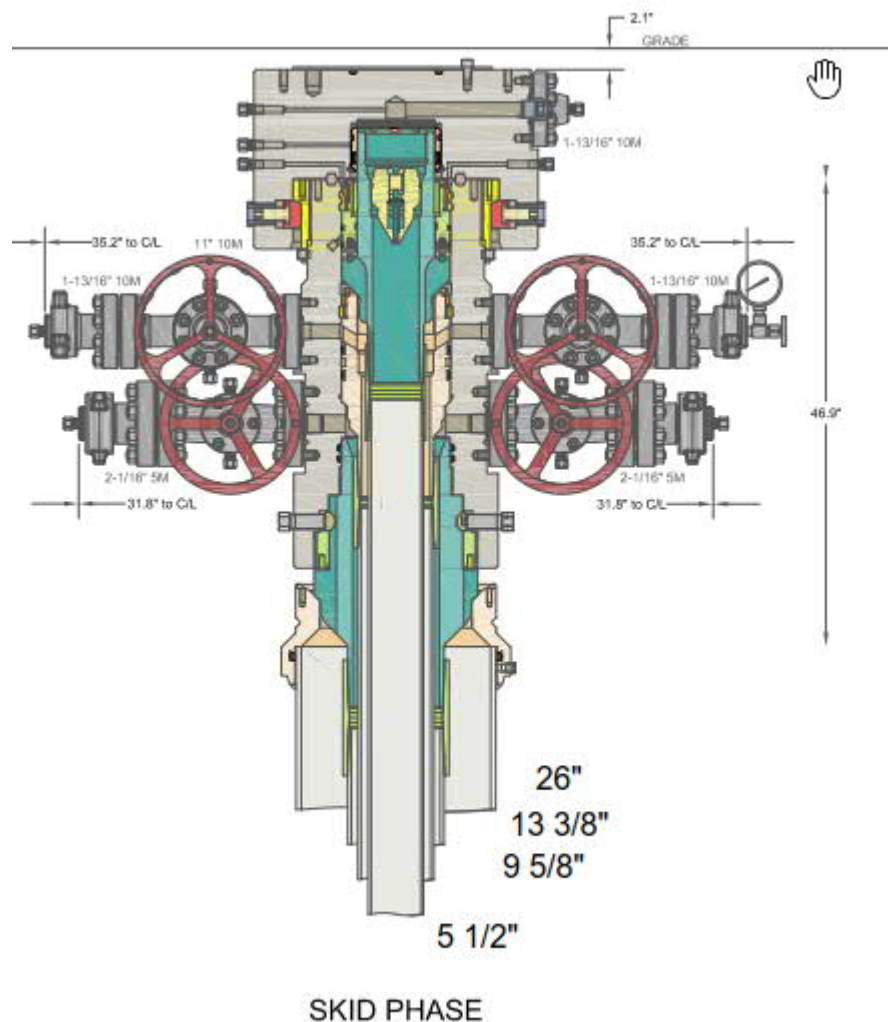


Illustration 2-2

Production Casing – CRD intends to Batch set all Production casings with Rig. Appropriate notifications will be made prior Testing BOPE, and prior to running/cementing all casing strings.

1. Big Rig will remove the nightcap and install and test BOPE.
2. Install wear bushing then drill Intermediate shoe-track plus 20' and conduct FIT to minimum MW equivalent to control the formation pressure to TD of well.
3. Drill Vertical hole to KOP – Trip out for Curve BHA.
4. Drill Curve, landing in production interval – Trip for Lateral BHA.
5. Drill Lateral / Production hole to Permitted BHL, perform cleanup cycles and trip out to run 5-1/2" Production Casing.
6. Remove wear bushing then run 5-1/2" production casing to TD landing casing mandrel in wellhead.
7. Cement 5-1/2" Production string to surface with floats holding.

8. Run in with wash tool and wash wellhead area – install pack-off and test void to 5,000psi for 15 minutes.
9. Install BPV in 5-1/2" mandrel hanger – Nipple down BOPE and install nightcap.
10. Test nightcap void to 5,000psi for 30 minutes per **illustration 2-2 page 3**.
11. Skid rig to adjacent well on pad to drill production hole.

Raider Fed Com 103H


Centennial Offline Cementing Procedure

13-3/8" & 9-5/8" Casing

1. Drill hole to Total Depth with Rig and perform wellbore cleanup cycles.
2. Run and casing to Depth.
3. Land casing with mandrel.
4. Circulate 1.5 csg capacity.
5. Flow test – Confirm well is static and floats are holding.
6. Set Annular packoff and pressure test. Test to 5k.
7. Nipple down BOP and install cap flange.
8. Skid rig to next well on pad
9. Remove cap flange (confirm well is static before removal)
 - a. If well is not static use the casing outlet valves to kill well
 - b. Drillers method will be used in well control event
 - c. High pressure return line will be rigged up to lower casing valve and run to choke manifold to control annular pressure
 - d. Kill mud will be circulated once influx is circulated out of hole
 - e. Confirm well is static and remove cap flange to start offline cement operations
10. Install offline cement tool.
11. Rig up cementers.
12. Circulate bottoms up with cement truck
13. Commence planned cement job, take returns through the annulus wellhead valve
14. After plug is bumped confirm floats hold and well is static
15. Rig down cementers and equipment
16. Install night cap with pressure gauge to monitor.
17. Will only offline surface and intermediate casing.


13 3/8" Surface job

CFL Off-Line Cementing Tool

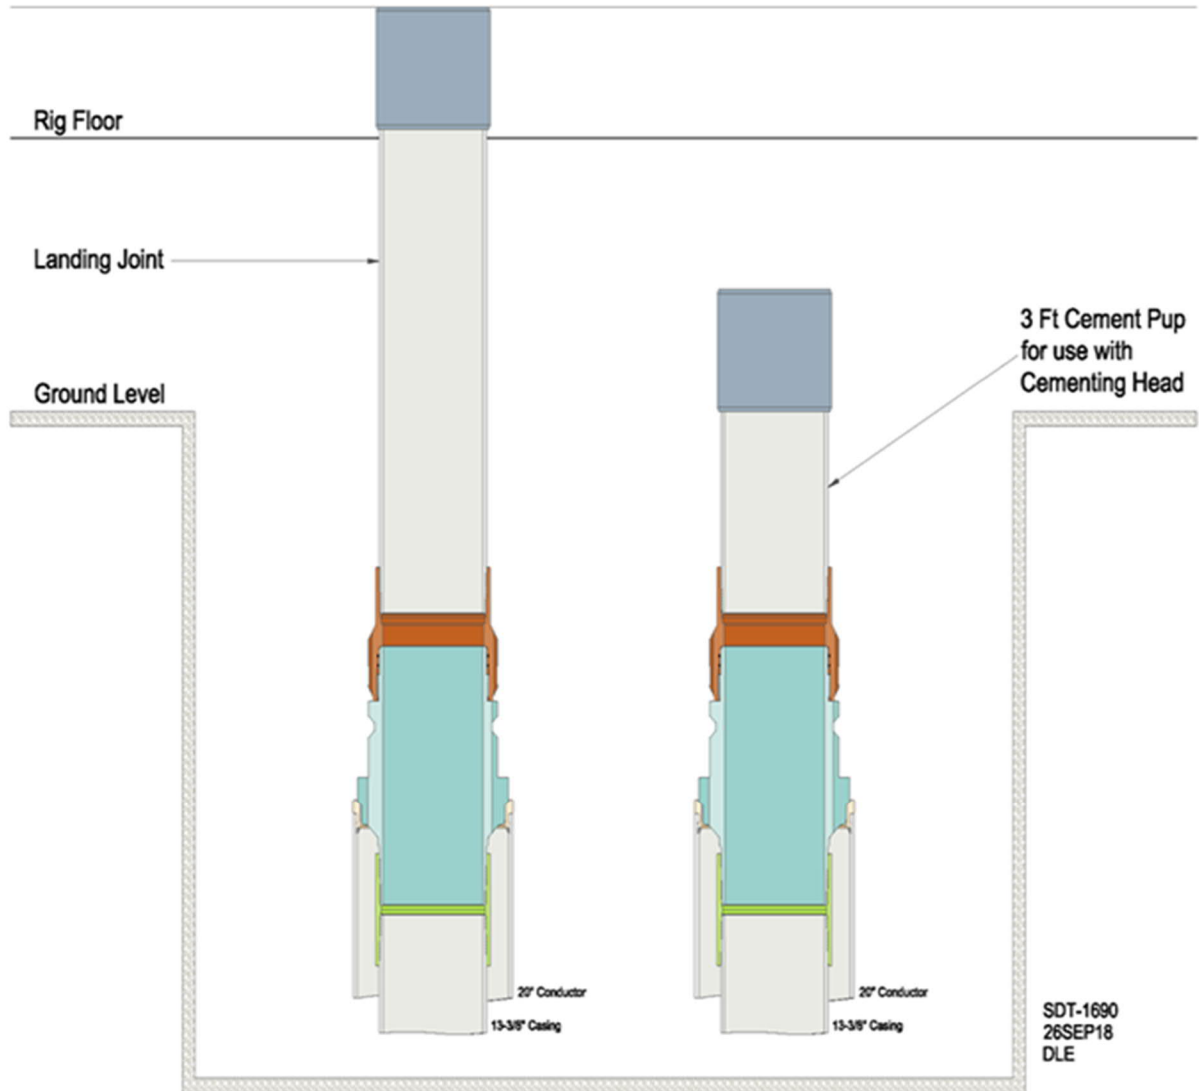





9 5/8" Intermediate Job

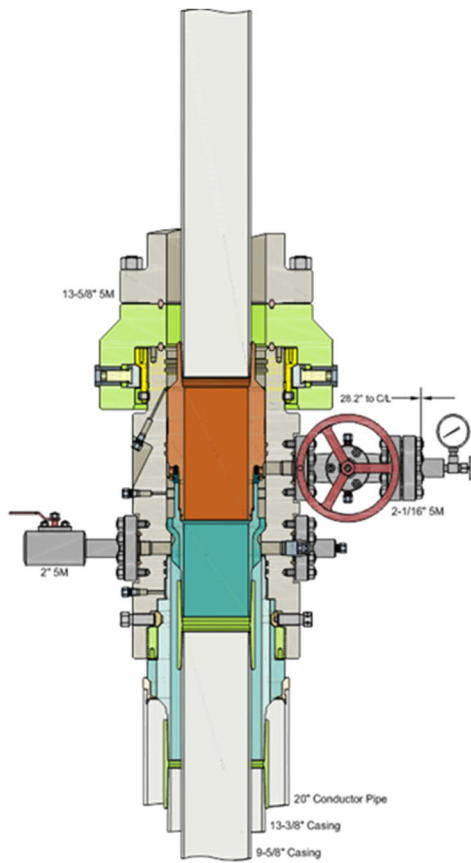

Run 9-5/8" Casing
Land Casing on 9-5/8" Mandrel Hanger
Cement 9-5/8" Casing
Retrieve Running Tool

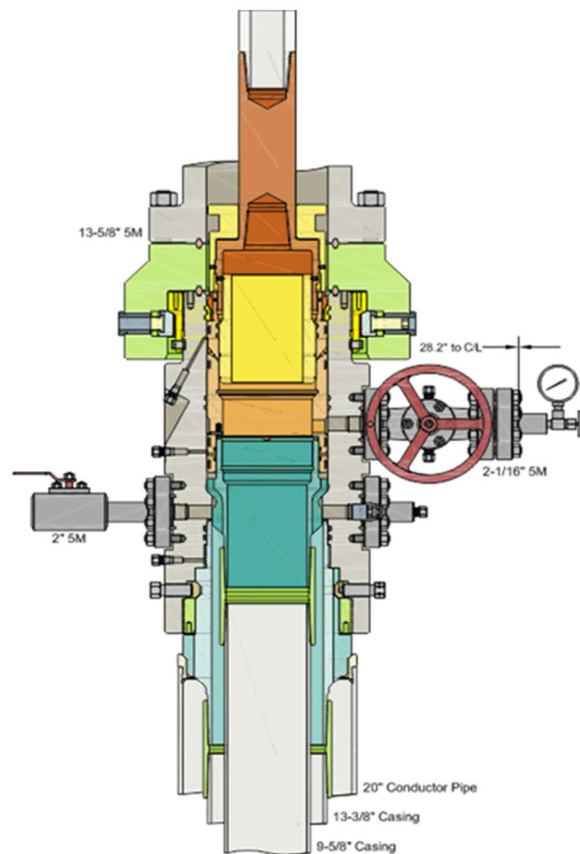

Run 13-5/8" Packoff
Test Upper and Lower Seals
Engage Lockring
Retrieve Running Tool

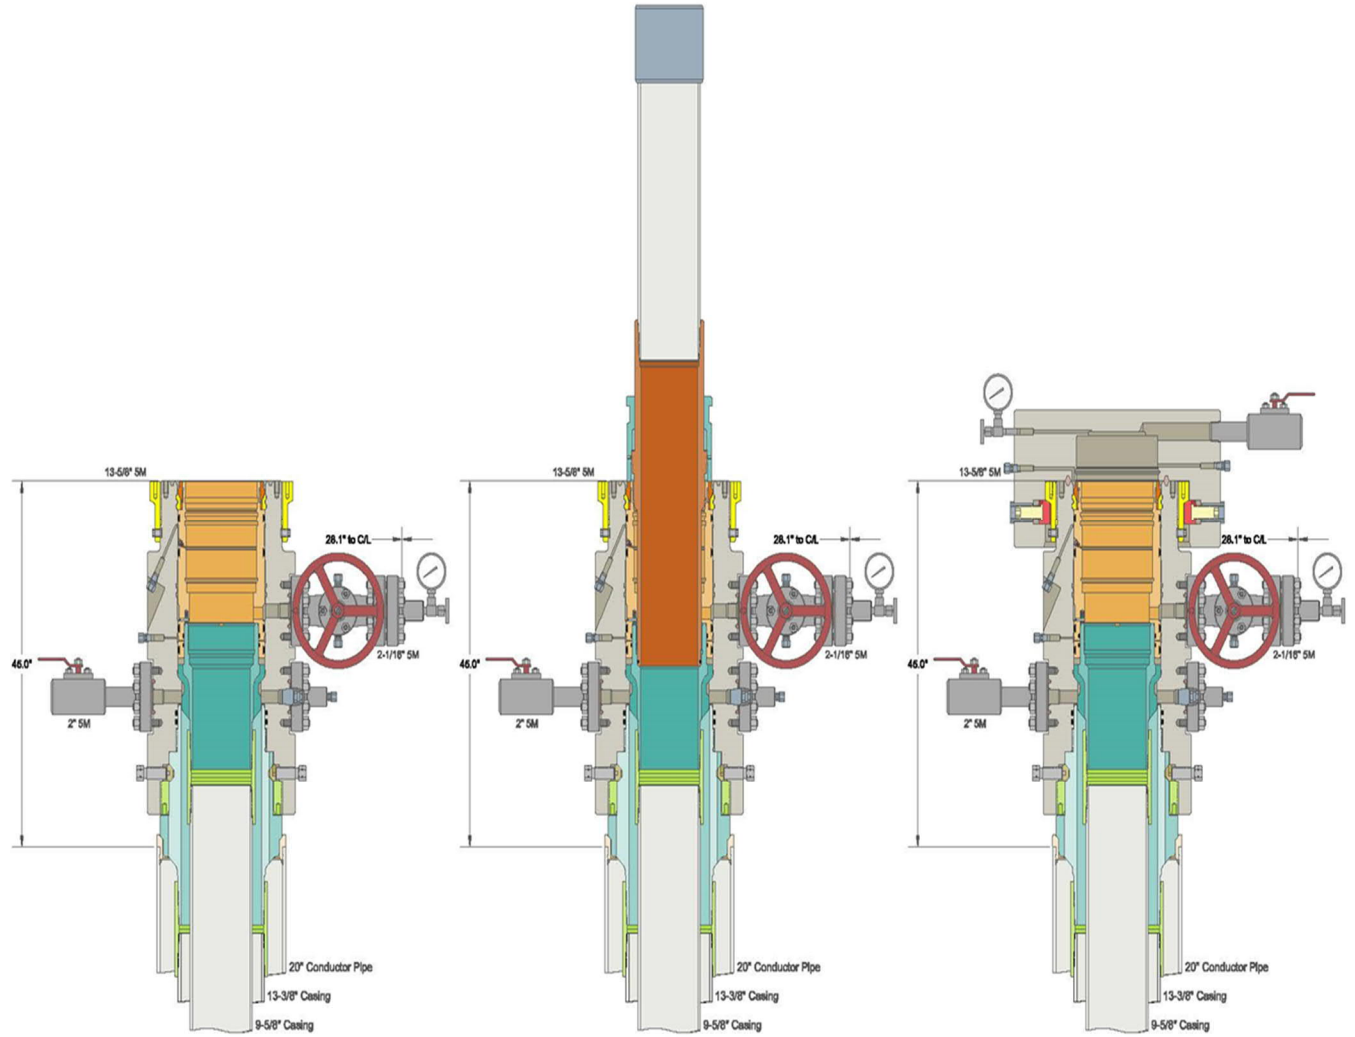

Centennial Resource Production, LLC hereby requests to use a flex hose on H&P choke manifold for the Raider Fed Com 103H well. The Flex Hose specifications are listed on the following pages.

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME:	Centennial
LEASE NO.:	NMNM126971
LOCATION:	Section 21, T.24 S., R.34 E., NMPM
COUNTY:	Lea County, New Mexico

WELL NAME & NO.:	Raider Fed Com 103H
SURFACE HOLE FOOTAGE:	355'/S & 1700'/E
BOTTOM HOLE FOOTAGE:	100'/N & 1428'/E

COA

H2S	☐ Yes	☒ No	
Potash	☒ None	☐ Secretary	☐ R-111-P
Cave/Karst Potential	☒ Low	☐ Medium	☐ High
Cave/Karst Potential	☐ Critical		
Variance	☐ None	☒ Flex Hose	☐ Other
Wellhead	☐ Conventional	☒ Multibowl	☐ Both
Wellhead Variance	☐ Diverter		
Other	☐ 4 String	☐ Capitan Reef	☐ WIPP
Other	☒ Fluid Filled	☐ Pilot Hole	☐ Open Annulus
Cementing	☐ Contingency Cement Squeeze	☐ EchoMeter	☐ Primary Cement Squeeze
Special Requirements	☐ Water Disposal	☒ COM	☐ Unit
Special Requirements	☐ Batch Sundry		
Special Requirements Variance	☐ Break Testing	☒ Offline Cementing	☐ Casing Clearance

A. HYDROGEN SULFIDE

Hydrogen Sulfide (H2S) monitors shall be installed prior to drilling out the surface shoe. If H2S is detected in concentrations greater than 100 ppm, the Hydrogen Sulfide area shall meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, provide measured values and formations to the BLM.

B. CASING

- The 13-3/8 inch surface casing shall be set at approximately 1325 feet (a minimum of 25 feet (Lea County) into the Rustler Anhydrite, above the salt, and below usable fresh water) and cemented to the surface. The surface hole shall be 17 1/2 inch in diameter. Excess calculates to 14%. Additional cement maybe required.

- a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
- b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
- c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
- d. If cement falls back, remedial cementing will be done prior to drilling out that string.

Intermediate casing must be kept 1/3rd fluid filled to meet BLM minimum collapse requirement.

2. The minimum required fill of cement behind the **9-5/8** inch intermediate casing is:
 - Cement to surface. If cement does not circulate see B.1.a, c-d above.

Wait on cement (WOC) time for a primary cement job is to include the tail cement slurry due to cave/karst.

3. The minimum required fill of cement behind the **5-1/2** inch production casing is:
 - Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.

C. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).
2. Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the **13-3/8** inch surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **5000 (5M)** psi.

Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.

- a. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
- b. Manufacturer representative shall install the test plug for the initial BOP test.

- c. If the cement does not circulate and one-inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
- d. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.

D. SPECIAL REQUIREMENT (S)

Communitization Agreement

- The operator will submit a Communitization Agreement to the Santa Fe Office, 301 Dinosaur Trail Santa Fe, New Mexico 87508, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
- The operator will submit an as-drilled survey well plat of the well completion, but are not limited to, those specified in Onshore Order 1 and 2.
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

Offline Cementing

Contact the BLM prior to the commencement of any offline cementing procedure.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ Eddy County

Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,
(575) 361-2822

☒ Lea County

Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (575)
689-5981

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. **Operator is approved to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).**
 - b. **Operator is approved to set surface casing with Spudder Rig**
 - **Notify the BLM when moving in and removing the Spudder Rig.**
 - **Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.**
 - **BOP/BOPE test to be conducted per Onshore Oil and Gas Order No. 2 as soon as 2nd Rig is rigged up on well.**
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the doghouse or stairway area.
3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.

3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.

3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.
 - e. If the cement does not circulate and one-inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead cement), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
 - b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the cement plug. The BOPE test can be initiated after bumping the cement plug with the casing valve open. (only applies to single stage cement jobs, prior to the cement setting up.)
 - c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer and can be initiated immediately with the casing valve open. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any

test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).

- d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

ZS 5/22/2023



Centennial Resources Development, Inc.

Lea County, NM (NAD83 - UTM Zone 13)

Raider

Raider Federal Com 103H

OH

Plan: Plan 1 08-17-22

Standard Planning Report

17 August, 2022





Planning Report



Database:	USA Compass	Local Co-ordinate Reference:	Well Raider Federal Com 103H
Company:	Centennial Resources Development, Inc.	TVD Reference:	RKB @ 3526.80usft (TBD)
Project:	Lea County, NM (NAD83 - UTM Zone 13)	MD Reference:	RKB @ 3526.80usft (TBD)
Site:	Raider	North Reference:	True
Well:	Raider Federal Com 103H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan 1 08-17-22		

Project	Lea County, NM (NAD83 - UTM Zone 13)		
Map System:	Universal Transverse Mercator (US Survey Fee	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	Zone 13N (108 W to 102 W)		Using geodetic scale factor

Site	Raider				
Site Position:		Northing:	11,690,439.89 usft	Latitude:	32° 11' 47.826895 N
From:	Map	Easting:	2,112,954.42 usft	Longitude:	103° 28' 19.068805 W
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16 "		

Well	Raider Federal Com 103H					
Well Position	+N/-S	54.96 usft	Northing:	11,690,495.26 usft	Latitude:	32° 11' 48.370699 N
	+E/-W	30.06 usft	Easting:	2,112,983.69 usft	Longitude:	103° 28' 18.719010 W
Position Uncertainty	1.00 usft		Wellhead Elevation:		Ground Level:	3,500.80 usft

Wellbore	OH				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	MVHD	10/17/2022	6.272	59.739	47,476.25713725

Design	Plan 1 08-17-22			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.00	0.00	0.00	1.53

Plan Survey Tool Program	Date	8/17/2022		
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks
1	0.00	19,533.58	Plan 1 08-17-22 (OH)	MWD+IFR1+MS
				OWSG MWD + IFR1 + Mult

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.000	
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.000	
1,200.00	10.00	133.16	1,194.93	-59.54	63.50	1.00	1.00	0.00	133.159	
2,346.99	10.00	133.16	2,324.49	-195.78	208.78	0.00	0.00	0.00	0.000	
3,346.99	0.00	0.00	3,319.42	-255.32	272.28	1.00	-1.00	0.00	180.000	
8,906.90	0.00	0.00	8,879.34	-255.32	272.28	0.00	0.00	0.00	0.000	
9,656.90	90.00	359.98	9,356.81	222.14	272.14	12.00	12.00	0.00	359.983	
19,533.58	90.00	359.98	9,356.80	10,098.82	269.24	0.00	0.00	0.00	0.000	BHL - Raider Feder



Planning Report



Database:	USA Compass	Local Co-ordinate Reference:	Well Raider Federal Com 103H
Company:	Centennial Resources Development, Inc.	TVD Reference:	RKB @ 3526.80usft (TBD)
Project:	Lea County, NM (NAD83 - UTM Zone 13)	MD Reference:	RKB @ 3526.80usft (TBD)
Site:	Raider	North Reference:	True
Well:	Raider Federal Com 103H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan 1 08-17-22		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
KOP, Begin 1.00°/100' Build									
300.00	1.00	133.16	299.99	-0.60	0.64	-0.58	1.00	1.00	0.00
400.00	2.00	133.16	399.96	-2.39	2.55	-2.32	1.00	1.00	0.00
500.00	3.00	133.16	499.86	-5.37	5.73	-5.22	1.00	1.00	0.00
600.00	4.00	133.16	599.68	-9.55	10.18	-9.27	1.00	1.00	0.00
700.00	5.00	133.16	699.37	-14.91	15.90	-14.48	1.00	1.00	0.00
800.00	6.00	133.16	798.90	-21.47	22.90	-20.85	1.00	1.00	0.00
900.00	7.00	133.16	898.26	-29.21	31.15	-28.37	1.00	1.00	0.00
1,000.00	8.00	133.16	997.40	-38.14	40.67	-37.04	1.00	1.00	0.00
1,100.00	9.00	133.16	1,096.30	-48.25	51.46	-46.86	1.00	1.00	0.00
1,200.00	10.00	133.16	1,194.93	-59.54	63.50	-57.83	1.00	1.00	0.00
Hold 10.00° Inc at 133.16° Azm									
1,300.00	10.00	133.16	1,293.41	-71.42	76.16	-69.36	0.00	0.00	0.00
1,400.00	10.00	133.16	1,391.89	-83.30	88.83	-80.90	0.00	0.00	0.00
1,500.00	10.00	133.16	1,490.37	-95.18	101.50	-92.44	0.00	0.00	0.00
1,600.00	10.00	133.16	1,588.85	-107.05	114.16	-103.97	0.00	0.00	0.00
1,700.00	10.00	133.16	1,687.33	-118.93	126.83	-115.51	0.00	0.00	0.00
1,800.00	10.00	133.16	1,785.82	-130.81	139.50	-127.05	0.00	0.00	0.00
1,900.00	10.00	133.16	1,884.30	-142.69	152.16	-138.58	0.00	0.00	0.00
2,000.00	10.00	133.16	1,982.78	-154.57	164.83	-150.12	0.00	0.00	0.00
2,100.00	10.00	133.16	2,081.26	-166.44	177.50	-161.65	0.00	0.00	0.00
2,200.00	10.00	133.16	2,179.74	-178.32	190.16	-173.19	0.00	0.00	0.00
2,300.00	10.00	133.16	2,278.22	-190.20	202.83	-184.73	0.00	0.00	0.00
2,346.99	10.00	133.16	2,324.49	-195.78	208.78	-190.15	0.00	0.00	0.00
Begin 1.00°/100' Drop									
2,400.00	9.47	133.16	2,376.74	-201.91	215.32	-196.10	1.00	-1.00	0.00
2,500.00	8.47	133.16	2,475.52	-212.58	226.69	-206.46	1.00	-1.00	0.00
2,600.00	7.47	133.16	2,574.55	-222.06	236.81	-215.67	1.00	-1.00	0.00
2,700.00	6.47	133.16	2,673.81	-230.36	245.66	-223.73	1.00	-1.00	0.00
2,800.00	5.47	133.16	2,773.27	-237.48	253.25	-230.64	1.00	-1.00	0.00
2,900.00	4.47	133.16	2,872.89	-243.40	259.57	-236.40	1.00	-1.00	0.00
3,000.00	3.47	133.16	2,972.65	-248.14	264.62	-241.00	1.00	-1.00	0.00
3,100.00	2.47	133.16	3,072.51	-251.68	268.40	-244.44	1.00	-1.00	0.00
3,200.00	1.47	133.16	3,172.45	-254.03	270.90	-246.72	1.00	-1.00	0.00
3,300.00	0.47	133.16	3,272.44	-255.19	272.14	-247.85	1.00	-1.00	0.00
3,346.99	0.00	0.00	3,319.42	-255.32	272.28	-247.98	1.00	-1.00	0.00
Begin Vertical Hold									
3,400.00	0.00	0.00	3,372.44	-255.32	272.28	-247.98	0.00	0.00	0.00
3,500.00	0.00	0.00	3,472.44	-255.32	272.28	-247.98	0.00	0.00	0.00
3,600.00	0.00	0.00	3,572.44	-255.32	272.28	-247.98	0.00	0.00	0.00
3,700.00	0.00	0.00	3,672.44	-255.32	272.28	-247.98	0.00	0.00	0.00
3,800.00	0.00	0.00	3,772.44	-255.32	272.28	-247.98	0.00	0.00	0.00
3,900.00	0.00	0.00	3,872.44	-255.32	272.28	-247.98	0.00	0.00	0.00
4,000.00	0.00	0.00	3,972.44	-255.32	272.28	-247.98	0.00	0.00	0.00
4,100.00	0.00	0.00	4,072.44	-255.32	272.28	-247.98	0.00	0.00	0.00
4,200.00	0.00	0.00	4,172.44	-255.32	272.28	-247.98	0.00	0.00	0.00
4,300.00	0.00	0.00	4,272.44	-255.32	272.28	-247.98	0.00	0.00	0.00
4,400.00	0.00	0.00	4,372.44	-255.32	272.28	-247.98	0.00	0.00	0.00
4,500.00	0.00	0.00	4,472.44	-255.32	272.28	-247.98	0.00	0.00	0.00
4,600.00	0.00	0.00	4,572.44	-255.32	272.28	-247.98	0.00	0.00	0.00
4,700.00	0.00	0.00	4,672.44	-255.32	272.28	-247.98	0.00	0.00	0.00



Planning Report



Database:	USA Compass	Local Co-ordinate Reference:	Well Raider Federal Com 103H
Company:	Centennial Resources Development, Inc.	TVD Reference:	RKB @ 3526.80usft (TBD)
Project:	Lea County, NM (NAD83 - UTM Zone 13)	MD Reference:	RKB @ 3526.80usft (TBD)
Site:	Raider	North Reference:	True
Well:	Raider Federal Com 103H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan 1 08-17-22		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
4,800.00	0.00	0.00	4,772.44	-255.32	272.28	-247.98	0.00	0.00	0.00
4,900.00	0.00	0.00	4,872.44	-255.32	272.28	-247.98	0.00	0.00	0.00
5,000.00	0.00	0.00	4,972.44	-255.32	272.28	-247.98	0.00	0.00	0.00
5,100.00	0.00	0.00	5,072.44	-255.32	272.28	-247.98	0.00	0.00	0.00
5,200.00	0.00	0.00	5,172.44	-255.32	272.28	-247.98	0.00	0.00	0.00
5,300.00	0.00	0.00	5,272.44	-255.32	272.28	-247.98	0.00	0.00	0.00
5,370.36	0.00	0.00	5,342.80	-255.32	272.28	-247.98	0.00	0.00	0.00
Lamar									
5,400.00	0.00	0.00	5,372.44	-255.32	272.28	-247.98	0.00	0.00	0.00
5,415.36	0.00	0.00	5,387.80	-255.32	272.28	-247.98	0.00	0.00	0.00
Bell Canyon									
5,500.00	0.00	0.00	5,472.44	-255.32	272.28	-247.98	0.00	0.00	0.00
5,600.00	0.00	0.00	5,572.44	-255.32	272.28	-247.98	0.00	0.00	0.00
5,700.00	0.00	0.00	5,672.44	-255.32	272.28	-247.98	0.00	0.00	0.00
5,800.00	0.00	0.00	5,772.44	-255.32	272.28	-247.98	0.00	0.00	0.00
5,900.00	0.00	0.00	5,872.44	-255.32	272.28	-247.98	0.00	0.00	0.00
6,000.00	0.00	0.00	5,972.44	-255.32	272.28	-247.98	0.00	0.00	0.00
6,100.00	0.00	0.00	6,072.44	-255.32	272.28	-247.98	0.00	0.00	0.00
6,200.00	0.00	0.00	6,172.44	-255.32	272.28	-247.98	0.00	0.00	0.00
6,300.00	0.00	0.00	6,272.44	-255.32	272.28	-247.98	0.00	0.00	0.00
6,334.36	0.00	0.00	6,306.80	-255.32	272.28	-247.98	0.00	0.00	0.00
Cherry Canyon									
6,400.00	0.00	0.00	6,372.44	-255.32	272.28	-247.98	0.00	0.00	0.00
6,500.00	0.00	0.00	6,472.44	-255.32	272.28	-247.98	0.00	0.00	0.00
6,519.36	0.00	0.00	6,491.80	-255.32	272.28	-247.98	0.00	0.00	0.00
Manzanita Lime									
6,600.00	0.00	0.00	6,572.44	-255.32	272.28	-247.98	0.00	0.00	0.00
6,700.00	0.00	0.00	6,672.44	-255.32	272.28	-247.98	0.00	0.00	0.00
6,800.00	0.00	0.00	6,772.44	-255.32	272.28	-247.98	0.00	0.00	0.00
6,900.00	0.00	0.00	6,872.44	-255.32	272.28	-247.98	0.00	0.00	0.00
7,000.00	0.00	0.00	6,972.44	-255.32	272.28	-247.98	0.00	0.00	0.00
7,100.00	0.00	0.00	7,072.44	-255.32	272.28	-247.98	0.00	0.00	0.00
7,200.00	0.00	0.00	7,172.44	-255.32	272.28	-247.98	0.00	0.00	0.00
7,300.00	0.00	0.00	7,272.44	-255.32	272.28	-247.98	0.00	0.00	0.00
7,400.00	0.00	0.00	7,372.44	-255.32	272.28	-247.98	0.00	0.00	0.00
7,500.00	0.00	0.00	7,472.44	-255.32	272.28	-247.98	0.00	0.00	0.00
7,600.00	0.00	0.00	7,572.44	-255.32	272.28	-247.98	0.00	0.00	0.00
7,700.00	0.00	0.00	7,672.44	-255.32	272.28	-247.98	0.00	0.00	0.00
7,800.00	0.00	0.00	7,772.44	-255.32	272.28	-247.98	0.00	0.00	0.00
7,828.36	0.00	0.00	7,800.80	-255.32	272.28	-247.98	0.00	0.00	0.00
Brushy Canyon									
7,900.00	0.00	0.00	7,872.44	-255.32	272.28	-247.98	0.00	0.00	0.00
8,000.00	0.00	0.00	7,972.44	-255.32	272.28	-247.98	0.00	0.00	0.00
8,100.00	0.00	0.00	8,072.44	-255.32	272.28	-247.98	0.00	0.00	0.00
8,200.00	0.00	0.00	8,172.44	-255.32	272.28	-247.98	0.00	0.00	0.00
8,300.00	0.00	0.00	8,272.44	-255.32	272.28	-247.98	0.00	0.00	0.00
8,400.00	0.00	0.00	8,372.44	-255.32	272.28	-247.98	0.00	0.00	0.00
8,500.00	0.00	0.00	8,472.44	-255.32	272.28	-247.98	0.00	0.00	0.00
8,600.00	0.00	0.00	8,572.44	-255.32	272.28	-247.98	0.00	0.00	0.00
8,700.00	0.00	0.00	8,672.44	-255.32	272.28	-247.98	0.00	0.00	0.00
8,800.00	0.00	0.00	8,772.44	-255.32	272.28	-247.98	0.00	0.00	0.00
8,900.00	0.00	0.00	8,872.44	-255.32	272.28	-247.98	0.00	0.00	0.00
8,906.90	0.00	0.00	8,879.34	-255.32	272.28	-247.98	0.00	0.00	0.00



Planning Report



Database:	USA Compass	Local Co-ordinate Reference:	Well Raider Federal Com 103H
Company:	Centennial Resources Development, Inc.	TVD Reference:	RKB @ 3526.80usft (TBD)
Project:	Lea County, NM (NAD83 - UTM Zone 13)	MD Reference:	RKB @ 3526.80usft (TBD)
Site:	Raider	North Reference:	True
Well:	Raider Federal Com 103H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan 1 08-17-22		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
KOP2, Begin 12.00°/100' Build										
9,000.00	11.17	359.98	8,971.85	-246.27	272.28	-238.93	12.00	12.00	0.00	
9,100.00	23.17	359.98	9,067.22	-216.81	272.27	-209.47	12.00	12.00	0.00	
9,200.00	35.17	359.98	9,154.37	-168.15	272.25	-160.84	12.00	12.00	0.00	
9,211.63	36.57	359.98	9,163.80	-161.34	272.25	-154.02	12.00	12.00	0.00	
Bone Spring Lime										
9,300.00	47.17	359.98	9,229.51	-102.44	272.23	-95.15	12.00	12.00	0.00	
9,300.43	47.22	359.98	9,229.80	-102.13	272.23	-94.83	12.00	12.00	0.00	
Avalon - Target Top at 0' VS										
9,400.00	59.17	359.98	9,289.34	-22.54	272.21	-15.28	12.00	12.00	0.00	
9,500.00	71.17	359.98	9,331.26	68.05	272.18	75.28	12.00	12.00	0.00	
9,600.00	83.17	359.98	9,353.42	165.37	272.15	172.57	12.00	12.00	0.00	
9,656.90	90.00	359.98	9,356.81	222.14	272.14	229.32	12.00	12.00	0.00	
LP, Hold 90.00° Inc at 359.98° Azm										
9,700.00	90.00	359.98	9,356.81	265.24	272.13	272.40	0.00	0.00	0.00	
9,800.00	90.00	359.98	9,356.80	265.24	272.10	372.36	0.00	0.00	0.00	
9,900.00	90.00	359.98	9,356.80	465.24	272.07	472.32	0.00	0.00	0.00	
10,000.00	90.00	359.98	9,356.80	565.24	272.04	572.29	0.00	0.00	0.00	
10,100.00	90.00	359.98	9,356.80	665.24	272.01	672.25	0.00	0.00	0.00	
10,200.00	90.00	359.98	9,356.80	765.24	271.98	772.22	0.00	0.00	0.00	
10,300.00	90.00	359.98	9,356.80	865.24	271.95	872.18	0.00	0.00	0.00	
10,400.00	90.00	359.98	9,356.80	965.24	271.92	972.14	0.00	0.00	0.00	
10,500.00	90.00	359.98	9,356.80	1,065.24	271.89	1,072.11	0.00	0.00	0.00	
10,600.00	90.00	359.98	9,356.80	1,165.24	271.86	1,172.07	0.00	0.00	0.00	
10,700.00	90.00	359.98	9,356.80	1,265.24	271.83	1,272.03	0.00	0.00	0.00	
10,800.00	90.00	359.98	9,356.80	1,365.24	271.80	1,372.00	0.00	0.00	0.00	
10,900.00	90.00	359.98	9,356.80	1,465.24	271.77	1,471.96	0.00	0.00	0.00	
11,000.00	90.00	359.98	9,356.80	1,565.24	271.74	1,571.93	0.00	0.00	0.00	
11,100.00	90.00	359.98	9,356.80	1,665.24	271.71	1,671.89	0.00	0.00	0.00	
11,200.00	90.00	359.98	9,356.80	1,765.24	271.69	1,771.85	0.00	0.00	0.00	
11,300.00	90.00	359.98	9,356.80	1,865.24	271.66	1,871.82	0.00	0.00	0.00	
11,400.00	90.00	359.98	9,356.80	1,965.24	271.63	1,971.78	0.00	0.00	0.00	
11,500.00	90.00	359.98	9,356.80	2,065.24	271.60	2,071.74	0.00	0.00	0.00	
11,600.00	90.00	359.98	9,356.80	2,165.24	271.57	2,171.71	0.00	0.00	0.00	
11,700.00	90.00	359.98	9,356.80	2,265.24	271.54	2,271.67	0.00	0.00	0.00	
11,800.00	90.00	359.98	9,356.80	2,365.24	271.51	2,371.63	0.00	0.00	0.00	
11,900.00	90.00	359.98	9,356.80	2,465.24	271.48	2,471.60	0.00	0.00	0.00	
12,000.00	90.00	359.98	9,356.80	2,565.24	271.45	2,571.56	0.00	0.00	0.00	
12,100.00	90.00	359.98	9,356.80	2,665.24	271.42	2,671.53	0.00	0.00	0.00	
12,200.00	90.00	359.98	9,356.80	2,765.24	271.39	2,771.49	0.00	0.00	0.00	
12,300.00	90.00	359.98	9,356.80	2,865.24	271.36	2,871.45	0.00	0.00	0.00	
12,400.00	90.00	359.98	9,356.80	2,965.24	271.33	2,971.42	0.00	0.00	0.00	
12,500.00	90.00	359.98	9,356.80	3,065.24	271.30	3,071.38	0.00	0.00	0.00	
12,600.00	90.00	359.98	9,356.80	3,165.24	271.27	3,171.34	0.00	0.00	0.00	
12,700.00	90.00	359.98	9,356.80	3,265.24	271.25	3,271.31	0.00	0.00	0.00	
12,800.00	90.00	359.98	9,356.80	3,365.24	271.22	3,371.27	0.00	0.00	0.00	
12,900.00	90.00	359.98	9,356.80	3,465.24	271.19	3,471.24	0.00	0.00	0.00	
13,000.00	90.00	359.98	9,356.80	3,565.24	271.16	3,571.20	0.00	0.00	0.00	
13,100.00	90.00	359.98	9,356.80	3,665.24	271.13	3,671.16	0.00	0.00	0.00	
13,200.00	90.00	359.98	9,356.80	3,765.24	271.10	3,771.13	0.00	0.00	0.00	
13,300.00	90.00	359.98	9,356.80	3,865.24	271.07	3,871.09	0.00	0.00	0.00	
13,400.00	90.00	359.98	9,356.80	3,965.24	271.04	3,971.05	0.00	0.00	0.00	
13,500.00	90.00	359.98	9,356.80	4,065.24	271.01	4,071.02	0.00	0.00	0.00	



Planning Report



Database:	USA Compass	Local Co-ordinate Reference:	Well Raider Federal Com 103H
Company:	Centennial Resources Development, Inc.	TVD Reference:	RKB @ 3526.80usft (TBD)
Project:	Lea County, NM (NAD83 - UTM Zone 13)	MD Reference:	RKB @ 3526.80usft (TBD)
Site:	Raider	North Reference:	True
Well:	Raider Federal Com 103H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan 1 08-17-22		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
13,600.00	90.00	359.98	9,356.80	4,165.24	270.98	4,170.98	0.00	0.00	0.00
13,700.00	90.00	359.98	9,356.80	4,265.24	270.95	4,270.94	0.00	0.00	0.00
13,800.00	90.00	359.98	9,356.80	4,365.24	270.92	4,370.91	0.00	0.00	0.00
13,900.00	90.00	359.98	9,356.80	4,465.24	270.89	4,470.87	0.00	0.00	0.00
14,000.00	90.00	359.98	9,356.80	4,565.24	270.86	4,570.84	0.00	0.00	0.00
14,100.00	90.00	359.98	9,356.80	4,665.24	270.83	4,670.80	0.00	0.00	0.00
14,200.00	90.00	359.98	9,356.80	4,765.24	270.81	4,770.76	0.00	0.00	0.00
14,300.00	90.00	359.98	9,356.80	4,865.24	270.78	4,870.73	0.00	0.00	0.00
14,400.00	90.00	359.98	9,356.80	4,965.24	270.75	4,970.69	0.00	0.00	0.00
14,500.00	90.00	359.98	9,356.80	5,065.24	270.72	5,070.65	0.00	0.00	0.00
14,600.00	90.00	359.98	9,356.80	5,165.24	270.69	5,170.62	0.00	0.00	0.00
14,700.00	90.00	359.98	9,356.80	5,265.24	270.66	5,270.58	0.00	0.00	0.00
14,800.00	90.00	359.98	9,356.80	5,365.24	270.63	5,370.55	0.00	0.00	0.00
14,900.00	90.00	359.98	9,356.80	5,465.24	270.60	5,470.51	0.00	0.00	0.00
15,000.00	90.00	359.98	9,356.80	5,565.24	270.57	5,570.47	0.00	0.00	0.00
15,100.00	90.00	359.98	9,356.80	5,665.24	270.54	5,670.44	0.00	0.00	0.00
15,200.00	90.00	359.98	9,356.80	5,765.24	270.51	5,770.40	0.00	0.00	0.00
15,300.00	90.00	359.98	9,356.80	5,865.24	270.48	5,870.36	0.00	0.00	0.00
15,400.00	90.00	359.98	9,356.80	5,965.24	270.45	5,970.33	0.00	0.00	0.00
15,500.00	90.00	359.98	9,356.80	6,065.24	270.42	6,070.29	0.00	0.00	0.00
15,600.00	90.00	359.98	9,356.80	6,165.24	270.40	6,170.26	0.00	0.00	0.00
15,700.00	90.00	359.98	9,356.80	6,265.24	270.37	6,270.22	0.00	0.00	0.00
15,800.00	90.00	359.98	9,356.80	6,365.24	270.34	6,370.18	0.00	0.00	0.00
15,900.00	90.00	359.98	9,356.80	6,465.24	270.31	6,470.15	0.00	0.00	0.00
16,000.00	90.00	359.98	9,356.80	6,565.24	270.28	6,570.11	0.00	0.00	0.00
16,100.00	90.00	359.98	9,356.80	6,665.24	270.25	6,670.07	0.00	0.00	0.00
16,200.00	90.00	359.98	9,356.80	6,765.24	270.22	6,770.04	0.00	0.00	0.00
16,300.00	90.00	359.98	9,356.80	6,865.24	270.19	6,870.00	0.00	0.00	0.00
16,400.00	90.00	359.98	9,356.80	6,965.24	270.16	6,969.96	0.00	0.00	0.00
16,500.00	90.00	359.98	9,356.80	7,065.24	270.13	7,069.93	0.00	0.00	0.00
16,600.00	90.00	359.98	9,356.80	7,165.24	270.10	7,169.89	0.00	0.00	0.00
16,700.00	90.00	359.98	9,356.80	7,265.24	270.07	7,269.86	0.00	0.00	0.00
16,800.00	90.00	359.98	9,356.80	7,365.24	270.04	7,369.82	0.00	0.00	0.00
16,900.00	90.00	359.98	9,356.80	7,465.24	270.01	7,469.78	0.00	0.00	0.00
17,000.00	90.00	359.98	9,356.80	7,565.24	269.98	7,569.75	0.00	0.00	0.00
17,100.00	90.00	359.98	9,356.80	7,665.24	269.96	7,669.71	0.00	0.00	0.00
17,200.00	90.00	359.98	9,356.80	7,765.24	269.93	7,769.67	0.00	0.00	0.00
17,300.00	90.00	359.98	9,356.80	7,865.24	269.90	7,869.64	0.00	0.00	0.00
17,400.00	90.00	359.98	9,356.80	7,965.24	269.87	7,969.60	0.00	0.00	0.00
17,500.00	90.00	359.98	9,356.80	8,065.24	269.84	8,069.57	0.00	0.00	0.00
17,600.00	90.00	359.98	9,356.80	8,165.24	269.81	8,169.53	0.00	0.00	0.00
17,700.00	90.00	359.98	9,356.80	8,265.24	269.78	8,269.49	0.00	0.00	0.00
17,800.00	90.00	359.98	9,356.80	8,365.24	269.75	8,369.46	0.00	0.00	0.00
17,900.00	90.00	359.98	9,356.80	8,465.24	269.72	8,469.42	0.00	0.00	0.00
18,000.00	90.00	359.98	9,356.80	8,565.24	269.69	8,569.38	0.00	0.00	0.00
18,100.00	90.00	359.98	9,356.80	8,665.24	269.66	8,669.35	0.00	0.00	0.00
18,200.00	90.00	359.98	9,356.80	8,765.24	269.63	8,769.31	0.00	0.00	0.00
18,300.00	90.00	359.98	9,356.80	8,865.24	269.60	8,869.27	0.00	0.00	0.00
18,400.00	90.00	359.98	9,356.80	8,965.24	269.57	8,969.24	0.00	0.00	0.00
18,500.00	90.00	359.98	9,356.80	9,065.24	269.54	9,069.20	0.00	0.00	0.00
18,600.00	90.00	359.98	9,356.80	9,165.24	269.52	9,169.17	0.00	0.00	0.00
18,700.00	90.00	359.98	9,356.80	9,265.24	269.49	9,269.13	0.00	0.00	0.00
18,800.00	90.00	359.98	9,356.80	9,365.24	269.46	9,369.09	0.00	0.00	0.00
18,900.00	90.00	359.98	9,356.80	9,465.24	269.43	9,469.06	0.00	0.00	0.00



Planning Report



Database:	USA Compass	Local Co-ordinate Reference:	Well Raider Federal Com 103H
Company:	Centennial Resources Development, Inc.	TVD Reference:	RKB @ 3526.80usft (TBD)
Project:	Lea County, NM (NAD83 - UTM Zone 13)	MD Reference:	RKB @ 3526.80usft (TBD)
Site:	Raider	North Reference:	True
Well:	Raider Federal Com 103H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan 1 08-17-22		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
19,000.00	90.00	359.98	9,356.80	9,565.24	269.40	9,569.02	0.00	0.00	0.00
19,100.00	90.00	359.98	9,356.80	9,665.24	269.37	9,668.98	0.00	0.00	0.00
19,200.00	90.00	359.98	9,356.80	9,765.24	269.34	9,768.95	0.00	0.00	0.00
19,300.00	90.00	359.98	9,356.80	9,865.24	269.31	9,868.91	0.00	0.00	0.00
19,400.00	90.00	359.98	9,356.80	9,965.24	269.28	9,968.88	0.00	0.00	0.00
19,500.00	90.00	359.98	9,356.80	10,065.24	269.25	10,068.84	0.00	0.00	0.00
19,533.58	90.00	359.98	9,356.80	10,098.82	269.24	10,102.41	0.00	0.00	0.00
TD at 19533.58									

Design Targets									
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
FTP - Raider Federal - hit/miss target - Shape	0.00	0.00	9,356.80	-255.32	272.28	11,690,243.87	2,113,259.53	32° 11' 45.844225 N	3° 28' 15.550473 W
- plan misses target center by 198.19usft at 9292.74usft MD (9224.53 TVD, -107.73 N, 272.23 E) - Point									
BHL - Raider Federal - plan hits target center - Rectangle (sides W0.00 H10,354.14 D20.00)	0.00	1.53	9,356.80	10,098.82	269.24	11,700,595.43	2,113,109.34	32° 13' 28.300369 N	3° 28' 15.584328 W

Formations						
Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)	
5,370.36	5,342.80	Lamar				
5,415.36	5,387.80	Bell Canyon				
6,334.36	6,306.80	Cherry Canyon				
6,519.36	6,491.80	Manzanita Lime				
7,828.36	7,800.80	Brushy Canyon				
9,211.63	9,163.80	Bone Spring Lime				
9,300.43	9,229.80	Avalon				
9,300.43	9,229.80	Target Top at 0' VS				

Plan Annotations				
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
200.00	200.00	0.00	0.00	KOP, Begin 1.00°/100' Build
1,200.00	1,194.93	-59.54	63.50	Hold 10.00° Inc at 133.16° Azm
2,346.99	2,324.49	-195.78	208.78	Begin 1.00°/100' Drop
3,346.99	3,319.42	-255.32	272.28	Begin Vertical Hold
8,906.90	8,879.34	-255.32	272.28	KOP2, Begin 12.00°/100' Build
9,656.90	9,356.81	222.14	272.14	LP, Hold 90.00° Inc at 359.98° Azm
19,533.58	9,356.80	10,098.82	269.24	TD at 19533.58



Centennial Resources Development, Inc.

Lea County, NM (NAD83 - UTM Zone 13)

Raider

Raider Federal Com 103H

OH

Plan 1 08-17-22

Anticollision Report

17 August, 2022





Anticollision Report



Company:	Centennial Resources Development, Inc.	Local Co-ordinate Reference:	Well Raider Federal Com 103H
Project:	Lea County, NM (NAD83 - UTM Zone 13)	TVD Reference:	RKB @ 3526.80usft (TBD)
Reference Site:	Raider	MD Reference:	RKB @ 3526.80usft (TBD)
Site Error:	0.00 usft	North Reference:	True
Reference Well:	Raider Federal Com 103H	Survey Calculation Method:	Minimum Curvature
Well Error:	1.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	USA Compass
Reference Design:	Plan 1 08-17-22	Offset TVD Reference:	Reference Datum

Reference	Plan 1 08-17-22		
Filter type:	NO GLOBAL FILTER: Using user defined selection & filtering criteria		
Interpolation Method:	MD Interval 100.00usft	Error Model:	ISCWSA
Depth Range:	Unlimited	Scan Method:	Closest Approach 3D
Results Limited by:	Maximum centre distance of 50,000.00usft	Error Surface:	Pedal Curve
Warning Levels Evaluated at:	2.00 Sigma	Casing Method:	Not applied

Survey Tool Program		Date	8/17/2022		
From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description	
0.00	19,533.58	Plan 1 08-17-22 (OH)	MWD+IFR1+MS	OWSG MWD + IFR1 + Multi-Station Correction	

Summary						
Site Name	Reference Measured Depth (usft)	Offset Measured Depth (usft)	Distance Between Centres (usft)	Distance Between Ellipses (usft)	Separation Factor	Warning
Offset Well - Wellbore - Design						
Raider						
Raider Federal Com 102H - OH - Plan 1 08-17-22	200.00	200.00	30.00	26.69	9.079	CC
Raider Federal Com 102H - OH - Plan 1 08-17-22	300.00	299.99	30.64	26.54	7.470	ES
Raider Federal Com 102H - OH - Plan 1 08-17-22	19,533.58	19,554.83	879.87	720.38	5.517	SF
Raider Federal Com 302H - OH - Plan 4 08-10-22	14,256.10	9,424.47	613.02	553.45	10.290	CC, ES, SF
Raider Federal Com 502H - OH / 67469 - Surveys (H&P)	4,795.51	4,798.50	160.09	137.88	7.206	CC
Raider Federal Com 502H - OH / 67469 - Surveys (H&P)	4,900.00	4,902.80	160.69	137.39	6.896	ES
Raider Federal Com 502H - OH / 67469 - Surveys (H&P)	5,200.00	5,194.16	172.21	145.79	6.518	SF
Raider Federal Com 503H - OH / 67470 - Surveys (H&P)	3,209.20	3,174.43	476.81	460.35	28.969	CC, ES
Raider Federal Com 503H - OH / 67470 - Surveys (H&P)	19,533.58	21,282.33	1,913.66	1,757.31	12.239	SF
Raider Federal Com 701H - OH / 67386 - Surveys (H&P)	749.74	747.09	54.05	46.67	7.328	CC
Raider Federal Com 701H - OH / 67386 - Surveys (H&P)	800.00	797.03	54.32	46.64	7.074	ES
Raider Federal Com 701H - OH / 67386 - Surveys (H&P)	900.00	896.38	56.69	48.45	6.880	SF
Raider Federal Com 703H - OH / 67430 - Surveys (H&P)	8,045.92	8,039.62	576.65	535.65	14.064	CC, ES, SF
Raider Federal Com 703H - ST01 / 67430 - Surveys (H&P)	8,045.92	8,039.62	576.65	535.65	14.064	CC, ES, SF

Offset Design: Raider - Raider Federal Com 102H - OH - Plan 1 08-17-22													Offset Site Error: 0.00 usft	
Survey Program: 0-MWD+IFR1+MS													Offset Well Error: 1.00 usft	
Reference		Offset		Semi Major Axis		Offset Wellbore Centre			Rule Assigned:				Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
0.00	0.00	0.00	0.00	1.00	1.00	-89.931	0.04	-30.00	30.00					
100.00	100.00	100.00	100.00	1.12	1.12	-89.931	0.04	-30.00	30.00	27.75	2.24	13.365		
200.00	200.00	200.00	200.00	1.65	1.65	-89.931	0.04	-30.00	30.00	26.69	3.30	9.079	CC	
300.00	299.99	299.99	299.99	2.05	2.05	138.021	0.04	-30.00	30.64	26.54	4.10	7.470	ES	
400.00	399.96	399.96	399.96	2.41	2.39	141.083	0.04	-30.00	32.63	27.85	4.79	6.818		
500.00	499.86	499.86	499.86	2.76	2.69	145.411	0.04	-30.00	36.13	30.71	5.42	6.667		
600.00	599.68	599.68	599.68	3.12	2.96	150.196	0.04	-30.00	41.30	35.27	6.03	6.847		
700.00	699.37	699.37	699.37	3.49	3.20	154.797	0.04	-30.00	48.27	41.64	6.64	7.272		
800.00	798.90	798.90	798.90	3.86	3.44	158.862	0.04	-30.00	57.10	49.85	7.25	7.880		
900.00	898.26	898.26	898.26	4.25	3.66	162.280	0.04	-30.00	67.79	59.93	7.86	8.629		
1,000.00	997.40	997.40	997.40	4.65	3.86	165.081	0.04	-30.00	80.32	71.86	8.47	9.486		
1,100.00	1,096.30	1,096.30	1,096.30	5.06	4.06	167.351	0.04	-30.00	94.69	85.61	9.08	10.426		
1,200.00	1,194.93	1,194.93	1,194.93	5.48	4.25	169.187	0.04	-30.00	110.86	101.16	9.70	11.430		
1,300.00	1,293.41	1,293.41	1,293.41	5.91	4.43	170.646	0.04	-30.00	127.97	117.65	10.31	12.407		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report



Company:	Centennial Resources Development, Inc.	Local Co-ordinate Reference:	Well Raider Federal Com 103H
Project:	Lea County, NM (NAD83 - UTM Zone 13)	TVD Reference:	RKB @ 3526.80usft (TBD)
Reference Site:	Raider	MD Reference:	RKB @ 3526.80usft (TBD)
Site Error:	0.00 usft	North Reference:	True
Reference Well:	Raider Federal Com 103H	Survey Calculation Method:	Minimum Curvature
Well Error:	1.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	USA Compass
Reference Design:	Plan 1 08-17-22	Offset TVD Reference:	Reference Datum

Offset Design: Raider - Raider Federal Com 102H - OH - Plan 1 08-17-22													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+MS													Offset Well Error: 1.00 usft
Reference		Offset		Semi Major Axis			Offset Wellbore Centre		Distance		Rule Assigned:		Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
1,400.00	1,391.89	1,391.89	1,391.89	6.34	4.61	171.760	0.04	-30.00	145.13	134.21	10.93	13.284	
1,500.00	1,490.37	1,490.37	1,490.37	6.77	4.78	172.638	0.04	-30.00	162.34	150.81	11.53	14.075	
1,600.00	1,588.85	1,588.85	1,588.85	7.21	4.95	173.348	0.04	-30.00	179.58	167.44	12.14	14.793	
1,700.00	1,687.33	1,687.33	1,687.33	7.65	5.11	173.933	0.04	-30.00	196.85	184.10	12.74	15.446	
1,800.00	1,785.82	1,785.82	1,785.82	8.09	5.27	174.424	0.04	-30.00	214.12	200.78	13.35	16.044	
1,900.00	1,884.30	1,884.30	1,884.30	8.53	5.43	174.842	0.04	-30.00	231.41	217.47	13.95	16.595	
2,000.00	1,982.78	1,982.78	1,982.78	8.98	5.58	175.201	0.04	-30.00	248.72	234.17	14.54	17.102	
2,100.00	2,081.26	2,079.55	2,079.54	9.42	5.72	175.402	-0.19	-30.50	266.29	251.17	15.12	17.617	
2,200.00	2,179.74	2,175.71	2,175.68	9.87	5.84	175.287	-1.05	-32.46	284.61	268.94	15.67	18.165	
2,300.00	2,278.22	2,271.54	2,271.44	10.31	5.98	174.913	-2.56	-35.88	303.71	287.50	16.22	18.730	
2,400.00	2,376.74	2,367.06	2,366.81	10.72	6.13	174.337	-4.70	-40.75	323.37	306.65	16.72	19.338	
2,500.00	2,475.52	2,462.44	2,461.94	11.16	6.30	173.574	-7.48	-47.07	342.34	325.08	17.26	19.836	
2,600.00	2,574.55	2,557.68	2,556.80	11.59	6.49	172.641	-10.89	-54.82	360.49	342.71	17.78	20.271	
2,700.00	2,673.81	2,652.73	2,651.32	12.01	6.70	171.559	-14.93	-63.99	377.89	359.59	18.30	20.654	
2,800.00	2,773.27	2,747.54	2,745.42	12.42	6.93	170.344	-19.59	-74.57	394.60	375.81	18.80	20.994	
2,900.00	2,872.89	2,842.06	2,839.04	12.81	7.17	169.009	-24.85	-86.53	410.72	391.44	19.28	21.302	
3,000.00	2,972.65	2,936.26	2,932.10	13.18	7.43	167.565	-30.72	-99.85	426.32	406.58	19.75	21.589	
3,100.00	3,072.51	3,031.48	3,025.93	13.54	7.72	166.005	-37.24	-114.67	441.46	421.26	20.20	21.850	
3,200.00	3,172.45	3,129.67	3,122.63	13.86	8.02	164.414	-44.11	-130.27	455.51	434.84	20.67	22.040	
3,300.00	3,272.44	3,228.02	3,219.48	14.13	8.34	162.858	-50.99	-145.90	468.25	447.15	21.10	22.196	
3,400.00	3,372.44	3,326.48	3,316.45	14.19	8.67	-65.529	-57.88	-161.55	479.92	458.59	21.33	22.501	
3,500.00	3,472.44	3,424.96	3,413.44	14.24	9.01	-67.026	-64.77	-177.20	491.75	470.19	21.56	22.804	
3,600.00	3,572.44	3,523.45	3,510.42	14.28	9.36	-68.453	-71.67	-192.85	503.91	482.09	21.82	23.099	
3,700.00	3,672.44	3,621.93	3,607.41	14.32	9.72	-69.813	-78.56	-208.50	516.36	494.28	22.08	23.384	
3,800.00	3,772.44	3,720.41	3,704.39	14.37	10.09	-71.109	-85.45	-224.15	529.09	506.72	22.36	23.659	
3,900.00	3,872.44	3,818.89	3,801.38	14.41	10.46	-72.345	-92.34	-239.81	542.07	519.41	22.66	23.923	
4,000.00	3,972.44	3,917.37	3,898.36	14.46	10.84	-73.523	-99.23	-255.46	555.30	532.33	22.97	24.176	
4,100.00	4,072.44	4,015.85	3,995.35	14.50	11.22	-74.646	-106.12	-271.11	568.75	545.45	23.29	24.419	
4,200.00	4,172.44	4,114.33	4,092.33	14.55	11.61	-75.718	-113.01	-286.76	582.40	558.78	23.63	24.651	
4,300.00	4,272.44	4,212.81	4,189.32	14.59	12.00	-76.741	-119.90	-302.41	596.25	572.28	23.97	24.873	
4,400.00	4,372.44	4,311.29	4,286.30	14.64	12.40	-77.717	-126.79	-318.06	610.28	585.95	24.33	25.085	
4,500.00	4,472.44	4,409.77	4,383.29	14.69	12.80	-78.650	-133.68	-333.71	624.47	599.78	24.70	25.287	
4,600.00	4,572.44	4,508.25	4,480.27	14.73	13.20	-79.542	-140.57	-349.36	638.83	613.76	25.07	25.480	
4,700.00	4,672.44	4,606.73	4,577.25	14.78	13.61	-80.394	-147.47	-365.01	653.33	627.87	25.46	25.664	
4,800.00	4,772.44	4,705.21	4,674.24	14.83	14.02	-81.210	-154.36	-380.67	667.96	642.11	25.85	25.839	
4,900.00	4,872.44	4,803.70	4,771.22	14.87	14.43	-81.991	-161.25	-396.32	682.73	656.47	26.25	26.007	
5,000.00	4,972.44	4,902.18	4,868.21	14.92	14.84	-82.739	-168.14	-411.97	697.61	670.95	26.66	26.167	
5,100.00	5,072.44	5,000.66	4,965.19	14.97	15.26	-83.456	-175.03	-427.62	712.60	685.53	27.08	26.320	
5,200.00	5,172.44	5,099.14	5,062.18	15.02	15.67	-84.143	-181.92	-443.27	727.71	700.21	27.50	26.465	
5,300.00	5,272.44	5,197.62	5,159.16	15.07	16.09	-84.803	-188.81	-458.92	742.91	714.98	27.92	26.605	
5,400.00	5,372.44	5,296.10	5,256.15	15.12	16.51	-85.436	-195.70	-474.57	758.20	729.84	28.36	26.738	
5,500.00	5,472.44	5,394.58	5,353.13	15.16	16.94	-86.044	-202.59	-490.22	773.58	744.78	28.79	26.866	
5,600.00	5,572.44	5,493.06	5,450.12	15.21	17.36	-86.629	-209.48	-505.88	789.04	759.80	29.24	26.988	
5,700.00	5,672.44	5,591.54	5,547.10	15.26	17.78	-87.191	-216.37	-521.53	804.58	774.90	29.68	27.105	
5,800.00	5,772.44	5,698.64	5,652.64	15.31	18.23	-87.767	-223.71	-538.20	819.89	789.72	30.17	27.175	
5,900.00	5,872.44	5,812.28	5,764.95	15.36	18.71	-88.293	-230.69	-554.04	833.65	802.94	30.71	27.149	
6,000.00	5,972.44	5,926.57	5,878.23	15.42	19.17	-88.737	-236.80	-567.92	845.67	814.44	31.23	27.081	
6,100.00	6,072.44	6,041.43	5,992.35	15.47	19.63	-89.106	-242.02	-579.78	855.92	824.19	31.73	26.975	
6,200.00	6,172.44	6,156.76	6,107.19	15.52	20.07	-89.403	-246.34	-589.58	864.37	832.16	32.21	26.836	
6,300.00	6,272.44	6,272.49	6,222.60	15.57	20.49	-89.631	-249.73	-597.28	871.01	838.35	32.66	26.668	
6,400.00	6,372.44	6,388.51	6,338.46	15.62	20.88	-89.795	-252.19	-602.87	875.81	842.73	33.08	26.475	
6,500.00	6,472.44	6,504.72	6,454.61	15.67	21.24	-89.894	-253.70	-606.30	878.76	845.31	33.46	26.265	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report



Company:	Centennial Resources Development, Inc.	Local Co-ordinate Reference:	Well Raider Federal Com 103H
Project:	Lea County, NM (NAD83 - UTM Zone 13)	TVD Reference:	RKB @ 3526.80usft (TBD)
Reference Site:	Raider	MD Reference:	RKB @ 3526.80usft (TBD)
Site Error:	0.00 usft	North Reference:	True
Reference Well:	Raider Federal Com 103H	Survey Calculation Method:	Minimum Curvature
Well Error:	1.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	USA Compass
Reference Design:	Plan 1 08-17-22	Offset TVD Reference:	Reference Datum

Offset Design: Raider - Raider Federal Com 102H - OH - Plan 1 08-17-22												Offset Site Error:	0.00 usft
Survey Program: 0-MWD+IFR1+MS												Offset Well Error:	1.00 usft
Rule Assigned:													
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference	Offset	Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
				(usft)	(usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
6,600.00	6,572.44	6,621.05	6,570.92	15.72	21.49	-89.931	-254.26	-607.58	879.86	846.13	33.73	26.082	
6,700.00	6,672.44	6,722.56	6,672.44	15.78	21.52	-89.931	-254.27	-607.59	879.87	846.05	33.82	26.013	
6,800.00	6,772.44	6,822.56	6,772.44	15.83	21.56	-89.931	-254.27	-607.59	879.87	845.95	33.92	25.940	
6,900.00	6,872.44	6,922.56	6,872.44	15.88	21.59	-89.931	-254.27	-607.59	879.87	845.85	34.02	25.866	
7,000.00	6,972.44	7,022.56	6,972.44	15.94	21.63	-89.931	-254.27	-607.59	879.87	845.76	34.11	25.792	
7,100.00	7,072.44	7,122.56	7,072.44	15.99	21.66	-89.931	-254.27	-607.59	879.87	845.66	34.21	25.719	
7,200.00	7,172.44	7,222.56	7,172.44	16.04	21.70	-89.931	-254.27	-607.59	879.87	845.56	34.31	25.645	
7,300.00	7,272.44	7,322.56	7,272.44	16.10	21.74	-89.931	-254.27	-607.59	879.87	845.46	34.41	25.572	
7,400.00	7,372.44	7,422.56	7,372.44	16.15	21.77	-89.931	-254.27	-607.59	879.87	845.36	34.51	25.498	
7,500.00	7,472.44	7,522.56	7,472.44	16.20	21.81	-89.931	-254.27	-607.59	879.87	845.26	34.61	25.425	
7,600.00	7,572.44	7,622.56	7,572.44	16.26	21.85	-89.931	-254.27	-607.59	879.87	845.16	34.71	25.352	
7,700.00	7,672.44	7,722.56	7,672.44	16.31	21.88	-89.931	-254.27	-607.59	879.87	845.06	34.81	25.279	
7,800.00	7,772.44	7,822.56	7,772.44	16.37	21.92	-89.931	-254.27	-607.59	879.87	844.96	34.91	25.206	
7,900.00	7,872.44	7,922.56	7,872.44	16.42	21.96	-89.931	-254.27	-607.59	879.87	844.86	35.01	25.133	
8,000.00	7,972.44	8,022.56	7,972.44	16.48	22.00	-89.931	-254.27	-607.59	879.87	844.76	35.11	25.060	
8,100.00	8,072.44	8,122.56	8,072.44	16.54	22.03	-89.931	-254.27	-607.59	879.87	844.66	35.21	24.987	
8,200.00	8,172.44	8,222.56	8,172.44	16.59	22.07	-89.931	-254.27	-607.59	879.87	844.56	35.32	24.915	
8,300.00	8,272.44	8,322.56	8,272.44	16.65	22.11	-89.931	-254.27	-607.59	879.87	844.45	35.42	24.842	
8,400.00	8,372.44	8,422.56	8,372.44	16.70	22.15	-89.931	-254.27	-607.59	879.87	844.35	35.52	24.770	
8,500.00	8,472.44	8,522.56	8,472.44	16.76	22.19	-89.931	-254.27	-607.59	879.87	844.25	35.63	24.698	
8,600.00	8,572.44	8,622.56	8,572.44	16.82	22.23	-89.931	-254.27	-607.59	879.87	844.14	35.73	24.625	
8,700.00	8,672.44	8,722.56	8,672.44	16.87	22.27	-89.931	-254.27	-607.59	879.87	844.04	35.83	24.554	
8,800.00	8,772.44	8,822.56	8,772.44	16.93	22.31	-89.931	-254.27	-607.59	879.87	843.93	35.94	24.482	
8,900.00	8,872.44	8,922.56	8,872.44	16.99	22.34	-89.931	-254.27	-607.59	879.87	843.83	36.04	24.411	
9,000.00	8,971.85	9,022.30	8,971.60	16.87	22.25	-89.916	-245.27	-607.60	879.87	843.80	36.07	24.392	
9,100.00	9,067.22	9,122.04	9,066.74	16.66	22.10	-89.921	-215.95	-607.60	879.87	843.80	36.07	24.395	
9,200.00	9,154.37	9,221.80	9,153.76	16.46	21.95	-89.930	-167.53	-607.62	879.87	843.83	36.05	24.410	
9,300.00	9,229.51	9,321.60	9,228.85	16.28	21.83	-89.942	-102.09	-607.64	879.87	843.85	36.02	24.427	
9,400.00	9,289.34	9,421.43	9,288.76	16.15	21.74	-89.956	-22.45	-607.66	879.87	843.86	36.01	24.431	
9,500.00	9,331.26	9,521.32	9,330.85	16.07	21.70	-89.972	67.93	-607.69	879.87	843.82	36.05	24.409	
9,600.00	9,353.42	9,621.25	9,353.26	16.07	21.72	-89.990	165.13	-607.72	879.87	843.74	36.14	24.349	
9,600.93	9,353.53	9,622.19	9,353.37	16.08	21.72	-89.990	166.06	-607.72	879.87	843.73	36.14	24.348	
9,700.00	9,356.81	9,721.24	9,356.81	16.15	21.79	-90.000	264.98	-607.75	879.87	843.58	36.29	24.244	
9,800.00	9,356.80	9,821.24	9,356.80	16.26	21.91	-90.000	364.98	-607.77	879.87	843.33	36.54	24.079	
9,900.00	9,356.80	9,921.24	9,356.80	16.40	22.05	-90.000	464.98	-607.80	879.87	843.02	36.85	23.875	
10,000.00	9,356.80	10,021.24	9,356.80	16.57	22.21	-90.000	564.98	-607.83	879.87	842.64	37.23	23.635	
10,100.00	9,356.80	10,121.24	9,356.80	16.77	22.39	-90.000	664.98	-607.86	879.87	842.21	37.66	23.363	
10,200.00	9,356.80	10,221.24	9,356.80	17.00	22.60	-90.000	764.98	-607.89	879.87	841.72	38.15	23.062	
10,300.00	9,356.80	10,321.24	9,356.80	17.25	22.83	-90.000	864.98	-607.92	879.87	841.17	38.70	22.737	
10,400.00	9,356.80	10,421.24	9,356.80	17.54	23.08	-90.000	964.98	-607.95	879.87	840.58	39.30	22.391	
10,500.00	9,356.80	10,521.24	9,356.80	17.85	23.35	-90.000	1,064.98	-607.98	879.87	839.93	39.94	22.028	
10,600.00	9,356.80	10,621.24	9,356.80	18.19	23.64	-90.000	1,164.98	-608.01	879.87	839.23	40.64	21.651	
10,700.00	9,356.80	10,721.24	9,356.80	18.56	23.96	-90.000	1,264.98	-608.04	879.87	838.49	41.38	21.263	
10,800.00	9,356.80	10,821.24	9,356.80	18.95	24.29	-90.000	1,364.98	-608.07	879.87	837.71	42.16	20.868	
10,900.00	9,356.80	10,921.24	9,356.80	19.37	24.64	-90.000	1,464.98	-608.10	879.87	836.89	42.99	20.469	
11,000.00	9,356.80	11,021.24	9,356.80	19.81	25.00	-90.000	1,564.98	-608.13	879.87	836.02	43.85	20.067	
11,100.00	9,356.80	11,121.24	9,356.80	20.27	25.39	-90.000	1,664.98	-608.16	879.87	835.13	44.74	19.665	
11,200.00	9,356.80	11,221.24	9,356.80	20.75	25.79	-90.000	1,764.98	-608.19	879.87	834.20	45.67	19.265	
11,300.00	9,356.80	11,321.24	9,356.80	21.25	26.20	-90.000	1,864.98	-608.21	879.87	833.24	46.63	18.868	
11,400.00	9,356.80	11,421.24	9,356.80	21.77	26.63	-90.000	1,964.98	-608.24	879.87	832.25	47.62	18.476	
11,500.00	9,356.80	11,521.24	9,356.80	22.30	27.08	-90.000	2,064.98	-608.27	879.87	831.23	48.64	18.090	
11,600.00	9,356.80	11,621.24	9,356.80	22.85	27.54	-90.000	2,164.98	-608.30	879.87	830.19	49.68	17.710	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report



Company:	Centennial Resources Development, Inc.	Local Co-ordinate Reference:	Well Raider Federal Com 103H
Project:	Lea County, NM (NAD83 - UTM Zone 13)	TVD Reference:	RKB @ 3526.80usft (TBD)
Reference Site:	Raider	MD Reference:	RKB @ 3526.80usft (TBD)
Site Error:	0.00 usft	North Reference:	True
Reference Well:	Raider Federal Com 103H	Survey Calculation Method:	Minimum Curvature
Well Error:	1.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	USA Compass
Reference Design:	Plan 1 08-17-22	Offset TVD Reference:	Reference Datum

Offset Design: Raider - Raider Federal Com 102H - OH - Plan 1 08-17-22												Offset Site Error:	0.00 usft
Survey Program: 0-MWD+IFR1+MS												Offset Well Error:	1.00 usft
Reference												Rule Assigned:	
Offset												Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	
							+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
11,700.00	9,356.80	11,721.24	9,356.80	23.41	28.01	-90.000	2,264.98	-608.33	879.87	829.12	50.75	17.337	
11,800.00	9,356.80	11,821.24	9,356.80	23.98	28.50	-90.000	2,364.98	-608.36	879.87	828.03	51.84	16.973	
11,900.00	9,356.80	11,921.24	9,356.80	24.57	28.99	-90.000	2,464.98	-608.39	879.87	826.92	52.95	16.616	
12,000.00	9,356.80	12,021.24	9,356.80	25.16	29.50	-90.000	2,564.98	-608.42	879.87	825.79	54.08	16.269	
12,100.00	9,356.80	12,121.24	9,356.80	25.77	30.02	-90.000	2,664.98	-608.45	879.87	824.64	55.23	15.930	
12,200.00	9,356.80	12,221.24	9,356.80	26.38	30.55	-90.000	2,764.98	-608.48	879.87	823.47	56.40	15.600	
12,300.00	9,356.80	12,321.24	9,356.80	27.00	31.09	-90.000	2,864.98	-608.51	879.87	822.28	57.59	15.279	
12,400.00	9,356.80	12,421.24	9,356.80	27.63	31.64	-90.000	2,964.98	-608.54	879.87	821.08	58.79	14.967	
12,500.00	9,356.80	12,521.24	9,356.80	28.27	32.20	-90.000	3,064.98	-608.57	879.87	819.87	60.00	14.664	
12,600.00	9,356.80	12,621.24	9,356.80	28.91	32.77	-90.000	3,164.98	-608.60	879.87	818.64	61.23	14.370	
12,700.00	9,356.80	12,721.24	9,356.80	29.56	33.34	-90.000	3,264.98	-608.63	879.87	817.40	62.47	14.084	
12,800.00	9,356.80	12,821.24	9,356.80	30.22	33.92	-90.000	3,364.98	-608.66	879.87	816.14	63.73	13.807	
12,900.00	9,356.80	12,921.24	9,356.80	30.88	34.51	-90.000	3,464.98	-608.68	879.87	814.88	64.99	13.538	
13,000.00	9,356.80	13,021.24	9,356.80	31.54	35.11	-90.000	3,564.98	-608.71	879.87	813.60	66.27	13.277	
13,100.00	9,356.80	13,121.24	9,356.80	32.21	35.71	-90.000	3,664.98	-608.74	879.87	812.32	67.56	13.024	
13,200.00	9,356.80	13,221.24	9,356.80	32.89	36.32	-90.000	3,764.98	-608.77	879.87	811.02	68.85	12.779	
13,300.00	9,356.80	13,321.24	9,356.80	33.56	36.93	-90.000	3,864.98	-608.80	879.87	809.71	70.16	12.541	
13,400.00	9,356.80	13,421.24	9,356.80	34.25	37.55	-90.000	3,964.98	-608.83	879.87	808.40	71.47	12.311	
13,500.00	9,356.80	13,521.24	9,356.80	34.93	38.18	-90.000	4,064.98	-608.86	879.87	807.08	72.79	12.087	
13,600.00	9,356.80	13,621.24	9,356.80	35.62	38.81	-90.000	4,164.98	-608.89	879.87	805.75	74.13	11.870	
13,700.00	9,356.80	13,721.24	9,356.80	36.31	39.45	-90.000	4,264.98	-608.92	879.87	804.41	75.46	11.660	
13,800.00	9,356.80	13,821.24	9,356.80	37.01	40.09	-90.000	4,364.98	-608.95	879.87	803.06	76.81	11.456	
13,900.00	9,356.80	13,921.24	9,356.80	37.70	40.73	-90.000	4,464.98	-608.98	879.87	801.71	78.16	11.257	
14,000.00	9,356.80	14,021.24	9,356.80	38.40	41.38	-90.000	4,564.98	-609.01	879.87	800.36	79.52	11.065	
14,100.00	9,356.80	14,121.24	9,356.80	39.11	42.03	-90.000	4,664.98	-609.04	879.87	798.99	80.88	10.879	
14,200.00	9,356.80	14,221.24	9,356.80	39.81	42.69	-90.000	4,764.98	-609.07	879.87	797.62	82.25	10.698	
14,300.00	9,356.80	14,321.24	9,356.80	40.52	43.35	-90.000	4,864.98	-609.10	879.87	796.25	83.62	10.522	
14,400.00	9,356.80	14,421.24	9,356.80	41.23	44.01	-90.000	4,964.98	-609.13	879.87	794.87	85.00	10.351	
14,500.00	9,356.80	14,521.24	9,356.80	41.94	44.68	-90.000	5,064.98	-609.15	879.87	793.48	86.39	10.185	
14,600.00	9,356.80	14,621.24	9,356.80	42.65	45.35	-90.000	5,164.98	-609.18	879.87	792.09	87.78	10.024	
14,700.00	9,356.80	14,721.24	9,356.80	43.37	46.02	-90.000	5,264.98	-609.21	879.87	790.70	89.17	9.867	
14,800.00	9,356.80	14,821.24	9,356.80	44.08	46.70	-90.000	5,364.98	-609.24	879.87	789.30	90.57	9.715	
14,900.00	9,356.80	14,921.24	9,356.80	44.80	47.37	-90.000	5,464.98	-609.27	879.87	787.90	91.97	9.566	
15,000.00	9,356.80	15,021.24	9,356.80	45.52	48.06	-90.000	5,564.98	-609.30	879.87	786.49	93.38	9.422	
15,100.00	9,356.80	15,121.24	9,356.80	46.24	48.74	-90.000	5,664.98	-609.33	879.87	785.08	94.79	9.282	
15,200.00	9,356.80	15,221.24	9,356.80	46.97	49.42	-90.000	5,764.98	-609.36	879.87	783.67	96.20	9.146	
15,300.00	9,356.80	15,321.24	9,356.80	47.69	50.11	-90.000	5,864.98	-609.39	879.87	782.25	97.62	9.013	
15,400.00	9,356.80	15,421.24	9,356.80	48.42	50.80	-90.000	5,964.98	-609.42	879.87	780.83	99.04	8.884	
15,500.00	9,356.80	15,521.24	9,356.80	49.14	51.50	-90.000	6,064.98	-609.45	879.87	779.41	100.47	8.758	
15,600.00	9,356.80	15,621.24	9,356.80	49.87	52.19	-90.000	6,164.98	-609.48	879.87	777.98	101.89	8.635	
15,700.00	9,356.80	15,721.24	9,356.80	50.60	52.89	-90.000	6,264.98	-609.51	879.87	776.55	103.32	8.516	
15,800.00	9,356.80	15,821.24	9,356.80	51.33	53.59	-90.000	6,364.98	-609.54	879.87	775.12	104.75	8.399	
15,900.00	9,356.80	15,921.24	9,356.80	52.06	54.29	-90.000	6,464.98	-609.57	879.87	773.68	106.19	8.286	
16,000.00	9,356.80	16,021.24	9,356.80	52.79	54.99	-90.000	6,564.98	-609.59	879.87	772.25	107.63	8.175	
16,100.00	9,356.80	16,121.24	9,356.80	53.52	55.69	-90.000	6,664.98	-609.62	879.87	770.81	109.07	8.067	
16,200.00	9,356.80	16,221.24	9,356.80	54.26	56.40	-90.000	6,764.98	-609.65	879.87	769.36	110.51	7.962	
16,300.00	9,356.80	16,321.24	9,356.80	54.99	57.10	-90.000	6,864.98	-609.68	879.87	767.92	111.95	7.859	
16,400.00	9,356.80	16,421.24	9,356.80	55.73	57.81	-90.000	6,964.98	-609.71	879.87	766.47	113.40	7.759	
16,500.00	9,356.80	16,521.24	9,356.80	56.46	58.52	-90.000	7,064.98	-609.74	879.87	765.03	114.85	7.661	
16,600.00	9,356.80	16,621.24	9,356.80	57.20	59.23	-90.000	7,164.98	-609.77	879.87	763.57	116.30	7.566	
16,700.00	9,356.80	16,721.24	9,356.80	57.94	59.95	-90.000	7,264.98	-609.80	879.87	762.12	117.75	7.472	
16,800.00	9,356.80	16,821.24	9,356.80	58.67	60.66	-90.000	7,364.98	-609.83	879.87	760.67	119.21	7.381	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report



Company:	Centennial Resources Development, Inc.	Local Co-ordinate Reference:	Well Raider Federal Com 103H
Project:	Lea County, NM (NAD83 - UTM Zone 13)	TVD Reference:	RKB @ 3526.80usft (TBD)
Reference Site:	Raider	MD Reference:	RKB @ 3526.80usft (TBD)
Site Error:	0.00 usft	North Reference:	True
Reference Well:	Raider Federal Com 103H	Survey Calculation Method:	Minimum Curvature
Well Error:	1.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	USA Compass
Reference Design:	Plan 1 08-17-22	Offset TVD Reference:	Reference Datum

Offset Design: Raider - Raider Federal Com 102H - OH - Plan 1 08-17-22												Offset Site Error:	0.00 usft
Survey Program: 0-MWD+IFR1+MS												Offset Well Error:	1.00 usft
Rule Assigned:												Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Semi Major Axis Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Distance Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
16,900.00	9,356.80	16,921.24	9,356.80	59.41	61.37	-90.000	7,464.98	-609.86	879.87	759.21	120.66	7.292	
17,000.00	9,356.80	17,021.24	9,356.80	60.15	62.09	-90.000	7,564.98	-609.89	879.87	757.75	122.12	7.205	
17,100.00	9,356.80	17,121.24	9,356.80	60.89	62.81	-90.000	7,664.98	-609.92	879.87	756.29	123.58	7.120	
17,200.00	9,356.80	17,221.24	9,356.80	61.63	63.53	-90.000	7,764.98	-609.95	879.87	754.83	125.04	7.037	
17,300.00	9,356.80	17,321.24	9,356.80	62.37	64.25	-90.000	7,864.98	-609.98	879.87	753.37	126.50	6.955	
17,400.00	9,356.80	17,421.24	9,356.80	63.12	64.97	-90.000	7,964.98	-610.01	879.87	751.90	127.97	6.876	
17,500.00	9,356.80	17,521.24	9,356.80	63.86	65.69	-90.000	8,064.98	-610.04	879.87	750.44	129.43	6.798	
17,600.00	9,356.80	17,621.24	9,356.80	64.60	66.41	-90.000	8,164.98	-610.06	879.87	748.97	130.90	6.722	
17,700.00	9,356.80	17,721.24	9,356.80	65.34	67.13	-90.000	8,264.98	-610.09	879.87	747.50	132.37	6.647	
17,800.00	9,356.80	17,821.24	9,356.80	66.09	67.86	-90.000	8,364.98	-610.12	879.87	746.03	133.84	6.574	
17,900.00	9,356.80	17,921.24	9,356.80	66.83	68.58	-90.000	8,464.98	-610.15	879.87	744.56	135.31	6.503	
18,000.00	9,356.80	18,021.24	9,356.80	67.58	69.31	-90.000	8,564.98	-610.18	879.87	743.09	136.78	6.433	
18,100.00	9,356.80	18,121.24	9,356.80	68.32	70.04	-90.000	8,664.98	-610.21	879.87	741.61	138.26	6.364	
18,200.00	9,356.80	18,221.24	9,356.80	69.07	70.76	-90.000	8,764.98	-610.24	879.87	740.14	139.73	6.297	
18,300.00	9,356.80	18,321.24	9,356.80	69.81	71.49	-90.000	8,864.98	-610.27	879.87	738.66	141.21	6.231	
18,400.00	9,356.80	18,421.24	9,356.80	70.56	72.22	-90.000	8,964.98	-610.30	879.87	737.19	142.69	6.166	
18,500.00	9,356.80	18,521.24	9,356.80	71.31	72.95	-90.000	9,064.98	-610.33	879.87	735.71	144.16	6.103	
18,600.00	9,356.80	18,621.24	9,356.80	72.05	73.68	-90.000	9,164.98	-610.36	879.87	734.23	145.64	6.041	
18,700.00	9,356.80	18,721.24	9,356.80	72.80	74.41	-90.000	9,264.98	-610.39	879.87	732.75	147.12	5.980	
18,800.00	9,356.80	18,821.24	9,356.80	73.55	75.14	-90.000	9,364.98	-610.42	879.87	731.27	148.61	5.921	
18,900.00	9,356.80	18,921.24	9,356.80	74.30	75.88	-90.000	9,464.98	-610.45	879.87	729.79	150.09	5.862	
19,000.00	9,356.80	19,021.24	9,356.80	75.05	76.61	-90.000	9,564.98	-610.48	879.87	728.30	151.57	5.805	
19,100.00	9,356.80	19,121.24	9,356.80	75.79	77.34	-90.000	9,664.98	-610.51	879.87	726.82	153.05	5.749	
19,200.00	9,356.80	19,221.24	9,356.80	76.54	78.08	-90.000	9,764.98	-610.53	879.87	725.33	154.54	5.694	
19,300.00	9,356.80	19,321.24	9,356.80	77.29	78.81	-90.000	9,864.98	-610.56	879.87	723.85	156.02	5.639	
19,400.00	9,356.80	19,421.24	9,356.80	78.04	79.55	-90.000	9,964.98	-610.59	879.87	722.36	157.51	5.586	
19,500.00	9,356.80	19,521.24	9,356.80	78.79	80.28	-90.000	10,064.98	-610.62	879.87	720.88	159.00	5.534	
19,533.58	9,356.80	19,554.83	9,356.80	79.04	80.53	-90.000	10,098.56	-610.63	879.87	720.38	159.50	5.517 SF	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report



Company:	Centennial Resources Development, Inc.	Local Co-ordinate Reference:	Well Raider Federal Com 103H
Project:	Lea County, NM (NAD83 - UTM Zone 13)	TVD Reference:	RKB @ 3526.80usft (TBD)
Reference Site:	Raider	MD Reference:	RKB @ 3526.80usft (TBD)
Site Error:	0.00 usft	North Reference:	True
Reference Well:	Raider Federal Com 103H	Survey Calculation Method:	Minimum Curvature
Well Error:	1.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	USA Compass
Reference Design:	Plan 1 08-17-22	Offset TVD Reference:	Reference Datum

Offset Design: Raider - Raider Federal Com 302H - OH - Plan 4 08-10-22														Offset Site Error:	0.00 usft
Survey Program:		0-MWD+IFR1+MS						Rule Assigned:						Offset Well Error:	1.00 usft
Reference	Offset	Semi Major Axis		Offset Wellbore Centre		Distance				Warning					
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning		
0.00	0.00	23.00	0.00	1.00	1.01	5.373	4,489.27	422.25	4,509.08						
100.00	100.00	123.00	100.00	1.12	1.25	5.373	4,489.27	422.25	4,509.08	4,506.71	2.38	1,897.954			
200.00	200.00	223.00	200.00	1.65	1.76	5.373	4,489.27	422.25	4,509.08	4,505.67	3.42	1,320.313			
300.00	299.99	322.99	299.99	2.05	2.15	-127.791	4,489.27	422.25	4,509.62	4,505.42	4.20	1,074.812			
400.00	399.96	422.96	399.96	2.41	2.47	-127.804	4,489.27	422.25	4,511.22	4,506.36	4.86	927.807			
500.00	499.86	522.86	499.86	2.76	2.76	-127.827	4,489.27	422.25	4,513.90	4,508.43	5.47	825.678			
600.00	599.68	622.68	599.68	3.12	3.03	-127.858	4,489.27	422.25	4,517.65	4,511.62	6.03	748.968			
700.00	699.37	722.37	699.37	3.49	3.27	-127.898	4,489.27	422.25	4,522.48	4,515.91	6.57	688.359			
800.00	798.90	821.90	798.90	3.86	3.50	-127.947	4,489.27	422.25	4,528.38	4,521.29	7.09	638.742			
900.00	898.26	921.26	898.26	4.25	3.71	-128.004	4,489.27	422.25	4,535.38	4,527.78	7.60	597.046			
1,000.00	997.40	1,020.40	997.40	4.65	3.92	-128.069	4,489.27	422.25	4,543.46	4,535.37	8.09	561.296			
1,100.00	1,096.30	1,119.30	1,096.30	5.06	4.12	-128.142	4,489.27	422.25	4,552.65	4,544.06	8.59	530.156			
1,200.00	1,194.93	1,217.93	1,194.93	5.48	4.30	-128.223	4,489.27	422.25	4,562.94	4,553.86	9.08	502.684			
1,300.00	1,293.41	1,316.41	1,293.41	5.91	4.49	-128.392	4,489.27	422.25	4,573.80	4,564.24	9.56	478.250			
1,400.00	1,391.89	1,414.89	1,391.89	6.34	4.66	-128.561	4,489.27	422.25	4,584.71	4,574.66	10.05	456.366			
1,500.00	1,490.37	1,513.37	1,490.37	6.77	4.83	-128.728	4,489.27	422.25	4,595.65	4,585.13	10.53	436.609			
1,600.00	1,588.85	1,611.85	1,588.85	7.21	5.00	-128.895	4,489.27	422.25	4,606.64	4,595.63	11.00	418.669			
1,700.00	1,687.33	1,710.33	1,687.33	7.65	5.16	-129.061	4,489.27	422.25	4,617.66	4,606.18	11.48	402.295			
1,800.00	1,785.82	1,808.82	1,785.82	8.09	5.32	-129.227	4,489.27	422.25	4,628.72	4,616.77	11.95	387.282			
1,900.00	1,884.30	1,907.30	1,884.30	8.53	5.47	-129.391	4,489.27	422.25	4,639.82	4,627.40	12.42	373.461			
2,000.00	1,982.78	2,000.00	1,977.00	8.98	5.62	-129.546	4,489.27	422.25	4,650.97	4,638.08	12.88	360.962			
2,100.00	2,081.26	2,069.07	2,046.07	9.42	5.72	-129.656	4,489.51	422.58	4,662.54	4,649.23	13.30	350.528			
2,200.00	2,179.74	2,134.35	2,111.33	9.87	5.82	-129.753	4,490.19	423.52	4,674.84	4,661.13	13.71	340.964			
2,300.00	2,278.22	2,200.00	2,176.96	10.31	5.92	-129.843	4,491.31	425.08	4,687.87	4,673.76	14.12	332.017			
2,400.00	2,376.74	2,264.95	2,241.86	10.72	6.02	-129.979	4,492.85	427.22	4,701.48	4,687.00	14.48	324.707			
2,500.00	2,475.52	2,330.41	2,307.22	11.16	6.14	-130.145	4,494.83	429.98	4,714.80	4,699.92	14.88	316.760			
2,600.00	2,574.55	2,400.00	2,376.68	11.59	6.27	-130.292	4,497.42	433.57	4,727.73	4,712.44	15.29	309.203			
2,700.00	2,673.81	2,461.61	2,438.11	12.01	6.39	-130.413	4,500.13	437.33	4,740.23	4,724.56	15.67	302.418			
2,800.00	2,773.27	2,527.27	2,503.53	12.42	6.53	-130.514	4,503.43	441.92	4,752.32	4,736.27	16.06	295.970			
2,900.00	2,872.89	2,600.00	2,575.90	12.81	6.69	-130.593	4,507.61	447.72	4,764.00	4,747.55	16.44	289.712			
3,000.00	2,972.65	2,658.48	2,634.03	13.18	6.84	-130.654	4,511.35	452.92	4,775.23	4,758.44	16.79	284.385			
3,100.00	3,072.51	2,723.94	2,699.02	13.54	7.00	-130.693	4,515.95	459.31	4,786.05	4,768.91	17.14	279.250			
3,200.00	3,172.45	2,800.00	2,774.40	13.86	7.20	-130.700	4,521.85	467.50	4,796.47	4,778.97	17.49	274.192			
3,300.00	3,272.44	2,854.35	2,828.19	14.13	7.35	-130.710	4,526.41	473.85	4,806.43	4,788.66	17.77	270.446			
3,400.00	3,372.44	2,919.22	2,892.28	14.19	7.54	2.508	4,532.26	481.96	4,816.16	4,798.24	17.92	268.712			
3,500.00	3,472.44	2,999.99	2,971.93	14.24	7.79	2.634	4,540.12	492.89	4,826.54	4,808.41	18.13	266.240			
3,600.00	3,572.44	3,073.81	3,044.62	14.28	8.02	2.754	4,547.61	503.29	4,837.37	4,819.04	18.32	263.999			
3,700.00	3,672.44	3,172.29	3,141.60	14.32	8.34	2.913	4,557.60	517.17	4,848.30	4,829.71	18.59	260.825			
3,800.00	3,772.44	3,270.77	3,238.59	14.37	8.67	3.071	4,567.59	531.05	4,859.26	4,840.40	18.86	257.637			
3,900.00	3,872.44	3,369.25	3,335.57	14.41	9.01	3.229	4,577.58	544.93	4,870.27	4,851.13	19.14	254.443			
4,000.00	3,972.44	3,467.73	3,432.55	14.46	9.37	3.386	4,587.57	558.81	4,881.31	4,861.88	19.43	251.254			
4,100.00	4,072.44	3,566.21	3,529.54	14.50	9.73	3.542	4,597.56	572.69	4,892.39	4,872.67	19.72	248.077			
4,200.00	4,172.44	3,664.69	3,626.52	14.55	10.09	3.698	4,607.55	586.57	4,903.50	4,883.48	20.02	244.919			
4,300.00	4,272.44	3,763.17	3,723.51	14.59	10.47	3.853	4,617.54	600.45	4,914.66	4,894.33	20.33	241.785			
4,400.00	4,372.44	3,861.65	3,820.49	14.64	10.84	4.007	4,627.53	614.33	4,925.84	4,905.21	20.64	238.682			
4,500.00	4,472.44	3,960.13	3,917.48	14.69	11.23	4.161	4,637.53	628.20	4,937.07	4,916.11	20.95	235.612			
4,600.00	4,572.44	4,058.61	4,014.46	14.73	11.62	4.313	4,647.52	642.08	4,948.32	4,927.05	21.28	232.580			
4,700.00	4,672.44	4,157.10	4,111.45	14.78	12.01	4.466	4,657.51	655.96	4,959.62	4,938.02	21.60	229.588			
4,800.00	4,772.44	4,255.58	4,208.43	14.83	12.41	4.617	4,667.50	669.84	4,970.95	4,949.01	21.93	226.640			
4,900.00	4,872.44	4,354.06	4,305.42	14.87	12.81	4.768	4,677.49	683.72	4,982.31	4,960.04	22.27	223.736			
5,000.00	4,972.44	4,452.54	4,402.40	14.92	13.21	4.918	4,687.48	697.60	4,993.71	4,971.10	22.61	220.878			
5,100.00	5,072.44	4,551.02	4,499.39	14.97	13.62	5.068	4,697.47	711.48	5,005.14	4,982.19	22.95	218.068			

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report



Company:	Centennial Resources Development, Inc.	Local Co-ordinate Reference:	Well Raider Federal Com 103H
Project:	Lea County, NM (NAD83 - UTM Zone 13)	TVD Reference:	RKB @ 3526.80usft (TBD)
Reference Site:	Raider	MD Reference:	RKB @ 3526.80usft (TBD)
Site Error:	0.00 usft	North Reference:	True
Reference Well:	Raider Federal Com 103H	Survey Calculation Method:	Minimum Curvature
Well Error:	1.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	USA Compass
Reference Design:	Plan 1 08-17-22	Offset TVD Reference:	Reference Datum

Offset Design: Raider - Raider Federal Com 302H - OH - Plan 4 08-10-22													Offset Site Error:	0.00 usft
Survey Program:		0-MWD+IFR1+MS						Rule Assigned:					Offset Well Error:	1.00 usft
Reference	Offset	Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)				
5,200.00	5,172.44	4,649.50	4,596.37	15.02	14.03	5.216	4,707.46	725.36	5,016.61	4,993.31	23.30	215.306		
5,300.00	5,272.44	4,747.98	4,693.36	15.07	14.44	5.365	4,717.45	739.24	5,028.11	5,004.46	23.65	212.593		
5,400.00	5,372.44	4,846.46	4,790.34	15.12	14.85	5.512	4,727.44	753.12	5,039.64	5,015.63	24.01	209.930		
5,500.00	5,472.44	15,229.12	10,389.18	15.16	41.29	85.165	-203.08	889.93	4,955.66	4,903.02	52.64	94.143		
5,600.00	5,572.44	15,230.17	10,389.19	15.21	41.30	85.262	-204.13	889.94	4,856.47	4,803.67	52.79	91.990		
5,700.00	5,672.44	15,231.21	10,389.20	15.26	41.31	85.358	-205.17	889.94	4,757.30	4,704.35	52.95	89.849		
5,800.00	5,772.44	15,232.26	10,389.21	15.31	41.31	85.455	-206.22	889.94	4,658.17	4,605.07	53.10	87.718		
5,900.00	5,872.44	15,233.31	10,389.22	15.36	41.32	85.551	-207.27	889.94	4,559.08	4,505.82	53.26	85.600		
6,000.00	5,972.44	15,234.36	10,389.24	15.42	41.33	85.648	-208.32	889.94	4,460.03	4,406.61	53.42	83.493		
6,100.00	6,072.44	15,235.40	10,389.25	15.47	41.33	85.744	-209.36	889.94	4,361.02	4,307.44	53.58	81.398		
6,200.00	6,172.44	15,236.45	10,389.26	15.52	41.34	85.841	-210.41	889.94	4,262.05	4,208.32	53.74	79.315		
6,300.00	6,272.44	15,237.50	10,389.27	15.57	41.35	85.938	-211.46	889.94	4,163.14	4,109.25	53.90	77.245		
6,400.00	6,372.44	15,238.54	10,389.28	15.62	41.36	86.034	-212.50	889.95	4,064.28	4,010.23	54.06	75.188		
6,500.00	6,472.44	15,239.59	10,389.29	15.67	41.36	86.131	-213.55	889.95	3,965.48	3,911.26	54.22	73.143		
6,600.00	6,572.44	15,240.64	10,389.30	15.72	41.37	86.228	-214.60	889.95	3,866.73	3,812.36	54.37	71.112		
6,700.00	6,672.44	15,241.69	10,389.31	15.78	41.38	86.325	-215.64	889.95	3,768.06	3,713.52	54.53	69.095		
6,800.00	6,772.44	15,242.73	10,389.32	15.83	41.38	86.421	-216.69	889.95	3,669.45	3,614.76	54.69	67.091		
6,900.00	6,872.44	15,243.78	10,389.33	15.88	41.39	86.518	-217.74	889.95	3,570.93	3,516.07	54.85	65.102		
7,000.00	6,972.44	15,244.83	10,389.35	15.94	41.40	86.615	-218.79	889.95	3,472.48	3,417.47	55.01	63.127		
7,100.00	7,072.44	15,245.87	10,389.36	15.99	41.40	86.712	-219.83	889.95	3,374.13	3,318.97	55.16	61.167		
7,200.00	7,172.44	15,246.92	10,389.37	16.04	41.41	86.808	-220.88	889.96	3,275.88	3,220.56	55.32	59.221		
7,300.00	7,272.44	15,247.97	10,389.38	16.10	41.42	86.905	-221.93	889.96	3,177.73	3,122.26	55.47	57.291		
7,400.00	7,372.44	15,249.02	10,389.39	16.15	41.42	87.002	-222.97	889.96	3,079.70	3,024.09	55.61	55.376		
7,500.00	7,472.44	15,250.06	10,389.40	16.20	41.43	87.099	-224.02	889.96	2,981.81	2,926.05	55.76	53.478		
7,600.00	7,572.44	15,251.11	10,389.41	16.26	41.44	87.196	-225.07	889.96	2,884.06	2,828.16	55.90	51.596		
7,700.00	7,672.44	15,252.16	10,389.42	16.31	41.45	87.293	-226.12	889.96	2,786.47	2,730.44	56.03	49.730		
7,800.00	7,772.44	15,253.20	10,389.43	16.37	41.45	87.390	-227.16	889.96	2,689.05	2,632.89	56.16	47.882		
7,900.00	7,872.44	15,254.25	10,389.44	16.42	41.46	87.487	-228.21	889.96	2,591.83	2,535.55	56.28	46.051		
8,000.00	7,972.44	15,255.30	10,389.46	16.48	41.47	87.584	-229.26	889.97	2,494.83	2,438.44	56.39	44.239		
8,100.00	8,072.44	15,256.35	10,389.47	16.54	41.47	87.681	-230.30	889.97	2,398.08	2,341.58	56.50	42.445		
8,200.00	8,172.44	15,257.39	10,389.48	16.59	41.48	87.778	-231.35	889.97	2,301.61	2,245.01	56.59	40.671		
8,300.00	8,272.44	15,258.44	10,389.49	16.65	41.49	87.875	-232.40	889.97	2,205.44	2,148.77	56.67	38.917		
8,400.00	8,372.44	15,259.49	10,389.50	16.70	41.49	87.972	-233.45	889.97	2,109.64	2,052.90	56.73	37.184		
8,500.00	8,472.44	15,260.53	10,389.51	16.76	41.50	88.069	-234.49	889.97	2,014.24	1,957.46	56.78	35.473		
8,600.00	8,572.44	15,261.58	10,389.52	16.82	41.51	88.166	-235.54	889.97	1,919.31	1,862.50	56.81	33.786		
8,700.00	8,672.44	15,262.63	10,389.53	16.87	41.51	88.263	-236.59	889.97	1,824.92	1,768.11	56.81	32.123		
8,800.00	8,772.44	15,263.68	10,389.54	16.93	41.52	88.360	-237.63	889.98	1,731.15	1,674.37	56.78	30.487		
8,900.00	8,872.44	15,264.72	10,389.55	16.99	41.53	88.457	-238.68	889.98	1,638.13	1,581.41	56.73	28.878		
9,000.00	8,971.85	15,256.72	10,389.47	16.87	41.48	112.790	-230.68	889.97	1,546.43	1,489.88	56.55	27.345		
9,100.00	9,067.22	15,228.25	10,389.17	16.66	41.29	129.375	-202.21	889.93	1,459.21	1,403.04	56.17	25.978		
9,200.00	9,154.37	15,180.51	10,388.67	16.46	40.97	138.575	-154.47	889.87	1,380.27	1,324.67	55.60	24.826		
9,300.00	9,229.51	15,115.59	10,387.99	16.28	40.55	143.709	-89.56	889.80	1,312.87	1,258.00	54.87	23.926		
9,400.00	9,289.34	15,036.32	10,387.16	16.15	40.03	146.601	-10.29	889.70	1,259.62	1,205.56	54.06	23.301		
9,500.00	9,331.26	14,946.18	10,386.22	16.07	39.44	148.174	79.85	889.59	1,222.41	1,169.18	53.23	22.964		
9,600.00	9,353.42	14,849.09	10,379.97	16.07	38.81	148.894	176.93	889.47	1,202.41	1,149.95	52.46	22.919		
9,700.00	9,356.81	14,749.26	10,384.16	16.15	38.17	149.003	276.75	889.35	1,198.56	1,146.76	51.80	23.137		
9,800.00	9,356.80	14,649.27	10,383.11	16.26	37.53	148.981	376.74	889.23	1,197.62	1,146.41	51.21	23.388		
9,900.00	9,356.80	14,549.27	10,382.06	16.40	36.90	148.959	476.73	889.11	1,196.67	1,146.02	50.65	23.625		
10,000.00	9,356.80	14,449.28	10,381.01	16.57	36.27	148.937	576.72	888.98	1,195.73	1,145.58	50.14	23.847		
10,100.00	9,356.80	14,349.29	10,379.97	16.77	35.65	148.915	676.71	888.86	1,194.78	1,145.11	49.67	24.054		
10,200.00	9,356.80	14,249.29	10,378.92	17.00	35.03	148.892	776.69	888.74	1,193.84	1,144.60	49.24	24.246		
10,300.00	9,356.80	14,149.30	10,377.87	17.25	34.42	148.870	876.68	888.62	1,192.89	1,144.04	48.85	24.421		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report



Company:	Centennial Resources Development, Inc.	Local Co-ordinate Reference:	Well Raider Federal Com 103H
Project:	Lea County, NM (NAD83 - UTM Zone 13)	TVD Reference:	RKB @ 3526.80usft (TBD)
Reference Site:	Raider	MD Reference:	RKB @ 3526.80usft (TBD)
Site Error:	0.00 usft	North Reference:	True
Reference Well:	Raider Federal Com 103H	Survey Calculation Method:	Minimum Curvature
Well Error:	1.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	USA Compass
Reference Design:	Plan 1 08-17-22	Offset TVD Reference:	Reference Datum

Offset Design: Raider - Raider Federal Com 302H - OH - Plan 4 08-10-22												Offset Site Error:	0.00 usft
Survey Program: 0-MWD+IFR1+MS												Offset Well Error:	1.00 usft
Reference												Rule Assigned:	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference	Offset	Highside Toolface (°)	Offset Wellbore Centre	Distance	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
10,400.00	9,356.80	14,049.30	10,376.83	17.54	33.82	148.848	976.67	888.50	1,191.95	1,143.45	48.49	24.579	
10,500.00	9,356.80	13,949.31	10,375.78	17.85	33.22	148.826	1,076.66	888.37	1,191.00	1,142.83	48.18	24.721	
10,600.00	9,356.80	13,849.31	10,374.73	18.19	32.64	148.803	1,176.65	888.25	1,190.06	1,142.16	47.90	24.845	
10,700.00	9,356.80	13,749.32	10,373.68	18.56	32.06	148.781	1,276.64	888.13	1,189.12	1,141.46	47.65	24.953	
10,800.00	9,356.80	13,649.32	10,372.64	18.95	31.48	148.759	1,376.63	888.01	1,188.17	1,140.73	47.44	25.045	
10,900.00	9,356.80	13,549.33	10,371.59	19.37	30.92	148.736	1,476.62	887.89	1,187.23	1,139.97	47.26	25.119	
11,000.00	9,356.80	13,449.34	10,370.54	19.81	30.37	148.714	1,576.61	887.76	1,186.29	1,139.17	47.12	25.177	
11,100.00	9,356.80	13,349.34	10,369.50	20.27	29.83	148.692	1,676.59	887.64	1,185.34	1,138.34	47.00	25.219	
11,200.00	9,356.80	13,249.35	10,368.45	20.75	29.30	148.669	1,776.58	887.52	1,184.40	1,137.48	46.92	25.244	
11,300.00	9,356.80	13,149.35	10,367.40	21.25	28.77	148.646	1,876.57	887.40	1,183.46	1,136.60	46.86	25.254	
11,400.00	9,356.80	13,049.36	10,366.36	21.77	28.27	148.624	1,976.56	887.28	1,182.52	1,135.68	46.84	25.248	
11,500.00	9,356.80	12,949.36	10,365.31	22.30	27.77	148.601	2,076.55	887.16	1,181.58	1,134.74	46.84	25.227	
11,600.00	9,356.80	12,849.37	10,364.26	22.85	27.29	148.579	2,176.54	887.03	1,180.63	1,133.76	46.87	25.190	
11,700.00	9,356.80	12,749.37	10,363.21	23.41	26.82	148.556	2,276.53	886.91	1,179.69	1,132.76	46.93	25.139	
11,800.00	9,356.80	12,649.38	10,362.17	23.98	26.36	148.533	2,376.52	886.79	1,178.75	1,131.73	47.02	25.072	
11,900.00	9,356.80	12,549.38	10,361.12	24.57	25.92	148.511	2,476.51	886.67	1,177.81	1,130.68	47.13	24.990	
12,000.00	9,356.80	12,449.39	10,360.07	25.16	25.50	148.488	2,576.50	886.55	1,176.87	1,129.59	47.28	24.894	
12,100.00	9,356.80	12,349.40	10,359.03	25.77	25.09	148.465	2,676.48	886.42	1,175.93	1,128.48	47.45	24.783	
12,200.00	9,356.80	12,249.40	10,357.98	26.38	24.70	148.442	2,776.47	886.30	1,174.99	1,127.33	47.65	24.658	
12,300.00	9,356.80	12,149.41	10,356.93	27.00	24.33	148.419	2,876.46	886.18	1,174.04	1,126.16	47.88	24.519	
12,400.00	9,356.80	12,049.41	10,355.88	27.63	23.97	148.396	2,976.45	886.06	1,173.10	1,124.96	48.14	24.366	
12,500.00	9,356.80	11,949.42	10,354.84	28.27	23.63	148.373	3,076.44	885.94	1,172.16	1,123.73	48.44	24.199	
12,600.00	9,356.80	11,849.42	10,353.79	28.91	23.32	148.350	3,176.43	885.81	1,171.22	1,122.46	48.76	24.019	
12,700.00	9,356.80	11,749.43	10,352.74	29.56	23.02	148.327	3,276.42	885.69	1,170.28	1,121.16	49.12	23.825	
12,800.00	9,356.80	11,649.43	10,351.70	30.22	22.74	148.304	3,376.41	885.57	1,169.34	1,119.84	49.51	23.619	
12,900.00	9,356.80	11,549.44	10,350.65	30.88	22.48	148.281	3,476.40	885.45	1,168.40	1,118.47	49.93	23.400	
13,000.00	9,356.80	11,449.45	10,349.60	31.54	22.24	148.258	3,576.38	885.33	1,167.47	1,117.08	50.39	23.169	
13,100.00	9,356.80	11,349.45	10,348.55	32.21	22.02	148.235	3,676.37	885.21	1,166.53	1,115.64	50.88	22.926	
13,200.00	9,356.80	11,249.46	10,347.51	32.89	21.82	148.211	3,776.36	885.08	1,165.59	1,114.18	51.41	22.672	
13,300.00	9,356.80	9,424.47	9,356.80	33.56	21.86	90.000	4,821.52	883.81	1,135.75	1,093.87	41.88	27.119	
13,400.00	9,356.80	9,424.47	9,356.80	34.25	21.86	90.000	4,821.52	883.81	1,052.95	1,009.56	43.39	24.267	
13,500.00	9,356.80	9,424.47	9,356.80	34.93	21.86	90.000	4,821.52	883.81	973.39	928.25	45.14	21.565	
13,600.00	9,356.80	9,424.47	9,356.80	35.62	21.86	90.000	4,821.52	883.81	897.92	850.78	47.14	19.049	
13,700.00	9,356.80	9,424.47	9,356.80	36.31	21.86	90.000	4,821.52	883.81	827.67	778.29	49.38	16.761	
13,800.00	9,356.80	9,424.47	9,356.80	37.01	21.86	90.000	4,821.52	883.81	764.08	712.27	51.81	14.747	
13,900.00	9,356.80	9,424.47	9,356.80	37.70	21.86	90.000	4,821.52	883.81	708.94	654.64	54.30	13.055	
14,000.00	9,356.80	9,424.47	9,356.80	38.40	21.86	90.000	4,821.52	883.81	664.37	607.74	56.62	11.733	
14,100.00	9,356.80	9,424.47	9,356.80	39.11	21.86	90.000	4,821.52	883.81	632.58	574.13	58.45	10.822	
14,200.00	9,356.80	9,424.47	9,356.80	39.81	21.86	90.000	4,821.52	883.81	615.58	556.12	59.46	10.353	
14,256.10	9,356.80	9,424.47	9,356.80	40.21	21.86	90.000	4,821.52	883.81	613.02	553.45	59.57	10.290 CC, ES, SF	
14,300.00	9,356.80	9,424.47	9,356.80	40.52	21.86	90.000	4,821.52	883.81	614.59	555.16	59.43	10.342	
14,400.00	9,356.80	9,424.47	9,356.80	41.23	21.86	90.000	4,821.52	883.81	629.68	571.28	58.41	10.781	
14,500.00	9,356.80	9,424.47	9,356.80	41.94	21.86	90.000	4,821.52	883.81	659.76	603.09	56.67	11.643	
14,600.00	9,356.80	9,424.47	9,356.80	42.65	21.86	90.000	4,821.52	883.81	702.90	648.32	54.57	12.880	
14,700.00	9,356.80	9,424.47	9,356.80	43.37	21.86	90.000	4,821.52	883.81	756.86	704.42	52.44	14.432	
14,800.00	9,356.80	9,424.47	9,356.80	44.08	21.86	90.000	4,821.52	883.81	819.53	769.07	50.46	16.241	
14,900.00	9,356.80	9,424.47	9,356.80	44.80	21.86	90.000	4,821.52	883.81	889.05	840.33	48.71	18.251	
15,000.00	9,356.80	9,424.47	9,356.80	45.52	21.86	90.000	4,821.52	883.81	963.94	916.72	47.22	20.415	
15,100.00	9,356.80	9,424.47	9,356.80	46.24	21.86	90.000	4,821.52	883.81	1,043.05	997.10	45.95	22.698	
15,200.00	9,356.80	9,424.47	9,356.80	46.97	21.86	90.000	4,821.52	883.81	1,125.50	1,080.60	44.89	25.070	
15,300.00	9,356.80	9,424.47	9,356.80	47.69	21.86	90.000	4,821.52	883.81	1,210.59	1,166.58	44.01	27.508	
15,400.00	9,356.80	9,424.47	9,356.80	48.42	21.86	90.000	4,821.52	883.81	1,297.81	1,254.54	43.27	29.995	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report



Company:	Centennial Resources Development, Inc.	Local Co-ordinate Reference:	Well Raider Federal Com 103H
Project:	Lea County, NM (NAD83 - UTM Zone 13)	TVD Reference:	RKB @ 3526.80usft (TBD)
Reference Site:	Raider	MD Reference:	RKB @ 3526.80usft (TBD)
Site Error:	0.00 usft	North Reference:	True
Reference Well:	Raider Federal Com 103H	Survey Calculation Method:	Minimum Curvature
Well Error:	1.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	USA Compass
Reference Design:	Plan 1 08-17-22	Offset TVD Reference:	Reference Datum

Offset Design: Raider - Raider Federal Com 302H - OH - Plan 4 08-10-22													Offset Site Error:	0.00 usft
Survey Program:		0-MWD+IFR1+MS					Rule Assigned:			Offset Well Error:		1.00 usft		
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Separation Factor	Warning		
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Ellipses (usft)			Minimum Separation (usft)	
15,500.00	9,356.80	9,424.47	9,356.80	49.14	21.86	90.000	4,821.52	883.81	1,386.75	1,344.11	42.65	32.517		
15,600.00	9,356.80	9,424.47	9,356.80	49.87	21.86	90.000	4,821.52	883.81	1,477.11	1,434.99	42.13	35.063		
15,700.00	9,356.80	9,424.47	9,356.80	50.60	21.86	90.000	4,821.52	883.81	1,568.64	1,526.95	41.69	37.625		
15,800.00	9,356.80	9,424.47	9,356.80	51.33	21.86	90.000	4,821.52	883.81	1,661.15	1,619.83	41.33	40.197		
15,900.00	9,356.80	9,424.47	9,356.80	52.06	21.86	90.000	4,821.52	883.81	1,754.48	1,713.46	41.02	42.773		
16,000.00	9,356.80	9,424.46	9,356.80	52.79	21.86	90.000	4,821.52	883.81	1,848.51	1,807.75	40.76	45.348		
16,100.00	9,356.80	9,424.46	9,356.80	53.52	21.86	90.000	4,821.52	883.81	1,943.13	1,902.58	40.55	47.920		
16,200.00	9,356.80	9,424.46	9,356.80	54.26	21.86	90.000	4,821.52	883.81	2,038.27	1,997.90	40.37	50.485		
16,300.00	9,356.80	9,424.46	9,356.80	54.99	21.86	90.000	4,821.52	883.81	2,133.85	2,093.62	40.23	53.041		
16,400.00	9,356.80	9,424.46	9,356.80	55.73	21.86	90.000	4,821.52	883.81	2,229.82	2,189.71	40.11	55.588		
16,500.00	9,356.80	9,424.46	9,356.80	56.46	21.86	90.000	4,821.52	883.81	2,326.13	2,286.11	40.02	58.122		
16,600.00	9,356.80	9,424.46	9,356.80	57.20	21.86	90.000	4,821.52	883.81	2,422.74	2,382.79	39.95	60.643		
16,700.00	9,356.80	9,424.46	9,356.80	57.94	21.86	90.000	4,821.52	883.81	2,519.61	2,479.71	39.90	63.151		
16,800.00	9,356.80	9,424.46	9,356.80	58.67	21.86	90.000	4,821.52	883.81	2,616.72	2,576.86	39.86	65.644		
16,900.00	9,356.80	9,424.46	9,356.80	59.41	21.86	90.000	4,821.52	883.81	2,714.04	2,674.20	39.84	68.121		
17,000.00	9,356.80	9,424.46	9,356.80	60.15	21.86	90.000	4,821.52	883.81	2,811.55	2,771.71	39.83	70.583		
17,100.00	9,356.80	9,424.46	9,356.80	60.89	21.86	90.000	4,821.52	883.81	2,909.22	2,869.38	39.84	73.028		
17,200.00	9,356.80	9,424.46	9,356.80	61.63	21.86	90.000	4,821.52	883.81	3,007.05	2,967.20	39.85	75.457		
17,300.00	9,356.80	9,424.46	9,356.80	62.37	21.86	90.000	4,821.52	883.81	3,105.02	3,065.14	39.88	77.869		
17,400.00	9,356.80	9,424.46	9,356.80	63.12	21.86	90.000	4,821.52	883.81	3,203.11	3,163.20	39.91	80.264		
17,500.00	9,356.80	9,424.46	9,356.80	63.86	21.86	90.000	4,821.52	883.81	3,301.32	3,261.37	39.95	82.641		
17,600.00	9,356.80	9,424.46	9,356.80	64.60	21.86	90.000	4,821.52	883.81	3,399.63	3,359.63	39.99	85.002		
17,700.00	9,356.80	9,424.46	9,356.80	65.34	21.86	90.000	4,821.52	883.81	3,498.03	3,457.99	40.05	87.345		
17,800.00	9,356.80	9,424.46	9,356.80	66.09	21.86	90.000	4,821.52	883.81	3,596.53	3,556.42	40.11	89.670		
17,900.00	9,356.80	9,424.46	9,356.80	66.83	21.86	90.000	4,821.52	883.81	3,695.11	3,654.93	40.17	91.978		
18,000.00	9,356.80	9,424.46	9,356.80	67.58	21.86	90.000	4,821.52	883.81	3,793.76	3,753.51	40.24	94.269		
18,100.00	9,356.80	9,424.46	9,356.80	68.32	21.86	90.000	4,821.52	883.81	3,892.48	3,852.16	40.32	96.542		
18,200.00	9,356.80	9,424.46	9,356.80	69.07	21.86	90.000	4,821.52	883.81	3,991.26	3,950.86	40.40	98.798		
18,300.00	9,356.80	9,424.46	9,356.80	69.81	21.86	90.000	4,821.52	883.81	4,090.10	4,049.62	40.48	101.037		
18,400.00	9,356.80	9,424.46	9,356.80	70.56	21.86	90.000	4,821.52	883.81	4,189.00	4,148.43	40.57	103.258		
18,500.00	9,356.80	9,424.46	9,356.80	71.31	21.86	90.000	4,821.52	883.81	4,287.95	4,247.29	40.66	105.461		
18,600.00	9,356.80	9,424.46	9,356.80	72.05	21.86	90.000	4,821.52	883.81	4,386.94	4,346.19	40.75	107.648		
18,700.00	9,356.80	9,424.46	9,356.80	72.80	21.86	90.000	4,821.52	883.81	4,485.98	4,445.13	40.85	109.818		
18,800.00	9,356.80	9,424.46	9,356.80	73.55	21.86	90.000	4,821.52	883.81	4,585.07	4,544.12	40.95	111.970		
18,900.00	9,356.80	9,424.46	9,356.80	74.30	21.86	90.000	4,821.52	883.81	4,684.19	4,643.14	41.05	114.106		
19,000.00	9,356.80	9,424.46	9,356.80	75.05	21.86	90.000	4,821.52	883.81	4,783.34	4,742.19	41.16	116.224		
19,100.00	9,356.80	9,424.46	9,356.80	75.79	21.86	90.000	4,821.52	883.81	4,882.54	4,841.27	41.26	118.326		
19,200.00	9,356.80	9,424.46	9,356.80	76.54	21.86	90.000	4,821.52	883.81	4,981.76	4,940.39	41.37	120.412		
19,300.00	9,356.80	9,424.46	9,356.80	77.29	21.86	90.000	4,821.52	883.81	5,081.02	5,039.53	41.48	122.481		
19,400.00	9,356.80	9,424.46	9,356.80	78.04	21.86	90.000	4,821.52	883.81	5,180.30	5,138.70	41.60	124.533		
19,500.00	9,356.80	9,424.46	9,356.80	78.79	21.86	90.000	4,821.52	883.81	5,279.61	5,237.90	41.71	126.569		
19,533.58	9,356.80	9,424.46	9,356.80	79.04	21.86	90.000	4,821.52	883.81	5,312.97	5,271.21	41.75	127.249		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report



Company:	Centennial Resources Development, Inc.	Local Co-ordinate Reference:	Well Raider Federal Com 103H
Project:	Lea County, NM (NAD83 - UTM Zone 13)	TVD Reference:	RKB @ 3526.80usft (TBD)
Reference Site:	Raider	MD Reference:	RKB @ 3526.80usft (TBD)
Site Error:	0.00 usft	North Reference:	True
Reference Well:	Raider Federal Com 103H	Survey Calculation Method:	Minimum Curvature
Well Error:	1.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	USA Compass
Reference Design:	Plan 1 08-17-22	Offset TVD Reference:	Reference Datum

Offset Design: Raider - Raider Federal Com 502H - OH / 67469 - Surveys (H&P 296)													Offset Site Error: 0.00 usft
Survey Program: 129-MWD+IFR1+MS													Offset Well Error: 1.00 usft
Reference													
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference	Offset	Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
							+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
0.00	0.00	0.00	3.30	1.00	1.00	94.829	-55.74	659.77	662.13				
100.00	100.00	91.46	94.76	1.12	1.17	94.831	-55.79	660.13	662.50	660.21	2.29	289.574	
200.00	200.00	194.31	197.61	1.65	1.59	94.816	-55.69	660.98	663.33	660.09	3.24	204.846	
300.00	299.99	297.30	300.59	2.05	1.98	-38.477	-54.75	661.10	662.68	658.67	4.01	165.113	
400.00	399.96	396.96	400.24	2.41	2.31	-38.718	-53.74	661.10	660.56	655.89	4.66	141.702	
500.00	499.86	496.15	499.43	2.76	2.61	-39.044	-52.95	661.18	657.18	651.93	5.25	125.178	
600.00	599.68	596.75	600.03	3.12	2.91	-39.483	-52.18	661.24	652.45	646.63	5.82	112.149	
700.00	699.37	697.00	700.28	3.49	3.18	-40.032	-51.44	661.20	646.33	639.97	6.36	101.611	
800.00	798.90	797.28	800.55	3.86	3.43	-40.671	-51.04	661.00	638.79	631.91	6.88	92.784	
900.00	898.26	896.25	899.53	4.25	3.65	-41.412	-50.85	660.76	629.98	622.58	7.40	85.180	
1,000.00	997.40	994.93	998.21	4.65	3.86	-42.284	-50.71	660.61	620.07	612.17	7.90	78.481	
1,100.00	1,096.30	1,092.89	1,096.16	5.06	4.03	-43.283	-50.68	660.54	609.09	600.70	8.39	72.614	
1,200.00	1,194.93	1,190.41	1,193.69	5.48	4.14	-44.415	-50.87	660.66	597.23	588.37	8.86	67.442	
1,300.00	1,293.41	1,290.87	1,294.14	5.91	4.25	-45.599	-51.09	660.74	584.93	575.63	9.30	62.916	
1,400.00	1,391.89	1,390.22	1,393.49	6.34	4.52	-46.845	-51.06	660.53	572.62	562.74	9.87	57.993	
1,500.00	1,490.37	1,488.68	1,491.95	6.77	4.73	-48.183	-50.55	660.21	560.49	550.16	10.34	54.221	
1,600.00	1,588.85	1,585.19	1,588.46	7.21	4.93	-49.557	-49.98	660.03	548.85	538.09	10.76	51.018	
1,700.00	1,687.33	1,685.91	1,689.18	7.65	5.13	-51.027	-49.59	659.90	537.57	526.40	11.17	48.145	
1,800.00	1,785.82	1,781.73	1,785.00	8.09	5.31	-52.485	-49.22	659.72	526.59	515.04	11.55	45.588	
1,900.00	1,884.30	1,879.87	1,883.14	8.53	5.47	-54.014	-49.00	659.89	516.30	504.38	11.92	43.320	
2,000.00	1,982.78	1,980.39	1,983.66	8.98	5.56	-55.610	-49.08	659.97	506.26	494.00	12.26	41.304	
2,100.00	2,081.26	2,089.25	2,092.51	9.42	5.65	-57.380	-49.73	658.88	495.46	482.88	12.57	39.407	
2,200.00	2,179.74	2,203.58	2,206.74	9.87	5.79	-59.425	-50.50	654.38	482.25	469.35	12.90	37.381	
2,300.00	2,278.22	2,313.27	2,316.15	10.31	5.99	-61.661	-51.04	646.57	466.59	453.41	13.18	35.396	
2,400.00	2,376.74	2,418.76	2,421.17	10.72	6.19	-63.908	-51.94	636.80	449.57	436.19	13.37	33.614	
2,500.00	2,475.52	2,525.37	2,527.12	11.16	6.42	-66.079	-53.64	625.08	432.01	418.39	13.62	31.721	
2,600.00	2,574.55	2,632.47	2,633.25	11.59	6.68	-68.276	-55.93	610.85	413.47	399.61	13.86	29.834	
2,700.00	2,673.81	2,735.41	2,734.95	12.01	6.95	-70.447	-58.35	595.07	394.23	380.13	14.09	27.973	
2,800.00	2,773.27	2,834.29	2,832.44	12.42	7.23	-72.630	-60.34	578.67	375.20	360.87	14.33	26.181	
2,900.00	2,872.89	2,930.71	2,927.47	12.81	7.51	-74.772	-62.11	562.48	357.22	342.64	14.58	24.505	
3,000.00	2,972.65	3,027.63	3,023.03	13.18	7.81	-76.883	-63.80	546.38	340.46	325.63	14.82	22.969	
3,100.00	3,072.51	3,124.81	3,118.87	13.54	8.12	-78.949	-65.31	530.36	324.82	309.75	15.07	21.554	
3,200.00	3,172.45	3,222.19	3,214.94	13.86	8.45	-80.919	-66.72	514.52	310.23	294.90	15.32	20.244	
3,300.00	3,272.44	3,319.75	3,311.26	14.13	8.78	-82.717	-68.18	499.04	296.59	281.00	15.59	19.022	
3,400.00	3,372.44	3,418.64	3,408.95	14.19	9.12	48.754	-69.82	483.84	283.73	267.95	15.78	17.977	
3,500.00	3,472.44	3,519.87	3,508.84	14.24	9.48	46.759	-71.70	467.54	270.50	254.48	16.02	16.890	
3,600.00	3,572.44	3,619.02	3,606.57	14.28	9.85	44.532	-73.73	450.93	257.02	240.77	16.25	15.812	
3,700.00	3,672.44	3,716.77	3,702.87	14.32	10.22	41.946	-75.15	434.20	244.14	227.65	16.49	14.802	
3,800.00	3,772.44	3,816.15	3,800.81	14.37	10.60	39.097	-76.66	417.46	231.96	215.21	16.74	13.853	
3,900.00	3,872.44	3,917.44	3,900.55	14.41	10.99	35.902	-79.02	399.91	219.46	202.44	17.02	12.894	
4,000.00	3,972.44	4,017.33	3,998.72	14.46	11.38	32.299	-82.15	381.75	206.55	189.22	17.33	11.918	
4,100.00	4,072.44	4,114.61	4,094.31	14.50	11.77	28.331	-85.29	363.95	194.40	176.73	17.67	11.000	
4,200.00	4,172.44	4,210.88	4,188.86	14.55	12.16	23.667	-87.21	345.96	184.28	166.22	18.06	10.205	
4,300.00	4,272.44	4,308.14	4,284.42	14.59	12.56	18.394	-88.21	327.85	176.51	157.99	18.52	9.530	
4,400.00	4,372.44	4,406.74	4,381.41	14.64	12.97	12.877	-89.31	310.23	170.53	151.45	19.09	8.935	
4,500.00	4,472.44	4,505.58	4,478.74	14.69	13.38	7.190	-90.75	293.04	166.00	146.25	19.75	8.404	
4,600.00	4,572.44	4,604.57	4,576.39	14.73	13.78	1.633	-92.53	276.92	162.91	142.41	20.50	7.946	
4,700.00	4,672.44	4,704.37	4,675.01	14.78	14.19	-3.751	-94.77	261.75	160.92	139.59	21.33	7.545	
4,795.51	4,767.95	4,798.50	4,767.95	14.82	14.57	-9.086	-97.24	247.00	160.09	137.88	22.22	7.206 CC	
4,800.00	4,772.44	4,802.91	4,772.29	14.83	14.59	-9.347	-97.35	246.28	160.09	137.83	22.26	7.192	
4,900.00	4,872.44	4,902.80	4,870.88	14.87	15.00	-15.089	-100.18	230.45	160.69	137.39	23.30	6.896 ES	
5,000.00	4,972.44	5,001.72	4,968.61	14.92	15.40	-20.473	-103.28	215.51	162.34	138.00	24.34	6.670	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report



Company:	Centennial Resources Development, Inc.	Local Co-ordinate Reference:	Well Raider Federal Com 103H
Project:	Lea County, NM (NAD83 - UTM Zone 13)	TVD Reference:	RKB @ 3526.80usft (TBD)
Reference Site:	Raider	MD Reference:	RKB @ 3526.80usft (TBD)
Site Error:	0.00 usft	North Reference:	True
Reference Well:	Raider Federal Com 103H	Survey Calculation Method:	Minimum Curvature
Well Error:	1.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	USA Compass
Reference Design:	Plan 1 08-17-22	Offset TVD Reference:	Reference Datum

Offset Design: Raider - Raider Federal Com 502H - OH / 67469 - Surveys (H&P 296)													Offset Site Error: 0.00 usft
Survey Program: 129-MWD+IFR1+MS													Offset Well Error: 1.00 usft
Reference													
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
				Reference	Offset		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
5,100.00	5,072.44	5,099.13	5,064.78	14.97	15.80	-25.790	-106.22	200.23	165.77	140.38	25.40	6.527	
5,200.00	5,172.44	5,194.16	5,158.48	15.02	16.21	-30.765	-107.84	184.48	172.21	145.79	26.42	6.518 SF	
5,300.00	5,272.44	5,291.73	5,254.63	15.07	16.62	-35.334	-108.15	167.94	181.28	153.87	27.41	6.613	
5,400.00	5,372.44	5,391.93	5,353.50	15.12	17.05	-39.360	-108.31	151.69	191.08	162.73	28.35	6.739	
5,500.00	5,472.44	5,490.72	5,451.05	15.16	17.49	-42.904	-108.78	136.09	201.19	171.97	29.22	6.885	
5,600.00	5,572.44	5,584.61	5,543.54	15.21	17.91	-46.088	-108.70	119.98	213.37	183.43	29.95	7.125	
5,700.00	5,672.44	5,681.34	5,638.57	15.26	18.34	-49.199	-108.25	101.90	227.61	196.92	30.70	7.415	
5,800.00	5,772.44	5,778.87	5,734.26	15.31	18.77	-52.062	-107.81	83.05	242.95	211.53	31.42	7.732	
5,900.00	5,872.44	5,877.31	5,830.80	15.36	19.21	-54.674	-107.58	63.82	258.87	226.76	32.12	8.061	
6,000.00	5,972.44	5,975.42	5,927.02	15.42	19.65	-57.041	-107.73	44.66	275.06	242.29	32.77	8.394	
6,100.00	6,072.44	6,072.69	6,022.34	15.47	20.09	-59.130	-107.66	25.26	292.12	258.74	33.38	8.752	
6,200.00	6,172.44	6,174.30	6,121.92	15.52	20.55	-61.282	-108.95	5.12	308.79	274.76	34.03	9.073	
6,300.00	6,272.44	6,275.15	6,220.91	15.57	21.00	-63.216	-110.75	-14.13	324.94	290.30	34.64	9.380	
6,400.00	6,372.44	6,375.64	6,319.70	15.62	21.44	-64.917	-112.71	-32.41	340.52	305.30	35.21	9.670	
6,500.00	6,472.44	6,474.55	6,416.96	15.67	21.88	-66.499	-115.08	-50.24	356.04	320.29	35.75	9.958	
6,600.00	6,572.44	6,574.03	6,514.79	15.72	22.32	-67.973	-117.63	-68.06	371.63	335.35	36.29	10.242	
6,700.00	6,672.44	6,672.66	6,611.84	15.78	22.76	-69.324	-120.31	-85.46	387.14	350.34	36.80	10.520	
6,800.00	6,772.44	6,769.88	6,707.43	15.83	23.19	-70.617	-123.32	-102.92	403.02	365.72	37.29	10.807	
6,900.00	6,872.44	6,865.33	6,801.18	15.88	23.61	-71.857	-126.59	-120.59	419.52	381.75	37.77	11.107	
7,000.00	6,972.44	6,961.05	6,895.03	15.94	24.05	-73.056	-130.00	-139.06	436.92	398.66	38.25	11.422	
7,100.00	7,072.44	7,060.38	6,992.44	15.99	24.49	-74.137	-132.98	-158.27	454.68	415.91	38.77	11.727	
7,200.00	7,172.44	7,160.32	7,090.68	16.04	24.94	-74.875	-134.00	-176.60	472.11	432.82	39.29	12.015	
7,300.00	7,272.44	7,258.57	7,187.33	16.10	25.39	-75.464	-134.35	-194.28	489.44	449.64	39.80	12.298	
7,400.00	7,372.44	7,357.85	7,285.02	16.15	25.83	-75.942	-134.06	-211.95	506.78	466.46	40.32	12.570	
7,500.00	7,472.44	7,459.67	7,385.29	16.20	26.29	-76.359	-133.52	-229.60	523.74	482.89	40.85	12.821	
7,600.00	7,572.44	7,552.18	7,476.38	16.26	26.70	-76.688	-132.75	-245.74	540.92	499.61	41.31	13.095	
7,700.00	7,672.44	7,655.27	7,577.84	16.31	27.16	-77.055	-132.05	-264.00	558.33	516.48	41.86	13.339	
7,800.00	7,772.44	7,763.58	7,684.68	16.37	27.64	-77.481	-132.29	-281.80	574.32	531.89	42.43	13.537	
7,900.00	7,872.44	7,864.79	7,784.63	16.42	28.08	-77.894	-133.09	-297.63	589.44	546.51	42.93	13.729	
8,000.00	7,972.44	7,969.58	7,888.23	16.48	28.54	-78.310	-134.15	-313.37	603.95	560.49	43.46	13.898	
8,100.00	8,072.44	8,079.21	7,996.81	16.54	29.00	-78.760	-135.94	-328.43	617.11	573.12	43.98	14.030	
8,200.00	8,172.44	8,183.74	8,100.53	16.59	29.44	-79.182	-138.09	-341.23	628.73	584.26	44.47	14.139	
8,300.00	8,272.44	8,290.15	8,206.19	16.65	29.87	-79.587	-140.30	-353.59	639.79	594.84	44.95	14.234	
8,400.00	8,372.44	8,395.35	8,310.80	16.70	30.29	-79.942	-142.38	-364.49	649.64	604.23	45.41	14.306	
8,500.00	8,472.44	8,485.84	8,400.73	16.76	30.65	-80.311	-144.96	-374.17	659.71	613.88	45.83	14.395	
8,600.00	8,572.44	8,583.53	8,497.56	16.82	31.04	-80.932	-150.26	-386.04	670.84	624.58	46.26	14.503	
8,700.00	8,672.44	8,673.71	8,586.78	16.87	31.40	-81.593	-156.31	-397.66	682.61	635.96	46.65	14.631	
8,800.00	8,772.44	8,762.45	8,674.42	16.93	31.76	-82.212	-161.96	-410.36	695.93	648.87	47.06	14.788	
8,900.00	8,872.44	8,870.64	8,781.21	16.99	32.21	-82.953	-168.97	-426.26	709.74	662.18	47.56	14.924	
9,000.00	8,971.85	8,945.31	8,854.88	16.87	32.55	-82.440	-173.57	-437.45	722.97	675.10	47.87	15.104	
9,100.00	9,067.22	9,033.33	8,941.32	16.66	32.94	-83.377	-179.29	-453.08	737.15	688.98	48.17	15.303	
9,200.00	9,154.37	9,135.16	9,041.62	16.46	33.39	-86.040	-184.99	-469.69	750.65	702.21	48.43	15.498	
9,300.00	9,229.51	9,229.18	9,134.70	16.28	33.79	-89.154	-188.54	-482.39	765.42	716.97	48.45	15.799	
9,400.00	9,289.34	9,293.08	9,198.15	16.15	34.06	-90.573	-190.43	-489.70	785.50	737.45	48.05	16.348	
9,500.00	9,331.26	9,331.86	9,236.67	16.07	34.21	-89.567	-191.62	-494.05	814.54	767.31	47.24	17.243	
9,600.00	9,353.42	9,350.63	9,255.32	16.07	34.29	-85.912	-192.22	-496.15	853.10	807.00	46.10	18.505	
9,700.00	9,356.81	9,350.75	9,255.43	16.15	34.29	-82.485	-192.23	-496.16	899.90	855.14	44.76	20.105	
9,800.00	9,356.80	9,347.56	9,252.26	16.26	34.28	-82.249	-192.13	-495.80	954.59	911.16	43.43	21.978	
9,900.00	9,356.80	9,344.39	9,249.11	16.40	34.26	-82.015	-192.02	-495.45	1,016.20	974.02	42.19	24.088	
10,000.00	9,356.80	9,341.25	9,246.00	16.57	34.25	-81.783	-191.92	-495.10	1,083.54	1,042.49	41.05	26.397	
10,100.00	9,356.80	9,338.14	9,242.91	16.77	34.24	-81.554	-191.82	-494.75	1,155.61	1,115.59	40.03	28.870	
10,200.00	9,356.80	9,335.06	9,239.84	17.00	34.23	-81.326	-191.72	-494.40	1,231.58	1,192.46	39.13	31.477	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report



Company:	Centennial Resources Development, Inc.	Local Co-ordinate Reference:	Well Raider Federal Com 103H
Project:	Lea County, NM (NAD83 - UTM Zone 13)	TVD Reference:	RKB @ 3526.80usft (TBD)
Reference Site:	Raider	MD Reference:	RKB @ 3526.80usft (TBD)
Site Error:	0.00 usft	North Reference:	True
Reference Well:	Raider Federal Com 103H	Survey Calculation Method:	Minimum Curvature
Well Error:	1.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	USA Compass
Reference Design:	Plan 1 08-17-22	Offset TVD Reference:	Reference Datum

Offset Design: Raider - Raider Federal Com 502H - OH / 67469 - Surveys (H&P 296)												Offset Site Error:	0.00 usft
Survey Program: 129-MWD+IFR1+MS												Offset Well Error:	1.00 usft
Reference												Rule Assigned:	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference	Offset	Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
				(usft)	(usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
10,300.00	9,356.80	9,332.00	9,236.81	17.25	34.21	-81.100	-191.63	-494.06	1,310.78	1,272.44	38.34	34.192	
10,400.00	9,356.80	9,328.97	9,233.80	17.54	34.20	-80.877	-191.53	-493.72	1,392.64	1,355.00	37.64	36.994	
10,500.00	9,356.80	9,325.97	9,230.82	17.85	34.19	-80.656	-191.44	-493.39	1,476.74	1,439.69	37.04	39.865	
10,600.00	9,356.80	9,322.99	9,227.86	18.19	34.18	-80.436	-191.34	-493.05	1,562.70	1,526.18	36.52	42.789	
10,700.00	9,356.80	9,320.03	9,224.93	18.56	34.17	-80.219	-191.25	-492.72	1,650.24	1,614.17	36.07	45.753	
10,800.00	9,356.80	9,317.11	9,222.02	18.95	34.15	-80.003	-191.16	-492.40	1,739.12	1,703.45	35.67	48.749	
10,900.00	9,356.80	9,314.21	9,219.14	19.37	34.14	-79.789	-191.07	-492.07	1,829.14	1,793.81	35.33	51.767	
11,000.00	9,356.80	9,311.33	9,216.28	19.81	34.13	-79.578	-190.98	-491.75	1,920.15	1,885.11	35.04	54.800	
11,100.00	9,356.80	12,875.64	11,095.59	20.27	41.02	-153.125	1,724.96	-609.49	1,950.25	1,899.24	51.01	38.232	
11,200.00	9,356.80	13,002.33	11,090.94	20.75	41.36	-153.108	1,851.55	-607.82	1,946.33	1,894.44	51.89	37.509	
11,300.00	9,356.80	13,096.92	11,086.75	21.25	41.62	-153.080	1,946.04	-606.78	1,941.87	1,889.20	52.68	36.865	
11,400.00	9,356.80	13,178.51	11,083.55	21.77	41.86	-153.045	2,027.57	-606.49	1,938.21	1,884.78	53.43	36.277	
11,500.00	9,356.80	13,268.66	11,080.72	22.30	42.13	-153.015	2,117.67	-606.24	1,935.26	1,881.02	54.24	35.678	
11,600.00	9,356.80	13,366.46	11,077.84	22.85	42.44	-152.980	2,215.43	-606.12	1,932.57	1,877.45	55.12	35.063	
11,700.00	9,356.80	13,463.73	11,074.96	23.41	42.76	-152.929	2,312.65	-606.59	1,930.13	1,874.12	56.01	34.458	
11,800.00	9,356.80	13,561.93	11,070.60	23.98	43.16	-152.852	2,430.77	-607.32	1,927.10	1,870.06	57.05	33.781	
11,900.00	9,356.80	13,671.20	11,066.96	24.57	43.47	-152.791	2,519.96	-607.76	1,923.72	1,865.77	57.95	33.197	
12,000.00	9,356.80	13,729.00	11,065.45	25.16	43.68	-152.768	2,577.75	-607.88	1,921.68	1,863.00	58.67	32.752	
12,072.15	9,356.80	13,788.39	11,064.93	25.60	43.90	-152.763	2,637.13	-607.84	1,921.15	1,861.83	59.32	32.385	
12,100.00	9,356.80	13,806.61	11,065.01	25.77	43.96	-152.765	2,655.35	-607.79	1,921.22	1,861.68	59.54	32.267	
12,200.00	9,356.80	13,891.09	11,066.12	26.38	44.28	-152.786	2,739.82	-607.60	1,922.25	1,861.78	60.46	31.791	
12,300.00	9,356.80	13,995.91	11,067.31	27.00	44.68	-152.785	2,844.63	-608.27	1,923.54	1,861.99	61.55	31.253	
12,400.00	9,356.80	14,159.04	11,063.97	27.63	45.33	-152.647	3,007.67	-611.82	1,922.55	1,859.48	63.06	30.486	
12,500.00	9,356.80	14,307.45	11,055.76	28.27	45.94	-152.391	3,155.75	-617.27	1,919.44	1,855.00	64.44	29.788	
12,600.00	9,356.80	14,458.07	11,045.67	28.91	46.62	-152.284	3,305.98	-616.06	1,912.97	1,847.10	65.86	29.044	
12,700.00	9,356.80	14,514.15	11,042.98	29.56	46.86	-152.331	3,361.91	-612.90	1,906.37	1,839.62	66.75	28.558	
12,800.00	9,356.80	14,578.00	11,042.98	30.22	47.14	-152.418	3,425.67	-609.63	1,903.35	1,835.63	67.72	28.107	
12,900.00	9,356.80	14,625.08	11,043.96	30.88	47.35	-152.484	3,472.70	-607.69	1,902.37	1,833.88	68.49	27.777	
13,000.00	9,356.80	14,728.10	11,044.54	31.54	47.81	-152.570	3,575.68	-604.82	1,901.55	1,831.84	69.71	27.278	
13,100.00	9,356.80	14,840.79	11,044.78	32.21	48.33	-152.624	3,688.34	-602.96	1,901.01	1,829.98	71.03	26.763	
13,200.00	9,356.80	14,984.12	11,039.96	32.89	49.00	-152.542	3,831.58	-603.57	1,898.02	1,825.44	72.58	26.151	
13,300.00	9,356.80	15,064.27	11,037.49	33.56	49.38	-152.506	3,911.69	-603.62	1,895.25	1,821.61	73.63	25.740	
13,400.00	9,356.80	15,228.76	11,029.07	34.25	50.18	-152.404	4,075.95	-603.10	1,890.20	1,814.85	75.36	25.084	
13,500.00	9,356.80	15,333.00	11,022.53	34.93	50.69	-152.355	4,179.96	-601.50	1,883.90	1,807.27	76.63	24.584	
13,600.00	9,356.80	15,394.96	11,020.13	35.62	51.00	-152.368	4,241.85	-599.79	1,879.03	1,801.43	77.60	24.215	
13,700.00	9,356.80	15,477.78	11,018.25	36.31	51.42	-152.412	4,324.61	-597.20	1,875.53	1,796.79	78.74	23.820	
13,800.00	9,356.80	15,574.17	11,016.64	37.01	51.91	-152.477	4,420.94	-593.99	1,872.50	1,792.50	80.00	23.405	
13,900.00	9,356.80	15,679.95	11,014.27	37.70	52.45	-152.511	4,526.66	-591.52	1,869.42	1,788.06	81.35	22.979	
14,000.00	9,356.80	15,799.40	11,009.76	38.40	53.07	-152.477	4,646.02	-590.49	1,865.67	1,782.86	82.81	22.530	
14,100.00	9,356.80	15,952.41	10,999.07	39.11	53.89	-152.349	4,798.64	-589.63	1,858.83	1,774.32	84.51	21.995	
14,200.00	9,356.80	16,026.01	10,994.15	39.81	54.28	-152.311	4,872.06	-588.45	1,852.20	1,766.59	85.61	21.635	
14,300.00	9,356.80	16,089.00	10,990.76	40.52	54.63	-152.263	4,934.96	-588.45	1,847.42	1,760.81	86.61	21.331	
14,400.00	9,356.80	16,164.98	10,988.00	41.23	55.04	-152.219	5,010.89	-588.61	1,844.29	1,756.58	87.71	21.027	
14,500.00	9,356.80	16,250.48	10,986.18	41.94	55.52	-152.199	5,096.37	-588.40	1,842.25	1,753.35	88.90	20.722	
14,600.00	9,356.80	16,337.14	10,984.18	42.65	56.00	-152.136	5,182.99	-589.68	1,840.90	1,750.80	90.10	20.432	
14,700.00	9,356.80	16,433.48	10,982.50	43.37	56.54	-152.067	5,279.31	-591.31	1,840.13	1,748.74	91.39	20.135	
14,800.00	9,356.80	16,549.47	10,979.86	44.08	57.19	-151.967	5,395.24	-593.56	1,839.03	1,746.15	92.88	19.799	
14,900.00	9,356.80	16,629.73	10,978.07	44.80	57.65	-151.907	5,475.47	-594.83	1,837.82	1,743.79	94.03	19.545	
15,000.00	9,356.80	16,741.59	10,976.93	45.52	58.29	-151.870	5,587.32	-595.58	1,837.26	1,741.75	95.51	19.236	
15,100.00	9,356.80	16,853.15	10,974.23	46.24	58.93	-151.794	5,698.84	-596.96	1,835.69	1,738.71	96.99	18.927	
15,200.00	9,356.80	16,939.00	10,971.16	46.97	59.43	-151.690	5,784.61	-599.10	1,833.78	1,735.60	98.19	18.676	
15,300.00	9,356.80	17,034.00	10,968.66	47.69	59.99	-151.583	5,879.53	-601.67	1,832.74	1,733.25	99.49	18.421	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report



Company:	Centennial Resources Development, Inc.	Local Co-ordinate Reference:	Well Raider Federal Com 103H
Project:	Lea County, NM (NAD83 - UTM Zone 13)	TVD Reference:	RKB @ 3526.80usft (TBD)
Reference Site:	Raider	MD Reference:	RKB @ 3526.80usft (TBD)
Site Error:	0.00 usft	North Reference:	True
Reference Well:	Raider Federal Com 103H	Survey Calculation Method:	Minimum Curvature
Well Error:	1.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	USA Compass
Reference Design:	Plan 1 08-17-22	Offset TVD Reference:	Reference Datum

Offset Design: Raider - Raider Federal Com 502H - OH / 67469 - Surveys (H&P 296)													Offset Site Error: 0.00 usft
Survey Program: 129-MWD+IFR1+MS													Offset Well Error: 1.00 usft
Reference													
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
				Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
15,400.00	9,356.80	17,156.38	10,965.35	48.42	60.71	-151.461	6,001.84	-604.33	1,831.40	1,730.32	101.08	18.118	
15,500.00	9,356.80	17,249.17	10,963.17	49.14	61.26	-151.408	6,094.59	-605.12	1,829.72	1,727.33	102.39	17.870	
15,600.00	9,356.80	17,352.96	10,960.73	49.87	61.88	-151.360	6,198.35	-605.56	1,827.83	1,724.02	103.82	17.606	
15,700.00	9,356.80	17,438.90	10,958.85	50.60	62.40	-151.311	6,284.27	-606.32	1,826.33	1,721.27	105.06	17.384	
15,800.00	9,356.80	17,530.38	10,957.31	51.33	62.95	-151.239	6,375.72	-608.13	1,825.77	1,719.42	106.35	17.167	
15,900.00	9,356.80	17,766.75	10,944.46	52.06	64.40	-150.944	6,611.64	-611.83	1,822.16	1,713.22	108.93	16.728	
16,000.00	9,356.80	17,828.93	10,939.13	52.79	64.78	-150.870	6,673.60	-611.54	1,814.69	1,704.65	110.04	16.491	
16,100.00	9,356.80	17,883.00	10,936.53	53.52	65.11	-150.827	6,727.60	-611.65	1,810.30	1,699.25	111.05	16.302	
16,200.00	9,356.80	17,957.71	10,934.44	54.26	65.57	-150.784	6,802.27	-612.09	1,807.98	1,695.78	112.21	16.113	
16,300.00	9,356.80	18,085.66	10,929.90	54.99	66.37	-150.691	6,930.14	-612.92	1,805.20	1,691.31	113.89	15.851	
16,400.00	9,356.80	18,178.66	10,925.45	55.73	66.95	-150.579	7,023.02	-614.51	1,801.85	1,686.63	115.21	15.639	
16,500.00	9,356.80	18,297.40	10,919.47	56.46	67.70	-150.443	7,141.59	-616.06	1,798.08	1,681.30	116.78	15.397	
16,600.00	9,356.80	18,405.40	10,913.61	57.20	68.38	-150.342	7,249.44	-616.38	1,793.48	1,675.22	118.26	15.166	
16,700.00	9,356.80	18,495.77	10,908.86	57.94	68.95	-150.267	7,339.68	-616.40	1,788.92	1,669.34	119.59	14.959	
16,800.00	9,356.80	18,574.35	10,905.49	58.67	69.45	-150.211	7,418.19	-616.51	1,785.28	1,664.47	120.80	14.779	
16,900.00	9,356.80	18,648.87	10,903.31	59.41	69.93	-150.162	7,492.68	-617.04	1,783.07	1,661.10	121.96	14.620	
17,000.00	9,356.80	18,744.65	10,901.09	60.15	70.54	-150.096	7,588.42	-618.15	1,781.61	1,658.27	123.35	14.444	
17,100.00	9,356.80	18,829.00	10,899.19	60.89	71.08	-150.024	7,672.74	-619.69	1,780.59	1,655.99	124.60	14.291	
17,200.00	9,356.80	18,924.00	10,897.03	61.63	71.70	-149.903	7,767.66	-622.79	1,780.24	1,654.29	125.95	14.134	
17,300.00	9,356.80	19,068.50	10,891.24	62.37	72.64	-149.642	7,911.91	-628.85	1,778.89	1,651.07	127.82	13.917	
17,400.00	9,356.80	19,191.39	10,885.19	63.12	73.44	-149.485	8,034.63	-630.97	1,775.47	1,646.02	129.45	13.715	
17,500.00	9,356.80	19,298.12	10,880.19	63.86	74.14	-149.410	8,141.24	-630.77	1,771.32	1,640.37	130.95	13.527	
17,600.00	9,356.80	19,397.00	10,875.90	64.60	74.78	-149.367	8,240.02	-629.77	1,767.06	1,634.67	132.39	13.347	
17,700.00	9,356.80	19,483.67	10,872.12	65.34	75.35	-149.310	8,326.61	-629.61	1,763.20	1,629.49	133.71	13.187	
17,800.00	9,356.80	19,583.26	10,867.54	66.09	76.01	-149.206	8,426.08	-630.63	1,759.75	1,624.61	135.14	13.022	
17,900.00	9,356.80	19,704.56	10,861.38	66.83	76.81	-149.080	8,547.22	-631.50	1,755.75	1,618.99	136.76	12.838	
18,000.00	9,356.80	19,807.96	10,855.13	67.58	77.49	-148.978	8,650.43	-631.41	1,750.49	1,612.26	138.23	12.664	
18,100.00	9,356.80	19,869.00	10,852.33	68.32	77.90	-148.935	8,711.41	-631.25	1,746.53	1,607.22	139.31	12.537	
18,200.00	9,356.80	19,964.00	10,850.08	69.07	78.53	-148.923	8,806.38	-630.35	1,744.00	1,603.27	140.74	12.392	
18,300.00	9,356.80	20,078.47	10,847.00	69.81	79.29	-148.915	8,920.79	-628.83	1,740.96	1,598.60	142.37	12.229	
18,400.00	9,356.80	20,152.00	10,845.53	70.56	79.78	-148.893	8,994.30	-628.74	1,739.00	1,595.44	143.56	12.114	
18,500.00	9,356.80	20,230.94	10,845.27	71.31	80.31	-148.895	9,073.24	-628.54	1,738.44	1,593.64	144.80	12.006	
18,600.00	9,356.80	20,341.56	10,845.43	72.05	81.05	-148.950	9,183.84	-626.70	1,737.70	1,591.27	146.43	11.867	
18,700.00	9,356.80	20,439.44	10,845.49	72.80	81.70	-149.005	9,281.71	-624.85	1,736.75	1,588.84	147.91	11.742	
18,800.00	9,356.80	20,620.20	10,840.53	73.55	82.92	-149.046	9,462.33	-620.46	1,732.87	1,582.65	150.23	11.535	
18,900.00	9,356.80	20,745.04	10,833.24	74.30	83.76	-149.017	9,586.91	-617.14	1,726.47	1,574.58	151.89	11.366	
19,000.00	9,356.80	20,857.00	10,824.75	75.05	84.52	-148.933	9,698.52	-615.03	1,718.97	1,565.55	153.43	11.204	
19,100.00	9,356.80	20,975.96	10,813.88	75.79	85.33	-148.766	9,816.98	-614.29	1,710.84	1,555.87	154.97	11.040	
19,200.00	9,356.80	21,062.09	10,805.20	76.54	85.92	-148.622	9,902.67	-614.05	1,702.09	1,545.77	156.32	10.888	
19,300.00	9,356.80	21,173.08	10,796.87	77.29	86.67	-148.573	10,013.29	-610.71	1,694.16	1,536.30	157.86	10.732	
19,400.00	9,356.80	21,259.00	10,789.93	78.04	87.26	-148.554	10,098.85	-607.11	1,685.16	1,525.91	159.26	10.581	
19,500.00	9,356.80	21,259.00	10,789.93	78.79	87.26	-148.554	10,098.85	-607.11	1,680.18	1,520.30	159.87	10.509	
19,533.58	9,356.80	21,259.00	10,789.93	79.04	87.26	-148.554	10,098.85	-607.11	1,679.84	1,519.87	159.97	10.501	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report



Company:	Centennial Resources Development, Inc.	Local Co-ordinate Reference:	Well Raider Federal Com 103H
Project:	Lea County, NM (NAD83 - UTM Zone 13)	TVD Reference:	RKB @ 3526.80usft (TBD)
Reference Site:	Raider	MD Reference:	RKB @ 3526.80usft (TBD)
Site Error:	0.00 usft	North Reference:	True
Reference Well:	Raider Federal Com 103H	Survey Calculation Method:	Minimum Curvature
Well Error:	1.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	USA Compass
Reference Design:	Plan 1 08-17-22	Offset TVD Reference:	Reference Datum

Offset Design: Raider - Raider Federal Com 503H - OH / 67470 - Surveys (H&P 296)													Offset Site Error: 0.00 usft
Survey Program: 156-MWD+IFR1+MS													Offset Well Error: 1.00 usft
Rule Assigned:													
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
0.00	0.00	0.00	3.20	1.00	1.00	94.622	-55.77	689.74	691.99				
100.00	100.00	95.84	99.04	1.12	1.25	94.605	-55.56	689.82	692.05	689.68	2.37	291.553	
200.00	200.00	197.61	200.81	1.65	1.69	94.550	-54.91	690.01	692.19	688.86	3.33	207.968	
300.00	299.99	297.93	301.13	2.05	1.93	-38.711	-54.28	689.82	691.27	687.33	3.94	175.545	
400.00	399.96	397.19	400.38	2.41	2.22	-38.890	-53.91	689.79	689.17	684.62	4.55	151.515	
500.00	499.86	498.08	501.28	2.76	2.46	-39.160	-53.70	689.67	685.65	680.55	5.10	134.486	
600.00	599.68	597.41	600.60	3.12	2.69	-39.504	-53.80	689.48	680.74	675.07	5.67	119.977	
700.00	699.37	696.29	699.48	3.49	2.92	-39.967	-53.76	689.43	674.64	668.42	6.22	108.388	
800.00	798.90	795.60	798.79	3.86	3.11	-40.530	-53.88	689.41	667.30	660.55	6.75	98.873	
900.00	898.26	894.24	897.43	4.25	3.28	-41.208	-54.01	689.47	658.78	651.53	7.25	90.817	
1,000.00	997.40	993.56	996.75	4.65	3.45	-42.015	-54.19	689.61	649.13	641.38	7.75	83.732	
1,100.00	1,096.30	1,091.29	1,094.49	5.06	3.61	-42.949	-54.35	689.73	638.31	630.07	8.24	77.445	
1,200.00	1,194.93	1,190.75	1,193.95	5.48	3.79	-44.069	-54.27	690.03	626.56	617.83	8.73	71.783	
1,300.00	1,293.41	1,289.21	1,292.40	5.91	3.93	-45.189	-54.24	690.14	614.22	605.04	9.18	66.888	
1,400.00	1,391.89	1,386.63	1,389.82	6.34	4.23	-46.350	-54.12	690.39	602.27	592.49	9.78	61.601	
1,500.00	1,490.37	1,486.05	1,489.24	6.77	4.44	-47.576	-54.04	690.69	590.62	580.36	10.26	57.541	
1,600.00	1,588.85	1,584.13	1,587.33	7.21	4.61	-48.848	-53.82	690.86	579.15	568.45	10.71	54.101	
1,700.00	1,687.33	1,682.76	1,685.95	7.65	4.78	-50.178	-53.59	691.10	568.05	556.91	11.14	51.006	
1,800.00	1,785.82	1,780.39	1,783.58	8.09	4.95	-51.539	-53.41	691.39	557.30	545.74	11.56	48.221	
1,900.00	1,884.30	1,879.05	1,882.24	8.53	5.13	-52.972	-53.17	691.74	546.96	534.99	11.97	45.710	
2,000.00	1,982.78	1,977.72	1,980.91	8.98	5.31	-54.456	-52.95	692.07	536.94	524.58	12.36	43.438	
2,100.00	2,081.26	2,075.20	2,078.38	9.42	5.49	-55.978	-52.69	692.46	527.38	514.64	12.75	41.377	
2,200.00	2,179.74	2,172.80	2,175.98	9.87	5.67	-57.575	-52.22	692.98	518.40	505.29	13.12	39.526	
2,300.00	2,278.22	2,270.38	2,273.56	10.31	5.87	-59.239	-51.57	693.65	510.04	496.57	13.47	37.853	
2,400.00	2,376.74	2,369.23	2,372.40	10.72	6.06	-60.918	-50.91	694.36	502.29	488.53	13.77	36.486	
2,500.00	2,475.52	2,467.87	2,471.04	11.16	6.26	-62.460	-50.29	695.08	495.72	481.61	14.11	35.136	
2,600.00	2,574.55	2,566.99	2,570.15	11.59	6.47	-63.873	-49.71	695.81	490.32	475.87	14.45	33.940	
2,700.00	2,673.81	2,666.08	2,669.24	12.01	6.67	-65.140	-49.14	696.56	485.98	471.20	14.78	32.876	
2,800.00	2,773.27	2,765.42	2,768.58	12.42	6.88	-66.265	-48.45	697.32	482.65	467.53	15.12	31.929	
2,900.00	2,872.89	2,865.48	2,868.63	12.81	7.09	-67.237	-47.71	698.03	480.17	464.72	15.45	31.086	
3,000.00	2,972.65	2,965.68	2,968.83	13.18	7.30	-68.047	-46.91	698.57	478.35	462.58	15.77	30.329	
3,100.00	3,072.51	3,065.54	3,068.68	13.54	7.50	-68.666	-46.18	699.11	477.24	461.14	16.10	29.644	
3,200.00	3,172.45	3,165.27	3,168.41	13.86	7.71	-69.099	-45.43	699.65	476.82	460.39	16.43	29.021	
3,209.20	3,181.65	3,174.43	3,177.56	13.88	7.73	-69.130	-45.35	699.70	476.81	460.35	16.46	28.969 CC, ES	
3,300.00	3,272.44	3,264.37	3,267.51	14.13	7.93	-69.355	-44.54	700.23	477.14	460.38	16.76	28.465	
3,400.00	3,372.44	3,363.45	3,366.58	14.19	8.15	63.707	-43.51	700.98	478.21	461.21	17.00	28.133	
3,500.00	3,472.44	3,462.42	3,465.54	14.24	8.37	63.642	-42.44	701.91	479.53	462.26	17.28	27.758	
3,600.00	3,572.44	3,562.36	3,565.46	14.28	8.60	63.586	-41.37	703.02	481.00	463.44	17.56	27.390	
3,700.00	3,672.44	3,662.11	3,665.20	14.32	8.84	63.541	-40.38	704.16	482.47	464.62	17.85	27.026	
3,800.00	3,772.44	3,761.02	3,764.10	14.37	9.07	63.518	-39.50	705.49	484.07	465.92	18.15	26.670	
3,900.00	3,872.44	3,853.00	3,856.05	14.41	9.27	63.588	-39.05	707.72	486.47	468.02	18.45	26.367	
4,000.00	3,972.44	3,948.00	3,950.94	14.46	9.51	63.819	-39.00	712.29	490.78	471.98	18.80	26.100	
4,100.00	4,072.44	4,028.93	4,031.61	14.50	9.74	64.166	-39.25	718.58	497.53	478.36	19.17	25.949	
4,200.00	4,172.44	4,122.48	4,124.58	14.55	10.02	64.868	-41.18	728.75	506.47	486.88	19.60	25.844	
4,300.00	4,272.44	4,228.94	4,230.01	14.59	10.30	66.134	-47.47	742.08	515.47	495.39	20.08	25.674	
4,400.00	4,372.44	4,331.64	4,331.57	14.64	10.50	67.563	-56.14	754.65	523.47	502.98	20.49	25.544	
4,500.00	4,472.44	4,432.61	4,431.48	14.69	10.70	68.904	-64.69	766.43	531.23	510.33	20.90	25.418	
4,600.00	4,572.44	4,532.40	4,530.31	14.73	10.91	70.140	-72.79	777.60	538.93	517.62	21.31	25.295	
4,700.00	4,672.44	4,628.13	4,625.12	14.78	11.12	71.278	-80.36	788.55	547.16	525.45	21.71	25.205	
4,800.00	4,772.44	4,724.43	4,720.40	14.83	11.36	72.416	-88.03	800.17	556.20	534.07	22.13	25.136	
4,900.00	4,872.44	4,822.21	4,817.14	14.87	11.62	73.533	-95.73	812.20	565.73	543.17	22.56	25.076	
5,000.00	4,972.44	4,917.70	4,911.56	14.92	11.88	74.589	-103.14	824.34	575.88	552.89	23.00	25.044	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report



Company:	Centennial Resources Development, Inc.	Local Co-ordinate Reference:	Well Raider Federal Com 103H
Project:	Lea County, NM (NAD83 - UTM Zone 13)	TVD Reference:	RKB @ 3526.80usft (TBD)
Reference Site:	Raider	MD Reference:	RKB @ 3526.80usft (TBD)
Site Error:	0.00 usft	North Reference:	True
Reference Well:	Raider Federal Com 103H	Survey Calculation Method:	Minimum Curvature
Well Error:	1.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	USA Compass
Reference Design:	Plan 1 08-17-22	Offset TVD Reference:	Reference Datum

Offset Design: Raider - Raider Federal Com 503H - OH / 67470 - Surveys (H&P 296)													Offset Site Error:	0.00 usft
Survey Program:		156-MWD+IFR1+MS					Rule Assigned:				Offset Well Error:	1.00 usft		
Reference		Offset		Semi Maior Axis		Offset Wellbore Centre		Distance		Warning				
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning	
5,100.00	5,072.44	5,012.59	5,005.34	14.97	12.16	75.586	-110.19	836.98	586.90	563.46	23.44	25.041		
5,200.00	5,172.44	5,108.62	5,100.18	15.02	12.45	76.564	-117.22	850.33	598.70	574.80	23.89	25.056		
5,300.00	5,272.44	5,206.72	5,197.06	15.07	12.78	77.495	-124.05	864.13	610.90	586.53	24.38	25.062		
5,400.00	5,372.44	5,304.79	5,293.94	15.12	13.14	78.349	-130.43	877.94	623.37	598.49	24.88	25.053		
5,500.00	5,472.44	5,408.82	5,396.78	15.16	13.48	79.199	-137.06	892.16	635.58	610.21	25.37	25.057		
5,600.00	5,572.44	5,503.75	5,490.72	15.21	13.80	79.896	-142.64	904.64	647.50	621.67	25.82	25.073		
5,700.00	5,672.44	5,588.70	5,574.56	15.26	14.12	80.534	-147.76	917.38	661.29	635.04	26.26	25.186		
5,800.00	5,772.44	5,677.69	5,662.06	15.31	14.45	81.264	-153.89	932.35	676.88	650.16	26.72	25.332		
5,900.00	5,872.44	5,768.24	5,750.94	15.36	14.80	81.956	-159.74	948.62	693.79	666.59	27.19	25.512		
6,000.00	5,972.44	5,859.93	5,840.80	15.42	15.16	82.598	-165.19	966.06	711.89	684.21	27.68	25.719		
6,100.00	6,072.44	5,964.39	5,943.20	15.47	15.58	83.263	-171.03	985.80	730.01	701.77	28.24	25.851		
6,200.00	6,172.44	6,073.25	6,050.21	15.52	16.02	83.841	-176.24	1,005.09	747.13	718.32	28.81	25.935		
6,300.00	6,272.44	6,179.38	6,154.82	15.57	16.44	84.366	-181.33	1,022.29	762.77	733.42	29.35	25.990		
6,400.00	6,372.44	6,281.06	6,255.11	15.62	16.85	84.821	-185.88	1,038.37	778.13	748.26	29.87	26.053		
6,500.00	6,472.44	6,383.01	6,355.79	15.67	17.25	85.223	-190.01	1,053.87	792.95	762.57	30.38	26.104		
6,600.00	6,572.44	6,481.36	6,452.95	15.72	17.65	85.573	-193.67	1,068.67	807.66	776.79	30.87	26.164		
6,700.00	6,672.44	6,583.69	6,554.07	15.78	18.06	85.915	-197.36	1,083.99	822.35	790.97	31.38	26.207		
6,800.00	6,772.44	6,681.98	6,651.24	15.83	18.46	86.218	-200.72	1,098.36	836.71	804.84	31.87	26.255		
6,900.00	6,872.44	6,778.23	6,746.34	15.88	18.85	86.536	-204.45	1,112.70	851.35	819.00	32.35	26.314		
7,000.00	6,972.44	6,876.37	6,843.23	15.94	19.25	86.910	-209.15	1,127.58	866.24	833.38	32.85	26.367		
7,100.00	7,072.44	6,965.30	6,930.95	15.99	19.61	87.255	-213.65	1,141.50	881.65	848.33	33.32	26.463		
7,200.00	7,172.44	7,063.03	7,027.20	16.04	20.08	87.651	-219.01	1,157.59	897.88	863.99	33.88	26.498		
7,300.00	7,272.44	7,163.48	7,126.16	16.10	20.57	88.039	-224.44	1,173.94	913.97	879.49	34.48	26.506		
7,400.00	7,372.44	7,266.81	7,228.01	16.15	21.00	88.427	-230.11	1,190.42	929.77	894.76	35.02	26.553		
7,500.00	7,472.44	7,394.29	7,354.03	16.20	21.52	88.906	-237.45	1,208.13	943.48	907.86	35.62	26.485		
7,600.00	7,572.44	7,513.84	7,472.60	16.26	21.98	89.267	-243.17	1,222.28	955.31	919.15	36.16	26.416		
7,700.00	7,672.44	7,646.94	7,605.12	16.31	22.49	89.506	-247.04	1,233.90	964.02	927.32	36.70	26.269		
7,800.00	7,772.44	7,748.01	7,705.93	16.37	22.85	89.586	-248.32	1,240.98	971.01	933.89	37.12	26.158		
7,900.00	7,872.44	7,854.60	7,812.30	16.42	23.22	89.650	-249.36	1,247.89	977.49	939.94	37.55	26.034		
8,000.00	7,972.44	7,960.00	7,917.51	16.48	23.58	89.722	-250.55	1,254.12	983.38	945.42	37.96	25.905		
8,100.00	8,072.44	8,072.19	8,029.54	16.54	23.95	89.812	-252.08	1,259.83	988.48	950.12	38.37	25.763		
8,200.00	8,172.44	8,191.32	8,148.60	16.59	24.30	89.853	-252.78	1,263.86	991.87	953.13	38.74	25.604		
8,300.00	8,272.44	8,302.46	8,259.72	16.65	24.59	89.903	-253.64	1,265.84	993.65	954.59	39.05	25.443		
8,400.00	8,372.44	8,409.93	8,367.18	16.70	24.83	89.923	-253.99	1,266.77	994.51	955.18	39.33	25.286		
8,500.00	8,472.44	8,510.04	8,467.29	16.76	25.03	89.925	-254.03	1,267.32	995.06	955.46	39.60	25.129		
8,600.00	8,572.44	8,615.02	8,572.27	16.82	25.18	89.917	-253.88	1,267.66	995.38	955.58	39.80	25.012		
8,700.00	8,672.44	8,723.89	8,681.13	16.87	25.14	89.873	-253.12	1,267.17	994.93	955.13	39.80	24.999		
8,800.00	8,772.44	8,830.15	8,787.38	16.93	24.98	89.795	-251.78	1,265.86	993.71	954.01	39.69	25.034		
8,900.00	8,872.44	8,935.05	8,892.25	16.99	24.80	89.704	-250.21	1,264.02	991.96	952.39	39.57	25.070		
9,000.00	8,971.85	9,036.38	8,993.54	16.87	24.60	90.394	-248.64	1,261.85	989.82	950.37	39.44	25.095		
9,100.00	9,067.22	9,136.09	9,093.21	16.66	24.40	92.225	-247.12	1,259.51	988.05	948.68	39.37	25.094		
9,152.84	9,114.55	9,187.56	9,144.66	16.56	24.29	93.549	-246.29	1,258.10	987.72	948.38	39.33	25.111		
9,200.00	9,154.37	9,231.71	9,188.78	16.46	24.20	94.835	-245.49	1,256.71	988.09	948.79	39.29	25.146		
9,300.00	9,229.51	9,315.20	9,272.19	16.28	24.01	97.403	-243.66	1,253.64	992.43	953.26	39.17	25.335		
9,400.00	9,289.34	9,376.47	9,333.39	16.15	23.88	98.737	-241.99	1,251.16	1,004.21	965.19	39.02	25.739		
9,500.00	9,331.26	9,417.08	9,373.96	16.07	23.79	98.163	-240.82	1,249.67	1,026.02	987.24	38.78	26.458		
9,600.00	9,353.42	9,438.00	9,394.86	16.07	23.75	95.230	-240.21	1,248.98	1,058.49	1,020.02	38.46	27.520		
9,700.00	9,356.81	9,438.00	9,394.86	16.15	23.75	92.231	-240.21	1,248.98	1,100.53	1,062.40	38.13	28.866		
9,800.00	9,356.80	9,438.00	9,394.86	16.26	23.75	92.231	-240.21	1,248.98	1,149.92	1,112.19	37.72	30.482		
9,900.00	9,356.80	9,438.00	9,394.86	16.40	23.75	92.231	-240.21	1,248.98	1,205.59	1,168.31	37.29	32.334		
10,000.00	9,356.80	9,438.00	9,394.86	16.57	23.75	92.231	-240.21	1,248.98	1,266.73	1,229.90	36.83	34.393		
10,100.00	9,356.80	9,452.40	9,409.25	16.77	23.74	93.075	-239.79	1,248.55	1,332.46	1,296.19	36.27	36.737		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report



Company:	Centennial Resources Development, Inc.	Local Co-ordinate Reference:	Well Raider Federal Com 103H
Project:	Lea County, NM (NAD83 - UTM Zone 13)	TVD Reference:	RKB @ 3526.80usft (TBD)
Reference Site:	Raider	MD Reference:	RKB @ 3526.80usft (TBD)
Site Error:	0.00 usft	North Reference:	True
Reference Well:	Raider Federal Com 103H	Survey Calculation Method:	Minimum Curvature
Well Error:	1.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	USA Compass
Reference Design:	Plan 1 08-17-22	Offset TVD Reference:	Reference Datum

Offset Design: Raider - Raider Federal Com 503H - OH / 67470 - Surveys (H&P 296)												Offset Site Error: 0.00 usft
Survey Program: 156-MWD+IFR1+MS												Offset Well Error: 1.00 usft
Reference												
Offset												
Semi Major Axis												
Reference												
Offset												
Highside												
Toolface												
Offset Wellbore Centre												
+N/-S												
(usft)												
+E/-W												
(usft)												
Distance												
Between												
Centres												
(usft)												
Between												
Ellipses												
(usft)												
Minimum												
Separation												
(usft)												
Separation												
Factor												
Warning												
Measured	Vertical	Measured	Vertical	Reference	Offset	Highside	Offset Wellbore Centre		Distance		Minimum	Separation
Depth	Depth	Depth	Depth			Toolface	+N/-S	+E/-W	Between	Between	Separation	Factor
(usft)	(usft)	(usft)	(usft)	(usft)	(usft)	(°)	(usft)	(usft)	Centres	Ellipses	(usft)	
10,200.00	9,356.80	9,454.42	9,411.26	17.00	23.74	93.193	-239.73	1,248.49	1,402.32	1,366.51	35.82	39.153
10,300.00	9,356.80	9,456.41	9,413.25	17.25	23.74	93.310	-239.67	1,248.44	1,475.65	1,440.27	35.39	41.700
10,400.00	9,356.80	9,458.39	9,415.23	17.54	23.74	93.425	-239.62	1,248.39	1,551.96	1,516.98	34.99	44.360
10,500.00	9,356.80	9,460.35	9,417.18	17.85	23.73	93.540	-239.56	1,248.34	1,630.83	1,596.22	34.62	47.113
10,600.00	9,356.80	9,462.28	9,419.12	18.19	23.73	93.653	-239.51	1,248.30	1,711.91	1,677.63	34.28	49.946
10,700.00	9,356.80	9,464.20	9,421.04	18.56	23.73	93.765	-239.46	1,248.25	1,794.89	1,760.92	33.97	52.843
10,800.00	9,356.80	9,466.10	9,422.93	18.95	23.73	93.876	-239.40	1,248.21	1,879.53	1,845.84	33.69	55.796
10,900.00	9,356.80	9,467.98	9,424.81	19.37	23.73	93.986	-239.35	1,248.17	1,965.60	1,932.17	33.43	58.792
11,000.00	9,356.80	12,817.04	11,121.50	19.81	31.27	151.070	1,583.53	1,247.10	2,016.38	1,970.53	45.85	43.980
11,056.04	9,356.80	12,855.08	11,121.28	20.07	31.41	151.066	1,621.56	1,247.13	2,016.13	1,969.97	46.16	43.680
11,100.00	9,356.80	12,887.92	11,121.03	20.27	31.53	151.045	1,654.40	1,247.81	2,016.28	1,969.87	46.41	43.447
11,200.00	9,356.80	12,997.76	11,120.22	20.75	31.90	150.973	1,764.21	1,250.26	2,016.74	1,969.55	47.19	42.739
11,300.00	9,356.80	13,102.61	11,119.06	21.25	32.28	150.933	1,869.04	1,251.19	2,016.19	1,968.21	47.99	42.016
11,310.62	9,356.80	13,109.71	11,119.00	21.31	32.30	150.930	1,876.15	1,251.28	2,016.18	1,968.13	48.05	41.959
11,400.00	9,356.80	13,177.76	11,118.80	21.77	32.55	150.891	1,944.18	1,252.69	2,016.82	1,968.18	48.64	41.464
11,500.00	9,356.80	13,306.85	11,117.61	22.30	33.04	150.808	2,073.23	1,255.34	2,016.99	1,967.34	49.65	40.623
11,600.00	9,356.80	13,412.37	11,115.38	22.85	33.46	150.710	2,178.70	1,258.01	2,016.39	1,965.85	50.55	39.892
11,700.00	9,356.80	13,500.47	11,113.76	23.41	33.82	150.637	2,266.76	1,260.03	2,015.94	1,964.58	51.36	39.251
11,706.97	9,356.80	13,506.21	11,113.69	23.45	33.84	150.633	2,272.50	1,260.16	2,015.94	1,964.52	51.42	39.209
11,800.00	9,356.80	13,591.68	11,113.03	23.98	34.20	150.582	2,357.95	1,261.81	2,016.20	1,963.98	52.22	38.607
11,900.00	9,356.80	13,684.80	11,112.73	24.57	34.60	150.543	2,451.05	1,263.21	2,016.68	1,963.55	53.13	37.958
12,000.00	9,356.80	13,773.68	11,112.95	25.16	34.99	150.511	2,539.93	1,264.60	2,017.68	1,963.66	54.03	37.346
12,100.00	9,356.80	13,862.84	11,113.78	25.77	35.39	150.490	2,629.08	1,265.88	2,019.21	1,964.26	54.95	36.747
12,200.00	9,356.80	13,950.12	11,115.23	26.38	35.79	150.482	2,716.34	1,267.01	2,021.31	1,965.43	55.88	36.173
12,300.00	9,356.80	14,079.24	11,117.99	27.00	36.40	150.490	2,845.42	1,268.23	2,023.83	1,966.64	57.19	35.386
12,400.00	9,356.80	14,188.52	11,118.39	27.63	36.93	150.490	2,954.70	1,268.38	2,024.21	1,965.85	58.36	34.686
12,500.00	9,356.80	14,286.79	11,119.25	28.27	37.41	150.510	3,052.96	1,268.03	2,024.81	1,965.35	59.45	34.056
12,600.00	9,356.80	14,377.00	11,120.77	28.91	37.87	150.560	3,143.15	1,266.86	2,025.65	1,965.14	60.51	33.477
12,700.00	9,356.80	14,518.99	11,121.53	29.56	38.60	150.624	3,285.11	1,264.65	2,025.22	1,963.15	62.06	32.632
12,800.00	9,356.80	14,603.42	11,122.72	30.22	39.04	150.709	3,369.48	1,261.85	2,024.80	1,961.68	63.12	32.078
12,900.00	9,356.80	14,707.34	11,123.45	30.88	39.60	150.777	3,473.37	1,259.48	2,024.31	1,959.95	64.36	31.452
13,000.00	9,356.80	14,846.10	11,120.65	31.54	40.36	150.659	3,612.04	1,262.62	2,023.94	1,958.06	65.89	30.718
13,100.00	9,356.80	14,953.36	11,115.22	32.21	40.94	150.491	3,719.09	1,266.34	2,021.23	1,954.12	67.11	30.118
13,200.00	9,356.80	15,046.44	11,110.86	32.89	41.46	150.356	3,812.02	1,269.32	2,018.75	1,950.52	68.23	29.589
13,300.00	9,356.80	15,145.00	11,105.42	33.56	42.00	150.162	3,910.32	1,274.05	2,016.35	1,946.97	69.38	29.061
13,400.00	9,356.80	15,240.00	11,101.08	34.25	42.55	150.009	4,005.14	1,277.71	2,014.32	1,943.77	70.54	28.554
13,498.58	9,356.80	15,299.00	11,100.01	34.92	42.89	149.971	4,064.12	1,278.64	2,013.48	1,942.08	71.40	28.202
13,500.00	9,356.80	15,299.93	11,100.00	34.93	42.89	149.970	4,065.05	1,278.66	2,013.48	1,942.07	71.41	28.197
13,600.00	9,356.80	15,374.75	11,100.39	35.62	43.32	149.962	4,139.86	1,279.17	2,014.24	1,941.82	72.42	27.814
13,700.00	9,356.80	15,628.76	11,096.26	36.31	44.81	149.995	4,393.71	1,275.38	2,012.73	1,937.54	75.19	26.768
13,800.00	9,356.80	15,686.42	11,093.50	37.01	45.16	149.979	4,451.29	1,274.43	2,007.62	1,931.51	76.11	26.377
13,900.00	9,356.80	15,830.82	11,085.67	37.70	46.02	149.931	4,595.44	1,271.80	2,001.93	1,924.13	77.80	25.731
14,000.00	9,356.80	15,901.00	11,082.27	38.40	46.44	149.903	4,665.53	1,270.91	1,996.85	1,917.99	78.85	25.323
14,100.00	9,356.80	15,950.90	11,080.73	39.11	46.75	149.885	4,715.40	1,270.76	1,993.56	1,913.87	79.70	25.015
14,200.00	9,356.80	16,033.09	11,078.68	39.81	47.25	149.849	4,797.57	1,270.97	1,991.54	1,910.71	80.83	24.638
14,300.00	9,356.80	16,114.72	11,077.22	40.52	47.75	149.815	4,879.18	1,271.49	1,990.34	1,908.38	81.96	24.284
14,355.82	9,356.80	16,156.89	11,076.92	40.91	48.01	149.805	4,921.35	1,271.71	1,990.15	1,907.59	82.56	24.106
14,400.00	9,356.80	16,195.29	11,076.96	41.23	48.24	149.802	4,959.75	1,271.82	1,990.26	1,907.17	83.09	23.953
14,500.00	9,356.80	16,317.69	11,076.71	41.94	49.00	149.815	5,082.15	1,271.14	1,989.77	1,905.09	84.68	23.49



Anticollision Report



Company:	Centennial Resources Development, Inc.	Local Co-ordinate Reference:	Well Raider Federal Com 103H
Project:	Lea County, NM (NAD83 - UTM Zone 13)	TVD Reference:	RKB @ 3526.80usft (TBD)
Reference Site:	Raider	MD Reference:	RKB @ 3526.80usft (TBD)
Site Error:	0.00 usft	North Reference:	True
Reference Well:	Raider Federal Com 103H	Survey Calculation Method:	Minimum Curvature
Well Error:	1.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	USA Compass
Reference Design:	Plan 1 08-17-22	Offset TVD Reference:	Reference Datum

Offset Design: Raider - Raider Federal Com 503H - OH / 67470 - Surveys (H&P 296)												Offset Site Error: 0.00 usft
Survey Program: 156-MWD+IFR1+MS												Offset Well Error: 1.00 usft
Reference												
Offset												
Semi Major Axis												
Reference												
Offset												
Highside												
Toolface												
Offset Wellbore Centre												
+N/-S												
(usft)												
+E/-W												
(usft)												
Distance												
Between												
Centres												
(usft)												
Between												
Ellipses												
(usft)												
Minimum												
Separation												
(usft)												
Separation												
Factor												
Warning												
Measured	Vertical	Measured	Vertical	Reference	Offset	Highside	+N/-S	+E/-W	Between	Between	Minimum	Separation
Depth	Depth	Depth	Depth	(usft)	(usft)	Toolface	(usft)	(usft)	Centres	Ellipses	Separation	Factor
(usft)	(usft)	(usft)	(usft)	(usft)	(usft)	(°)	(usft)	(usft)	(usft)	(usft)	(usft)	
14,900.00	9,356.80	16,749.03	11,073.83	44.80	51.73	150.080	5,513.28	1,258.73	1,981.64	1,891.06	90.57	21.879
15,000.00	9,356.80	16,856.77	11,071.96	45.52	52.42	150.112	5,620.97	1,256.35	1,979.04	1,887.00	92.05	21.501
15,100.00	9,356.80	16,979.04	11,068.52	46.24	53.21	150.108	5,743.18	1,254.49	1,975.90	1,882.25	93.66	21.098
15,200.00	9,356.80	17,076.59	11,064.40	46.97	53.85	150.086	5,840.64	1,252.97	1,971.50	1,876.48	95.02	20.749
15,300.00	9,356.80	17,150.77	11,062.25	47.69	54.33	150.069	5,914.78	1,252.37	1,968.52	1,872.38	96.14	20.475
15,400.00	9,356.80	17,223.00	11,060.46	48.42	54.80	150.062	5,986.98	1,251.58	1,966.09	1,868.85	97.24	20.219
15,476.66	9,356.80	17,278.21	11,059.69	48.97	55.17	150.058	6,042.19	1,251.31	1,965.18	1,867.11	98.08	20.037
15,500.00	9,356.80	17,289.79	11,059.68	49.14	55.24	150.055	6,053.76	1,251.39	1,965.25	1,866.99	98.27	19.999
15,600.00	9,356.80	17,360.05	11,060.46	49.87	55.70	150.038	6,124.01	1,252.53	1,966.91	1,867.60	99.31	19.806
15,700.00	9,356.80	17,497.64	11,061.57	50.60	56.61	149.994	6,261.57	1,254.83	1,968.61	1,867.44	101.17	19.459
15,800.00	9,356.80	17,607.56	11,060.00	51.33	57.33	149.912	6,371.45	1,257.16	1,968.44	1,865.76	102.67	19.172
15,845.31	9,356.80	17,646.95	11,059.47	51.66	57.60	149.885	6,410.84	1,257.94	1,968.37	1,865.13	103.24	19.067
15,900.00	9,356.80	17,695.00	11,059.01	52.06	57.91	149.853	6,458.87	1,258.90	1,968.47	1,864.54	103.92	18.941
16,000.00	9,356.80	17,790.00	11,058.33	52.79	58.54	149.786	6,553.84	1,261.14	1,969.04	1,863.78	105.26	18.706
16,100.00	9,356.80	17,877.24	11,057.78	53.52	59.13	149.710	6,641.03	1,263.82	1,970.05	1,863.55	106.51	18.497
16,200.00	9,356.80	17,967.79	11,057.44	54.26	59.73	149.624	6,731.53	1,267.03	1,971.54	1,863.75	107.79	18.291
16,300.00	9,356.80	18,053.66	11,057.67	54.99	60.30	149.549	6,817.35	1,270.12	1,973.61	1,864.59	109.01	18.104
16,400.00	9,356.80	18,195.59	11,059.18	55.73	61.27	149.523	6,959.24	1,272.03	1,975.31	1,864.34	110.98	17.800
16,500.00	9,356.80	18,317.46	11,058.22	56.46	62.10	149.500	7,081.10	1,272.34	1,974.72	1,862.05	112.67	17.527
16,600.00	9,356.80	18,416.36	11,057.48	57.20	62.77	149.494	7,180.00	1,272.13	1,973.98	1,859.88	114.10	17.300
16,700.00	9,356.80	18,508.16	11,057.25	57.94	63.40	149.508	7,271.79	1,271.40	1,973.38	1,857.92	115.46	17.092
16,753.63	9,356.80	18,555.54	11,057.66	58.33	63.72	149.535	7,319.16	1,270.54	1,973.30	1,857.13	116.17	16.986
16,800.00	9,356.80	18,599.62	11,058.26	58.67	64.02	149.568	7,363.23	1,269.57	1,973.33	1,856.50	116.83	16.891
16,900.00	9,356.80	18,698.64	11,060.05	59.41	64.70	149.662	7,462.19	1,266.85	1,973.51	1,855.21	118.31	16.681
17,000.00	9,356.80	18,829.51	11,062.49	60.15	65.60	149.829	7,592.94	1,261.57	1,973.16	1,852.97	120.19	16.417
17,100.00	9,356.80	18,954.60	11,060.81	60.89	66.47	149.870	7,717.97	1,258.90	1,970.90	1,848.95	121.95	16.161
17,200.00	9,356.80	19,048.38	11,059.01	61.63	67.12	149.885	7,811.71	1,257.25	1,968.37	1,845.01	123.35	15.957
17,300.00	9,356.80	19,151.32	11,058.08	62.37	67.84	149.945	7,914.61	1,254.31	1,966.18	1,841.30	124.87	15.746
17,400.00	9,356.80	19,252.95	11,055.83	63.12	68.55	149.962	8,016.20	1,252.30	1,963.28	1,836.92	126.36	15.537
17,500.00	9,356.80	19,329.74	11,054.75	63.86	69.08	149.976	8,092.97	1,251.08	1,961.28	1,833.70	127.58	15.373
17,600.00	9,356.80	19,406.85	11,053.94	64.60	69.62	149.959	8,170.07	1,251.27	1,960.50	1,831.73	128.77	15.225
17,660.07	9,356.80	19,462.38	11,053.55	65.05	70.01	149.939	8,225.60	1,251.80	1,960.43	1,830.84	129.59	15.128
17,700.00	9,356.80	19,500.34	11,053.43	65.34	70.27	149.931	8,263.55	1,252.05	1,960.46	1,830.31	130.15	15.063
17,800.00	9,356.80	19,611.41	11,054.09	66.09	71.05	149.974	8,374.61	1,250.70	1,960.39	1,828.61	131.78	14.876
17,900.00	9,356.80	19,747.94	11,052.97	66.83	72.01	150.004	8,511.12	1,248.84	1,959.02	1,825.33	133.69	14.653
18,000.00	9,356.80	19,873.12	11,050.20	67.58	72.90	150.034	8,636.23	1,246.03	1,955.98	1,820.53	135.45	14.441
18,100.00	9,356.80	19,964.00	11,048.11	68.32	73.54	150.061	8,727.05	1,243.74	1,952.73	1,815.89	136.85	14.270
18,200.00	9,356.80	20,049.01	11,045.05	69.07	74.15	149.995	8,812.00	1,244.51	1,950.07	1,811.93	138.14	14.116
18,300.00	9,356.80	20,182.32	11,037.24	69.81	75.09	149.762	8,944.99	1,249.12	1,946.71	1,806.83	139.88	13.917
18,400.00	9,356.80	20,317.98	11,028.92	70.56	76.05	149.588	9,080.38	1,251.03	1,942.29	1,800.67	141.63	13.714
18,500.00	9,356.80	20,428.76	11,020.77	71.31	76.84	149.471	9,190.85	1,250.79	1,935.82	1,792.67	143.15	13.523
18,600.00	9,356.80	20,503.56	11,015.10	72.05	77.37	149.361	9,265.43	1,251.71	1,929.95	1,785.58	144.37	13.368
18,700.00	9,356.80	20,591.57	11,009.40	72.80	77.99	149.236	9,353.24	1,253.21	1,925.23	1,779.54	145.70	13.214
18,800.00	9,356.80	20,733.52	10,999.87	73.55	79.00	149.062	9,494.87	1,254.27	1,919.99	1,772.50	147.49	13.018
18,900.00	9,356.80	20,780.38	10,997.32	74.30	79.34	149.025	9,541.66	1,254.16	1,914.90	1,766.41	148.49	12.896
19,000.00	9,356.80	20,846.76	10,995.30	75.05	79.81	149.002	9,608.00	1,253.80	1,911.96	1,762.34	149.62	12.779
19,100.00	9,356.80	20,927.62	10,993.81	75.79	80.39	148.985	9,688.85	1,253.57	1,910.24	1,759.35	150.88	12.660
19,200.00	9,356.80	21,009.35	10,993.11	76.54	80.97	148.974	9,770.57	1,253.55	1,909.51	1,757.36	152.15	12.550



Anticollision Report



Company:	Centennial Resources Development, Inc.	Local Co-ordinate Reference:	Well Raider Federal Com 103H
Project:	Lea County, NM (NAD83 - UTM Zone 13)	TVD Reference:	RKB @ 3526.80usft (TBD)
Reference Site:	Raider	MD Reference:	RKB @ 3526.80usft (TBD)
Site Error:	0.00 usft	North Reference:	True
Reference Well:	Raider Federal Com 103H	Survey Calculation Method:	Minimum Curvature
Well Error:	1.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	USA Compass
Reference Design:	Plan 1 08-17-22	Offset TVD Reference:	Reference Datum

Offset Design:	Raider - Raider Federal Com 503H - OH / 67470 - Surveys (H&P 296)											Offset Site Error:	0.00 usft
Survey Program:	156-MWD+IFR1+MS											Offset Well Error:	1.00 usft
Reference	Offset	Semi Major Axis		Offset Wellbore Centre		Distance		Rule Assigned:		Warning			
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
19,533.58	9,356.80	21,282.33	10,997.94	79.04	82.92	149.088	10,043.48	1,251.94	1,913.66	1,757.31	156.35	12.239 SF	



Anticollision Report



Company:	Centennial Resources Development, Inc.	Local Co-ordinate Reference:	Well Raider Federal Com 103H
Project:	Lea County, NM (NAD83 - UTM Zone 13)	TVD Reference:	RKB @ 3526.80usft (TBD)
Reference Site:	Raider	MD Reference:	RKB @ 3526.80usft (TBD)
Site Error:	0.00 usft	North Reference:	True
Reference Well:	Raider Federal Com 103H	Survey Calculation Method:	Minimum Curvature
Well Error:	1.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	USA Compass
Reference Design:	Plan 1 08-17-22	Offset TVD Reference:	Reference Datum

Offset Design: Raider - Raider Federal Com 701H - OH / 67386 - Surveys (H&P 625)												Offset Site Error:	0.00 usft
Survey Program: 170-MWD+IFR1+MS												Offset Well Error:	1.00 usft
Reference	Offset	Semi Major Axis		Distance		Rule Assigned:		Warning					
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
0.00	0.00	0.00	2.40	1.00	1.00	-151.323	-54.96	-30.06	62.69				
100.00	100.00	97.85	100.25	1.12	1.31	-151.537	-54.89	-29.76	62.44	60.01	2.43	25.706	
200.00	200.00	198.04	200.44	1.65	1.91	-152.189	-54.71	-28.86	61.85	58.30	3.56	17.395	
300.00	299.99	298.06	300.45	2.05	2.42	74.632	-54.47	-27.74	60.89	56.45	4.44	13.707	
400.00	399.96	397.98	400.36	2.41	2.84	76.071	-54.34	-26.50	59.52	54.35	5.17	11.519	
500.00	499.86	498.07	500.44	2.76	3.24	79.217	-54.18	-25.16	57.76	51.92	5.84	9.893	
600.00	599.68	597.97	600.34	3.12	3.61	84.488	-53.73	-23.83	55.76	49.30	6.46	8.629	
700.00	699.37	697.63	699.98	3.49	3.96	91.648	-53.46	-22.31	54.28	47.21	7.07	7.680	
749.74	748.89	747.09	749.44	3.67	4.14	96.010	-53.38	-21.65	54.05	46.67	7.38	7.328 CC	
800.00	798.90	797.03	799.38	3.86	4.31	100.893	-53.35	-21.08	54.32	46.64	7.68	7.074 ES	
900.00	898.26	896.38	898.71	4.25	4.55	111.244	-53.62	-20.02	56.69	48.45	8.24	6.880 SF	
1,000.00	997.40	995.68	998.01	4.65	4.79	121.881	-53.87	-18.96	61.67	52.80	8.88	6.948	
1,100.00	1,096.30	1,094.65	1,096.98	5.06	5.03	131.689	-54.16	-17.91	69.62	60.05	9.57	7.272	
1,200.00	1,194.93	1,193.22	1,195.54	5.48	5.27	140.177	-54.31	-17.05	80.72	70.42	10.30	7.839	
1,300.00	1,293.41	1,291.59	1,293.91	5.91	5.49	146.835	-54.48	-16.45	94.15	83.15	11.00	8.559	
1,400.00	1,391.89	1,389.68	1,391.99	6.34	5.68	151.937	-54.31	-16.02	108.78	97.13	11.65	9.339	
1,500.00	1,490.37	1,487.61	1,489.92	6.77	5.82	156.013	-53.53	-16.02	124.68	112.47	12.21	10.211	
1,600.00	1,588.85	1,586.07	1,588.38	7.21	5.93	159.120	-52.87	-16.11	141.09	128.37	12.73	11.085	
1,700.00	1,687.33	1,684.34	1,686.65	7.65	6.05	161.555	-52.25	-16.24	157.85	144.61	13.24	11.922	
1,800.00	1,785.82	1,782.64	1,784.94	8.09	6.17	163.600	-51.37	-16.35	174.92	161.17	13.76	12.717	
1,900.00	1,884.30	1,880.76	1,883.06	8.53	6.31	165.312	-50.39	-16.42	192.20	177.93	14.27	13.466	
2,000.00	1,982.78	1,976.33	1,978.62	8.98	6.41	166.572	-49.60	-17.17	210.15	195.33	14.81	14.187	
2,100.00	2,081.26	2,072.27	2,074.50	9.42	6.44	166.980	-50.27	-20.54	229.69	214.37	15.33	14.988	
2,200.00	2,179.74	2,171.76	2,173.81	9.87	6.43	166.689	-53.29	-25.54	249.39	233.54	15.85	15.735	
2,300.00	2,278.22	2,265.06	2,266.75	10.31	6.48	165.812	-58.71	-31.66	269.08	252.75	16.33	16.473	
2,400.00	2,376.74	2,358.02	2,359.05	10.72	6.50	164.635	-64.89	-40.80	291.01	274.27	16.74	17.388	
2,500.00	2,475.52	2,453.51	2,453.80	11.16	6.52	163.522	-70.98	-50.97	312.44	295.28	17.17	18.202	
2,600.00	2,574.55	2,549.56	2,549.07	11.59	6.57	162.484	-76.77	-61.68	332.94	315.36	17.59	18.930	
2,700.00	2,673.81	2,650.88	2,649.58	12.01	6.66	161.428	-82.89	-72.94	351.91	333.87	18.04	19.505	
2,800.00	2,773.27	2,754.19	2,752.14	12.42	6.76	160.335	-89.92	-83.18	367.97	349.48	18.50	19.894	
2,900.00	2,872.89	2,856.65	2,853.98	12.81	6.88	159.332	-96.84	-92.06	381.42	362.48	18.94	20.140	
3,000.00	2,972.65	2,960.11	2,957.01	13.18	7.01	158.540	-102.64	-99.42	392.35	372.97	19.37	20.251	
3,100.00	3,072.51	3,061.92	3,058.46	13.54	7.15	157.740	-108.42	-105.78	400.91	381.13	19.78	20.272	
3,200.00	3,172.45	3,163.49	3,159.67	13.86	7.32	156.824	-114.77	-111.55	407.22	387.07	20.14	20.215	
3,300.00	3,272.44	3,257.74	3,253.59	14.13	7.48	155.982	-119.91	-117.40	412.79	392.36	20.43	20.202	
3,400.00	3,372.44	3,361.01	3,356.55	14.19	7.73	-71.772	-124.93	-123.65	417.15	396.53	20.62	20.226	
3,500.00	3,472.44	3,464.34	3,459.60	14.24	8.14	-72.680	-130.17	-129.05	420.58	399.62	20.97	20.059	
3,600.00	3,572.44	3,562.29	3,557.30	14.28	8.46	-73.543	-135.41	-133.63	423.52	402.32	21.20	19.981	
3,700.00	3,672.44	3,653.68	3,648.38	14.32	8.66	-74.386	-140.25	-139.48	428.21	406.94	21.27	20.132	
3,800.00	3,772.44	3,750.66	3,744.91	14.37	8.89	-75.324	-145.48	-147.15	434.45	413.07	21.38	20.316	
3,900.00	3,872.44	3,851.13	3,844.92	14.41	9.14	-76.299	-151.18	-154.89	440.54	419.01	21.53	20.460	
4,000.00	3,972.44	3,948.86	3,942.27	14.46	9.38	-77.040	-155.28	-162.45	447.11	425.42	21.69	20.612	
4,100.00	4,072.44	4,048.12	4,041.12	14.50	9.64	-77.789	-159.53	-170.34	453.95	432.07	21.87	20.754	
4,200.00	4,172.44	4,147.91	4,140.46	14.55	9.91	-78.626	-164.65	-178.46	460.88	438.82	22.06	20.890	
4,300.00	4,272.44	4,248.78	4,240.87	14.59	10.19	-79.438	-169.78	-186.50	467.76	445.49	22.27	21.005	
4,400.00	4,372.44	4,350.36	4,342.05	14.64	10.48	-80.183	-174.61	-194.16	474.34	451.85	22.49	21.090	
4,500.00	4,472.44	4,453.97	4,445.31	14.69	10.78	-80.868	-179.20	-201.29	480.41	457.68	22.74	21.130	
4,600.00	4,572.44	4,551.76	4,562.87	14.73	11.12	-81.529	-183.98	-206.79	484.45	461.42	23.03	21.033	
4,700.00	4,672.44	4,684.88	4,675.84	14.78	11.41	-82.197	-189.58	-207.50	484.27	461.03	23.24	20.836	
4,726.93	4,699.37	4,708.44	4,699.37	14.79	11.46	-82.328	-190.68	-207.57	484.18	460.91	23.27	20.810	
4,800.00	4,772.44	4,773.98	4,764.86	14.83	11.61	-82.646	-193.27	-208.51	484.83	461.49	23.35	20.766	
4,900.00	4,872.44	4,873.88	4,864.63	14.87	11.87	-83.172	-197.45	-211.03	486.83	463.31	23.52	20.697	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report



Company:	Centennial Resources Development, Inc.	Local Co-ordinate Reference:	Well Raider Federal Com 103H
Project:	Lea County, NM (NAD83 - UTM Zone 13)	TVD Reference:	RKB @ 3526.80usft (TBD)
Reference Site:	Raider	MD Reference:	RKB @ 3526.80usft (TBD)
Site Error:	0.00 usft	North Reference:	True
Reference Well:	Raider Federal Com 103H	Survey Calculation Method:	Minimum Curvature
Well Error:	1.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	USA Compass
Reference Design:	Plan 1 08-17-22	Offset TVD Reference:	Reference Datum

Offset Design: Raider - Raider Federal Com 701H - OH / 67386 - Surveys (H&P 625)												Offset Site Error:	0.00 usft
Survey Program: 170-MWD+IFR1+MS												Offset Well Error:	1.00 usft
Reference												Rule Assigned:	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference	Offset	Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
							+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
5,000.00	4,972.44	4,984.72	4,975.26	14.92	12.16	-83.959	-204.07	-211.96	486.95	463.26	23.70	20.550	
5,070.36	5,042.79	5,052.44	5,042.79	14.96	12.32	-84.554	-209.15	-212.07	486.54	462.77	23.77	20.469	
5,100.00	5,072.44	5,076.68	5,066.95	14.97	12.39	-84.787	-211.10	-212.38	486.71	462.90	23.81	20.440	
5,200.00	5,172.44	5,160.20	5,150.12	15.02	12.64	-85.636	-218.10	-215.47	489.67	465.72	23.95	20.443	
5,300.00	5,272.44	5,248.80	5,238.33	15.07	12.93	-86.392	-224.21	-221.08	495.52	471.38	24.13	20.532	
5,400.00	5,372.44	5,340.49	5,329.54	15.12	13.23	-87.107	-230.02	-228.39	503.14	478.79	24.35	20.660	
5,500.00	5,472.44	5,430.57	5,418.98	15.16	13.54	-87.814	-235.87	-237.33	512.77	488.18	24.59	20.854	
5,600.00	5,572.44	5,529.43	5,517.06	15.21	13.88	-88.572	-242.36	-247.90	523.28	498.38	24.89	21.020	
5,700.00	5,672.44	5,628.26	5,615.10	15.26	14.23	-89.296	-248.80	-258.53	533.94	508.73	25.21	21.177	
5,800.00	5,772.44	5,727.85	5,713.92	15.31	14.58	-89.976	-255.10	-269.29	544.72	519.17	25.55	21.320	
5,900.00	5,872.44	5,826.35	5,811.68	15.36	14.92	-90.574	-260.85	-279.78	555.42	529.53	25.89	21.450	
6,000.00	5,972.44	5,931.07	5,915.71	15.42	15.27	-90.924	-264.41	-291.26	566.46	540.15	26.31	21.532	
6,100.00	6,072.44	6,045.33	6,029.54	15.47	15.60	-91.000	-265.33	-300.98	574.95	548.18	26.77	21.476	
6,200.00	6,172.44	6,160.47	6,144.46	15.52	15.88	-90.973	-265.18	-308.16	581.20	554.00	27.20	21.371	
6,300.00	6,272.44	6,281.58	6,265.45	15.57	15.99	-90.626	-261.70	-311.54	583.90	556.36	27.54	21.202	
6,400.00	6,372.44	6,385.25	6,369.00	15.62	15.92	-90.140	-256.76	-312.63	584.92	557.23	27.69	21.126	
6,500.00	6,472.44	6,496.12	6,479.77	15.67	15.79	-89.688	-252.14	-312.32	584.66	556.89	27.76	21.058	
6,600.00	6,572.44	6,601.55	6,585.14	15.72	15.61	-89.451	-249.74	-310.23	582.67	554.92	27.75	20.999	
6,700.00	6,672.44	6,702.09	6,686.63	15.78	15.43	-89.209	-247.31	-307.98	580.46	552.75	27.71	20.945	
6,800.00	6,772.44	6,801.24	6,784.74	15.83	15.28	-89.034	-245.58	-305.73	578.22	550.54	27.67	20.896	
6,900.00	6,872.44	6,898.86	6,882.34	15.88	15.21	-89.076	-246.03	-303.84	576.27	548.65	27.63	20.858	
7,000.00	6,972.44	6,999.03	6,982.50	15.94	15.17	-89.182	-247.12	-302.17	574.60	547.00	27.59	20.825	
7,100.00	7,072.44	7,099.51	7,082.95	15.99	15.13	-89.269	-248.01	-300.37	572.80	545.24	27.55	20.788	
7,200.00	7,172.44	7,198.03	7,181.46	16.04	15.10	-89.348	-248.82	-298.69	571.07	543.55	27.52	20.749	
7,300.00	7,272.44	7,296.10	7,279.51	16.10	15.06	-89.404	-249.40	-297.31	569.66	542.16	27.50	20.716	
7,400.00	7,372.44	7,395.86	7,379.27	16.15	15.03	-89.451	-249.87	-296.10	568.45	540.97	27.48	20.684	
7,500.00	7,472.44	7,495.53	7,478.93	16.20	15.01	-89.502	-250.39	-294.80	567.14	539.66	27.48	20.639	
7,541.12	7,513.55	7,530.16	7,513.55	16.23	15.05	-89.513	-250.50	-294.60	566.90	539.38	27.52	20.599	
7,600.00	7,572.44	7,581.00	7,564.39	16.26	15.10	-89.512	-250.49	-295.03	567.39	539.80	27.58	20.571	
7,700.00	7,672.44	7,676.64	7,660.02	16.31	15.25	-89.483	-250.19	-296.88	569.31	541.48	27.83	20.457	
7,800.00	7,772.44	7,776.45	7,759.80	16.37	15.42	-89.461	-249.95	-299.06	571.50	543.41	28.10	20.341	
7,900.00	7,872.44	7,875.09	7,858.41	16.42	15.62	-89.482	-250.13	-301.35	573.82	545.46	28.37	20.229	
8,000.00	7,972.44	7,973.37	7,956.65	16.48	15.83	-89.535	-250.64	-303.93	576.45	547.81	28.64	20.126	
8,100.00	8,072.44	8,074.36	8,057.61	16.54	16.05	-89.568	-250.95	-306.63	579.11	550.18	28.93	20.019	
8,200.00	8,172.44	8,175.98	8,159.20	16.59	16.25	-89.560	-250.86	-309.06	581.51	552.30	29.21	19.905	
8,300.00	8,272.44	8,276.35	8,259.55	16.65	16.43	-89.527	-250.50	-311.29	583.73	554.24	29.49	19.791	
8,400.00	8,372.44	8,375.58	8,358.75	16.70	16.59	-89.469	-249.90	-313.52	585.98	556.21	29.77	19.682	
8,500.00	8,472.44	8,475.01	8,458.14	16.76	16.76	-89.411	-249.27	-315.92	588.40	558.35	30.05	19.578	
8,600.00	8,572.44	8,575.02	8,558.13	16.82	16.93	-89.338	-248.50	-318.32	590.81	560.47	30.34	19.475	
8,700.00	8,672.44	8,674.39	8,657.46	16.87	17.09	-89.237	-247.43	-320.76	593.28	562.66	30.62	19.378	
8,800.00	8,772.44	8,774.12	8,757.15	16.93	17.23	-89.113	-246.10	-323.29	595.84	564.95	30.89	19.287	
8,900.00	8,872.44	8,873.62	8,856.60	16.99	17.38	-88.969	-244.56	-325.84	598.43	567.25	31.18	19.195	
9,000.00	8,971.85	8,972.31	8,955.25	16.87	17.53	-89.379	-243.09	-328.49	601.01	569.61	31.40	19.139	
9,100.00	9,067.22	9,068.44	9,051.33	16.66	17.66	-91.534	-241.36	-331.15	604.12	572.54	31.58	19.128	
9,200.00	9,154.37	9,157.66	9,140.49	16.46	17.77	-94.712	-239.20	-333.52	610.09	578.39	31.69	19.249	
9,300.00	9,229.51	9,240.92	9,223.70	16.28	17.83	-98.161	-237.07	-335.35	622.35	590.67	31.69	19.642	
9,400.00	9,289.34	9,308.26	9,291.03	16.15	17.85	-100.318	-235.94	-335.86	644.43	612.93	31.50	20.458	
9,500.00	9,331.26	9,354.40	9,337.17	16.07	17.83	-99.653	-235.29	-335.84	679.52	648.36	31.16	21.808	
9,600.00	9,353.42	9,378.99	9,361.75	16.07	17.82	-95.249	-234.96	-335.74	727.92	697.17	30.75	23.669	
9,700.00	9,356.81	9,383.28	9,366.04	16.15	17.82	-90.870	-234.91	-335.71	787.21	756.86	30.35	25.938	
9,800.00	9,356.80	9,384.36	9,367.12	16.26	17.82	-90.972	-234.90	-335.71	854.22	824.21	30.01	28.467	
9,900.00	9,356.80	9,385.41	9,368.17	16.40	17.82	-91.071	-234.89	-335.70	927.19	897.47	29.72	31.194	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report



Company:	Centennial Resources Development, Inc.	Local Co-ordinate Reference:	Well Raider Federal Com 103H
Project:	Lea County, NM (NAD83 - UTM Zone 13)	TVD Reference:	RKB @ 3526.80usft (TBD)
Reference Site:	Raider	MD Reference:	RKB @ 3526.80usft (TBD)
Site Error:	0.00 usft	North Reference:	True
Reference Well:	Raider Federal Com 103H	Survey Calculation Method:	Minimum Curvature
Well Error:	1.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	USA Compass
Reference Design:	Plan 1 08-17-22	Offset TVD Reference:	Reference Datum

Offset Design: Raider - Raider Federal Com 701H - OH / 67386 - Surveys (H&P 625)													Offset Site Error: 0.00 usft
Survey Program: 170-MWD+IFR1+MS													Offset Well Error: 1.00 usft
Reference		Offset		Semi Major Axis			Offset Wellbore Centre		Distance		Rule Assigned:		Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
10,000.00	9,356.80	9,386.44	9,369.19	16.57	17.81	-91.167	-234.87	-335.70	1,004.83	975.33	29.49	34.070	
10,100.00	9,356.80	9,387.43	9,370.19	16.77	17.81	-91.261	-234.86	-335.69	1,086.12	1,056.81	29.31	37.060	
10,200.00	9,356.80	9,388.39	9,371.15	17.00	17.81	-91.352	-234.85	-335.69	1,170.32	1,141.16	29.16	40.136	
10,300.00	9,356.80	9,389.33	9,372.09	17.25	17.81	-91.440	-234.84	-335.68	1,256.83	1,227.79	29.04	43.277	
10,400.00	9,356.80	9,390.25	9,373.01	17.54	17.81	-91.526	-234.83	-335.68	1,345.22	1,316.27	28.95	46.469	
10,500.00	9,356.80	9,391.14	9,373.90	17.85	17.81	-91.610	-234.82	-335.67	1,435.12	1,406.25	28.88	49.698	
10,600.00	9,356.80	9,392.00	9,374.76	18.19	17.81	-91.692	-234.81	-335.67	1,526.29	1,497.47	28.82	52.956	
10,700.00	9,356.80	9,392.85	9,375.61	18.56	17.81	-91.771	-234.80	-335.66	1,618.50	1,589.72	28.78	56.234	
10,800.00	9,356.80	9,393.67	9,376.43	18.95	17.81	-91.849	-234.80	-335.66	1,711.58	1,682.83	28.75	59.527	
10,900.00	9,356.80	9,394.47	9,377.23	19.37	17.81	-91.925	-234.79	-335.65	1,805.40	1,776.67	28.74	62.829	
11,000.00	9,356.80	9,395.26	9,378.02	19.81	17.81	-91.998	-234.78	-335.65	1,899.85	1,871.13	28.73	66.137	
11,100.00	9,356.80	9,396.02	9,378.78	20.27	17.81	-92.070	-234.77	-335.64	1,994.85	1,966.12	28.73	69.446	
11,200.00	9,356.80	9,396.77	9,379.52	20.75	17.81	-92.140	-234.77	-335.64	2,090.31	2,061.57	28.73	72.754	
11,300.00	9,356.80	9,397.49	9,380.25	21.25	17.81	-92.209	-234.76	-335.64	2,186.17	2,157.43	28.74	76.059	
11,400.00	9,356.80	9,398.20	9,380.96	21.77	17.80	-92.276	-234.75	-335.63	2,282.39	2,253.63	28.76	79.357	
11,500.00	9,356.80	9,398.90	9,381.66	22.30	17.80	-92.341	-234.74	-335.63	2,378.92	2,350.14	28.78	82.648	
11,600.00	9,356.80	9,399.58	9,382.33	22.85	17.80	-92.405	-234.74	-335.63	2,475.73	2,446.92	28.81	85.928	
11,700.00	9,356.80	9,400.24	9,383.00	23.41	17.80	-92.467	-234.73	-335.62	2,572.78	2,543.93	28.84	89.198	
11,800.00	9,356.80	9,400.89	9,383.64	23.98	17.80	-92.528	-234.73	-335.62	2,670.05	2,641.17	28.88	92.455	
11,900.00	9,356.80	9,401.52	9,384.28	24.57	17.80	-92.588	-234.72	-335.61	2,767.51	2,738.59	28.92	95.698	
12,000.00	9,356.80	9,402.14	9,384.90	25.16	17.80	-92.646	-234.72	-335.61	2,865.15	2,836.18	28.96	98.926	
12,100.00	9,356.80	9,402.75	9,385.50	25.77	17.80	-92.703	-234.71	-335.61	2,962.94	2,933.93	29.01	102.138	
12,200.00	9,356.80	15,088.00	12,276.84	26.38	29.80	-168.590	2,827.67	-317.93	2,979.56	2,912.17	67.40	44.209	
12,300.00	9,356.80	15,181.00	12,274.79	27.00	30.36	-168.611	2,920.63	-316.46	2,977.12	2,908.60	68.52	43.450	
12,400.00	9,356.80	15,231.85	12,274.18	27.63	30.66	-168.639	2,971.44	-314.87	2,975.69	2,906.43	69.26	42.964	
12,409.81	9,356.80	15,235.28	12,274.20	27.70	30.68	-168.641	2,974.87	-314.75	2,975.68	2,906.37	69.32	42.930	
12,500.00	9,356.80	15,276.00	12,275.05	28.27	30.92	-168.674	3,015.56	-313.17	2,976.61	2,906.70	69.91	42.576	
12,600.00	9,356.80	15,486.58	12,276.91	28.91	32.19	-168.880	3,225.84	-302.69	2,976.60	2,904.29	72.31	41.166	
12,700.00	9,356.80	15,559.00	12,276.43	29.56	32.64	-168.941	3,298.19	-299.41	2,975.06	2,901.79	73.27	40.605	
12,800.00	9,356.80	15,654.03	12,276.02	30.22	33.23	-168.990	3,393.17	-296.75	2,974.08	2,899.61	74.47	39.936	
12,900.00	9,356.80	15,880.11	12,269.47	30.88	34.66	-169.052	3,619.05	-292.27	2,970.65	2,893.57	77.08	38.539	
13,000.00	9,356.80	15,936.00	12,267.53	31.54	35.02	-169.060	3,674.90	-291.51	2,966.64	2,888.71	77.93	38.067	
13,100.00	9,356.80	16,001.49	12,266.02	32.21	35.45	-169.060	3,740.38	-291.25	2,964.02	2,885.16	78.86	37.586	
13,200.00	9,356.80	16,092.73	12,263.70	32.89	36.04	-169.054	3,831.59	-291.11	2,961.51	2,881.45	80.06	36.991	
13,300.00	9,356.80	16,167.15	12,262.45	33.56	36.52	-169.067	3,905.99	-290.21	2,959.65	2,878.56	81.09	36.500	
13,400.00	9,356.80	16,219.00	12,262.14	34.25	36.86	-169.087	3,957.83	-289.11	2,958.85	2,877.00	81.85	36.148	
13,424.29	9,356.80	16,250.55	12,262.18	34.41	37.07	-169.101	3,989.37	-288.41	2,958.75	2,876.49	82.26	35.968	
13,500.00	9,356.80	16,313.00	12,262.73	34.93	37.48	-169.118	4,051.81	-287.61	2,959.16	2,876.05	83.11	35.607	
13,600.00	9,356.80	16,382.55	12,263.77	35.62	37.94	-169.131	4,121.35	-287.15	2,960.39	2,876.32	84.07	35.212	
13,700.00	9,356.80	16,455.90	12,265.24	36.31	38.42	-169.147	4,194.69	-286.62	2,962.24	2,877.16	85.08	34.816	
13,800.00	9,356.80	16,572.40	12,267.87	37.01	39.20	-169.161	4,311.14	-286.41	2,964.43	2,877.80	86.63	34.218	
13,900.00	9,356.80	16,715.74	12,267.90	37.70	40.17	-169.100	4,454.44	-289.68	2,964.60	2,876.10	88.50	33.498	
14,000.00	9,356.80	16,784.00	12,268.00	38.40	40.64	-169.045	4,522.63	-292.62	2,965.53	2,876.07	89.47	33.147	
14,100.00	9,356.80	16,843.97	12,268.68	39.11	41.05	-168.985	4,582.51	-295.93	2,967.68	2,877.36	90.32	32.858	
14,200.00	9,356.80	16,993.40	12,270.26	39.81	42.07	-168.814	4,731.63	-305.32	2,970.07	2,877.77	92.29	32.181	
14,300.00	9,356.80	17,204.45	12,267.07	40.52	43.55	-168.652	4,942.42	-313.28	2,969.30	2,874.28	95.02	31.251	
14,400.00	9,356.80	17,257.00	12,266.19	41.23	43.91	-168.633	4,994.95	-314.15	2,967.75	2,871.90	95.85	30.962	
14,500.00	9,356.80	17,397.71	12,263.42	41.94	44.89	-168.599	5,135.62	-315.41	2,965.96	2,868.24	97.72	30.353	
14,600.00	9,356.80	17,525.69	12,259.98	42.65	45.78	-168.569	5,263.55	-316.38	2,963.57	2,864.14	99.43	29.806	
14,700.00	9,356.80	17,634.00	12,255.20	43.37	46.54	-168.521	5,371.74	-317.96	2,959.48	2,858.57	100.92	29.326	
14,800.00	9,356.80	17,681.04	12,253.56	44.08	46.87	-168.507	5,418.75	-318.38	2,956.52	2,854.80	101.72	29.066	
14,900.00	9,356.80	17,729.00	12,253.43	44.80	47.20	-168.510	5,466.70	-318.19	2,955.86	2,853.36	102.51	28.836	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report



Company:	Centennial Resources Development, Inc.	Local Co-ordinate Reference:	Well Raider Federal Com 103H
Project:	Lea County, NM (NAD83 - UTM Zone 13)	TVD Reference:	RKB @ 3526.80usft (TBD)
Reference Site:	Raider	MD Reference:	RKB @ 3526.80usft (TBD)
Site Error:	0.00 usft	North Reference:	True
Reference Well:	Raider Federal Com 103H	Survey Calculation Method:	Minimum Curvature
Well Error:	1.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	USA Compass
Reference Design:	Plan 1 08-17-22	Offset TVD Reference:	Reference Datum

Offset Design: Raider - Raider Federal Com 701H - OH / 67386 - Surveys (H&P 625)												Offset Site Error:	0.00 usft
Survey Program: 170-MWD+IFR1+MS												Offset Well Error:	1.00 usft
Reference												Rule Assigned:	
Offset												Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	
							+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
14,901.64	9,356.80	17,729.00	12,253.43	44.81	47.20	-168.510	5,466.70	-318.19	2,955.86	2,853.35	102.51	28.835	
15,000.00	9,356.80	17,776.82	12,254.17	45.52	47.54	-168.518	5,514.52	-317.95	2,956.97	2,853.72	103.25	28.639	
15,100.00	9,356.80	17,850.56	12,255.69	46.24	48.06	-168.514	5,588.24	-318.48	2,959.13	2,854.81	104.32	28.367	
15,200.00	9,356.80	18,016.00	12,259.58	46.97	49.22	-168.534	5,753.62	-318.29	2,961.91	2,855.31	106.60	27.786	
15,300.00	9,356.80	18,253.16	12,256.05	47.69	50.90	-168.540	5,990.70	-317.32	2,960.89	2,851.20	109.69	26.992	
15,400.00	9,356.80	18,326.86	12,252.86	48.42	51.43	-168.512	6,064.33	-318.17	2,956.93	2,846.11	110.82	26.683	
15,500.00	9,356.80	18,389.00	12,250.95	49.14	51.87	-168.479	6,126.42	-319.54	2,954.30	2,842.51	111.79	26.426	
15,600.00	9,356.80	18,433.76	12,250.15	49.87	52.20	-168.444	6,171.15	-321.22	2,953.22	2,840.68	112.54	26.242	
15,611.88	9,356.80	18,439.57	12,250.09	49.96	52.24	-168.438	6,176.95	-321.51	2,953.21	2,840.58	112.63	26.220	
15,700.00	9,356.80	18,483.00	12,249.88	50.60	52.56	-168.386	6,220.29	-324.23	2,953.88	2,840.58	113.31	26.070	
15,800.00	9,356.80	18,736.88	12,244.14	51.33	54.40	-168.081	6,473.58	-339.14	2,952.95	2,836.29	116.66	25.312	
15,900.00	9,356.80	18,800.48	12,241.94	52.06	54.86	-168.065	6,537.14	-339.53	2,949.76	2,832.09	117.67	25.067	
16,000.00	9,356.80	18,859.00	12,241.07	52.79	55.28	-168.067	6,595.66	-339.27	2,948.14	2,829.53	118.61	24.856	
16,100.00	9,356.80	18,935.93	12,241.03	53.52	55.84	-168.095	6,672.57	-337.83	2,947.64	2,827.88	119.77	24.611	
16,125.61	9,356.80	18,954.00	12,241.12	53.71	55.97	-168.106	6,690.63	-337.26	2,947.60	2,827.55	120.04	24.554	
16,200.00	9,356.80	19,004.91	12,241.56	54.26	56.33	-168.133	6,741.52	-335.93	2,947.85	2,827.03	120.82	24.399	
16,300.00	9,356.80	19,074.54	12,242.68	54.99	56.83	-168.148	6,811.14	-335.40	2,949.23	2,827.37	121.86	24.201	
16,400.00	9,356.80	19,154.73	12,244.30	55.73	57.41	-168.142	6,891.31	-336.09	2,951.38	2,828.34	123.04	23.987	
16,500.00	9,356.80	19,443.38	12,242.38	56.46	59.51	-168.076	7,179.79	-339.24	2,951.44	2,824.49	126.95	23.249	
16,600.00	9,356.80	19,518.00	12,240.37	57.20	60.05	-168.096	7,254.37	-337.80	2,948.30	2,820.18	128.11	23.013	
16,700.00	9,356.80	19,574.94	12,239.55	57.94	60.46	-168.117	7,311.29	-336.53	2,946.24	2,817.19	129.05	22.830	
16,800.00	9,356.80	19,675.83	12,238.76	58.67	61.19	-168.172	7,412.13	-333.54	2,944.86	2,814.33	130.54	22.560	
16,900.00	9,356.80	19,783.22	12,237.19	59.41	61.97	-168.201	7,519.49	-331.68	2,943.06	2,810.96	132.10	22.279	
17,000.00	9,356.80	19,876.16	12,235.68	60.15	62.64	-168.209	7,612.42	-330.96	2,941.31	2,807.82	133.49	22.034	
17,100.00	9,356.80	19,939.94	12,234.98	60.89	63.11	-168.212	7,676.19	-330.72	2,940.21	2,805.72	134.49	21.861	
17,125.38	9,356.80	19,954.20	12,234.96	61.08	63.21	-168.212	7,690.45	-330.71	2,940.16	2,805.44	134.72	21.824	
17,200.00	9,356.80	19,990.00	12,235.12	61.63	63.47	-168.211	7,726.25	-330.77	2,940.59	2,805.30	135.29	21.735	
17,300.00	9,356.80	20,040.12	12,236.01	62.37	63.84	-168.204	7,776.35	-331.37	2,942.67	2,806.61	136.06	21.628	
17,400.00	9,356.80	20,311.73	12,235.34	63.12	65.84	-168.184	8,047.82	-332.33	2,942.02	2,802.14	139.87	21.033	
17,500.00	9,356.80	20,367.00	12,234.67	63.86	66.24	-168.227	8,103.03	-330.00	2,939.96	2,799.16	140.80	20.880	
17,594.31	9,356.80	20,423.40	12,234.84	64.56	66.65	-168.278	8,159.37	-327.36	2,939.34	2,797.63	141.71	20.742	
17,600.00	9,356.80	20,426.78	12,234.87	64.60	66.67	-168.281	8,162.74	-327.21	2,939.34	2,797.58	141.76	20.735	
17,700.00	9,356.80	20,519.73	12,236.19	65.34	67.35	-168.359	8,255.61	-323.43	2,939.87	2,796.71	143.16	20.536	
17,800.00	9,356.80	20,680.56	12,235.44	66.09	68.52	-168.521	8,416.19	-314.84	2,937.84	2,792.36	145.48	20.195	
17,879.56	9,356.80	20,709.03	12,235.44	66.68	68.73	-168.545	8,444.63	-313.59	2,937.14	2,791.15	146.00	20.118	
17,900.00	9,356.80	20,744.00	12,236.05	66.83	68.99	-168.569	8,479.58	-312.46	2,937.55	2,791.05	146.50	20.051	
17,914.64	9,356.80	20,744.00	12,236.05	66.94	68.99	-168.569	8,479.58	-312.46	2,937.52	2,790.99	146.52	20.048	
18,000.00	9,356.80	20,777.45	12,236.89	67.58	69.23	-168.589	8,513.01	-311.59	2,938.63	2,791.56	147.07	19.981	
18,100.00	9,356.80	20,894.30	12,239.06	68.32	70.08	-168.656	8,629.80	-308.58	2,939.91	2,791.09	148.81	19.756	
18,200.00	9,356.80	20,984.32	12,240.66	69.07	70.74	-168.698	8,719.78	-306.70	2,941.24	2,791.07	150.17	19.586	
18,300.00	9,356.80	21,097.96	12,242.73	69.81	71.58	-168.737	8,833.40	-305.11	2,942.77	2,790.90	151.87	19.377	
18,400.00	9,356.80	21,362.46	12,239.44	70.56	73.52	-168.807	9,097.78	-300.88	2,941.53	2,786.05	155.48	18.918	
18,500.00	9,356.80	21,522.26	12,230.48	71.31	74.70	-168.806	9,257.32	-299.21	2,935.71	2,778.08	157.64	18.623	
18,600.00	9,356.80	21,592.00	12,226.55	72.05	75.22	-168.789	9,326.94	-299.34	2,930.05	2,771.24	158.81	18.450	
18,700.00	9,356.80	21,655.34	12,223.74	72.80	75.69	-168.779	9,390.22	-299.31	2,925.49	2,765.59	159.90	18.296	
18,800.00	9,356.80	21,922.00	12,203.92	73.55	77.67	-168.849	9,655.86	-291.82	2,916.43	2,753.31	163.13	17.878	
18,900.00	9,356.80	21,969.00	12,200.14	74.30	78.01	-168.872	9,702.66	-289.91	2,907.54	2,743.39	164.15	17.713	
19,000.00	9,356.80	22,021.67	12,197.04	75.05	78.40	-168.902	9,755.20	-287.78	2,900.60	2,735.43	165.18	17.561	
19,100.00	9,356.80	22,040.00	12,195.96	75.79	78.53	-168.913	9,773.48	-287.04	2,895.19	2,729.43	165.76	17.466	
19,200.00	9,356.80	22,040.00	12,195.96	76.54	78.53	-168.913	9,773.48	-287.04	2,893.18	2,727.20	165.98	17.431	
19,208.41	9,356.80	22,040.00	12,195.96	76.61	78.53	-168.913	9,773.48	-287.04	2,893.16	2,727.17	165.99	17.430	
19,300.00	9,356.80	22,040.00	12,195.96	77.29	78.53	-168.913	9,773.48	-287.04	2,894.61	2,728.60	166.01	17.436	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report



Company:	Centennial Resources Development, Inc.	Local Co-ordinate Reference:	Well Raider Federal Com 103H
Project:	Lea County, NM (NAD83 - UTM Zone 13)	TVD Reference:	RKB @ 3526.80usft (TBD)
Reference Site:	Raider	MD Reference:	RKB @ 3526.80usft (TBD)
Site Error:	0.00 usft	North Reference:	True
Reference Well:	Raider Federal Com 103H	Survey Calculation Method:	Minimum Curvature
Well Error:	1.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	USA Compass
Reference Design:	Plan 1 08-17-22	Offset TVD Reference:	Reference Datum

Offset Design: Raider - Raider Federal Com 701H - OH / 67386 - Surveys (H&P 625)													Offset Site Error: 0.00 usft
Survey Program: 170-MWD+IFR1+MS													Offset Well Error: 1.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (")	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
19,400.00	9,356.80	22,040.00	12,195.96	78.04	78.53	-168.913	9,773.48	-287.04	2,899.50	2,733.64	165.87	17.481	
19,500.00	9,356.80	22,040.00	12,195.96	78.79	78.53	-168.913	9,773.48	-287.04	2,907.82	2,742.28	165.54	17.566	
19,533.58	9,356.80	22,040.00	12,195.96	79.04	78.53	-168.913	9,773.48	-287.04	2,911.38	2,745.99	165.39	17.603	



Anticollision Report



Company:	Centennial Resources Development, Inc.	Local Co-ordinate Reference:	Well Raider Federal Com 103H
Project:	Lea County, NM (NAD83 - UTM Zone 13)	TVD Reference:	RKB @ 3526.80usft (TBD)
Reference Site:	Raider	MD Reference:	RKB @ 3526.80usft (TBD)
Site Error:	0.00 usft	North Reference:	True
Reference Well:	Raider Federal Com 103H	Survey Calculation Method:	Minimum Curvature
Well Error:	1.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	USA Compass
Reference Design:	Plan 1 08-17-22	Offset TVD Reference:	Reference Datum

Offset Design: Raider - Raider Federal Com 703H - OH / 67430 - Surveys (H&P 489)													Offset Site Error: 0.00 usft
Survey Program: 198-MWD+IFR1+MS								Rule Assigned:					Offset Well Error: 1.00 usft
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
0.00	0.00	0.00	2.00	1.00	1.00	92.516	-56.67	1,289.69	1,290.94				
100.00	100.00	100.98	102.98	1.12	1.43	92.514	-56.62	1,289.58	1,290.82	1,288.27	2.55	506.060	
200.00	200.00	203.85	205.85	1.65	2.26	92.508	-56.46	1,289.23	1,290.47	1,286.56	3.92	329.596	
300.00	299.99	304.10	306.10	2.05	2.74	-40.692	-56.26	1,288.77	1,289.35	1,284.56	4.79	269.359	
400.00	399.96	403.74	405.74	2.41	3.36	-40.790	-56.12	1,288.31	1,286.90	1,281.15	5.75	223.682	
500.00	499.86	503.12	505.11	2.76	4.04	-40.940	-56.12	1,287.88	1,283.17	1,276.41	6.76	189.784	
600.00	599.68	602.97	604.97	3.12	4.59	-41.146	-56.23	1,287.47	1,278.15	1,270.52	7.63	167.515	
700.00	699.37	702.83	704.83	3.49	5.11	-41.413	-56.38	1,287.04	1,271.83	1,263.36	8.47	150.185	
800.00	798.90	803.94	805.93	3.86	5.57	-41.743	-56.66	1,286.54	1,264.16	1,254.91	9.24	136.746	
900.00	898.26	904.99	906.98	4.25	6.03	-42.130	-57.14	1,285.90	1,255.09	1,245.07	10.02	125.319	
1,000.00	997.40	1,006.14	1,008.12	4.65	6.43	-42.577	-57.87	1,285.10	1,244.63	1,233.89	10.74	115.907	
1,100.00	1,096.30	1,106.76	1,108.73	5.06	6.83	-43.083	-58.85	1,284.14	1,232.79	1,221.34	11.45	107.707	
1,200.00	1,194.93	1,205.75	1,207.72	5.48	7.15	-43.652	-59.92	1,283.11	1,219.69	1,207.61	12.07	101.013	
1,300.00	1,293.41	1,305.75	1,307.70	5.91	7.48	-44.176	-61.00	1,282.03	1,205.99	1,193.27	12.72	94.788	
1,400.00	1,391.89	1,406.95	1,408.89	6.34	7.84	-44.729	-61.86	1,280.72	1,192.20	1,178.81	13.39	89.028	
1,500.00	1,490.37	1,505.78	1,507.70	6.77	8.08	-45.296	-62.42	1,279.27	1,178.35	1,164.42	13.93	84.563	
1,600.00	1,588.85	1,602.35	1,604.27	7.21	8.24	-45.878	-62.65	1,277.91	1,164.70	1,150.28	14.41	80.801	
1,700.00	1,687.33	1,704.65	1,706.55	7.65	8.43	-46.510	-62.89	1,276.47	1,151.16	1,136.26	14.90	77.252	
1,800.00	1,785.82	1,808.12	1,810.01	8.09	8.62	-47.167	-63.10	1,274.50	1,137.28	1,121.88	15.40	73.872	
1,900.00	1,884.30	1,904.79	1,906.66	8.53	8.80	-47.803	-63.20	1,272.48	1,123.35	1,107.47	15.88	70.727	
2,000.00	1,982.78	2,001.90	2,003.75	8.98	8.99	-48.448	-63.43	1,270.61	1,109.73	1,093.36	16.37	67.798	
2,100.00	2,081.26	2,101.86	2,103.69	9.42	9.19	-49.136	-63.55	1,268.66	1,096.23	1,079.37	16.85	65.039	
2,200.00	2,179.74	2,282.52	2,283.75	9.87	9.91	-50.538	-62.77	1,254.69	1,075.81	1,058.08	17.74	60.652	
2,300.00	2,278.22	2,377.86	2,378.63	10.31	10.16	-51.355	-61.87	1,245.38	1,055.20	1,036.95	18.25	57.811	
2,400.00	2,376.74	2,474.74	2,475.04	10.72	10.42	-52.129	-60.79	1,235.96	1,035.02	1,016.31	18.72	55.304	
2,500.00	2,475.52	2,571.98	2,571.81	11.16	10.69	-52.802	-59.67	1,226.47	1,015.98	996.75	19.22	52.852	
2,600.00	2,574.55	2,667.44	2,666.82	11.59	10.96	-53.412	-58.69	1,217.26	998.25	978.52	19.73	50.606	
2,700.00	2,673.81	2,763.16	2,762.11	12.01	11.23	-53.982	-57.60	1,208.22	981.92	961.70	20.22	48.557	
2,800.00	2,773.27	2,872.41	2,870.83	12.42	11.56	-54.477	-58.31	1,197.71	966.25	945.51	20.73	46.602	
2,900.00	2,872.89	2,968.03	2,968.98	12.81	11.85	-54.742	-60.47	1,188.42	951.26	930.01	21.25	44.756	
3,000.00	2,972.65	3,061.32	3,058.82	13.18	12.14	-54.830	-64.20	1,180.19	937.83	916.05	21.78	43.059	
3,100.00	3,072.51	3,161.86	3,158.85	13.54	12.44	-54.748	-69.93	1,171.81	925.55	903.24	22.31	41.490	
3,200.00	3,172.45	3,257.61	3,254.12	13.86	12.72	-54.582	-75.47	1,164.01	914.44	891.61	22.83	40.057	
3,300.00	3,272.44	3,353.33	3,349.39	14.13	13.00	-54.327	-81.12	1,156.61	904.72	881.39	23.33	38.772	
3,400.00	3,372.44	3,448.11	3,443.75	14.19	13.28	79.125	-86.74	1,149.79	896.40	872.70	23.70	37.825	
3,500.00	3,472.44	3,545.16	3,540.41	14.24	13.57	79.412	-92.53	1,143.19	888.60	864.53	24.08	36.908	
3,600.00	3,572.44	3,641.61	3,636.48	14.28	13.85	79.708	-98.31	1,136.91	881.10	856.65	24.45	36.037	
3,700.00	3,672.44	3,736.12	3,730.66	14.32	14.12	80.000	-103.85	1,131.26	874.17	849.36	24.81	35.228	
3,800.00	3,772.44	3,845.04	3,839.18	14.37	14.45	80.376	-110.72	1,125.04	867.50	842.31	25.19	34.434	
3,900.00	3,872.44	3,959.13	3,952.73	14.41	14.82	80.635	-116.26	1,115.43	858.30	832.71	25.60	33.532	
4,000.00	3,972.44	4,058.86	4,051.98	14.46	15.16	80.849	-120.89	1,106.85	849.07	823.06	26.00	32.651	
4,100.00	4,072.44	4,156.15	4,148.79	14.50	15.49	81.083	-125.71	1,098.42	839.73	813.31	26.41	31.794	
4,200.00	4,172.44	4,249.03	4,241.26	14.55	15.81	81.299	-130.04	1,090.90	831.01	804.19	26.81	30.994	
4,300.00	4,272.44	4,340.44	4,332.35	14.59	16.11	81.496	-133.91	1,084.28	823.21	796.01	27.20	30.263	
4,400.00	4,372.44	4,431.84	4,423.50	14.64	16.41	81.674	-137.33	1,078.54	816.45	788.87	27.58	29.603	
4,500.00	4,472.44	4,536.16	4,527.60	14.69	16.75	81.824	-140.36	1,072.43	810.25	782.28	27.97	28.970	
4,600.00	4,572.44	4,631.90	4,623.10	14.73	17.07	81.921	-142.64	1,066.13	803.41	775.06	28.35	28.337	
4,700.00	4,672.44	4,807.86	4,797.67	14.78	17.99	82.245	-149.88	1,046.49	791.33	762.26	29.07	27.222	
4,800.00	4,772.44	4,899.52	4,888.18	14.83	18.35	82.453	-154.57	1,032.74	775.79	746.26	29.53	26.268	
4,900.00	4,872.44	4,987.65	4,975.35	14.87	18.69	82.702	-159.46	1,020.78	761.60	731.60	29.99	25.391	
5,000.00	4,972.44	5,076.91	5,063.78	14.92	19.03	83.005	-164.82	1,009.90	748.74	718.30	30.44	24.594	
5,100.00	5,072.44	5,167.69	5,153.85	14.97	19.37	83.335	-170.29	999.98	737.17	706.29	30.88	23.872	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report



Company:	Centennial Resources Development, Inc.	Local Co-ordinate Reference:	Well Raider Federal Com 103H
Project:	Lea County, NM (NAD83 - UTM Zone 13)	TVD Reference:	RKB @ 3526.80usft (TBD)
Reference Site:	Raider	MD Reference:	RKB @ 3526.80usft (TBD)
Site Error:	0.00 usft	North Reference:	True
Reference Well:	Raider Federal Com 103H	Survey Calculation Method:	Minimum Curvature
Well Error:	1.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	USA Compass
Reference Design:	Plan 1 08-17-22	Offset TVD Reference:	Reference Datum

Offset Design: Raider - Raider Federal Com 703H - OH / 67430 - Surveys (H&P 489)													Offset Site Error: 0.00 usft
Survey Program: 198-MWD+IFR1+MS													Offset Well Error: 1.00 usft
Rule Assigned:													
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference	Offset	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
5,200.00	5,172.44	5,260.97	5,246.51	15.02	19.72	83.672	-175.66	990.66	726.57	695.26	31.31	23.208	
5,300.00	5,272.44	5,355.22	5,340.21	15.07	20.07	83.992	-180.64	981.88	716.74	685.01	31.72	22.592	
5,400.00	5,372.44	5,450.45	5,434.97	15.12	20.41	84.312	-185.47	973.68	707.64	675.50	32.14	22.021	
5,500.00	5,472.44	5,548.76	5,532.81	15.16	20.77	84.661	-190.53	965.58	698.94	666.40	32.54	21.478	
5,600.00	5,572.44	5,649.62	5,633.20	15.21	21.13	85.038	-195.85	957.29	690.27	657.32	32.95	20.950	
5,700.00	5,672.44	5,751.26	5,734.31	15.26	21.50	85.432	-201.28	948.60	681.29	647.94	33.35	20.426	
5,800.00	5,772.44	5,843.57	5,826.14	15.31	21.84	85.837	-206.66	940.83	672.46	638.72	33.74	19.928	
5,900.00	5,872.44	5,934.65	5,916.85	15.36	22.15	86.286	-212.31	934.80	665.40	631.30	34.10	19.511	
6,000.00	5,972.44	6,033.47	6,015.24	15.42	22.48	86.839	-219.07	928.65	658.77	624.32	34.45	19.124	
6,100.00	6,072.44	6,130.93	6,112.30	15.47	22.80	87.389	-225.66	922.84	652.46	617.68	34.78	18.761	
6,200.00	6,172.44	6,228.47	6,209.49	15.52	23.13	87.929	-231.99	917.34	646.55	611.45	35.10	18.421	
6,300.00	6,272.44	6,325.46	6,306.16	15.57	23.44	88.439	-237.88	912.18	641.02	605.62	35.41	18.104	
6,400.00	6,372.44	6,422.68	6,403.07	15.62	23.75	88.968	-243.88	907.45	636.01	600.31	35.70	17.815	
6,500.00	6,472.44	6,522.30	6,502.40	15.67	24.07	89.503	-249.85	902.83	631.29	595.30	35.99	17.542	
6,600.00	6,572.44	6,620.89	6,600.75	15.72	24.39	89.980	-255.10	898.23	626.60	590.32	36.28	17.271	
6,700.00	6,672.44	6,718.83	6,698.54	15.78	24.71	90.285	-258.42	893.97	622.25	585.65	36.59	17.004	
6,800.00	6,772.44	6,819.18	6,798.77	15.83	25.03	90.521	-260.93	889.76	618.07	581.14	36.93	16.738	
6,900.00	6,872.44	6,921.56	6,901.02	15.88	25.37	90.753	-263.38	885.19	613.63	576.36	37.27	16.465	
7,000.00	6,972.44	7,017.37	6,996.72	15.94	25.67	90.931	-265.21	880.95	609.24	571.63	37.61	16.200	
7,100.00	7,072.44	7,117.31	7,096.57	15.99	25.98	91.043	-266.33	877.00	605.30	567.35	37.96	15.947	
7,200.00	7,172.44	7,214.39	7,193.58	16.04	26.28	91.137	-267.25	873.32	601.54	563.23	38.30	15.705	
7,300.00	7,272.44	7,314.58	7,293.70	16.10	26.58	91.258	-268.45	869.76	598.01	559.36	38.64	15.475	
7,400.00	7,372.44	7,413.09	7,392.14	16.15	26.89	91.374	-269.57	866.36	594.57	555.59	38.99	15.251	
7,500.00	7,472.44	7,512.14	7,491.13	16.20	27.24	91.482	-270.61	863.12	591.34	551.95	39.38	15.015	
7,600.00	7,572.44	7,611.04	7,589.98	16.26	27.59	91.593	-271.67	860.04	588.25	548.49	39.77	14.792	
7,700.00	7,672.44	7,709.34	7,688.23	16.31	27.88	91.705	-272.74	857.24	585.43	545.34	40.09	14.603	
7,800.00	7,772.44	7,809.69	7,788.53	16.37	28.17	91.846	-274.09	854.52	582.76	542.36	40.40	14.423	
7,900.00	7,872.44	7,911.50	7,890.28	16.42	28.48	92.008	-275.62	851.38	579.73	539.01	40.73	14.235	
8,000.00	7,972.44	8,003.09	7,981.83	16.48	28.68	92.122	-276.68	848.83	577.02	536.06	40.96	14.086	
8,045.92	8,018.35	8,039.62	8,018.36	16.51	28.70	92.138	-276.83	848.53	576.65	535.65	41.00	14.064 CC, ES, SF	
8,100.00	8,072.44	8,086.23	8,064.97	16.54	28.68	92.127	-276.74	848.95	577.12	536.11	41.01	14.073	
8,200.00	8,172.44	8,187.86	8,166.60	16.59	28.50	92.111	-276.62	850.09	578.24	537.35	40.89	14.140	
8,300.00	8,272.44	8,288.41	8,267.14	16.65	28.32	92.078	-276.32	851.10	579.23	538.44	40.79	14.200	
8,400.00	8,372.44	8,389.97	8,368.70	16.70	28.14	92.035	-275.92	851.90	579.99	539.29	40.71	14.247	
8,500.00	8,472.44	8,491.61	8,470.33	16.76	27.99	91.997	-275.56	852.45	580.53	539.87	40.66	14.278	
8,600.00	8,572.44	8,592.97	8,571.69	16.82	27.87	91.963	-275.21	852.66	580.72	540.06	40.66	14.281	
8,700.00	8,672.44	8,693.95	8,672.67	16.87	27.79	91.887	-274.44	852.76	580.80	540.07	40.73	14.260	
8,800.00	8,772.44	8,795.82	8,774.53	16.93	27.78	91.801	-273.57	852.60	580.61	539.75	40.86	14.209	
8,900.00	8,872.44	8,896.49	8,875.20	16.99	27.81	91.727	-272.81	852.16	580.15	539.10	41.05	14.134	
8,961.86	8,934.15	8,957.97	8,936.68	16.91	27.84	92.081	-272.33	851.89	579.99	538.88	41.11	14.109	
9,000.00	8,971.85	8,995.42	8,974.13	16.87	27.86	92.561	-272.07	851.74	580.05	538.92	41.12	14.105	
9,100.00	9,067.22	9,094.37	9,073.08	16.66	27.95	95.203	-271.46	851.17	581.51	540.47	41.04	14.171	
9,200.00	9,154.37	9,186.14	9,164.84	16.46	28.10	98.865	-270.83	849.96	586.86	546.16	40.70	14.421	
9,300.00	9,229.51	9,263.12	9,241.79	16.28	28.27	102.066	-270.23	848.55	600.37	560.38	39.98	15.015	
9,400.00	9,289.34	9,324.08	9,302.75	16.15	28.43	103.518	-269.70	847.38	626.17	587.31	38.85	16.116	
9,500.00	9,331.26	9,367.18	9,345.83	16.07	28.53	102.064	-269.31	846.53	666.26	628.82	37.43	17.799	
9,600.00	9,353.42	9,390.47	9,369.12	16.07	28.59	96.686	-269.10	846.06	719.98	684.02	35.96	20.020	
9,700.00	9,356.81	9,394.85	9,373.50	16.15	28.60	91.667	-269.05	845.97	784.25	749.59	34.66	22.626	
9,800.00	9,356.80	9,395.82	9,374.47	16.26	28.61	91.763	-269.04	845.95	855.53	821.91	33.62	25.446	
9,900.00	9,356.80	9,395.00	9,373.65	16.40	28.60	91.682	-269.05	845.97	932.11	899.29	32.82	28.398	
10,000.00	9,356.80	9,395.00	9,373.65	16.57	28.60	91.682	-269.05	845.97	1,012.78	980.55	32.23	31.428	
10,100.00	9,356.80	9,395.00	9,373.65	16.77	28.60	91.682	-269.05	845.97	1,096.64	1,064.85	31.79	34.496	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report



Company:	Centennial Resources Development, Inc.	Local Co-ordinate Reference:	Well Raider Federal Com 103H
Project:	Lea County, NM (NAD83 - UTM Zone 13)	TVD Reference:	RKB @ 3526.80usft (TBD)
Reference Site:	Raider	MD Reference:	RKB @ 3526.80usft (TBD)
Site Error:	0.00 usft	North Reference:	True
Reference Well:	Raider Federal Com 103H	Survey Calculation Method:	Minimum Curvature
Well Error:	1.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	USA Compass
Reference Design:	Plan 1 08-17-22	Offset TVD Reference:	Reference Datum

Offset Design: Raider - Raider Federal Com 703H - OH / 67430 - Surveys (H&P 489)													Offset Site Error:	0.00 usft	
Survey Program:		198-MWD+IFR1+MS					Rule Assigned:							Offset Well Error:	1.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning		
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)					
10,200.00	9,356.80	9,395.00	9,373.65	17.00	28.60	91.682	-269.05	845.97	1,183.01	1,151.53	31.48	37.580			
10,300.00	9,356.80	9,400.10	9,378.74	17.25	28.61	92.190	-269.00	845.87	1,271.37	1,240.12	31.24	40.694			
10,400.00	9,356.80	9,401.01	9,379.66	17.54	28.61	92.282	-268.99	845.85	1,361.34	1,330.25	31.09	43.782			
10,500.00	9,356.80	9,401.94	9,380.59	17.85	28.61	92.374	-268.98	845.84	1,452.63	1,421.63	31.00	46.862			
10,600.00	9,356.80	9,402.88	9,381.53	18.19	28.61	92.468	-268.97	845.82	1,544.99	1,514.05	30.94	49.930			
10,700.00	9,356.80	9,403.84	9,382.48	18.56	28.61	92.564	-268.96	845.80	1,638.26	1,607.34	30.92	52.986			
10,800.00	9,356.80	9,404.81	9,383.45	18.95	28.61	92.660	-268.95	845.79	1,732.27	1,701.35	30.92	56.029			
10,900.00	9,356.80	9,405.79	9,384.44	19.37	28.61	92.759	-268.94	845.77	1,826.92	1,795.98	30.93	59.060			
11,000.00	9,356.80	9,406.79	9,385.44	19.81	28.61	92.858	-268.93	845.75	1,922.11	1,891.15	30.96	62.079			
11,100.00	9,356.80	9,407.81	9,386.45	20.27	28.61	92.960	-268.92	845.74	2,017.76	1,986.76	31.00	65.084			
11,200.00	9,356.80	9,408.84	9,387.49	20.75	28.61	93.063	-268.91	845.72	2,113.82	2,082.77	31.05	68.078			
11,300.00	9,356.80	9,409.89	9,388.53	21.25	28.61	93.167	-268.90	845.70	2,210.22	2,179.12	31.10	71.058			
11,400.00	9,356.80	9,410.95	9,389.60	21.77	28.61	93.273	-268.89	845.69	2,306.94	2,275.77	31.16	74.025			
11,500.00	9,356.80	9,412.03	9,390.68	22.30	28.61	93.381	-268.88	845.67	2,403.92	2,372.69	31.23	76.979			
11,600.00	9,356.80	9,413.13	9,391.78	22.85	28.61	93.490	-268.87	845.66	2,501.13	2,469.84	31.30	79.920			
11,700.00	9,356.80	9,414.25	9,392.89	23.41	28.61	93.601	-268.85	845.64	2,598.56	2,567.20	31.37	82.847			
11,800.00	9,356.80	9,415.38	9,394.02	23.98	28.61	93.714	-268.84	845.63	2,696.18	2,664.74	31.44	85.761			
11,900.00	9,356.80	9,416.53	9,395.18	24.57	28.61	93.829	-268.83	845.61	2,793.96	2,762.45	31.51	88.660			
12,000.00	9,356.80	9,417.70	9,396.35	25.16	28.61	93.946	-268.81	845.59	2,891.90	2,860.31	31.59	91.544			
12,100.00	9,356.80	15,021.13	12,266.77	25.77	36.39	167.904	2,701.38	895.06	2,976.26	2,906.83	69.44	42.863			
12,200.00	9,356.80	15,100.09	12,265.98	26.38	36.75	167.910	2,780.33	894.51	2,975.20	2,904.79	70.41	42.256			
12,239.11	9,356.80	15,124.29	12,265.98	26.62	36.86	167.915	2,804.53	894.24	2,975.10	2,904.38	70.72	42.068			
12,300.00	9,356.80	15,205.76	12,266.23	27.00	37.24	167.938	2,885.99	893.07	2,975.19	2,903.51	71.68	41.509			
12,400.00	9,356.80	15,306.51	12,265.49	27.63	37.73	167.969	2,986.72	891.25	2,974.09	2,901.19	72.90	40.795			
12,500.00	9,356.80	15,466.34	12,262.47	28.27	38.52	167.994	3,146.49	889.20	2,971.75	2,896.95	74.80	39.729			
12,600.00	9,356.80	15,527.00	12,261.61	28.91	38.82	168.000	3,207.14	888.72	2,970.00	2,894.37	75.63	39.270			
12,641.72	9,356.80	15,527.00	12,261.61	29.18	38.82	168.000	3,207.14	888.72	2,969.71	2,894.02	75.69	39.235			
12,700.00	9,356.80	15,557.38	12,261.74	29.56	38.98	168.004	3,237.52	888.52	2,969.93	2,893.82	76.11	39.022			
12,800.00	9,356.80	15,622.00	12,263.16	30.22	39.31	167.999	3,302.12	889.05	2,971.97	2,895.01	76.97	38.615			
12,900.00	9,356.80	15,717.00	12,264.32	30.88	39.79	167.953	3,397.07	891.74	2,973.78	2,895.58	78.19	38.031			
13,000.00	9,356.80	15,775.92	12,265.04	31.54	40.11	167.925	3,455.95	893.33	2,976.05	2,897.04	79.01	37.669			
13,100.00	9,356.80	15,811.00	12,266.70	32.21	40.29	167.926	3,490.99	893.64	2,980.83	2,901.34	79.49	37.500			
13,200.00	9,356.80	16,056.07	12,274.49	32.89	41.60	167.935	3,735.83	894.72	2,983.74	2,901.09	82.65	36.100			
13,300.00	9,356.80	16,096.00	12,275.01	33.56	41.81	167.919	3,775.74	895.67	2,985.65	2,902.42	83.23	35.874			
13,400.00	9,356.80	16,174.70	12,277.11	34.25	42.24	167.890	3,854.38	897.68	2,988.84	2,904.57	84.27	35.467			
13,500.00	9,356.80	16,356.09	12,281.45	34.93	43.25	167.878	4,035.69	899.17	2,991.50	2,904.87	86.62	34.534			
13,600.00	9,356.80	16,431.75	12,281.90	35.62	43.68	167.887	4,111.35	898.77	2,992.19	2,904.53	87.66	34.133			
13,700.00	9,356.80	16,497.37	12,283.84	36.31	44.06	167.906	4,176.94	898.15	2,994.78	2,906.21	88.57	33.814			
13,800.00	9,356.80	16,647.00	12,287.27	37.01	44.93	167.962	4,326.50	895.87	2,996.62	2,906.06	90.56	33.091			
13,900.00	9,356.80	16,688.15	12,287.89	37.70	45.17	167.966	4,367.64	895.75	2,998.54	2,907.35	91.18	32.884			
14,000.00	9,356.80	16,742.00	12,291.13	38.40	45.48	167.989	4,421.38	895.19	3,003.46	2,911.50	91.96	32.659			
14,100.00	9,356.80	16,742.00	12,291.13	39.11	45.48	167.989	4,421.38	895.19	3,009.91	2,917.99	91.92	32.745			
14,200.00	9,356.80	16,818.56	12,297.97	39.81	45.93	168.034	4,497.63	894.23	3,018.40	2,925.47	92.94	32.477			
14,300.00	9,356.80	16,890.43	12,304.98	40.52	46.35	168.077	4,569.15	893.37	3,027.71	2,933.83	93.89	32.249			
14,400.00	9,356.80	17,085.00	12,320.19	41.23	47.52	168.238	4,762.99	887.83	3,033.70	2,937.04	96.66	31.385			
14,500.00	9,356.80	17,085.00	12,320.19	41.94	47.52	168.238	4,762.99	887.83	3,042.01	2,945.45	96.56	31.503			
14,600.00	9,356.80	17,085.00	12,320.19	42.65	47.52	168.238	4,762.99	887.83	3,053.57	2,957.19	96.38	31.683			
14,700.00	9,356.80	17,085.00	12,320.19	43.37	47.52	168.238	4,762.99	887.83	3,068.35	2,972.24	96.11	31.924			
14,800.00	9,356.80	17,085.00	12,320.19	44.08	47.52	168.238	4,762.99	887.83	3,086.31	2,990.54	95.77	32.227			
14,900.00	9,356.80	17,085.00	12,320.19	44.80	47.52	168.238	4,762.99	887.83	3,107.37	3,012.03	95.35	32.590			
15,000.00	9,356.80	17,085.00	12,320.19	45.52	47.52	168.238	4,762.99	887.83	3,131.49	3,036.64	94.86	33.013			
15,100.00	9,356.80	17,085.00	12,320.19	46.24	47.52	168.238	4,762.99	887.83	3,158.60	3,064.30	94.30	33.495			

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report



Company:	Centennial Resources Development, Inc.	Local Co-ordinate Reference:	Well Raider Federal Com 103H
Project:	Lea County, NM (NAD83 - UTM Zone 13)	TVD Reference:	RKB @ 3526.80usft (TBD)
Reference Site:	Raider	MD Reference:	RKB @ 3526.80usft (TBD)
Site Error:	0.00 usft	North Reference:	True
Reference Well:	Raider Federal Com 103H	Survey Calculation Method:	Minimum Curvature
Well Error:	1.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	USA Compass
Reference Design:	Plan 1 08-17-22	Offset TVD Reference:	Reference Datum

Offset Design: Raider - Raider Federal Com 703H - OH / 67430 - Surveys (H&P 489)													Offset Site Error: 0.00 usft
Survey Program: 198-MWD+IFR1+MS													Offset Well Error: 1.00 usft
Reference		Offset		Semi Major Axis			Offset Wellbore Centre		Distance			Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)		
15,200.00	9,356.80	17,085.00	12,320.19	46.97	47.52	168.238	4,762.99	887.83	3,188.61	3,094.92	93.69	34.035	
15,300.00	9,356.80	17,085.00	12,320.19	47.69	47.52	168.238	4,762.99	887.83	3,221.45	3,128.43	93.02	34.633	
15,400.00	9,356.80	17,085.00	12,320.19	48.42	47.52	168.238	4,762.99	887.83	3,257.02	3,164.72	92.30	35.286	
15,500.00	9,356.80	17,085.00	12,320.19	49.14	47.52	168.238	4,762.99	887.83	3,295.25	3,203.71	91.55	35.995	
15,600.00	9,356.80	17,085.00	12,320.19	49.87	47.52	168.238	4,762.99	887.83	3,336.04	3,245.29	90.76	36.759	
15,700.00	9,356.80	17,085.00	12,320.19	50.60	47.52	168.238	4,762.99	887.83	3,379.30	3,289.36	89.93	37.575	
15,800.00	9,356.80	17,085.00	12,320.19	51.33	47.52	168.238	4,762.99	887.83	3,424.93	3,335.84	89.09	38.444	
15,900.00	9,356.80	17,085.00	12,320.19	52.06	47.52	168.238	4,762.99	887.83	3,472.84	3,384.62	88.23	39.363	
16,000.00	9,356.80	17,085.00	12,320.19	52.79	47.52	168.238	4,762.99	887.83	3,522.94	3,435.59	87.35	40.332	
16,100.00	9,356.80	17,085.00	12,320.19	53.52	47.52	168.238	4,762.99	887.83	3,575.14	3,488.67	86.46	41.349	
16,200.00	9,356.80	17,085.00	12,320.19	54.26	47.52	168.238	4,762.99	887.83	3,629.34	3,543.77	85.57	42.413	
16,300.00	9,356.80	17,085.00	12,320.19	54.99	47.52	168.238	4,762.99	887.83	3,685.45	3,600.78	84.68	43.523	
16,400.00	9,356.80	17,085.00	12,320.19	55.73	47.52	168.238	4,762.99	887.83	3,743.40	3,659.61	83.79	44.677	
16,500.00	9,356.80	17,085.00	12,320.19	56.46	47.52	168.238	4,762.99	887.83	3,803.10	3,720.19	82.90	45.874	
16,600.00	9,356.80	17,085.00	12,320.19	57.20	47.52	168.238	4,762.99	887.83	3,864.46	3,782.43	82.03	47.112	
16,700.00	9,356.80	17,085.00	12,320.19	57.94	47.52	168.238	4,762.99	887.83	3,927.41	3,846.24	81.16	48.390	
16,800.00	9,356.80	17,085.00	12,320.19	58.67	47.52	168.238	4,762.99	887.83	3,991.87	3,911.56	80.31	49.707	
16,900.00	9,356.80	17,085.00	12,320.19	59.41	47.52	168.238	4,762.99	887.83	4,057.77	3,978.30	79.47	51.060	
17,000.00	9,356.80	17,085.00	12,320.19	60.15	47.52	168.238	4,762.99	887.83	4,125.04	4,046.39	78.65	52.449	
17,100.00	9,356.80	17,085.00	12,320.19	60.89	47.52	168.238	4,762.99	887.83	4,193.62	4,115.78	77.84	53.872	
17,200.00	9,356.80	17,085.00	12,320.19	61.63	47.52	168.238	4,762.99	887.83	4,263.44	4,186.38	77.06	55.327	
17,300.00	9,356.80	17,085.00	12,320.19	62.37	47.52	168.238	4,762.99	887.83	4,334.45	4,258.15	76.29	56.814	
17,400.00	9,356.80	17,085.00	12,320.19	63.12	47.52	168.238	4,762.99	887.83	4,406.58	4,331.03	75.55	58.329	
17,500.00	9,356.80	17,085.00	12,320.19	63.86	47.52	168.238	4,762.99	887.83	4,479.78	4,404.95	74.82	59.872	
17,600.00	9,356.80	17,085.00	12,320.19	64.60	47.52	168.238	4,762.99	887.83	4,554.00	4,479.88	74.12	61.442	
17,700.00	9,356.80	17,085.00	12,320.19	65.34	47.52	168.238	4,762.99	887.83	4,629.19	4,555.75	73.44	63.036	
17,800.00	9,356.80	17,085.00	12,320.19	66.09	47.52	168.238	4,762.99	887.83	4,705.30	4,632.52	72.78	64.654	
17,900.00	9,356.80	17,085.00	12,320.19	66.83	47.52	168.238	4,762.99	887.83	4,782.30	4,710.16	72.14	66.294	
18,000.00	9,356.80	17,085.00	12,320.19	67.58	47.52	168.238	4,762.99	887.83	4,860.13	4,788.61	71.52	67.954	
18,100.00	9,356.80	17,085.00	12,320.19	68.32	47.52	168.238	4,762.99	887.83	4,938.76	4,867.83	70.92	69.634	
18,200.00	9,356.80	17,085.00	12,320.19	69.07	47.52	168.238	4,762.99	887.83	5,018.15	4,947.80	70.35	71.331	
18,300.00	9,356.80	17,085.00	12,320.19	69.81	47.52	168.238	4,762.99	887.83	5,098.26	5,028.47	69.80	73.044	
18,400.00	9,356.80	17,085.00	12,320.19	70.56	47.52	168.238	4,762.99	887.83	5,179.07	5,109.81	69.26	74.773	
18,500.00	9,356.80	17,085.00	12,320.19	71.31	47.52	168.238	4,762.99	887.83	5,260.54	5,191.79	68.75	76.515	
18,600.00	9,356.80	17,085.00	12,320.19	72.05	47.52	168.238	4,762.99	887.83	5,342.63	5,274.38	68.26	78.270	
18,700.00	9,356.80	17,085.00	12,320.19	72.80	47.52	168.238	4,762.99	887.83	5,425.33	5,357.55	67.79	80.037	
18,800.00	9,356.80	17,085.00	12,320.19	73.55	47.52	168.238	4,762.99	887.83	5,508.60	5,441.27	67.33	81.813	
18,900.00	9,356.80	17,085.00	12,320.19	74.30	47.52	168.238	4,762.99	887.83	5,592.42	5,525.53	66.90	83.598	
19,000.00	9,356.80	17,085.00	12,320.19	75.05	47.52	168.238	4,762.99	887.83	5,676.77	5,610.29	66.48	85.391	
19,100.00	9,356.80	17,085.00	12,320.19	75.79	47.52	168.238	4,762.99	887.83	5,761.61	5,695.53	66.08	87.192	
19,200.00	9,356.80	17,085.00	12,320.19	76.54	47.52	168.238	4,762.99	887.83	5,846.94	5,781.24	65.70	88.997	
19,300.00	9,356.80	17,085.00	12,320.19	77.29	47.52	168.238	4,762.99	887.83	5,932.72	5,867.39	65.33	90.808	
19,400.00	9,356.80	17,085.00	12,320.19	78.04	47.52	168.238	4,762.99	887.83	6,018.94	5,953.96	64.98	92.622	
19,500.00	9,356.80	17,085.00	12,320.19	78.79	47.52	168.238	4,762.99	887.83	6,105.58	6,040.93	64.65	94.440	
19,533.58	9,356.80	17,085.00	12,320.19	79.04	47.52	168.238	4,762.99	887.83	6,134.77	6,070.23	64.54	95.051	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report



Company:	Centennial Resources Development, Inc.	Local Co-ordinate Reference:	Well Raider Federal Com 103H
Project:	Lea County, NM (NAD83 - UTM Zone 13)	TVD Reference:	RKB @ 3526.80usft (TBD)
Reference Site:	Raider	MD Reference:	RKB @ 3526.80usft (TBD)
Site Error:	0.00 usft	North Reference:	True
Reference Well:	Raider Federal Com 103H	Survey Calculation Method:	Minimum Curvature
Well Error:	1.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	USA Compass
Reference Design:	Plan 1 08-17-22	Offset TVD Reference:	Reference Datum

Offset Design: Raider - Raider Federal Com 703H - ST01 / 67430 - Surveys (H&P 489)													Offset Site Error: 0.00 usft
Survey Program: 198-MWD+IFR1+MS, 12575-MWD+IFR1+MS													Offset Well Error: 1.00 usft
Reference	Offset	Semi Major Axis	Rule Assigned:										
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
							+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
0.00	0.00	0.00	2.00	1.00	1.00	92.516	-56.67	1,289.69	1,290.94				
100.00	100.00	100.98	102.98	1.12	1.43	92.514	-56.62	1,289.58	1,290.82	1,288.27	2.55	506.060	
200.00	200.00	203.85	205.85	1.65	2.26	92.508	-56.46	1,289.23	1,290.47	1,286.56	3.92	329.596	
300.00	299.99	304.10	306.10	2.05	2.74	-40.692	-56.26	1,288.77	1,289.35	1,284.56	4.79	269.359	
400.00	399.96	403.74	405.74	2.41	3.36	-40.790	-56.12	1,288.31	1,286.90	1,281.15	5.75	223.682	
500.00	499.86	503.12	505.11	2.76	4.04	-40.940	-56.12	1,287.88	1,283.17	1,276.41	6.76	189.784	
600.00	599.68	602.97	604.97	3.12	4.59	-41.146	-56.23	1,287.47	1,278.15	1,270.52	7.63	167.515	
700.00	699.37	702.83	704.83	3.49	5.11	-41.413	-56.38	1,287.04	1,271.83	1,263.36	8.47	150.185	
800.00	798.90	803.94	805.93	3.86	5.57	-41.743	-56.66	1,286.54	1,264.16	1,254.91	9.24	136.746	
900.00	898.26	904.99	906.98	4.25	6.03	-42.130	-57.14	1,285.90	1,255.09	1,245.07	10.02	125.319	
1,000.00	997.40	1,006.14	1,008.12	4.65	6.43	-42.577	-57.87	1,285.10	1,244.63	1,233.89	10.74	115.907	
1,100.00	1,096.30	1,106.76	1,108.73	5.06	6.83	-43.083	-58.85	1,284.14	1,232.79	1,221.34	11.45	107.707	
1,200.00	1,194.93	1,205.75	1,207.72	5.48	7.15	-43.652	-59.92	1,283.11	1,219.69	1,207.61	12.07	101.013	
1,300.00	1,293.41	1,305.75	1,307.70	5.91	7.48	-44.176	-61.00	1,282.03	1,205.99	1,193.27	12.72	94.788	
1,400.00	1,391.89	1,406.95	1,408.89	6.34	7.84	-44.729	-61.86	1,280.72	1,192.20	1,178.81	13.39	89.028	
1,500.00	1,490.37	1,505.78	1,507.70	6.77	8.08	-45.296	-62.42	1,279.27	1,178.35	1,164.42	13.93	84.563	
1,600.00	1,588.85	1,602.35	1,604.27	7.21	8.24	-45.878	-62.65	1,277.91	1,164.70	1,150.28	14.41	80.801	
1,700.00	1,687.33	1,704.65	1,706.55	7.65	8.43	-46.510	-62.89	1,276.47	1,151.16	1,136.26	14.90	77.252	
1,800.00	1,785.82	1,808.12	1,810.01	8.09	8.62	-47.167	-63.10	1,274.50	1,137.28	1,121.88	15.40	73.872	
1,900.00	1,884.30	1,904.79	1,906.66	8.53	8.80	-47.803	-63.20	1,272.48	1,123.35	1,107.47	15.88	70.727	
2,000.00	1,982.78	2,001.90	2,003.75	8.98	8.99	-48.448	-63.43	1,270.61	1,109.73	1,093.36	16.37	67.798	
2,100.00	2,081.26	2,101.86	2,103.69	9.42	9.19	-49.136	-63.55	1,268.66	1,096.23	1,079.37	16.85	65.039	
2,200.00	2,179.74	2,282.52	2,283.75	9.87	9.91	-50.538	-62.77	1,254.69	1,075.81	1,058.08	17.74	60.652	
2,300.00	2,278.22	2,377.86	2,378.63	10.31	10.16	-51.355	-61.87	1,245.38	1,055.20	1,036.95	18.25	57.811	
2,400.00	2,376.74	2,474.74	2,475.04	10.72	10.42	-52.129	-60.79	1,235.96	1,035.02	1,016.31	18.72	55.304	
2,500.00	2,475.52	2,571.98	2,571.81	11.16	10.69	-52.802	-59.67	1,226.47	1,015.98	996.75	19.22	52.852	
2,600.00	2,574.55	2,667.44	2,666.82	11.59	10.96	-53.412	-58.69	1,217.26	998.25	978.52	19.73	50.606	
2,700.00	2,673.81	2,763.16	2,762.11	12.01	11.23	-53.982	-57.60	1,208.22	981.92	961.70	20.22	48.557	
2,800.00	2,773.27	2,872.41	2,870.83	12.42	11.56	-54.477	-58.31	1,197.71	966.25	945.51	20.73	46.602	
2,900.00	2,872.89	2,968.03	2,968.98	12.81	11.85	-54.742	-60.47	1,188.42	951.26	930.01	21.25	44.756	
3,000.00	2,972.65	3,061.32	3,058.82	13.18	12.14	-54.830	-64.20	1,180.19	937.83	916.05	21.78	43.059	
3,100.00	3,072.51	3,161.86	3,158.85	13.54	12.44	-54.748	-69.93	1,171.81	925.55	903.24	22.31	41.490	
3,200.00	3,172.45	3,257.61	3,254.12	13.86	12.72	-54.582	-75.47	1,164.01	914.44	891.61	22.83	40.057	
3,300.00	3,272.44	3,353.33	3,349.39	14.13	13.00	-54.327	-81.12	1,156.61	904.72	881.39	23.33	38.772	
3,400.00	3,372.44	3,448.11	3,443.75	14.19	13.28	79.125	-86.74	1,149.79	896.40	872.70	23.70	37.825	
3,500.00	3,472.44	3,545.16	3,540.41	14.24	13.57	79.412	-92.53	1,143.19	888.60	864.53	24.08	36.908	
3,600.00	3,572.44	3,641.61	3,636.48	14.28	13.85	79.708	-98.31	1,136.91	881.10	856.65	24.45	36.037	
3,700.00	3,672.44	3,736.12	3,730.66	14.32	14.12	80.000	-103.85	1,131.26	874.17	849.36	24.81	35.228	
3,800.00	3,772.44	3,845.04	3,839.18	14.37	14.45	80.376	-110.72	1,125.04	867.50	842.31	25.19	34.434	
3,900.00	3,872.44	3,959.13	3,952.73	14.41	14.82	80.635	-116.26	1,115.43	858.30	832.71	25.60	33.532	
4,000.00	3,972.44	4,058.86	4,051.98	14.46	15.16	80.849	-120.89	1,106.85	849.07	823.06	26.00	32.651	
4,100.00	4,072.44	4,156.15	4,148.79	14.50	15.49	81.083	-125.71	1,098.42	839.73	813.31	26.41	31.794	
4,200.00	4,172.44	4,249.03	4,241.26	14.55	15.81	81.299	-130.04	1,090.90	831.01	804.19	26.81	30.994	
4,300.00	4,272.44	4,340.44	4,332.35	14.59	16.11	81.496	-133.91	1,084.28	823.21	796.01	27.20	30.263	
4,400.00	4,372.44	4,431.84	4,423.50	14.64	16.41	81.674	-137.33	1,078.54	816.45	788.87	27.58	29.603	
4,500.00	4,472.44	4,536.16	4,527.60	14.69	16.75	81.824	-140.36	1,072.43	810.25	782.28	27.97	28.970	
4,600.00	4,572.44	4,631.90	4,623.10	14.73	17.07	81.921	-142.64	1,066.13	803.41	775.06	28.35	28.337	
4,700.00	4,672.44	4,807.86	4,797.67	14.78	17.99	82.245	-149.88	1,046.49	791.33	762.26	29.07	27.222	
4,800.00	4,772.44	4,899.52	4,888.18	14.83	18.35	82.453	-154.57	1,032.74	775.79	746.26	29.53	26.268	
4,900.00	4,872.44	4,987.65	4,975.35	14.87	18.69	82.702	-159.46	1,020.78	761.60	731.60	29.99	25.391	
5,000.00	4,972.44	5,076.91	5,063.78	14.92	19.03	83.005	-164.82	1,009.90	748.74	718.30	30.44	24.594	
5,100.00	5,072.44	5,167.69	5,153.85	14.97	19.37	83.335	-170.29	999.98	737.17	706.29	30.88	23.872	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report



Company:	Centennial Resources Development, Inc.	Local Co-ordinate Reference:	Well Raider Federal Com 103H
Project:	Lea County, NM (NAD83 - UTM Zone 13)	TVD Reference:	RKB @ 3526.80usft (TBD)
Reference Site:	Raider	MD Reference:	RKB @ 3526.80usft (TBD)
Site Error:	0.00 usft	North Reference:	True
Reference Well:	Raider Federal Com 103H	Survey Calculation Method:	Minimum Curvature
Well Error:	1.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	USA Compass
Reference Design:	Plan 1 08-17-22	Offset TVD Reference:	Reference Datum

Offset Design: Raider - Raider Federal Com 703H - ST01 / 67430 - Surveys (H&P 489)													Offset Site Error: 0.00 usft
Survey Program: 198-MWD+IFR1+MS, 12575-MWD+IFR1+MS													Offset Well Error: 1.00 usft
Reference	Offset	Semi Major Axis		Distance		Rule Assigned:		Warning					
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
5,200.00	5,172.44	5,260.97	5,246.51	15.02	19.72	83.672	-175.66	990.66	726.57	695.26	31.31	23.208	
5,300.00	5,272.44	5,355.22	5,340.21	15.07	20.07	83.992	-180.64	981.88	716.74	685.01	31.72	22.592	
5,400.00	5,372.44	5,450.45	5,434.97	15.12	20.41	84.312	-185.47	973.68	707.64	675.50	32.14	22.021	
5,500.00	5,472.44	5,548.76	5,532.81	15.16	20.77	84.661	-190.53	965.58	698.94	666.40	32.54	21.478	
5,600.00	5,572.44	5,649.62	5,633.20	15.21	21.13	85.038	-195.85	957.29	690.27	657.32	32.95	20.950	
5,700.00	5,672.44	5,751.26	5,734.31	15.26	21.50	85.432	-201.28	948.60	681.29	647.94	33.35	20.426	
5,800.00	5,772.44	5,843.57	5,826.14	15.31	21.84	85.837	-206.66	940.83	672.46	638.72	33.74	19.928	
5,900.00	5,872.44	5,934.65	5,916.85	15.36	22.15	86.286	-212.31	934.80	665.40	631.30	34.10	19.511	
6,000.00	5,972.44	6,033.47	6,015.24	15.42	22.48	86.839	-219.07	928.65	658.77	624.32	34.45	19.124	
6,100.00	6,072.44	6,130.93	6,112.30	15.47	22.80	87.389	-225.66	922.84	652.46	617.68	34.78	18.761	
6,200.00	6,172.44	6,228.47	6,209.49	15.52	23.13	87.929	-231.99	917.34	646.55	611.45	35.10	18.421	
6,300.00	6,272.44	6,325.46	6,306.16	15.57	23.44	88.439	-237.88	912.18	641.02	605.62	35.41	18.104	
6,400.00	6,372.44	6,422.68	6,403.07	15.62	23.75	88.968	-243.88	907.45	636.01	600.31	35.70	17.815	
6,500.00	6,472.44	6,522.30	6,502.40	15.67	24.07	89.503	-249.85	902.83	631.29	595.30	35.99	17.542	
6,600.00	6,572.44	6,620.89	6,600.75	15.72	24.39	89.980	-255.10	898.23	626.60	590.32	36.28	17.271	
6,700.00	6,672.44	6,718.83	6,698.54	15.78	24.71	90.285	-258.42	893.97	622.25	585.65	36.59	17.004	
6,800.00	6,772.44	6,819.18	6,798.77	15.83	25.03	90.521	-260.93	889.76	618.07	581.14	36.93	16.738	
6,900.00	6,872.44	6,921.56	6,901.02	15.88	25.37	90.753	-263.38	885.19	613.63	576.36	37.27	16.465	
7,000.00	6,972.44	7,017.37	6,996.72	15.94	25.67	90.931	-265.21	880.95	609.24	571.63	37.61	16.200	
7,100.00	7,072.44	7,117.31	7,096.57	15.99	25.98	91.043	-266.33	877.00	605.30	567.35	37.96	15.947	
7,200.00	7,172.44	7,214.39	7,193.58	16.04	26.28	91.137	-267.25	873.32	601.54	563.23	38.30	15.705	
7,300.00	7,272.44	7,314.58	7,293.70	16.10	26.58	91.258	-268.45	869.76	598.01	559.36	38.64	15.475	
7,400.00	7,372.44	7,413.09	7,392.14	16.15	26.89	91.374	-269.57	866.36	594.57	555.59	38.99	15.251	
7,500.00	7,472.44	7,512.14	7,491.13	16.20	27.24	91.482	-270.61	863.12	591.34	551.95	39.38	15.015	
7,600.00	7,572.44	7,611.04	7,589.98	16.26	27.59	91.593	-271.67	860.04	588.25	548.49	39.77	14.792	
7,700.00	7,672.44	7,709.34	7,688.23	16.31	27.88	91.705	-272.74	857.24	585.43	545.34	40.09	14.603	
7,800.00	7,772.44	7,809.69	7,788.53	16.37	28.17	91.846	-274.09	854.52	582.76	542.36	40.40	14.423	
7,900.00	7,872.44	7,911.50	7,890.28	16.42	28.48	92.008	-275.62	851.38	579.73	539.01	40.73	14.235	
8,000.00	7,972.44	8,003.09	7,981.83	16.48	28.68	92.122	-276.68	848.83	577.02	536.06	40.96	14.086	
8,045.92	8,018.35	8,039.62	8,018.36	16.51	28.70	92.138	-276.83	848.53	576.65	535.65	41.00	14.064 CC, ES, SF	
8,100.00	8,072.44	8,086.23	8,064.97	16.54	28.68	92.127	-276.74	848.95	577.12	536.11	41.01	14.073	
8,200.00	8,172.44	8,187.86	8,166.60	16.59	28.50	92.111	-276.62	850.09	578.24	537.35	40.89	14.140	
8,300.00	8,272.44	8,288.41	8,267.14	16.65	28.32	92.078	-276.32	851.10	579.23	538.44	40.79	14.200	
8,400.00	8,372.44	8,389.97	8,368.70	16.70	28.14	92.035	-275.92	851.90	579.99	539.29	40.71	14.247	
8,500.00	8,472.44	8,491.61	8,470.33	16.76	27.99	91.997	-275.56	852.45	580.53	539.87	40.66	14.278	
8,600.00	8,572.44	8,592.97	8,571.69	16.82	27.87	91.963	-275.21	852.66	580.72	540.06	40.66	14.281	
8,700.00	8,672.44	8,693.95	8,672.67	16.87	27.79	91.887	-274.44	852.76	580.80	540.07	40.73	14.260	
8,800.00	8,772.44	8,795.82	8,774.53	16.93	27.78	91.801	-273.57	852.60	580.61	539.75	40.86	14.209	
8,900.00	8,872.44	8,896.49	8,875.20	16.99	27.81	91.727	-272.81	852.16	580.15	539.10	41.05	14.134	
8,961.86	8,934.15	8,957.97	8,936.68	16.91	27.84	92.081	-272.33	851.89	579.99	538.88	41.11	14.109	
9,000.00	8,971.85	8,995.42	8,974.13	16.87	27.86	92.561	-272.07	851.74	580.05	538.92	41.12	14.105	
9,100.00	9,067.22	9,094.37	9,073.08	16.66	27.95	95.203	-271.46	851.17	581.51	540.47	41.04	14.171	
9,200.00	9,154.37	9,186.14	9,164.84	16.46	28.10	98.865	-270.83	849.96	586.86	546.16	40.70	14.421	
9,300.00	9,229.51	9,263.12	9,241.79	16.28	28.27	102.066	-270.23	848.55	600.37	560.38	39.98	15.015	
9,400.00	9,289.34	9,324.08	9,302.75	16.15	28.43	103.518	-269.70	847.38	626.17	587.31	38.85	16.116	
9,500.00	9,331.26	9,367.18	9,345.83	16.07	28.53	102.064	-269.31	846.53	666.26	628.82	37.43	17.799	
9,600.00	9,353.42	9,390.47	9,369.12	16.07	28.59	96.686	-269.10	846.06	719.98	684.02	35.96	20.020	
9,700.00	9,356.81	9,394.85	9,373.50	16.15	28.60	91.667	-269.05	845.97	784.25	749.59	34.66	22.626	
9,800.00	9,356.80	9,395.82	9,374.47	16.26	28.61	91.763	-269.04	845.95	855.53	821.91	33.62	25.446	
9,900.00	9,356.80	9,395.00	9,373.65	16.40	28.60	91.682	-269.05	845.97	932.11	899.29	32.82	28.398	
10,000.00	9,356.80	9,395.00	9,373.65	16.57	28.60	91.682	-269.05	845.97	1,012.78	980.55	32.23	31.428	
10,100.00	9,356.80	9,395.00	9,373.65	16.77	28.60	91.682	-269.05	845.97	1,096.64	1,064.85	31.79	34.496	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report



Company:	Centennial Resources Development, Inc.	Local Co-ordinate Reference:	Well Raider Federal Com 103H
Project:	Lea County, NM (NAD83 - UTM Zone 13)	TVD Reference:	RKB @ 3526.80usft (TBD)
Reference Site:	Raider	MD Reference:	RKB @ 3526.80usft (TBD)
Site Error:	0.00 usft	North Reference:	True
Reference Well:	Raider Federal Com 103H	Survey Calculation Method:	Minimum Curvature
Well Error:	1.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	USA Compass
Reference Design:	Plan 1 08-17-22	Offset TVD Reference:	Reference Datum

Offset Design: Raider - Raider Federal Com 703H - ST01 / 67430 - Surveys (H&P 489)													Offset Site Error: 0.00 usft
Survey Program: 198-MWD+IFR1+MS, 12575-MWD+IFR1+MS							Rule Assigned:						Offset Well Error: 1.00 usft
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference	Offset	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
10,200.00	9,356.80	9,395.00	9,373.65	17.00	28.60	91.682	-269.05	845.97	1,183.01	1,151.53	31.48	37.580	
10,300.00	9,356.80	9,400.10	9,378.74	17.25	28.61	92.190	-269.00	845.87	1,271.37	1,240.12	31.24	40.694	
10,400.00	9,356.80	9,401.01	9,379.66	17.54	28.61	92.282	-268.99	845.85	1,361.34	1,330.25	31.09	43.782	
10,500.00	9,356.80	9,401.94	9,380.59	17.85	28.61	92.374	-268.98	845.84	1,452.63	1,421.63	31.00	46.862	
10,600.00	9,356.80	9,402.88	9,381.53	18.19	28.61	92.468	-268.97	845.82	1,544.99	1,514.05	30.94	49.930	
10,700.00	9,356.80	9,403.84	9,382.48	18.56	28.61	92.564	-268.96	845.80	1,638.26	1,607.34	30.92	52.986	
10,800.00	9,356.80	9,404.81	9,383.45	18.95	28.61	92.660	-268.95	845.79	1,732.27	1,701.35	30.92	56.029	
10,900.00	9,356.80	9,405.79	9,384.44	19.37	28.61	92.759	-268.94	845.77	1,826.92	1,795.98	30.93	59.060	
11,000.00	9,356.80	9,406.79	9,385.44	19.81	28.61	92.858	-268.93	845.75	1,922.11	1,891.15	30.96	62.079	
11,100.00	9,356.80	9,407.81	9,386.45	20.27	28.61	92.960	-268.92	845.74	2,017.76	1,986.76	31.00	65.084	
11,200.00	9,356.80	9,408.84	9,387.49	20.75	28.61	93.063	-268.91	845.72	2,113.82	2,082.77	31.05	68.078	
11,300.00	9,356.80	9,409.89	9,388.53	21.25	28.61	93.167	-268.90	845.70	2,210.22	2,179.12	31.10	71.058	
11,400.00	9,356.80	9,410.95	9,389.60	21.77	28.61	93.273	-268.89	845.69	2,306.94	2,275.77	31.16	74.025	
11,500.00	9,356.80	9,412.03	9,390.68	22.30	28.61	93.381	-268.88	845.67	2,403.92	2,372.69	31.23	76.979	
11,600.00	9,356.80	9,413.13	9,391.78	22.85	28.61	93.490	-268.87	845.66	2,501.13	2,469.84	31.30	79.920	
11,700.00	9,356.80	9,414.25	9,392.89	23.41	28.61	93.601	-268.85	845.64	2,598.56	2,567.20	31.37	82.847	
11,800.00	9,356.80	9,415.38	9,394.02	23.98	28.61	93.714	-268.84	845.63	2,696.18	2,664.74	31.44	85.761	
11,900.00	9,356.80	9,416.53	9,395.18	24.57	28.61	93.829	-268.83	845.61	2,793.96	2,762.45	31.51	88.660	
12,000.00	9,356.80	9,417.70	9,396.35	25.16	28.61	93.946	-268.81	845.59	2,891.90	2,860.31	31.59	91.544	
12,100.00	9,356.80	9,418.90	9,397.54	25.77	28.61	94.064	-268.80	845.58	2,989.97	2,958.30	31.67	94.414	
12,200.00	9,356.80	15,040.00	12,299.51	26.38	36.19	169.107	2,719.72	837.69	2,997.05	2,931.97	65.08	46.051	
12,300.00	9,356.80	15,095.09	12,300.44	27.00	36.40	169.104	2,774.81	838.03	2,999.05	2,933.19	65.86	45.535	
12,400.00	9,356.80	15,142.60	12,302.48	27.63	36.59	169.118	2,822.27	837.64	3,003.02	2,936.44	66.58	45.101	
12,500.00	9,356.80	15,242.24	12,307.59	28.27	37.00	169.164	2,921.76	836.14	3,007.78	2,940.10	67.68	44.444	
12,600.00	9,356.80	15,451.21	12,316.23	28.91	37.89	169.286	3,130.47	831.21	3,012.13	2,942.53	69.60	43.277	
12,700.00	9,356.80	15,755.53	12,309.29	29.56	39.30	169.435	3,434.49	821.87	3,008.16	2,935.95	72.21	41.661	
12,800.00	9,356.80	15,796.00	12,307.15	30.22	39.50	169.458	3,474.87	820.24	3,003.00	2,930.02	72.97	41.154	
12,900.00	9,356.80	15,856.16	12,304.84	30.88	39.80	169.482	3,534.95	818.54	2,999.23	2,925.34	73.89	40.590	
13,000.00	9,356.80	15,891.00	12,304.48	31.54	39.98	169.486	3,569.79	818.23	2,998.02	2,923.41	74.60	40.187	
13,004.39	9,356.80	15,891.00	12,304.48	31.57	39.98	169.486	3,569.79	818.23	2,998.01	2,923.39	74.62	40.176	
13,100.00	9,356.80	15,938.89	12,304.79	32.21	40.22	169.481	3,617.67	818.54	2,998.76	2,923.37	75.39	39.775	
13,200.00	9,356.80	15,986.00	12,305.74	32.89	40.45	169.464	3,664.76	819.62	3,001.20	2,925.04	76.16	39.405	
13,300.00	9,356.80	16,255.47	12,307.91	33.56	41.82	169.334	3,934.02	826.85	3,003.77	2,924.99	78.78	38.129	
13,400.00	9,356.80	16,336.56	12,304.91	34.25	42.25	169.263	4,014.98	830.07	3,001.05	2,921.18	79.88	37.571	
13,500.00	9,356.80	16,429.91	12,303.38	34.93	42.74	169.202	4,108.27	832.97	3,000.00	2,918.93	81.07	37.005	
13,600.00	9,356.80	16,572.01	12,299.03	35.62	43.51	169.096	4,250.23	837.77	2,997.53	2,914.88	82.66	36.265	
13,700.00	9,356.80	16,647.00	12,296.87	36.31	43.92	169.044	4,325.15	840.10	2,995.24	2,911.53	83.72	35.778	
13,800.00	9,356.80	16,775.22	12,291.97	37.01	44.62	168.931	4,453.17	845.11	2,992.10	2,906.87	85.22	35.110	
13,900.00	9,356.80	16,836.00	12,290.10	37.70	44.96	168.861	4,513.83	848.46	2,990.02	2,903.84	86.18	34.696	
13,947.59	9,356.80	16,836.00	12,290.10	38.04	44.96	168.861	4,513.83	848.46	2,989.62	2,903.24	86.38	34.610	
14,000.00	9,356.80	16,866.31	12,289.69	38.40	45.13	168.824	4,544.08	850.34	2,989.66	2,902.79	86.87	34.417	
14,100.00	9,356.80	16,931.00	12,290.48	39.11	45.49	168.744	4,608.61	854.69	2,991.75	2,903.90	87.85	34.056	
14,200.00	9,356.80	17,253.31	12,280.12	39.81	47.39	168.505	4,930.32	865.24	2,987.70	2,896.61	91.09	32.800	
14,300.00	9,356.80	17,311.00	12,277.60	40.52	47.74	168.504	4,987.95	864.79	2,983.12	2,891.04	92.07	32.400	
14,400.00	9,356.80	17,363.51	12,276.24	41.23	48.05	168.517	5,040.43	863.79	2,980.01	2,887.01	93.00	32.044	
14,500.00	9,356.80	17,452.57	12,274.89	41.94	48.59	168.564	5,129.44	861.02	2,977.89	2,883.65	94.24	31.599	
14,600.00	9,356.80	17,558.95	12,273.08	42.65	49.24	168.626	5,235.74	857.31	2,975.53	2,879.88	95.65	31.110	
14,700.00	9,356.80	17,631.29	12,271.86	43.37	49.69	168.654	5,308.04	855.59	2,973.48	2,876.73	96.75	30.735	
14,800.00	9,356.80	17,691.00	12,271.64	44.08	50.06	168.671	5,367.74	854.59	2,972.76	2,875.04	97.72	30.420	
14,802.33	9,356.80	17,691.00	12,271.64	44.10	50.06	168.671	5,367.74	854.59	2,972.76	2,875.03	97.73	30.417	
14,900.00	9,356.80	17,746.67	12,272.22	44.80	50.40	168.689	5,423.41	853.75	2,973.46	2,874.81	98.65	30.140	
15,000.00	9,356.80	17,811.24	12,273.84	45.52	50.80	168.715	5,487.94	852.66	2,975.55	2,875.89	99.66	29.857	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report



Company:	Centennial Resources Development, Inc.	Local Co-ordinate Reference:	Well Raider Federal Com 103H
Project:	Lea County, NM (NAD83 - UTM Zone 13)	TVD Reference:	RKB @ 3526.80usft (TBD)
Reference Site:	Raider	MD Reference:	RKB @ 3526.80usft (TBD)
Site Error:	0.00 usft	North Reference:	True
Reference Well:	Raider Federal Com 103H	Survey Calculation Method:	Minimum Curvature
Well Error:	1.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	USA Compass
Reference Design:	Plan 1 08-17-22	Offset TVD Reference:	Reference Datum

Offset Design: Raider - Raider Federal Com 703H - ST01 / 67430 - Surveys (H&P 489)													Offset Site Error: 0.00 usft
Survey Program: 198-MWD+IFR1+MS, 12575-MWD+IFR1+MS													Offset Well Error: 1.00 usft
Reference	Offset	Semi Major Axis		Rule Assigned:		Distance		Warning					
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
15,100.00	9,356.80	17,894.54	12,276.64	46.24	51.32	168.752	5,571.18	851.24	2,978.50	2,877.65	100.86	29.532	
15,200.00	9,356.80	18,014.05	12,280.11	46.97	52.07	168.770	5,690.64	850.94	2,981.31	2,878.88	102.43	29.105	
15,300.00	9,356.80	18,190.60	12,283.06	47.69	53.18	168.795	5,867.16	850.15	2,983.12	2,878.53	104.59	28.522	
15,400.00	9,356.80	18,340.17	12,281.00	48.42	54.14	168.785	6,016.72	850.22	2,981.56	2,875.10	106.45	28.008	
15,500.00	9,356.80	18,451.23	12,278.85	49.14	54.85	168.776	6,127.75	850.26	2,979.68	2,871.73	107.95	27.603	
15,600.00	9,356.80	18,543.00	12,276.46	49.87	55.44	168.755	6,219.49	850.88	2,977.30	2,868.04	109.26	27.249	
15,700.00	9,356.80	18,616.65	12,274.82	50.60	55.92	168.723	6,293.10	852.21	2,975.59	2,865.19	110.40	26.952	
15,781.64	9,356.80	18,670.61	12,274.36	51.19	56.27	168.698	6,347.05	853.42	2,975.25	2,863.99	111.27	26.740	
15,800.00	9,356.80	18,684.00	12,274.32	51.33	56.36	168.693	6,360.44	853.66	2,975.27	2,863.80	111.47	26.690	
15,900.00	9,356.80	18,762.75	12,274.62	52.06	56.87	168.676	6,439.18	854.60	2,975.86	2,863.20	112.66	26.415	
16,000.00	9,356.80	18,878.52	12,275.51	52.79	57.63	168.665	6,554.95	855.34	2,976.79	2,862.55	114.23	26.059	
16,100.00	9,356.80	19,111.00	12,271.38	53.52	59.16	168.644	6,787.36	855.56	2,975.28	2,858.34	116.94	25.443	
16,200.00	9,356.80	19,178.88	12,268.59	54.26	59.61	168.624	6,855.18	856.04	2,971.50	2,853.44	118.06	25.169	
16,300.00	9,356.80	19,205.00	12,267.81	54.99	59.78	168.614	6,881.29	856.38	2,969.48	2,850.73	118.75	25.005	
16,359.08	9,356.80	19,248.22	12,267.12	55.43	60.07	168.596	6,924.50	857.19	2,968.93	2,849.49	119.44	24.857	
16,400.00	9,356.80	19,263.84	12,267.11	55.73	60.17	168.589	6,940.11	857.57	2,969.10	2,849.35	119.76	24.793	
16,500.00	9,356.80	19,309.55	12,267.78	56.46	60.48	168.566	6,985.79	858.93	2,970.99	2,850.40	120.59	24.637	
16,600.00	9,356.80	19,456.15	12,269.65	57.20	61.45	168.509	7,132.34	862.25	2,972.60	2,850.08	122.53	24.260	
16,700.00	9,356.80	19,598.84	12,270.15	57.94	62.41	168.492	7,275.03	863.24	2,973.13	2,848.72	124.42	23.897	
16,800.00	9,356.80	19,707.66	12,269.48	58.67	63.15	168.471	7,383.83	864.17	2,972.71	2,846.76	125.94	23.603	
16,900.00	9,356.80	19,795.90	12,268.73	59.41	63.74	168.454	7,472.08	864.89	2,972.08	2,844.82	127.26	23.354	
16,915.31	9,356.80	19,804.55	12,268.70	59.53	63.80	168.452	7,480.73	864.97	2,972.06	2,844.65	127.41	23.327	
17,000.00	9,356.80	19,867.00	12,269.05	60.15	64.23	168.438	7,543.17	865.77	2,972.65	2,844.26	128.39	23.153	
17,100.00	9,356.80	19,977.50	12,270.00	60.89	64.98	168.425	7,653.66	866.65	2,973.70	2,843.75	129.95	22.883	
17,200.00	9,356.80	20,056.00	12,270.10	61.63	65.51	168.406	7,732.15	867.61	2,974.16	2,842.99	131.16	22.675	
17,300.00	9,356.80	20,115.37	12,270.62	62.37	65.92	168.382	7,791.50	869.00	2,975.69	2,843.53	132.15	22.517	
17,400.00	9,356.80	20,175.10	12,272.31	63.12	66.32	168.351	7,851.17	870.95	2,979.01	2,845.89	133.12	22.378	
17,500.00	9,356.80	20,288.14	12,275.87	63.86	67.09	168.297	7,964.10	874.53	2,982.76	2,848.03	134.73	22.139	
17,600.00	9,356.80	20,399.10	12,278.60	64.60	67.85	168.241	8,074.98	878.05	2,985.80	2,849.49	136.31	21.904	
17,700.00	9,356.80	20,522.01	12,281.28	65.34	68.69	168.177	8,197.79	881.96	2,988.63	2,850.59	138.03	21.652	
17,800.00	9,356.80	20,672.40	12,281.86	66.09	69.73	168.074	8,348.07	887.57	2,989.64	2,849.59	140.05	21.346	
17,900.00	9,356.80	20,774.08	12,281.67	66.83	70.43	168.003	8,449.68	891.29	2,990.22	2,848.69	141.53	21.128	
18,000.00	9,356.80	20,885.56	12,281.59	67.58	71.20	167.958	8,561.14	893.62	2,990.60	2,847.48	143.12	20.896	
18,100.00	9,356.80	20,992.26	12,281.39	68.32	71.95	167.938	8,667.83	894.55	2,990.60	2,845.95	144.66	20.674	
18,200.00	9,356.80	21,128.38	12,279.87	69.07	72.90	167.890	8,803.92	896.81	2,989.84	2,843.34	146.51	20.407	
18,300.00	9,356.80	21,216.64	12,278.65	69.81	73.52	167.883	8,892.17	896.87	2,988.55	2,840.69	147.86	20.212	
18,363.64	9,356.80	21,253.54	12,278.46	70.29	73.78	167.881	8,929.07	896.97	2,988.26	2,839.75	148.51	20.122	
18,400.00	9,356.80	21,288.00	12,278.51	70.56	74.03	167.872	8,963.53	897.41	2,988.41	2,839.39	149.02	20.054	
18,500.00	9,356.80	21,367.41	12,278.78	71.31	74.58	167.840	9,042.91	899.16	2,989.12	2,838.86	150.26	19.893	
18,600.00	9,356.80	21,457.13	12,279.30	72.05	75.22	167.817	9,132.62	900.49	2,990.02	2,838.39	151.62	19.720	
18,700.00	9,356.80	21,567.44	12,280.89	72.80	76.00	167.863	9,242.89	898.34	2,991.03	2,837.80	153.23	19.520	
18,800.00	9,356.80	21,643.92	12,282.20	73.55	76.54	167.907	9,319.34	896.23	2,992.15	2,837.70	154.44	19.374	
18,900.00	9,356.80	21,744.43	12,284.31	74.30	77.26	167.950	9,419.81	894.35	2,993.81	2,837.87	155.94	19.198	
19,000.00	9,356.80	21,911.23	12,285.80	75.05	78.44	168.043	9,586.53	889.69	2,994.04	2,835.84	158.20	18.926	
19,100.00	9,356.80	22,030.16	12,285.12	75.79	79.29	168.092	9,705.42	886.88	2,992.99	2,833.10	159.89	18.719	
19,200.00	9,356.80	22,140.00	12,283.62	76.54	80.07	168.117	9,815.24	885.21	2,991.33	2,829.84	161.49	18.523	
19,300.00	9,356.80	22,225.89	12,282.77	77.29	80.69	168.153	9,901.09	883.08	2,989.87	2,827.03	162.84	18.361	
19,370.77	9,356.80	22,261.00	12,282.57	77.82	80.94	168.172	9,936.19	882.00	2,989.24	2,825.73	163.50	18.282	
19,400.00	9,356.80	22,261.00	12,282.57	78.04	80.94	168.172	9,936.19	882.00	2,989.38	2,825.77	163.61	18.272	
19,500.00	9,356.80	22,261.00	12,282.57	78.79	80.94	168.172	9,936.19	882.00	2,992.03	2,828.18	163.85	18.261	
19,533.58	9,356.80	22,261.00	12,282.57	79.04	80.94	168.172	9,936.19	882.00	2,993.67	2,829.77	163.90	18.265	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report



Company:	Centennial Resources Development, Inc.	Local Co-ordinate Reference:	Well Raider Federal Com 103H
Project:	Lea County, NM (NAD83 - UTM Zone 13)	TVD Reference:	RKB @ 3526.80usft (TBD)
Reference Site:	Raider	MD Reference:	RKB @ 3526.80usft (TBD)
Site Error:	0.00 usft	North Reference:	True
Reference Well:	Raider Federal Com 103H	Survey Calculation Method:	Minimum Curvature
Well Error:	1.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	USA Compass
Reference Design:	Plan 1 08-17-22	Offset TVD Reference:	Reference Datum

Reference Depths are relative to RKB @ 3526.80usft (TBD)

Offset Depths are relative to Offset Datum


Central Meridian is 105° 0' 0.000000 W

Coordinates are relative to: Raider Federal Com 103H

Coordinate System is Universal Transverse Mercator (US Survey Feet), Zone 13N

Grid Convergence at Surface is: 0.814°

Ladder Plot

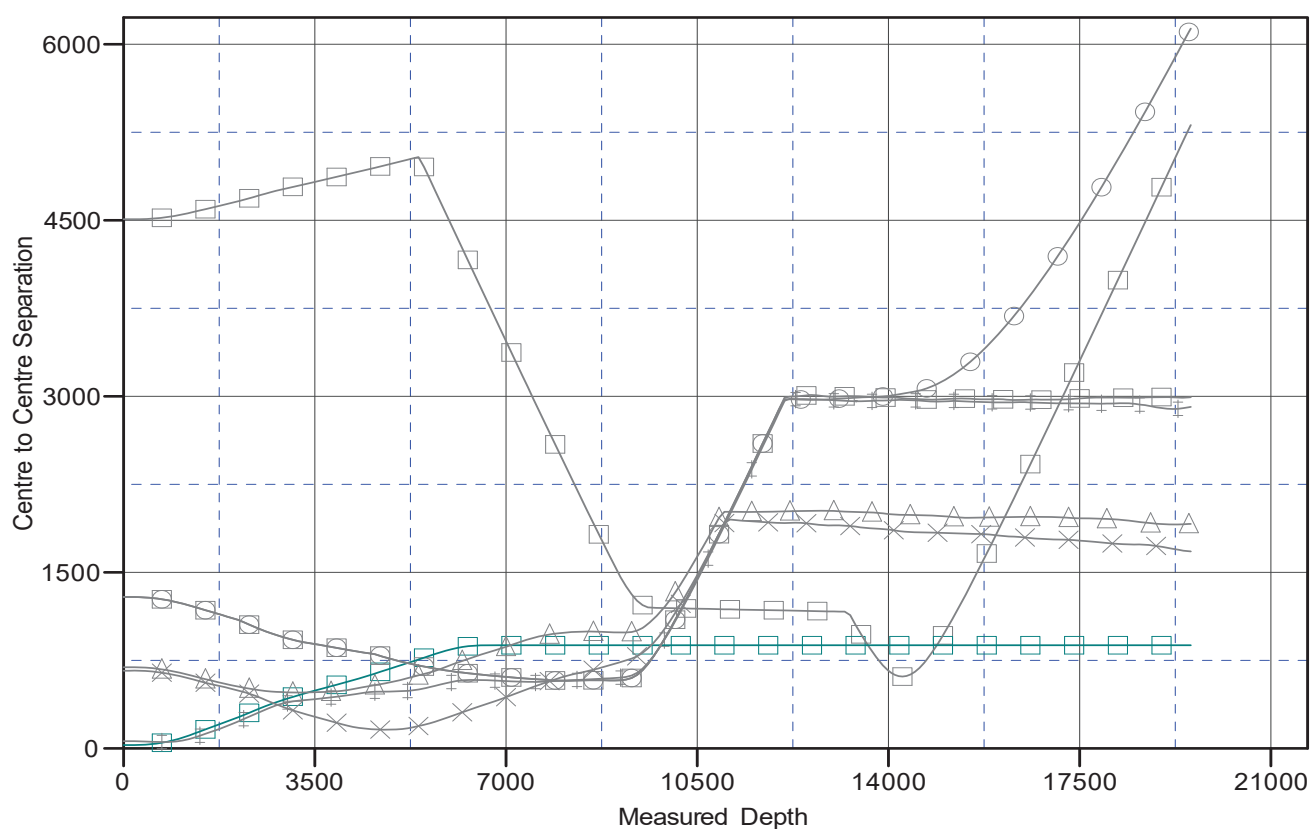

LEGEND

Raider FederalCom 302H, OH, Plan 4 06-10-22 V0	Raider FederalCom 502H, OH / 67469, Surveys (H&P 296) V0	Raider FederalCom 701H, OH / 67386, Surveys (H&P 625) V0
Raider FederalCom 102H, OH, Plan 1 08-17-22 V0	Raider FederalCom 703H, OH / 67430, Surveys (H&P 489) V0	
Raider FederalCom 503H, OH / 67470, Surveys (H&P 296) V0	Raider FederalCom 703H, ST01 / 67430, Surveys (H&P 489) V0	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report



Company:	Centennial Resources Development, Inc.	Local Co-ordinate Reference:	Well Raider Federal Com 103H
Project:	Lea County, NM (NAD83 - UTM Zone 13)	TVD Reference:	RKB @ 3526.80usft (TBD)
Reference Site:	Raider	MD Reference:	RKB @ 3526.80usft (TBD)
Site Error:	0.00 usft	North Reference:	True
Reference Well:	Raider Federal Com 103H	Survey Calculation Method:	Minimum Curvature
Well Error:	1.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	USA Compass
Reference Design:	Plan 1 08-17-22	Offset TVD Reference:	Reference Datum

Reference Depths are relative to RKB @ 3526.80usft (TBD)

Offset Depths are relative to Offset Datum


Central Meridian is 105° 0' 0.000000 W

Coordinates are relative to: Raider Federal Com 103H

Coordinate System is Universal Transverse Mercator (US Survey Feet), Zone 13N

Grid Convergence at Surface is: 0.814°


Separation Factor Plot

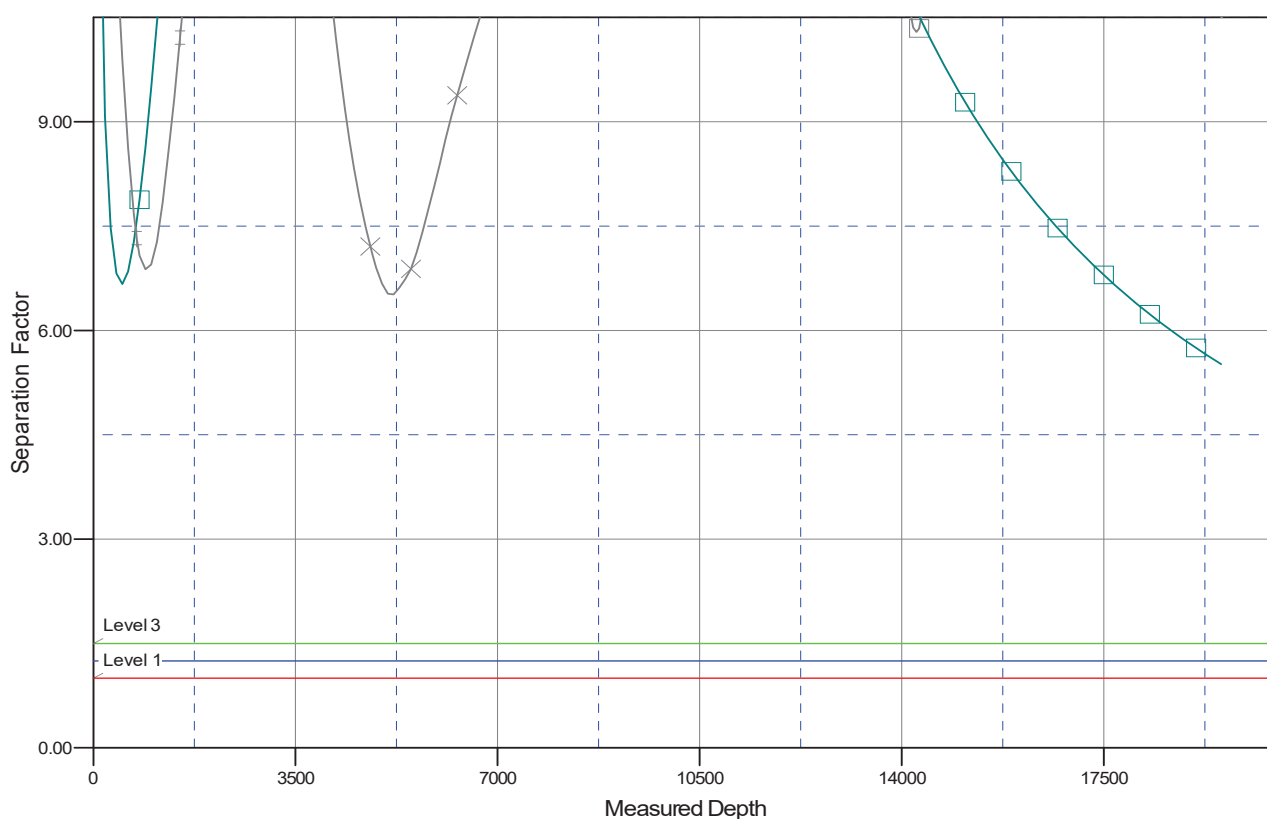

LEGEND

	Raider FederalCom 302H, OH, Plan 4 08-10-22 V0		Raider FederalCom 502H, OH / 67469, Surveys (H&P 296) V0		Raider FederalCom 701H, OH / 67386, Surveys (H&P 625) V0
	Raider FederalCom 102H, OH, Plan 1 08-17-22 V0		Raider FederalCom 703H, OH / 67430, Surveys (H&P 489) V0		
	Raider FederalCom 503H, OH / 67470, Surveys (H&P 296) V0		Raider FederalCom 703H, ST01 / 67430, Surveys (H&P 489) V0		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation


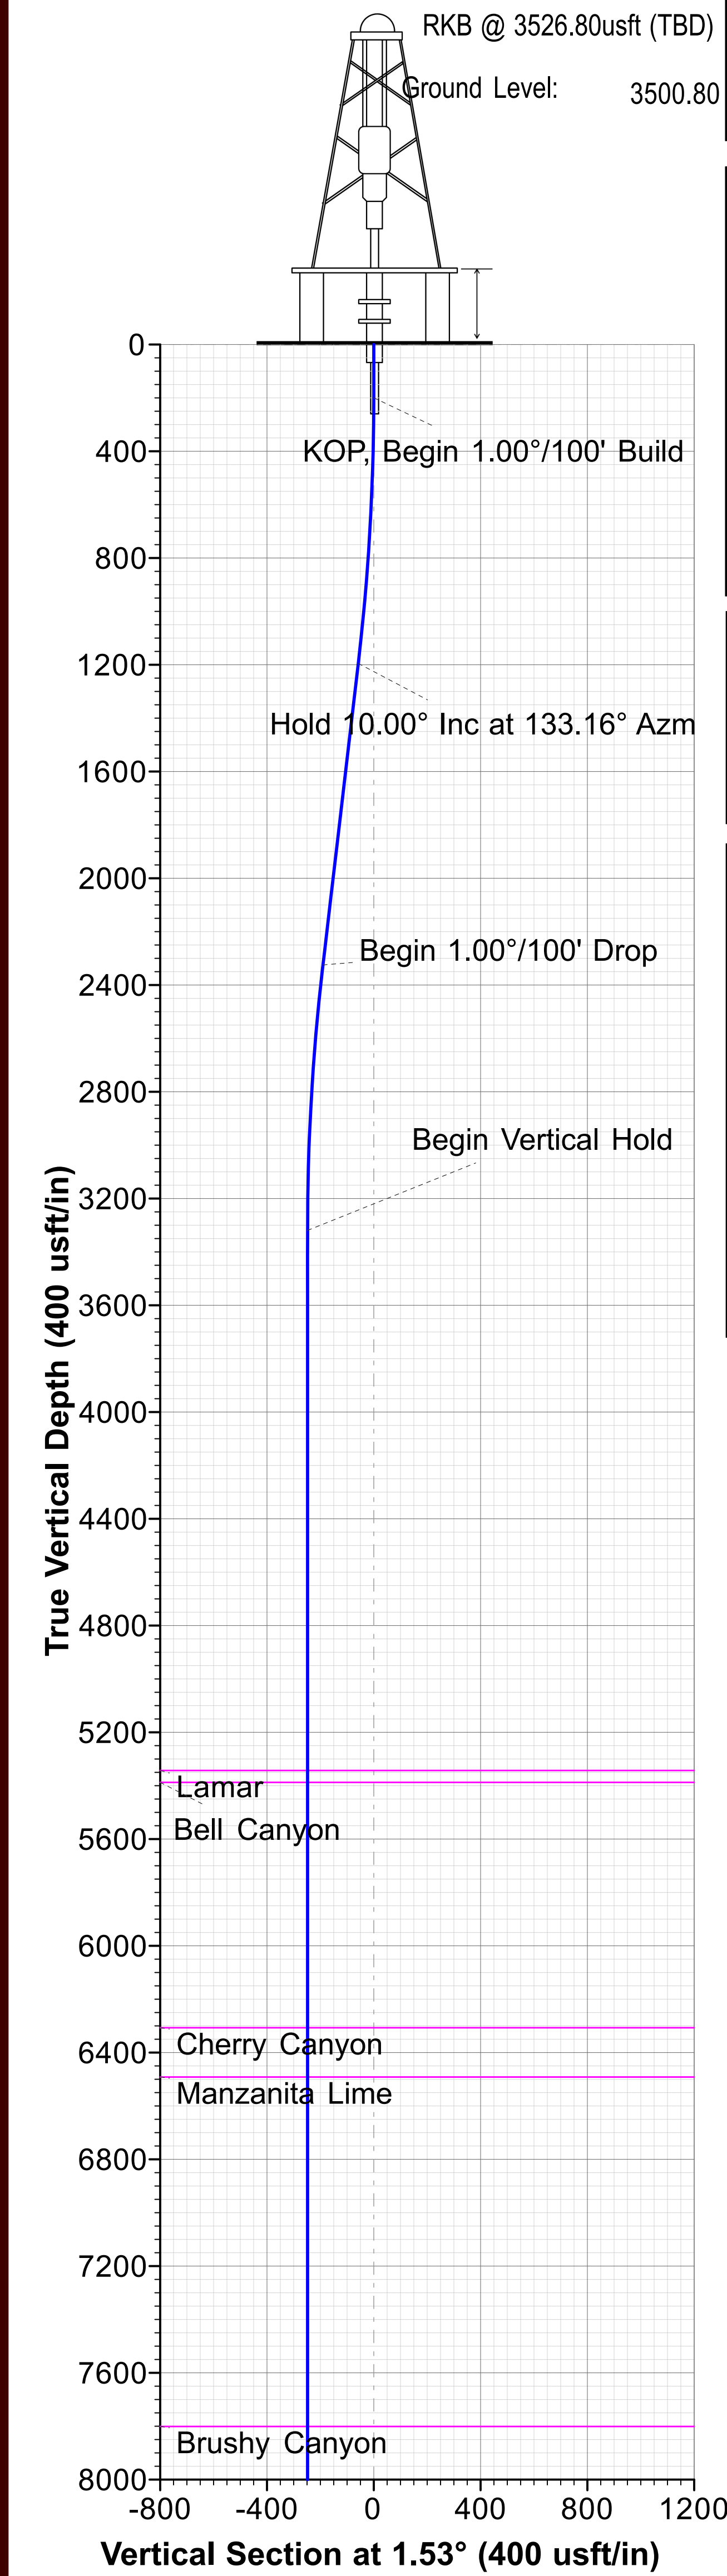


WELL DETAILS									
+N/-S		+E/-W	Northing	Easting	Ground Level:	3500.80	Latitude	Longitude	
0.00		0.00	11690495.26	2112983.69			32° 11' 48.370699 N	103° 28' 18.719010 W	

SECTION DETAILS											
Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSec	Target	Annotation
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.000	0.00		
2	200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.000	0.00		
3	1200.00	10.00	133.16	1194.93	-59.54	63.50	1.00	133.159	-57.83		KOP, Begin 1.00°/100' Build
4	2346.99	10.00	133.16	2324.49	-195.78	208.78	0.00	0.000	-190.15		Hold 10.00° Inc at 133.16° Azm
5	3346.99	0.00	0.00	3319.42	-255.32	272.28	1.00	180.000	-247.98		Begin 1.00°/100' Drop
6	8906.90	0.00	0.00	8879.34	-255.32	272.28	0.00	0.000	-247.98		Begin Vertical Hold
7	9656.90	90.00	359.98	9356.80	222.14	272.14	12.00	359.983	229.32		KOP2, Begin 12.00°/100' Build
8	19533.58	90.00	359.98	9356.80	10098.82	269.24	0.00	0.000	10102.41	BHL - Raider Federal Com 103H	LP, Hold 90.00° Inc at 359.98° Azm

DESIGN TARGET DETAILS									
Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude		
BHL - Raider Federal Com 103H	9356.80	10098.82	269.24	11700595.43	2113109.34	32° 13' 28.300369 N	103° 28' 15.584328 W		
FTP - Raider Federal Com 103H	9356.80	-255.32	272.28	11690243.87	2113259.53	32° 11' 45.844225 N	103° 28' 15.550473 W		

FORMATION TOP DETAILS				
TVDPath	MDPath	Formation	DipAngle	DipDir
5342.80	5370.36	Lamar		
5387.80	5415.36	Bell Canyon		
6306.80	6334.36	Cherry Canyon		
6491.80	6519.36	Manzanita Lime		
7800.80	7828.36	Brushy Canyon		
9163.80	9211.63	Bone Spring Lime		
9229.80	9300.43	Avalon		
9229.80	9300.43	Target Top at 0° VS		

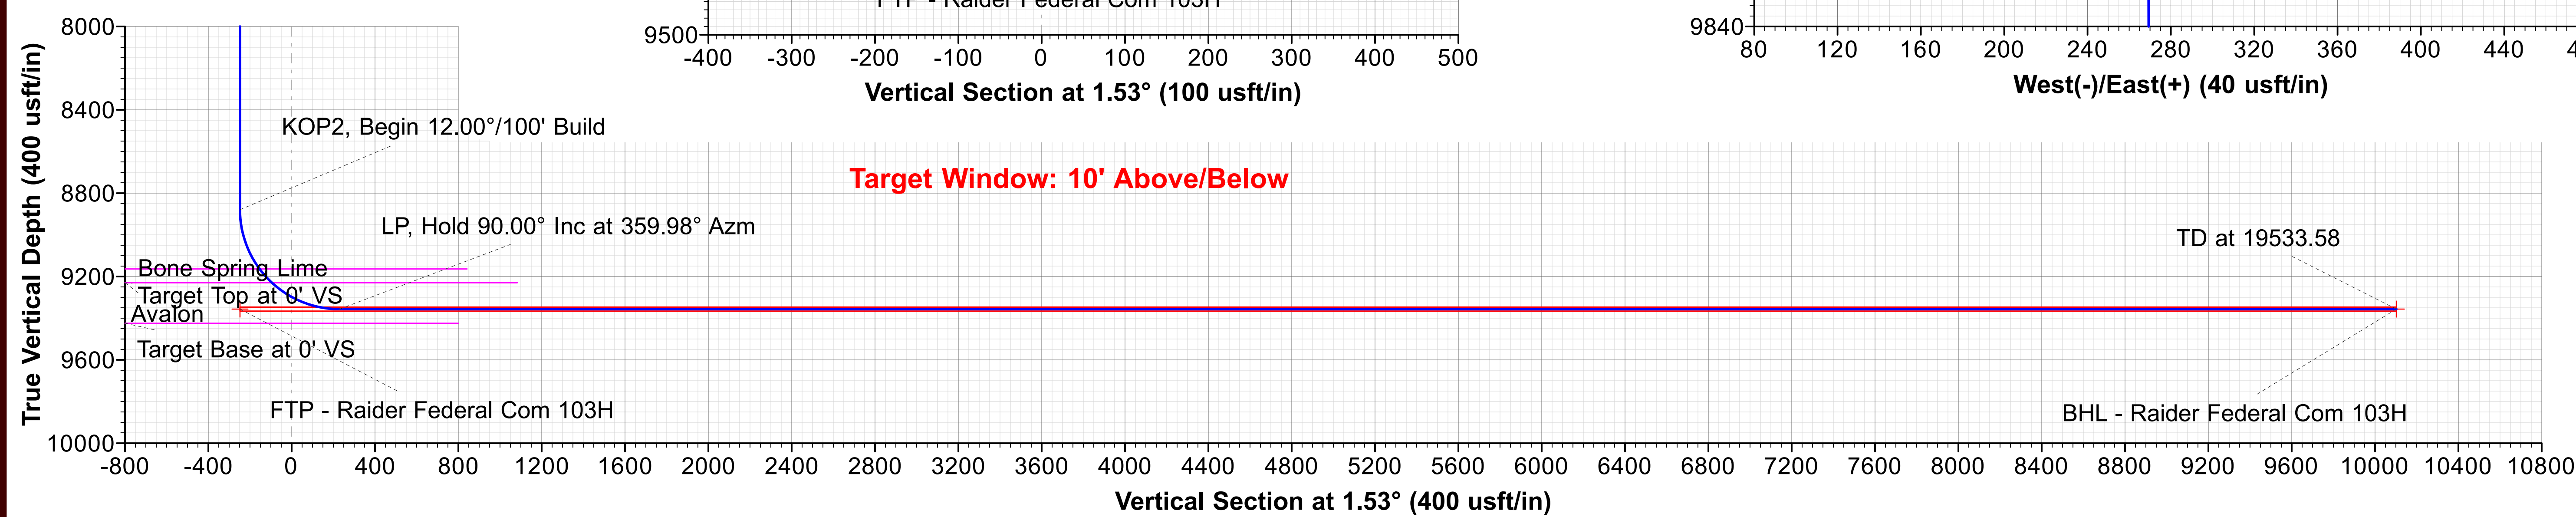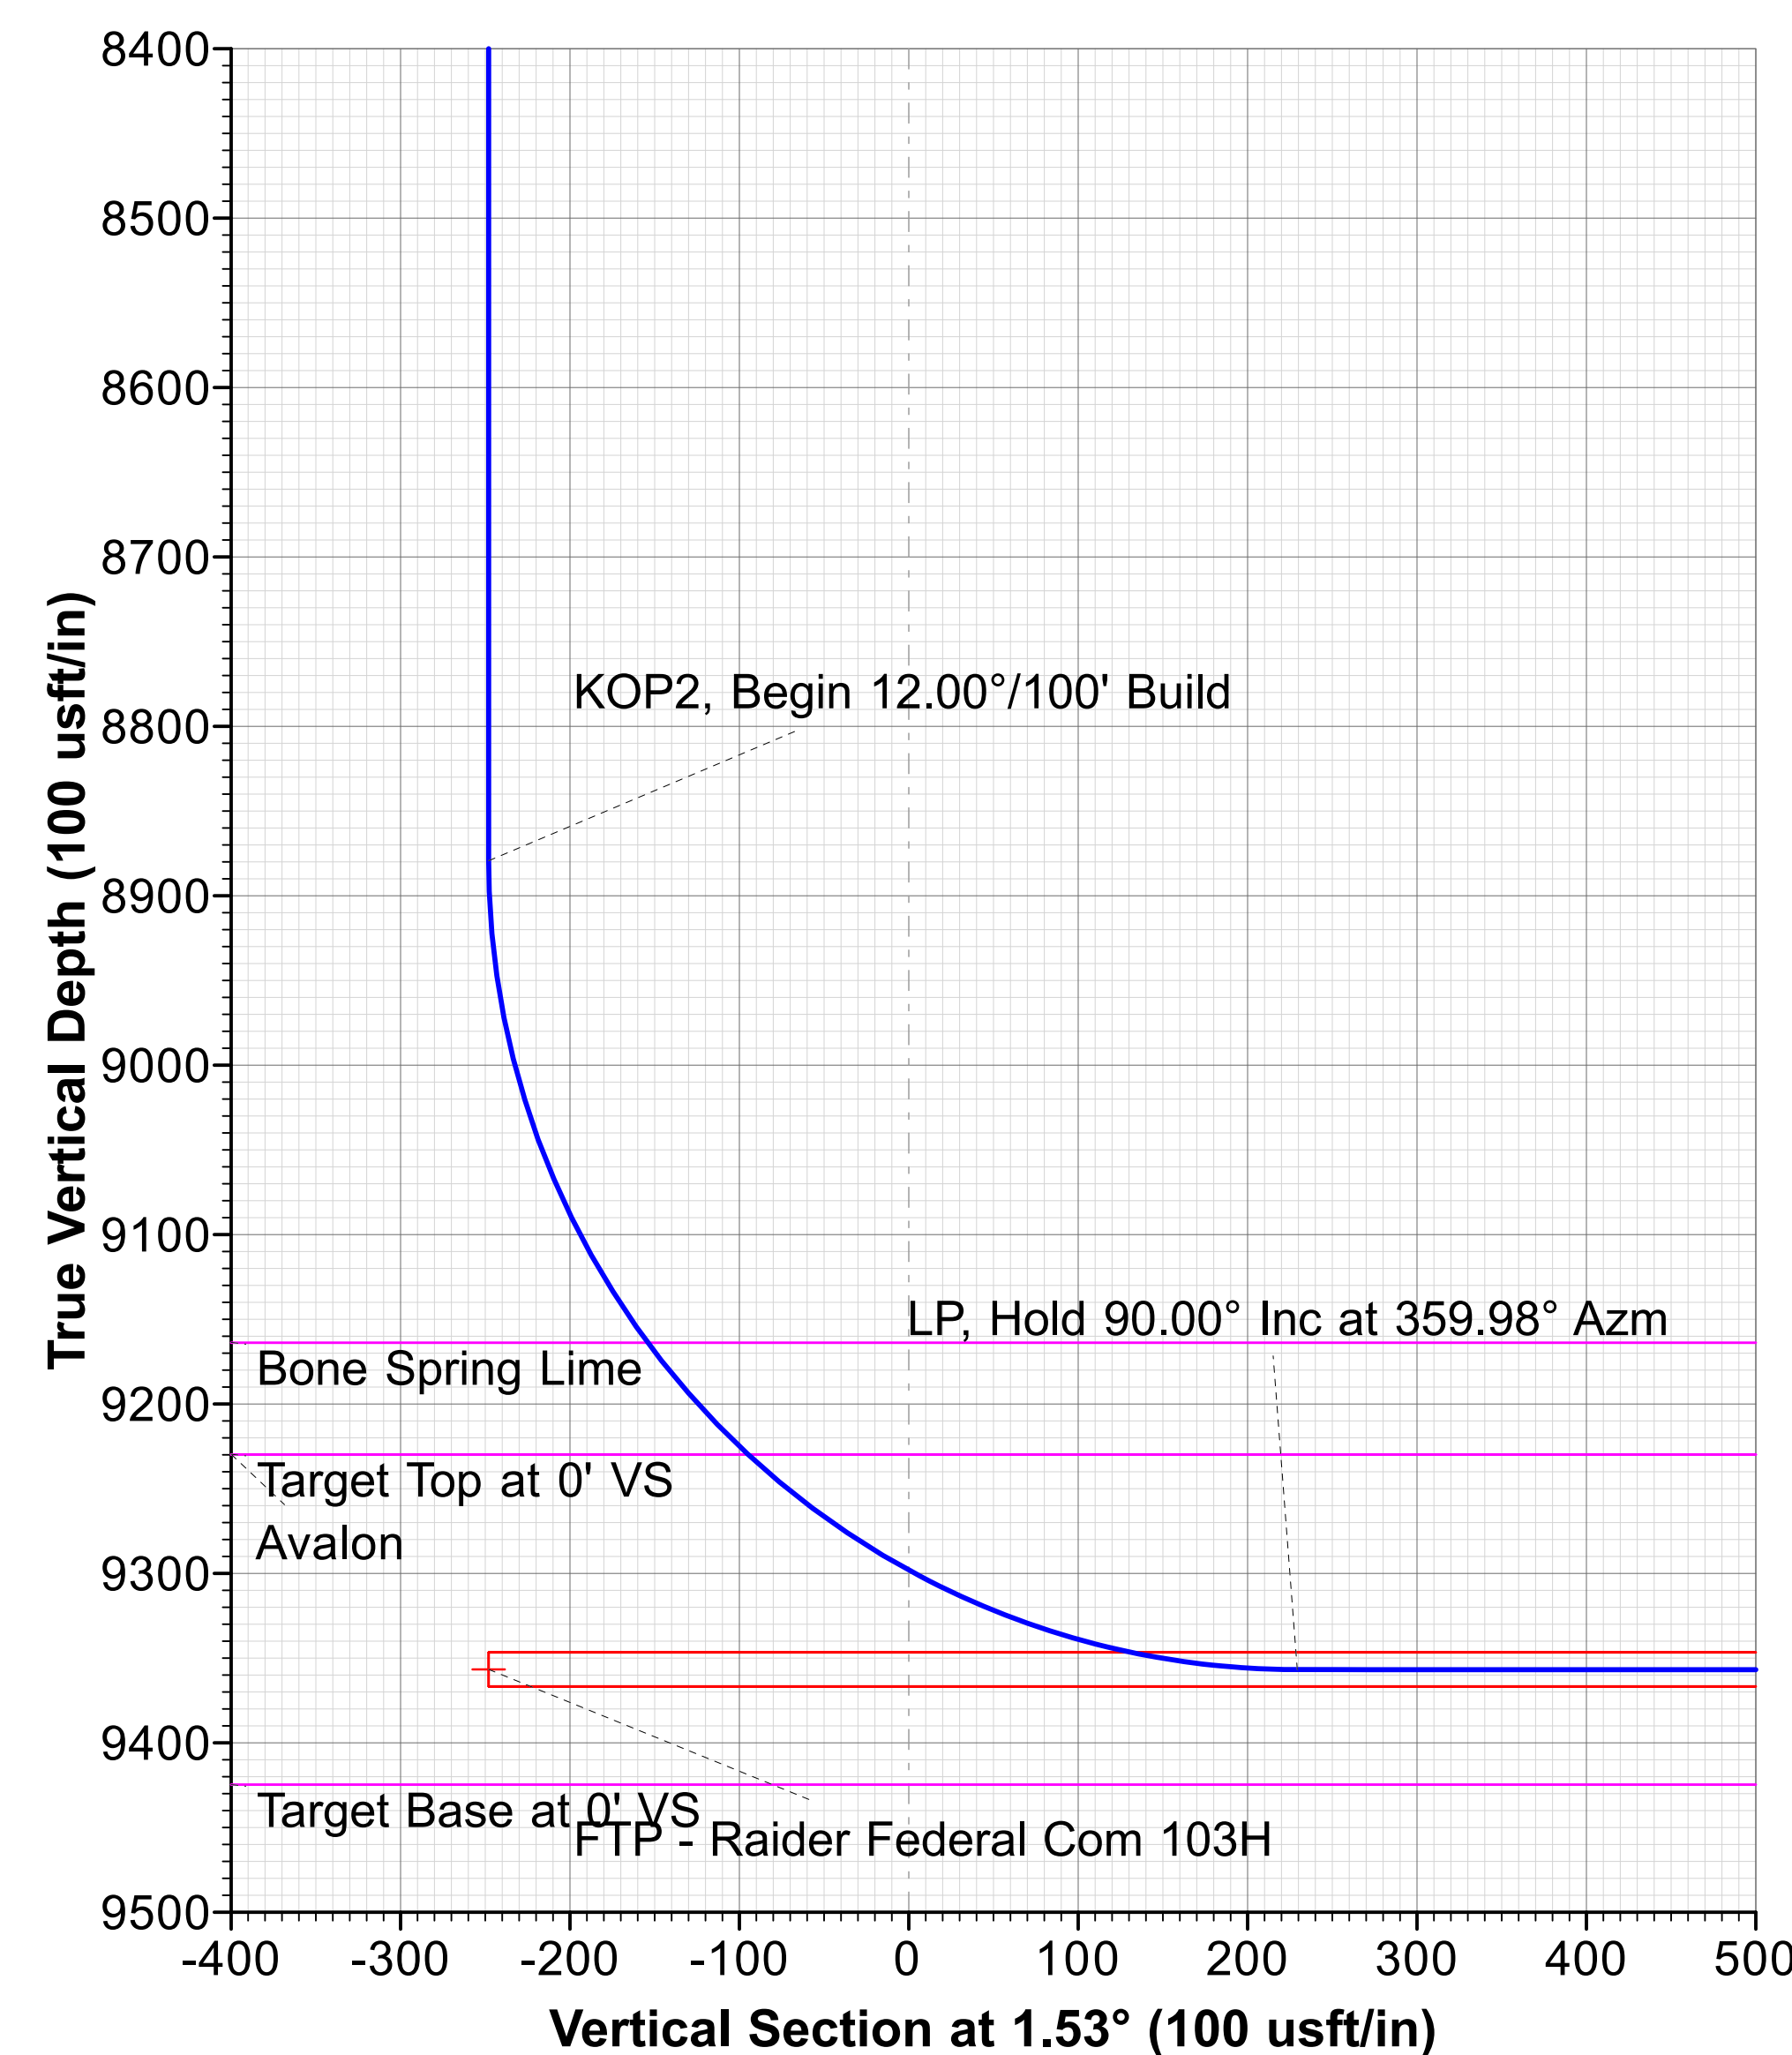




Map System: Universal Transverse Mercator (US Survey Feet)
Datum: North American Datum 1983
Ellipsoid: GRS 1980
Zone Name: Zone 13N (108 W to 102 W)
Local Origin: Well Raider Federal Com 103H, True North

Latitude: 32° 11' 48.370699 N
Longitude: 103° 28' 18.719010 W

Grid East: 2112983.69
Grid North: 11690495.26
Scale Factor: 1.000

Geomagnetic Model: MVHD
Sample Date: 17-Oct-22
Magnetic Declination: 6.272°
Dip Angle from Horizontal: 59.739°
Magnetic Field Strength: 47476.25713725nT

To convert a Magnetic Direction to a Grid Direction, Add 5.458°
To convert a Magnetic Direction to a True Direction, Add 6.272° East
To convert a True Direction to a Grid Direction, Subtract 0.814°

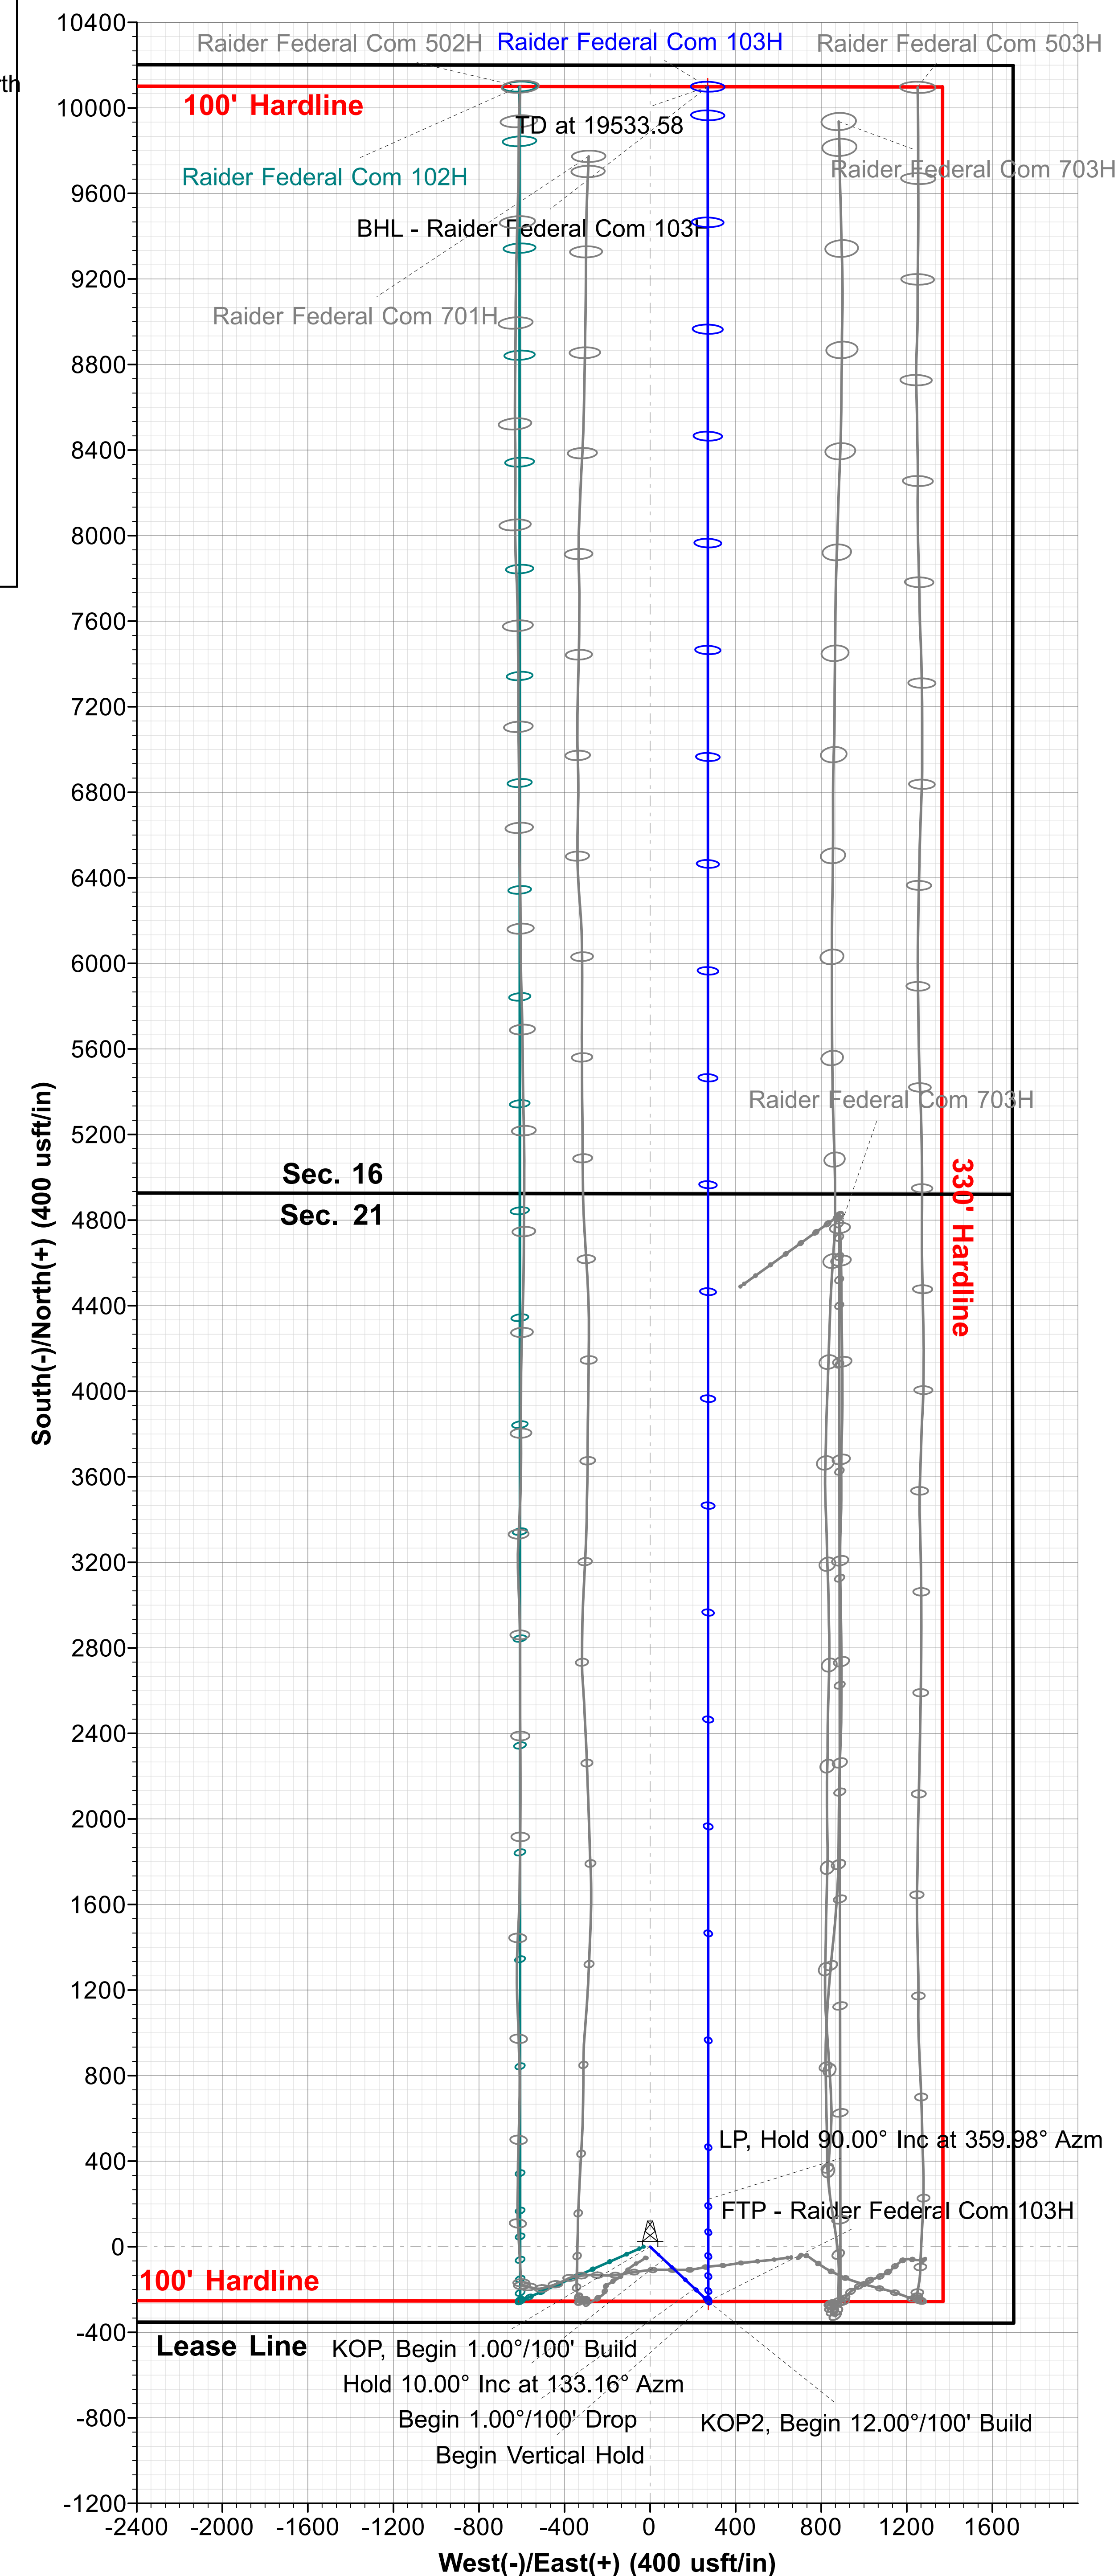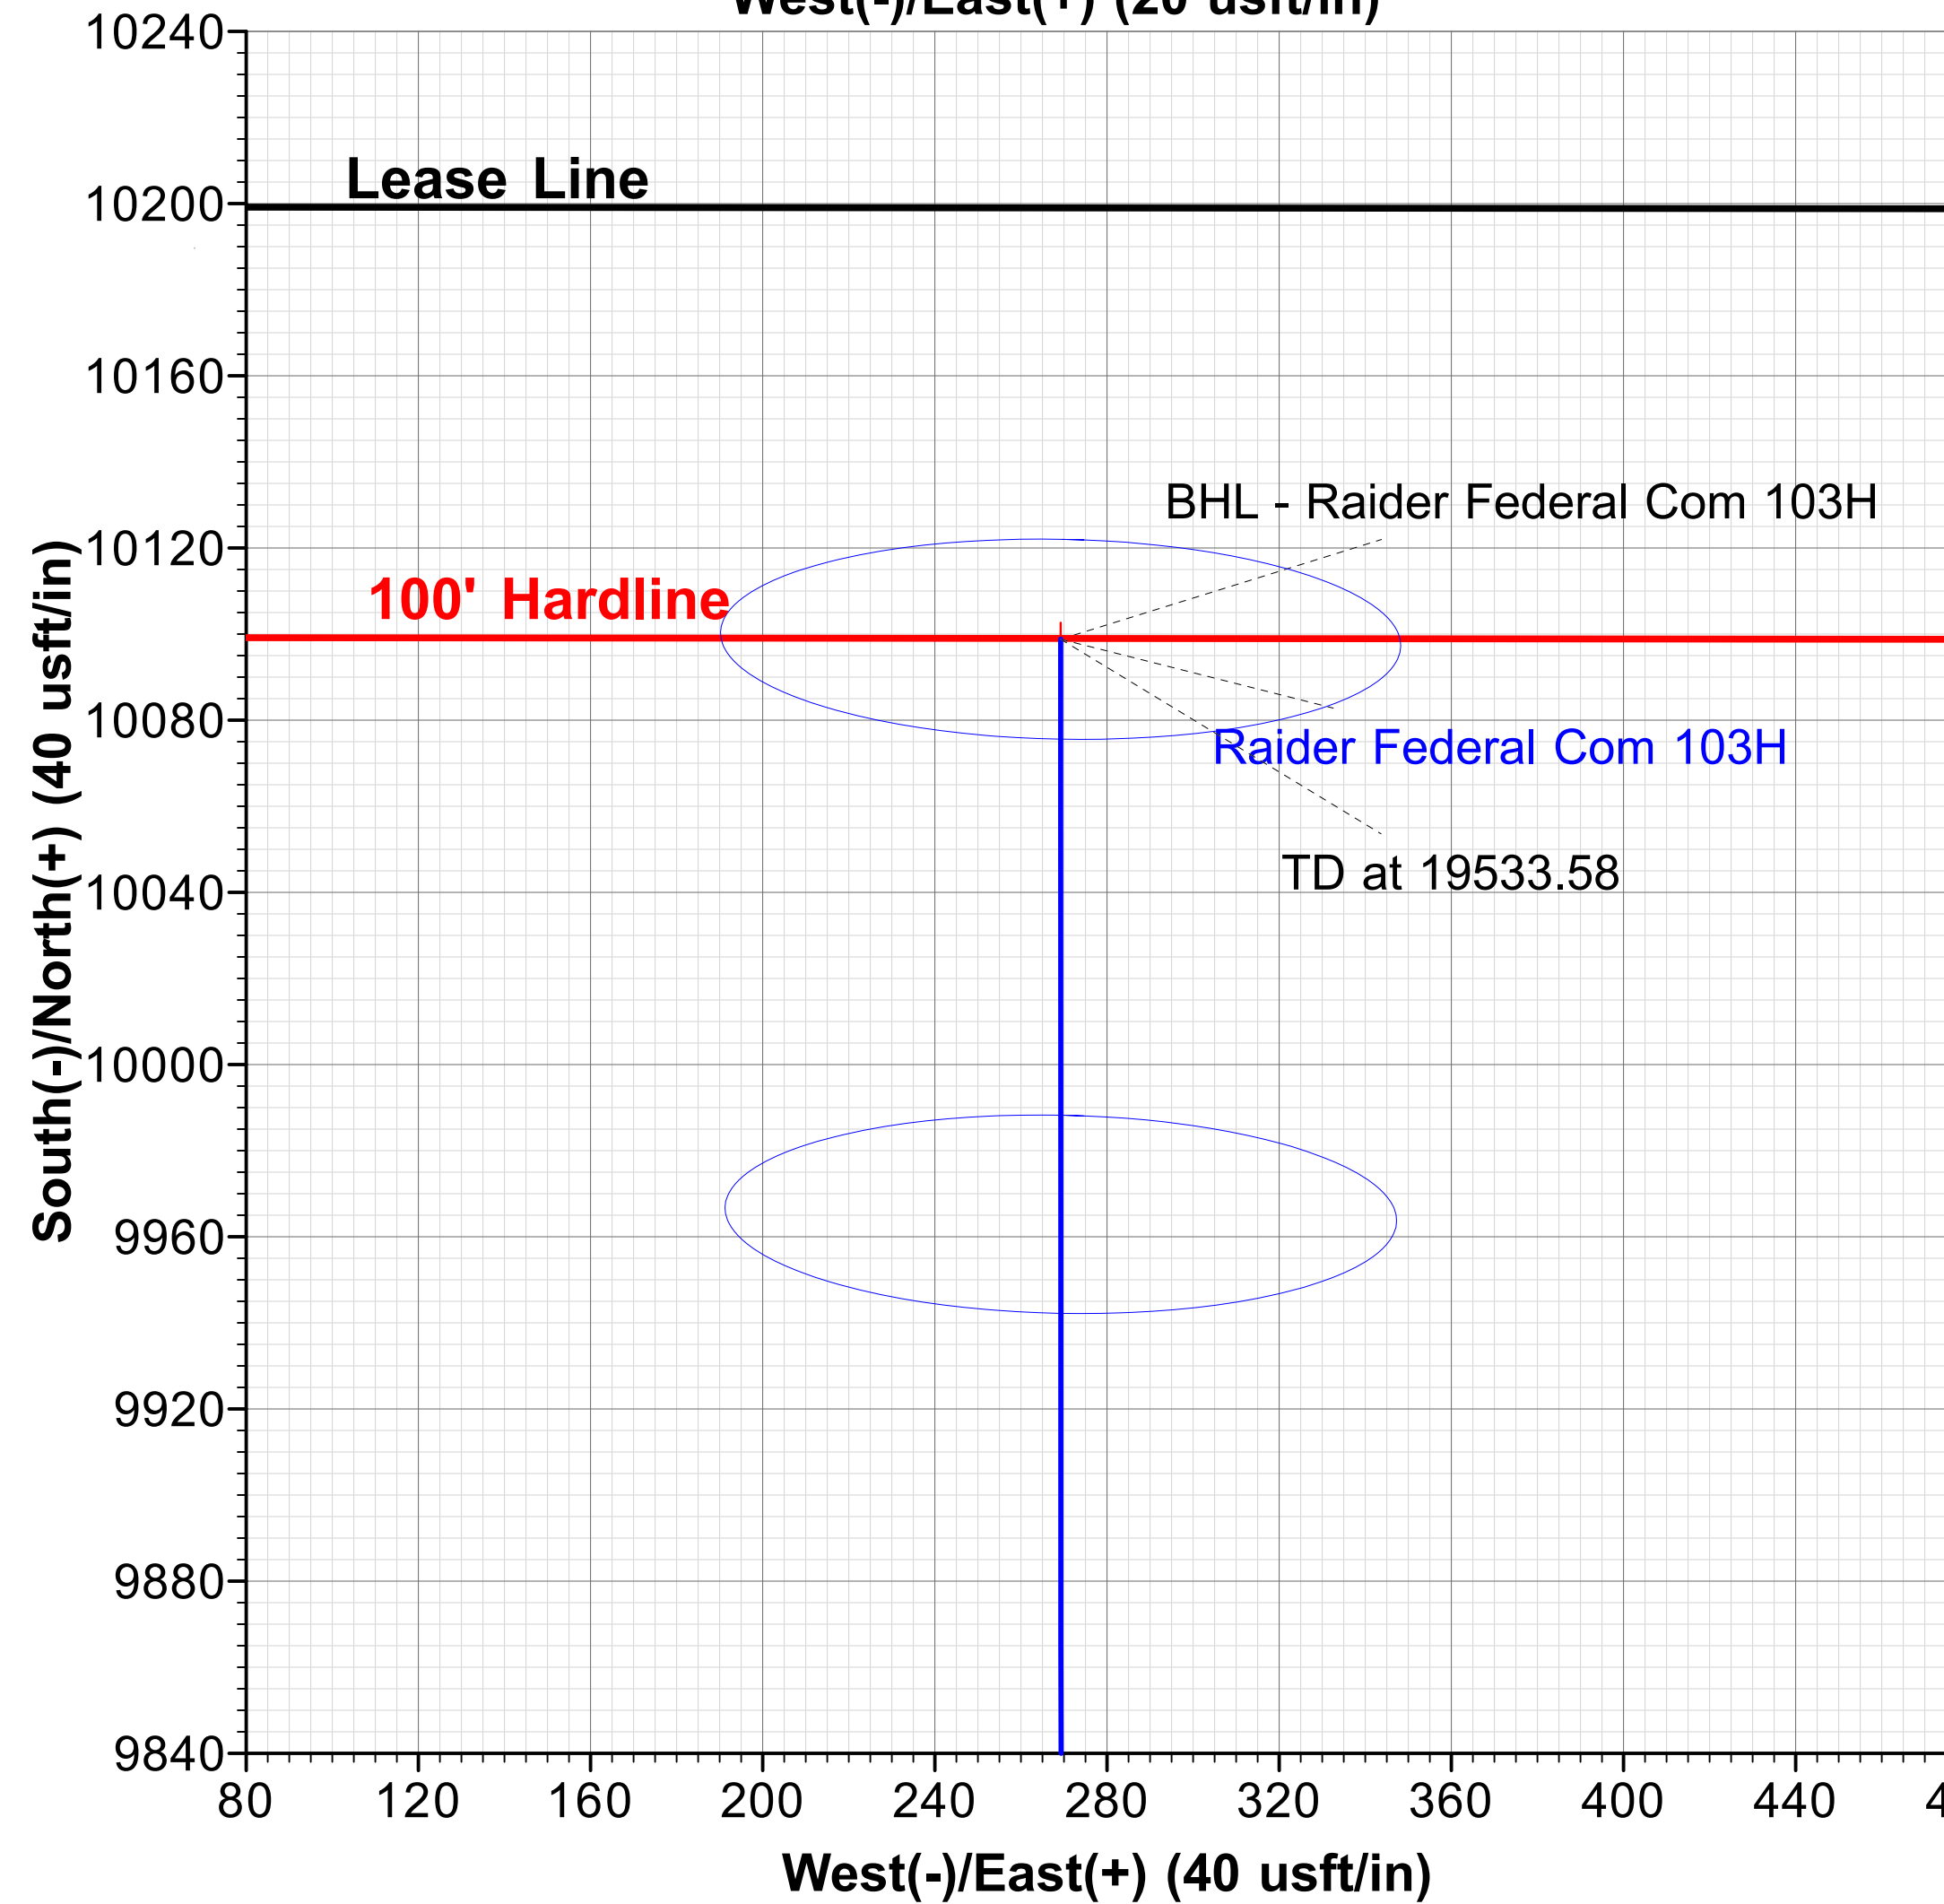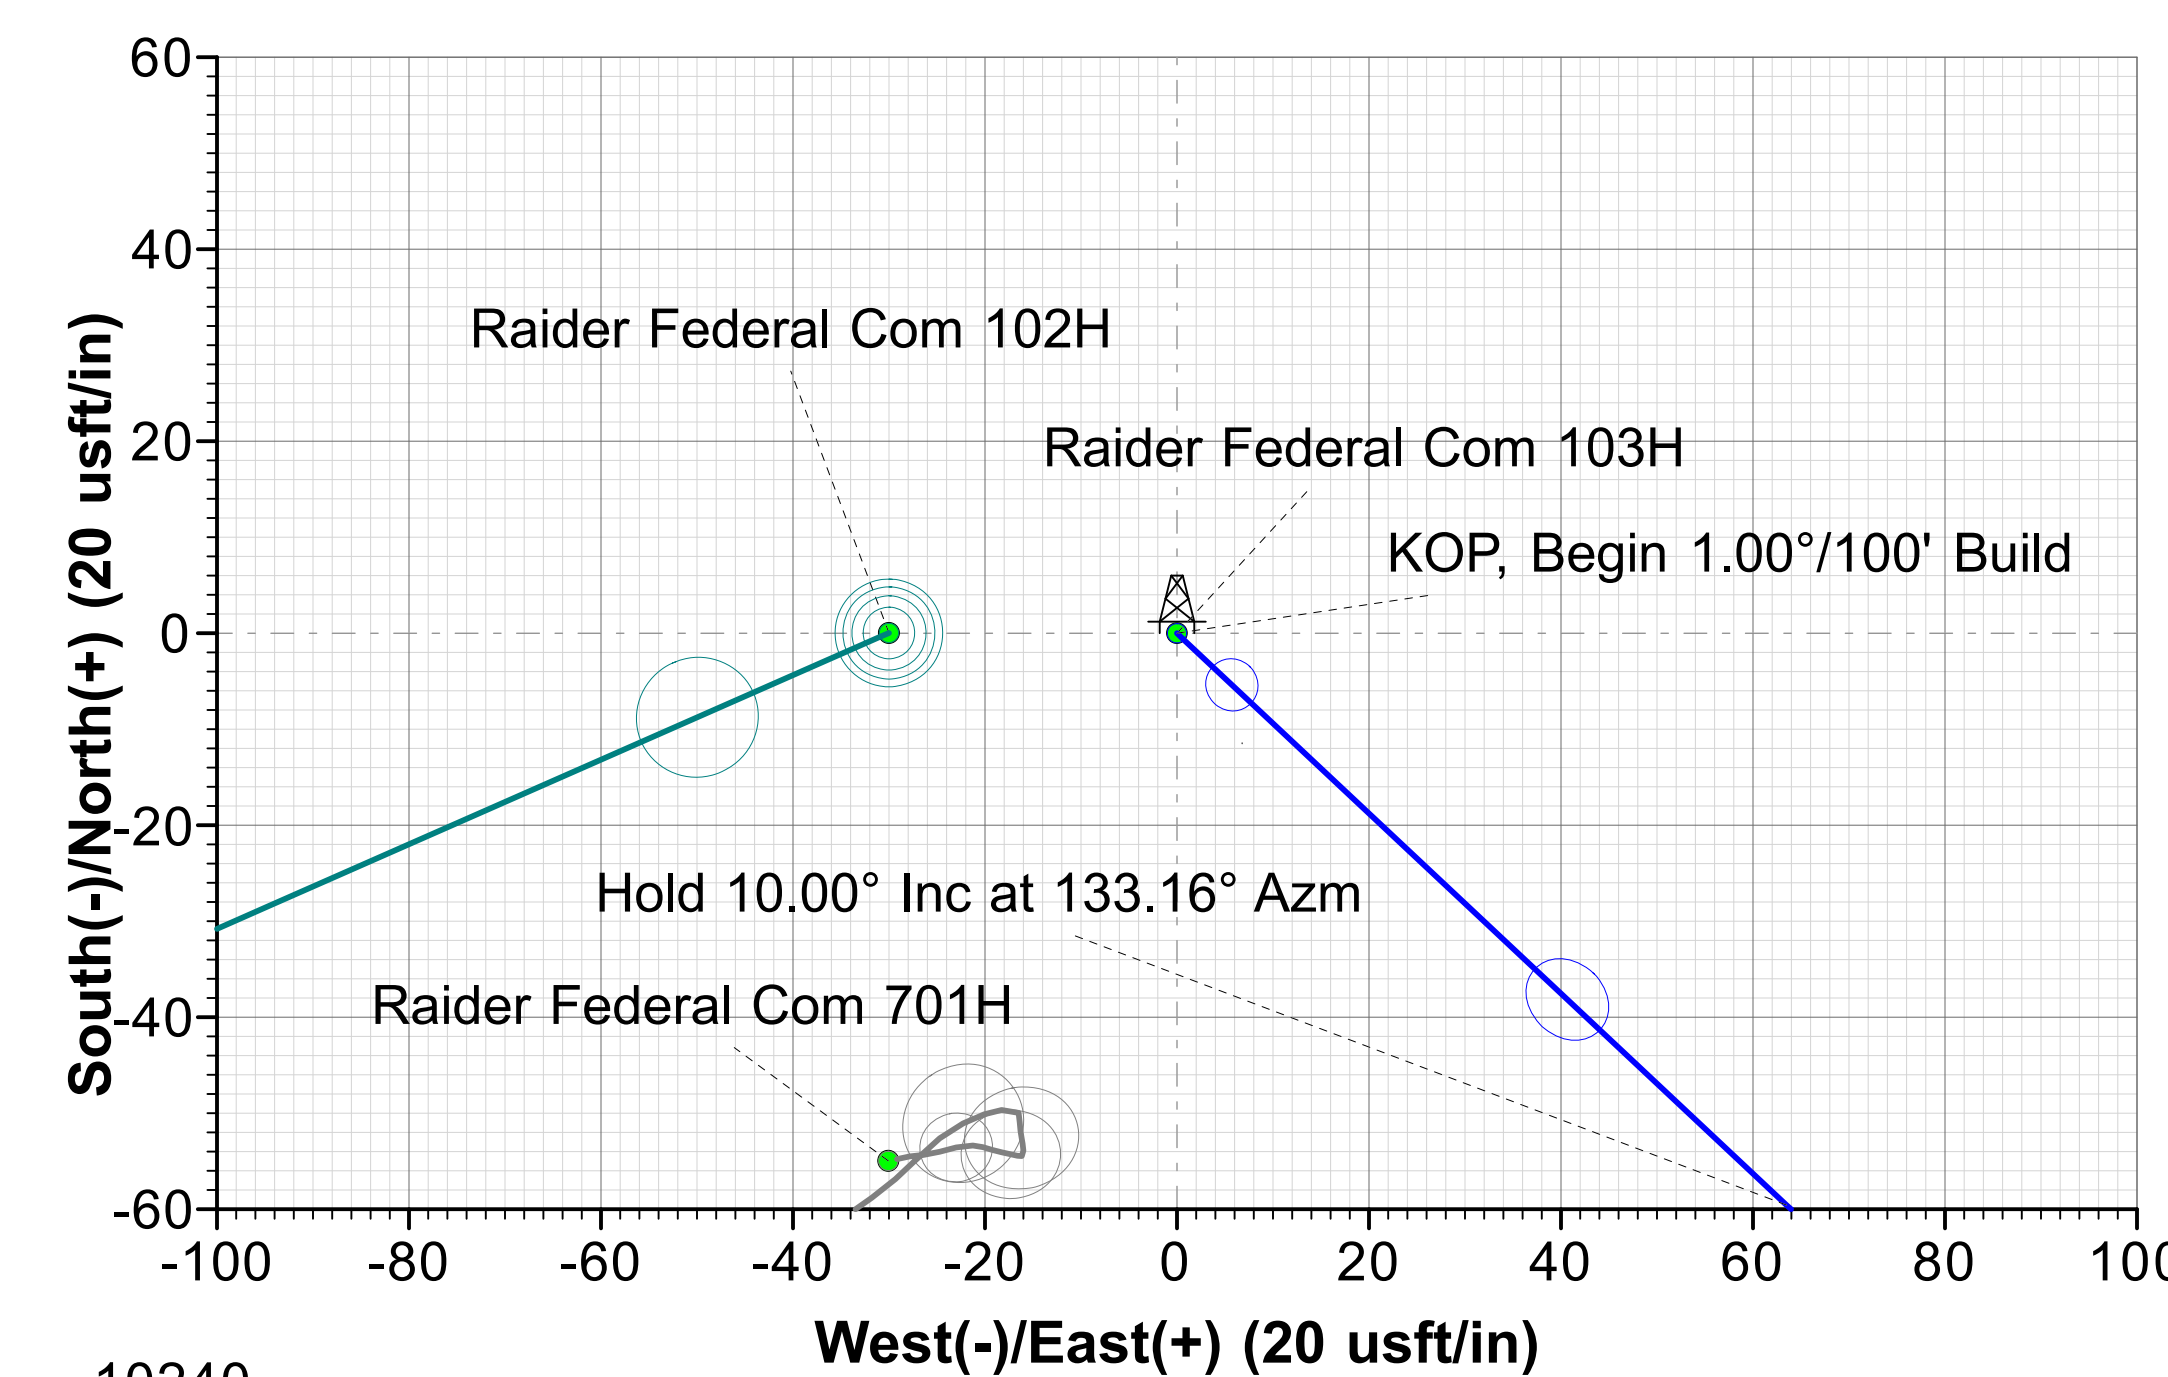

State of New Mexico
Energy, Minerals and Natural Resources Department

Submit Electronically
Via E-permitting

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description

Effective May 25, 2021

I. Operator: Permian Resources Operating, LLC **OGRID:** 372165 **Date:** 08/14/25

II. Type: ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe: _____

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
SEE ATTACHED						

IV. Central Delivery Point Name: RAIDER CDP [See 19.15.27.9(D)(1) NMAC]

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
SEE ATTACHED						

VI. Separation Equipment: ☒ Attach a complete description of how Operator will size separation equipment to optimize gas capture.

VII. Operational Practices: ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices: ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

Section 2 – Enhanced Plan

EFFECTIVE APRIL 1, 2022

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☒ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF
SEE ATTACHED			

X. Natural Gas Gathering System (NGGS):

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in
TARGA	LUCID-TARGA GATHERING SYSTEM	I-21-24S-34E	TBD	TBD

XI. Map. ☐ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system ☐ will ☐ will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

XIII. Line Pressure. Operator ☐ does ☐ does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

XIV. Confidentiality: ☐ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

Section 3 – Certifications

Effective May 25, 2021

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☒ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

If Operator checks this box, Operator will select one of the following:

Well Shut-In. ☑ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

Venting and Flaring Plan. ☑ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

Section 4 - Notices


1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature: 
Printed Name: Ashley Brown
Title: Regulatory Supervisor
E-mail Address: Ashley.Brown@permianres.com
Date: 5/15/2025
Phone: (432) 400-2972
OIL CONSERVATION DIVISION (Only applicable when submitted as a standalone form)
Approved By:
Title:
Approval Date:
Conditions of Approval:

WELL NAME	API	ULSTR	FOOTAGES	ANTICIPATED OIL BBL/D	ANTICIPATED GAS MCF/D	ANTICIPATED PRODUCED WATER BBL/D
RAIDER FEDERAL COM 103H	PENDING	O-21-24S-34E	355' FSL, 1700' FEL	1622	2437	10891
SHEBA FEDERAL COM 106H	PENDING	H-27-24S-34E	2319' FNL, 1030' FEL	1611	2420	10818
WELL NAME	API	SPUD DATE	TD REACHED DATE	COMPLETION COMMENCEMENT DATE	INITIAL FLOW BACK DATE	FIRST PRODUCTION DATE
RAIDER FEDERAL COM 103H	PENDING	TBD	TBD	TBD	TBD	TBD
SHEBA FEDERAL COM 106H	PENDING	TBD	TBD	TBD	TBD	TBD
WELL NAME	API		ANTICIPATED AVERAGE NATURAL GAS RATE MCF/D		ANTICIPATED VOLUME OF NATURAL GAS FOR THE FIRST YEAR MCF	
RAIDER FEDERAL COM 103H	PENDING		1216		460356	
SHEBA FEDERAL COM 106H	PENDING		1150		430429	

Permian Resources Operating, LLC (372165)

Natural Gas Management Plan Descriptions**VI. Separation Equipment:**

Permian utilizes a production forecast from our Reservoir Engineering team to appropriately size each permanent, 3-phase separator and heater treater utilized for production operations. Our goal is to maintain 5 minutes of retention time in the test vessel and 20 minutes in the heater treater at peak production rates. The gas produced is routed from the separator to the gas sales line.

VII. Operational Practices:*Drilling*

During Permian's drilling operations it is uncommon for venting or flaring to occur. If flaring is needed due to safety concerns, gas will be routed to a flare and volumes will be estimated.

Flowback

During completion/recompletion flowback operations, after separation flowback begins and as soon as it is technically feasible, Permian routes gas through a permanent separator and the controlled facility where the gas is either sold or flared through a high-pressure flare if needed.

Production

Per 19.15.27.8.D, Permian's facilities are designed to minimize waste. Our produced gas will only be vented or flared in an emergency or malfunction situation, except as allowed for normal operations noted in 19.15.27.8.D(2) & (4). All gas that is flared is metered. All gas that may be vented will be estimated.

Performance Standards

Permian utilizes a production forecast from our Reservoir Engineering team to appropriately size each permanent, 3-phase separator and heater treater utilized for production operations.

All of Permian's permanent storage tanks associated with production operations which are routed to a flare or control device are equipped with an automatic gauging system.

All of Permian's flare stacks, both currently installed and for future installation, are:

- 1) Appropriately sized and designed to ensure proper combustion efficiency.
- 2) Equipped with an automatic ignitor or continuous pilot.
- 3) Anchored and located at least 100 feet from the well and storage tanks.

Permian's field operations and HSE teams have implemented an AVO inspection schedule that adheres to the requirements of 19.15.27.8.E(5).

All of our operations and facilities are designed to minimize waste. We routinely employ the following methods and practices:

- Closed-loop systems
- Enclosed and properly sized tanks

Permian Resources Operating, LLC (372165)

- Vapor recovery units to maximize recovery of low-pressure gas streams and potential unauthorized emissions
- Low-emitting or electric engines whenever practical
- Combustors and flare stacks in the event of a malfunction or emergency
- Routine facility inspections to identify leaking components, functioning control devices, such as flares and combustors, and repair / replacement of malfunctioning components where applicable


Measurement or estimation

Permian measures or estimates the volumes of natural gas vented, flared and/or beneficially used for all of our drilling, completing and producing wells. We utilize accepted industry standards and methodology which can be independently verified. Annual GOR testing is completed on our wells and will be submitted as required by the OCD. None of our equipment is designed to allow diversion around metering elements except during inspection, maintenance and repair operations.


VIII. Best Management Practices:

Permian utilizes the following BMPs to minimize venting during active and planned maintenance activities:


- Use a closed-loop process wherever possible during planned maintenance activities, such as blowdowns, liquid removal, and work over operations.
- Employ low-emitting or electric engines for equipment, such as compressors
- Adhere to a strict preventative maintenance program which includes routine facility inspections, identification of component malfunctions, and repairing or replacing components such as hatches, seals, valves, etc. where applicable
- Utilize vapor recovery units (VRU's) to maximize recovery of volumes of low-pressure gas streams and potential unauthorized emissions
- Route low pressure gas and emissions streams to a combustion device to prevent venting where necessary

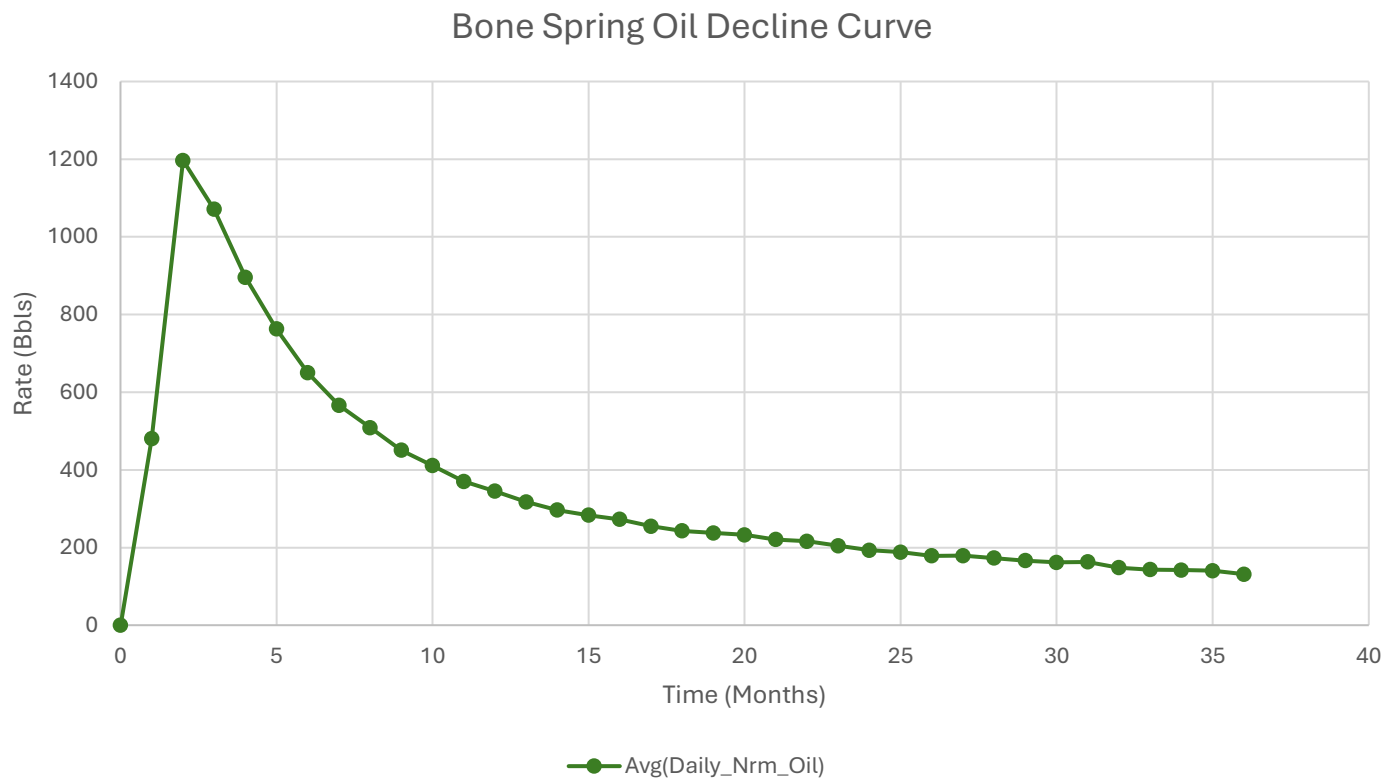


1. Represented curve is generic based on 3-Years available information for the Bone Spring formation and may not be representative of forecasted production or actual volumes.
2. Decline curves are based on an average 10,000ft lateral length. Multiple factors may influence production and decline curves, including but not limited to: lateral length and completion type.

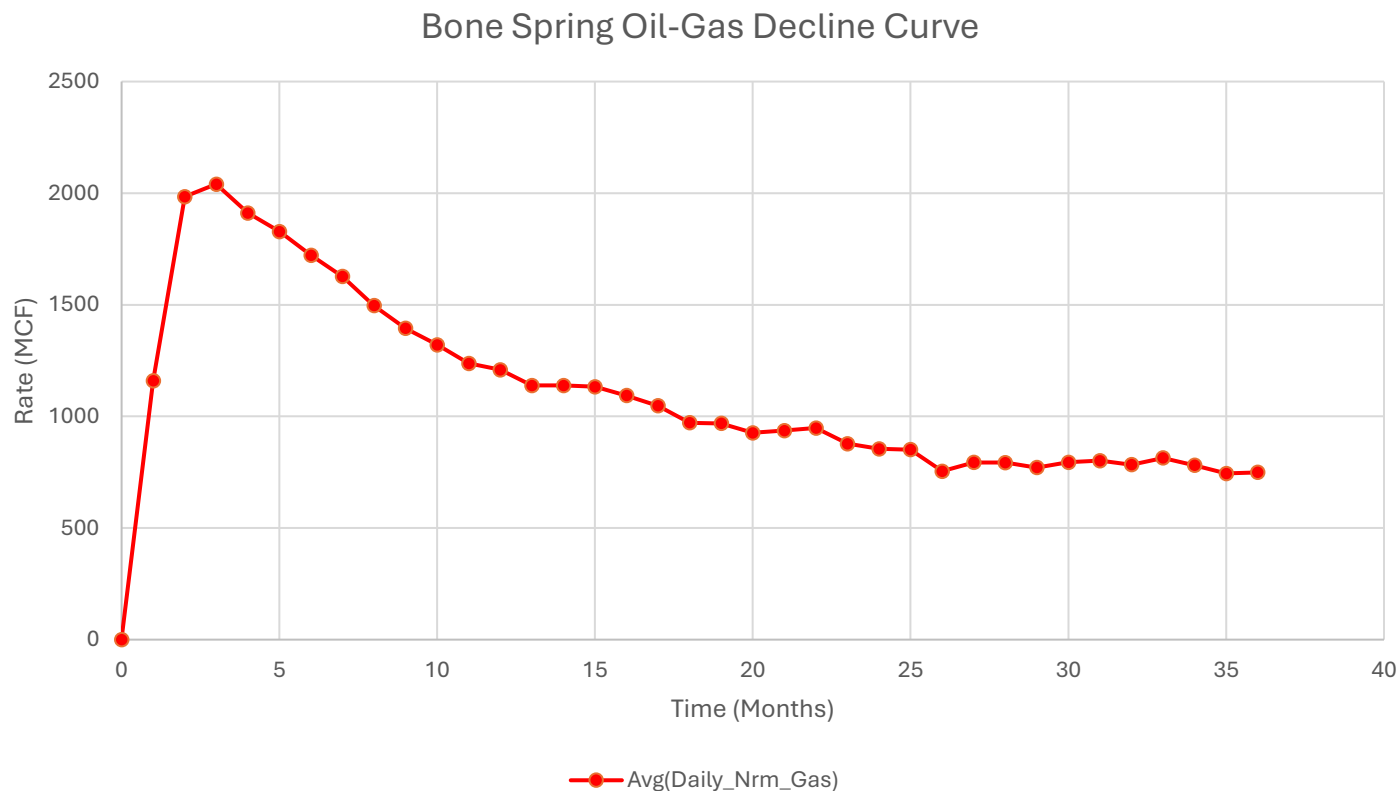

1. Represented curve is generic based on 3-Years available information for the Bone Spring formation and may not be representative of forecasted production or actual volumes.
2. Decline curves are based on an average 10,000ft lateral length. Multiple factors may influence production and decline curves, including but not limited to: lateral length and completion type.

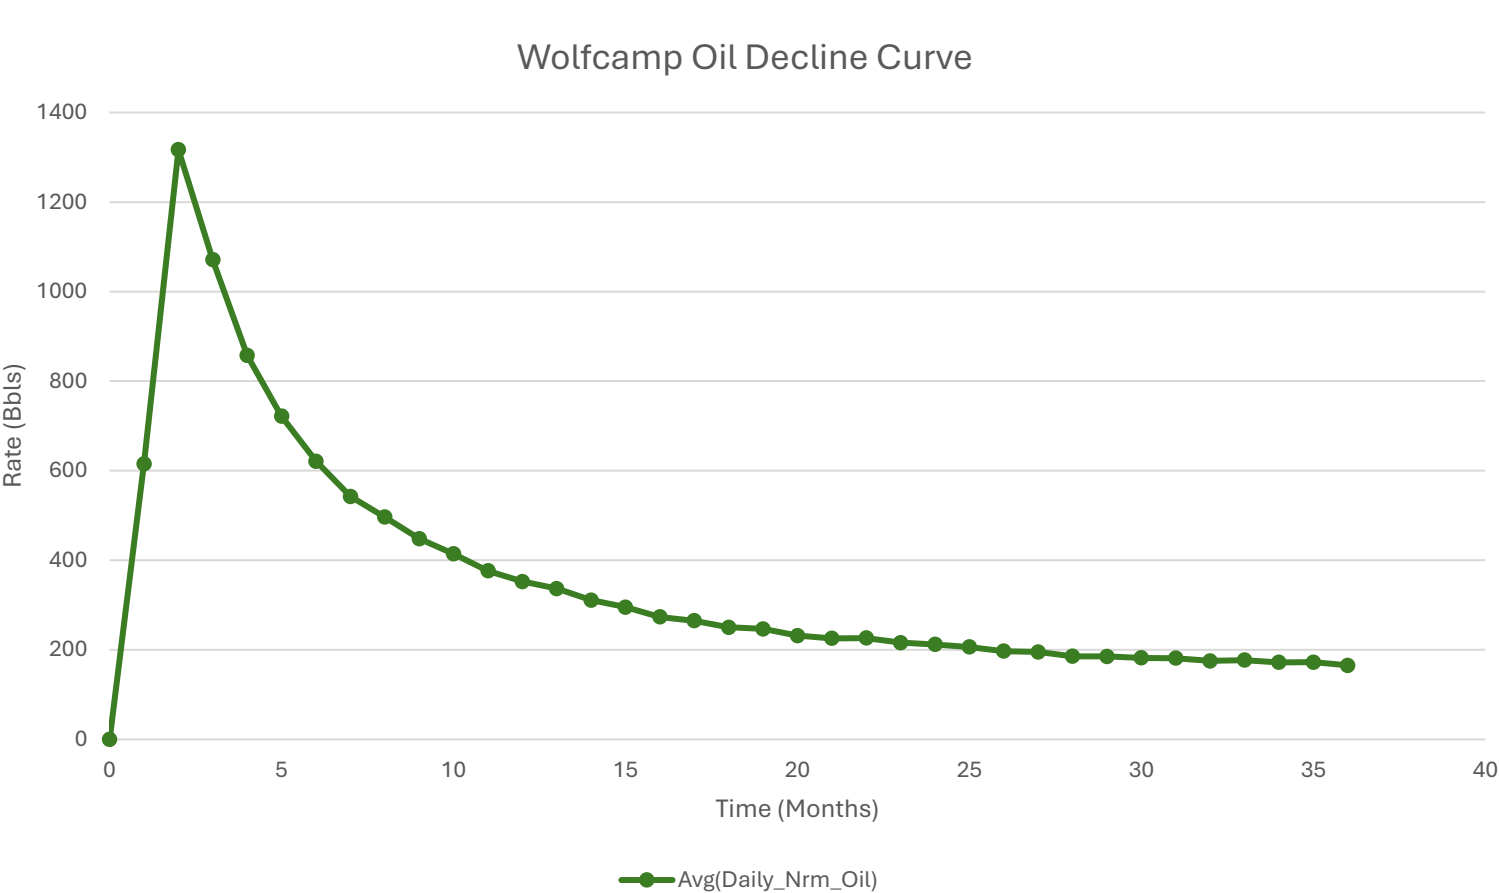

1. Represented curve is generic based on 3-Years available information for the Bone Spring formation and may not be representative of forecasted production or actual volumes.
2. Decline curves are based on an average 10,000ft lateral length. Multiple factors may influence production and decline curves, including but not limited to: lateral length and completion type.

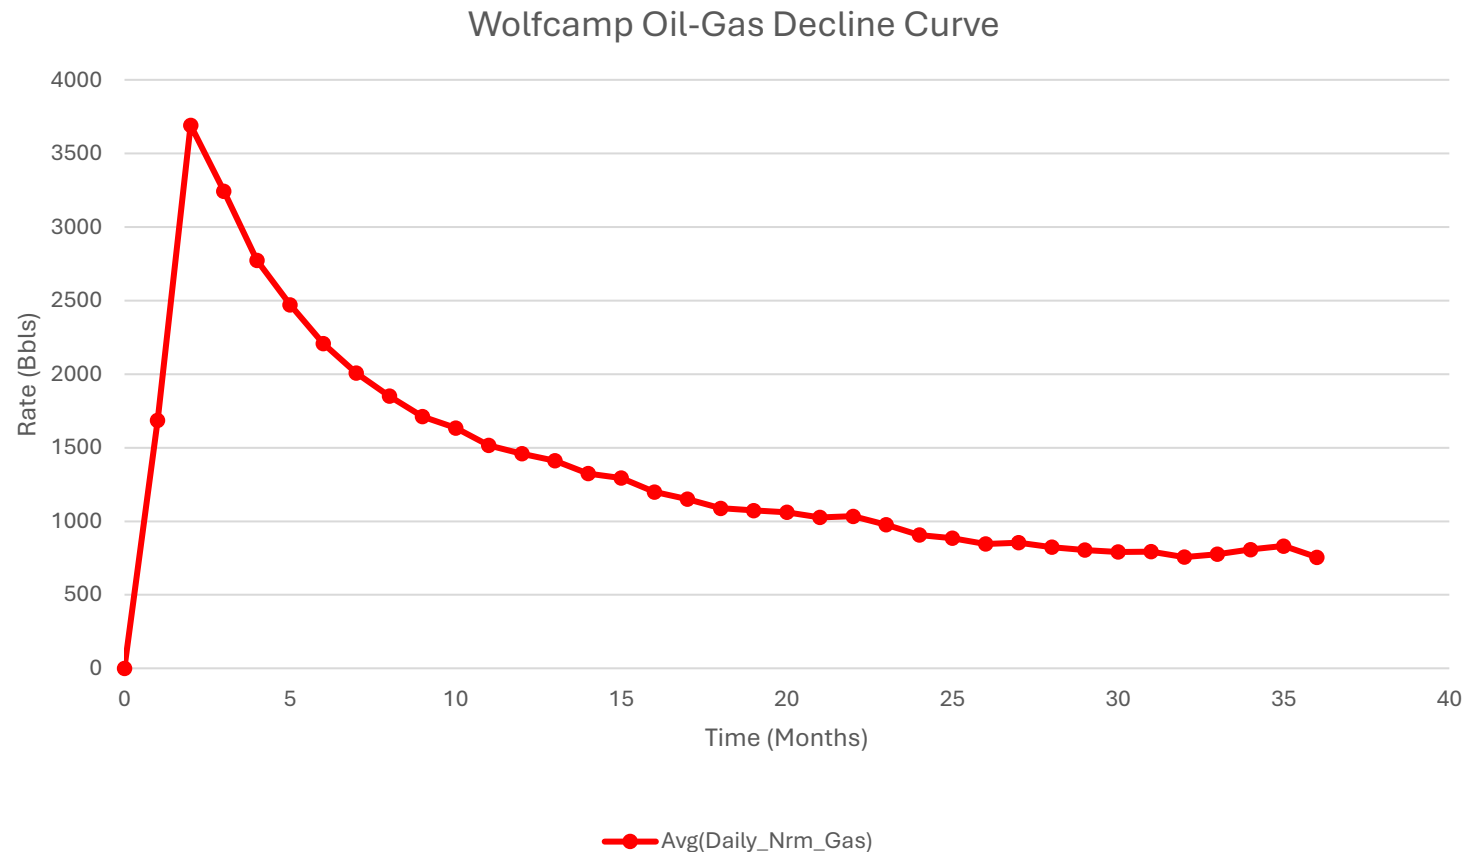

1. Represented curve is generic based on 3-Years available information for the Bone Spring formation and may not be representative of forecasted production or actual volumes.
2. Decline curves are based on an average 10,000ft lateral length. Multiple factors may influence production and decline curves, including but not limited to: lateral length and completion type.



H₂S CONTINGENCY PLAN

FOR

CENTENNIAL RESOURCE PRODUCTION, LLC.

Raider Federal Com 102H & 103H

Lea County, New Mexico

07-18-2022

This plan is subject to updating

Centennial Resource Production, LLC.	H ₂ S Contingency Plan Raider Federal Com 102H & 103H	Lea County, New Mexico
--------------------------------------	---	------------------------

Table of Contents

Section 1.0 – Introduction	3
I. Purpose	
II. Scope & Applicability	
Section 2.0 - Plan Implementation.....	3
I. Activation Requirements	
II. Emergency Evacuation	
III. Emergency Response Activities	
Section 3.0 - Potential Hazardous Conditions.....	4
Section 4.0 - Notification of H₂S Release Event.....	6
I. Local & State Law Enforcement	
II. General Public	
III. New Mexico Oil Conservation Division	
IV. New Mexico Environment Department	
V. Bureau of Land Management	
Section 5.0 - Emergency Contact List.....	7
I. Centennial Management Personnel	
II. Lea County Sheriff	
III. New Mexico State Highway Patrol	
IV. Fire / EMS	
V. Lea County Hospital	
VI. Emergency Response Contractors	
VII. New Mexico Oil Conservation Division	
VIII. New Mexico Environment Department	
IX. Bureau of Land Management	
X. Other Agencies	
Section 6.0 – Drilling Location Information.....	9-12
I. Site Safety Information	
II. Directions to Location	
III. Plat of Location including GPS Coordinates	
IV. Routes of Ingress & Egress (MAP)	
V. ROE Map	
VI. Residences in ROE	
VII. Public Roads in ROE	
Section 7.0 – Hazard Communication.....	13-15
I. Physical Characteristics of Hydrogen Sulfide Gas	
II. Human Health Hazards / Toxicological Information	
III. Environmental Hazards	
Section 8.0 - Regulatory Information.....	15-17
I. OSHA Information	
II. New Mexico Oil Conservation Division & Bureau of Land Management	
Section 9.0 - Training Requirements.....	17
Section 10.0 - Personal Protective Equipment.....	18
Appendices	
I. Appendix A – H ₂ S SDS	
II. Appendix B – SO ₂ SDS	

Centennial Resource Production, LLC.	H ₂ S Contingency Plan Raider Federal Com 102H & 103H	Lea County, New Mexico
--------------------------------------	---	------------------------

Section 1.0 – Introduction

I. Purpose

The purpose of this contingency plan (Plan) is to provide Centennial Resource Production, LLC. (Centennial) with an organized plan of action for alerting and protecting Centennial employees, the general public, and any potential first responders prior to any intentional release or immediately following the accidental / unintentional release of a potentially hazardous volume / concentration of Hydrogen Sulfide Gas (H₂S).

II. Scope & Applicability

This Plan applies to all planned, unplanned, uncontrolled and/or unauthorized releases of hazardous concentrations of H₂S or any associated hazardous byproducts of combustion, occurring at any Centennial owned or operated facilities including but not limited to: wells, flowlines, pipelines, tank batteries, production facilities, SWD facilities, compressor stations, gas processing plants, drilling / completions / workover operations, and any other applicable company owned property.

Section 2.0 - Plan Implementation

I. Activation Requirements

In accordance with the requirements of Bureau of Land Management Onshore Order #6 and NMAC 19.15.11, this Plan shall be activated in advance of any authorized, planned, unplanned, uncontrolled, or unauthorized release of a hazardous volume / concentration of H₂S gas, or SO₂, which could potentially adversely impact the workers, general public or the environment.

II. Emergency Evacuation

In the event of an unplanned, uncontrolled, or unauthorized release of a hazardous volume / concentration of H₂S gas, the first priority is to ensure the safety of the workers and general public. Upon discovery and subsequent determination of an applicable release, which cannot be quickly mitigated, immediately by using 911, notify local authorities to begin the process of alerting the general public, evacuate any residents within the Radius of Exposure (ROE), and limit any general public or employee access to any areas within the ROE of the affected facility.

III. Emergency Response Activities

The purpose of emergency response actions is to take steps to quickly mitigate / stop the ongoing release of the hazardous source of H₂S. Upon discovery of any hazardous release, immediately notify Centennial management to activate the Emergency Response Team (ERT). Once Centennial supervision arrives and assesses the situation, a work plan identifying the proper procedures shall be developed to stop the release.

Section 3.0 - Potential Hazardous Conditions & Response Actions

During a planned or unplanned release of H₂S, there are several hazardous conditions that are presented both to employees, the general public, and emergency responders. These specific hazardous conditions are identified in the tables below.

Centennial Resource Production, LLC.	H ₂ S Contingency Plan Raider Federal Com 102H & 103H	Lea County, New Mexico
--------------------------------------	---	------------------------

H ₂ S OPERATING CONDITIONS – RESPONSE ACTIONS TO CONSIDER		✓
H₂S CONDITION 1: POTENTIAL DANGER TO LIFE AND HEALTH → WARNING SIGN GREEN		
H₂S concentration <10 ppm detected by location monitors		☐
General Actions During Condition 1		☐
Notify Site Supervisor / Centennial Person-in-Charge (PIC) of any observed increase in ambient H ₂ S concentrations		☐
All personnel check safety equipment is in adequate working order & store in accessible location		☐
Sensitize crews with safety meetings.		☐
Limit visitors and non-essential personnel on location		☐
Continuously monitor H ₂ S concentrations and check calibration of sensors		☐
Ensure H ₂ S scavenger is on location.		☐
H₂S CONDITION 2: MODERATE DANGER TO LIFE AND HEALTH → WARNING SIGN YELLOW		
H₂S concentration >10 ppm and < 30 ppm in atmosphere detected by location monitors:		☐
General Actions During Condition 2		☐
Sound H ₂ S alarm and/or display yellow flag.		☐
Account for on-site personnel		☐
Upon sounding of an area or personal H ₂ S monitor alarm when 10 ppm is reached, proceed to a safe briefing area upwind of the location immediately (see MA-4, Figure 5-1).		☐
Don proper respiratory protection.		☐
Alert other affected personnel		☐
If trained and safe to do so undertake measures to control source H ₂ S discharge and eliminate possible ignition sources. Initiate Emergency Shutdown procedures as deemed necessary to correct or control the specific situation.		☐
Account for on-site personnel at safe briefing area.		☐
Stay in safe briefing area if not working to correct the situation.		☐
Keep Site Supervisor / Centennial PIC informed. Notify applicable government agencies (Appendix A) If off-site impact; notify any neighbors within Radius of Exposure (ROE), Fig 5.11		☐
Continuously monitor H ₂ S until readings below 10 ppm.		☐
Evacuated area shall not be re-entered except by trained and authorized personnel utilizing appropriate respiratory protection; or until “all clear” sounded by Centennial PIC / Site Supervisor.		

Centennial Resource Production, LLC.	H ₂ S Contingency Plan Raider Federal Com 102H & 103H	Lea County, New Mexico
--------------------------------------	---	------------------------

H₂S CONDITION 3: EXTREME DANGER TO LIFE AND HEALTH → WARNING SIGN RED	
> 30 ppm H ₂ S concentration in air detected by location monitors: Extreme danger to life	☐
General Actions During Condition 3	☐
Sound H ₂ S alarm and/or display red flag.	☐
Account for on-site personnel	☐
Move away from H ₂ S source and get out of the affected area.	☐
Proceed to designated safe briefing area; alert other affected personnel.	☐
Account for personnel at safe briefing area.	☐
If trained and safe to do so undertake measures to control source H ₂ S discharge and eliminate possible ignition sources. Initiate Emergency Shutdown procedures as deemed necessary to correct or control the specific situation.	☐
Notify vehicles or situation and divert all traffic away from location.	☐
Centennial Person-in-Charge will make appropriate community notifications.	☐
Red warning flag must be on display until the situation has been corrected and the Centennial Person-in-Charge determines it is safe to resume operations under Condition 1 .	☐
Notify management of the condition and action taken. If H ₂ S concentration is increasing and steps to correct the situation are not successful – or at any time if well control is questionable – alert all responsible parties for possible activation of the H ₂ S Contingency Plan. If well control at the surface is lost, determine if situation warrants igniting the well.	☐
If uncontrolled flow at the surface occurs, the Centennial PIC, with approval, if possible, from those coordinating the emergency (as specified in the site-specific H₂S Contingency Plan) are responsible for determining if the situation warrants igniting the flow of the uncontrolled well. This decision should be made only as a last resort and in a situation where it is obvious that human life is in danger and there is no hope of controlling the flow under prevailing conditions.	☐
If the flow is ignited, burning H ₂ S will be converted to sulfur dioxide (SO ₂), which is also highly toxic. Do not assume that area is safe after the flow is ignited. If the well is ignited, evacuation of the area is mandatory, because SO ₂ will remain in low-lying places under no-wind conditions.	☐
Keep Site Supervisor / Centennial PIC informed. Notify applicable government agencies and local law enforcement (Appendix A) If off-site impact; notify any neighbors within the Radius of Exposure (ROE), see example in Figure 5-11 .	☐
Continuously monitor H ₂ S until readings fall below 10 ppm.	☐
Evacuated area shall not be re-entered except by trained and authorized personnel utilizing appropriate respiratory protection; or until “all clear” sounded by Centennial PIC / Site Supervisor.	☐
IF ABOVE ACTIONS CANNOT BE ACCOMPLISHED IN TIME TO PREVENT EXPOSURE TO THE PUBLIC	
Alert public (directly or through appropriate government agencies) who may be subject to potentially harmful exposure levels.	☐
Make recommendations to public officials regarding blocking unauthorized access to the unsafe area and assist as appropriate.	☐

Centennial Resource Production, LLC.	H ₂ S Contingency Plan Raider Federal Com 102H & 103H	Lea County, New Mexico
--------------------------------------	---	------------------------

Make recommendations to public officials regarding evacuating the public and assist as appropriate.	☐
Monitor ambient air in the area of exposure (after following abatement measures) to determine when it is safe for re-entry.	☐

Section 4.0 - Notification of H₂S Release Event

I. Local & State Law Enforcement

Prior to the planned / controlled release of a hazardous concentration of H₂S gas or any associated byproducts of the combustion of H₂S gas, notify local law enforcement agencies regarding the contents of this plan.

In the event of the discovery of an unplanned/uncontrolled release of a hazardous concentration of H₂S gas or any associated byproducts of combustion, immediately notify local and/or state law enforcement agencies of the situation and ask for their assistance.

II. General Public

In the event of a planned or unplanned release of a hazardous concentration of H₂S gas or any associated byproducts of combustion, notify local law enforcement agencies and ask for their assistance in alerting the general public and limiting access to any public roads that may be impacted by such a release.

III. New Mexico Oil Conservation Division

The Centennial HSE Department will make any applicable notification to the New Mexico OCD regarding any release of a hazardous concentration of H₂S Gas or any associated byproducts of combustion.

IV. New Mexico Environment Department

The Centennial HSE Department will make any applicable notifications to the NMED regarding any release of a hazardous concentration of H₂S gas or any associated byproducts of combustion.

V. Bureau of Land Management

The Centennial Regulatory Department will make any applicable notifications to the BLM regarding any release of a hazardous concentration of H₂S gas or any associated byproducts of combustion.

Centennial Resource Production, LLC.	H ₂ S Contingency Plan Raider Federal Com 102H & 103H	Lea County, New Mexico
--------------------------------------	---	------------------------

Section 5.0 - Emergency Contact List

EMERGENCY CONTACT LIST				
CENTENNIAL RESOURCE PRODUCTION, LLC.				
POSITION	NAME	OFFICE	CELL	ALT PHONE
Operations				
Operations Superintendent	Cory Lewis	432.305.1009	432.557.4274	
TX Operations Assistant Superintendent	Josh Graham	432.940.3191	432.940.3191	
Drilling Superintendent	Jason Fitzgerald	432.315.0146	318-347-3916	
NM Operations Assistant Superintendent	Manual Mata	432.664.0278	575.408.0216	
Drilling Engineer	Ronny Hise	432.315.0144	432.770.4786	
Production Engineer	Travis Donnely	432.315.0143	661.246.5725	
Vice President Operations	Clayton Smith	720.499.1416	361.215.2494	
HSE & Regulatory				
H&S Manager	Adam Hicks	720.499.2377	903.426.4556	
Regulatory Manager	Sarah Ferreyros	720.499.1454	720.854.9020	
Environmental Manager	Montgomery Floyd	432-315-0123	432-425-8321	
Environmental	Nikki Mishler	432-315-0134	432-634-8722	
HSE Consultant	Blake Wisdom		918-323-2343	
Local, State, & Federal Agencies				
Lea County Sheriff		575-396-3611		911
New Mexico State Highway Patrol		505-757-2297		911
Eunice Fire / EMS		575-394-3258		911
Lea County Hospital		575-492-5000		
Secorp – Safety Contractor	Ricky Stephens		(325)-262-0707	
New Mexico Oil Conservation Division – District 1 Office – Hobbs, NM.		575-393-6161		
New Mexico Environment Department – District III Office – Hobbs, NM		575-397-6910		
New Mexico Oil Conservation Division – Hobbs, NM	24 Hour Emergency	575-393-6161		
Bureau of Land Management – Carlsbad, NM		575-234-5972		
U.S. Fish & Wildlife		502-248-6911		

Section 6.0 – Drilling Location Information**I. Site Safety Information****1. Safe Briefing Area**

- a. There shall be two areas that will be designated as "SAFE BRIEFING AREAS". If H₂S is detected in concentrations equal to or in excess of 10 ppm all personnel not assigned emergency duties are to assemble in the designated Safe Briefing area for instructions. These two areas shall be positioned in accessible locations to facilitate the availability of self-contained breathing air devices. The briefing areas shall be positioned no less than 250' from the wellhead and in such locations that at least one briefing area will be up-wind from the well at all times.


Centennial Resource Production, LLC.	H ₂ S Contingency Plan Raider Federal Com 102H & 103H	Lea County, New Mexico
--------------------------------------	---	------------------------

2. Wind Indicators

- a. 4 Windsocks will be installed at strategic points on the facility.

3. Danger Signs

- a. A warning sign indicating the possible well conditions will be displayed at the location entrance.

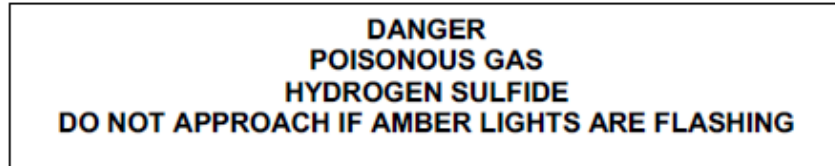

4. H₂S Detectors and Alarms

- a. Continuous monitoring type H₂S detectors, capable of sensing a minimum of 5ppm H₂S in air will be located centrally located at the tanks, heater treater, and combustor. Continuous monitoring type SO₂ detector will also be located at the combustor. The automatic H₂S alarm/flashing light will be located at the site entrance and in front of tank battery.

5. Safety Trailer

- a. A safety trailer equipped with an emergency cascade breathing air system with 2 ea. Work/escape packs, a stretcher, 2 OSHA approved full body harnesses, and a 20# Class ABC fire extinguisher shall be available at the site in close proximity to the safe briefing area. The cascade system shall be able to be deployed to the drill floor when needed to provide safe breathing air to the workers as needed.

6. Well Control Equipment

- a. The location shall have a flare line to a remote automatic ignitor and back up flare gun, placed 150' from the wellhead.
b. The location shall be equipped with a remotely operated choke system and a mud gas separator.

7. Mud Program

- a. Company shall have a mud program that contains sufficient weight and additives to control H₂S.

8. Metallurgy

- a. All drill strings, casing, tubing, wellhead, BOP, spools, kill lines, choke manifold and lines, and valves shall be suitable for anticipated H₂S volume and pressure.

9. Communication

- a. The location shall be equipped with a means of effective communication such as a cell phones, intercoms, satellite phones or landlines.

II. Directions to Location


From intersection of 3rd Street and Hwy 128 in Jal, turn west on Hwy 128 and travel 17.76 miles on Hwy 128 to Co Road 2B on left. Turn left and travel 1.13 miles down Co Road 2B until you reach lease road for Raider locations. Turn right to head to Raider 102H location.

Centennial Resource Production, LLC.

H₂S Contingency Plan
Raider Federal Com 102H & 103H

Lea County, New Mexico

Plat of Location

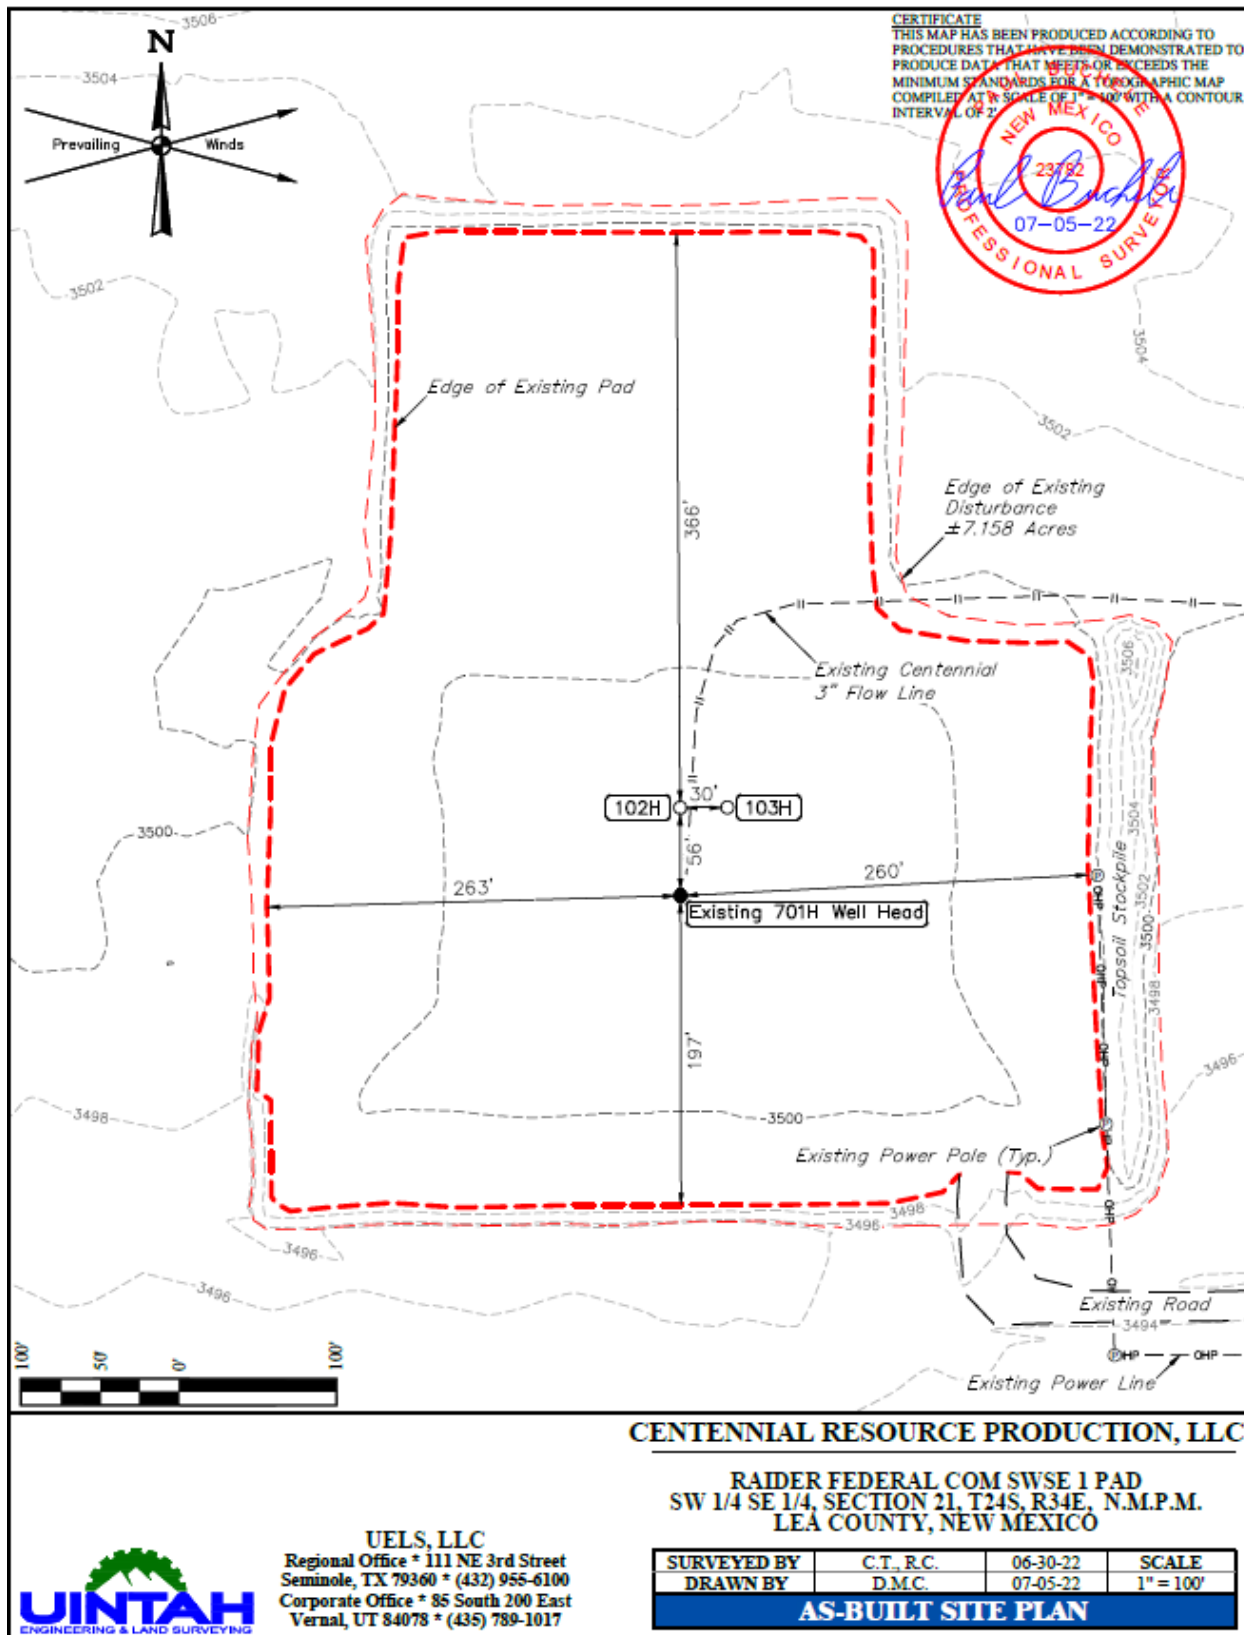

Centennial Resource Production, LLC.	H ₂ S Contingency Plan Raider Federal Com 102H & 103H	Lea County, New Mexico
--------------------------------------	---	------------------------


1. Routes of Ingress & Egress (MAP)



2. Residences in proximity to the 3000' Radius of Exposure (ROE) (MAP)

There are no residences or public gathering places with the 3000' ROE, 100 PPM, 300 PPM, or 500 PPM ROE.

Centennial Resource Production, LLC.	H ₂ S Contingency Plan Raider Federal Com 102H & 103H	Lea County, New Mexico
--------------------------------------	---	------------------------

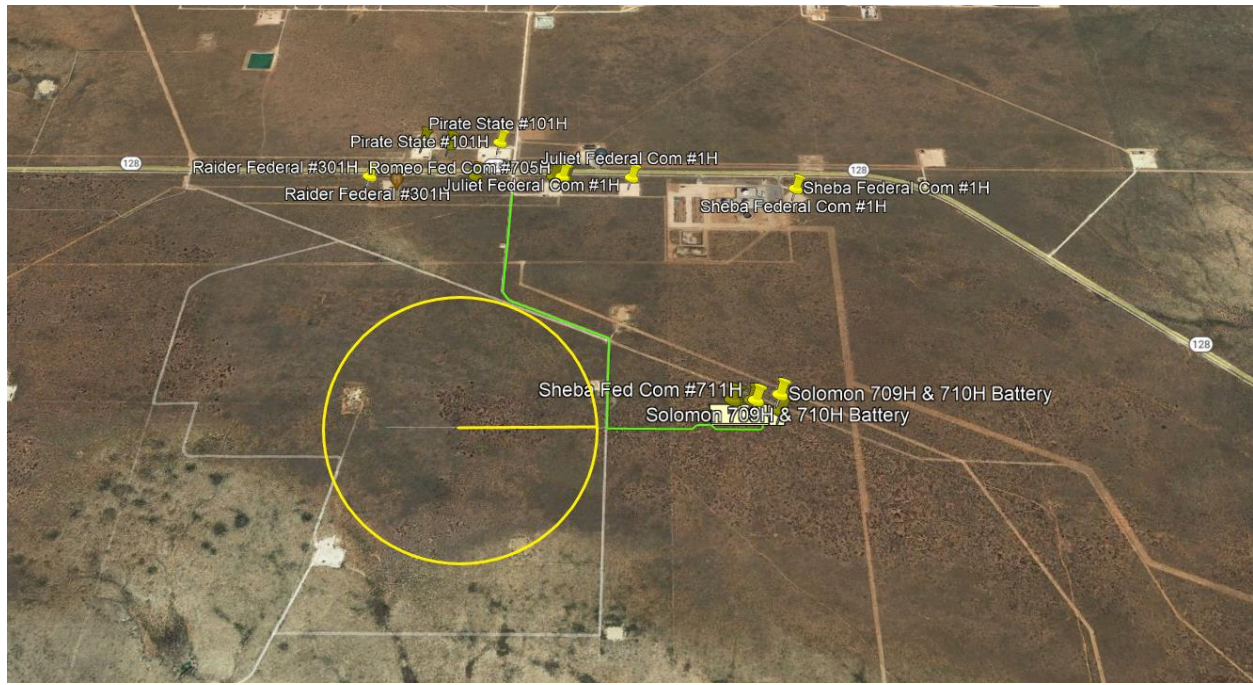Map of 3000' ROE Perimeter**100 PPM, 300 PPM, & 500 PPM Max ROE under worst case scenario**Enter H₂S in PPM

1500

Enter Gas flow in mcf/day (maximum worst case conditions)

2500

500 ppm radius of exposure (public road)

105 feet

300 ppm radius of exposure

146 feet

100 ppm radius of exposure (public area)

230 feet

- Location GPS Coordinates **Lat: 32.196770, Long: -103.471963**

3. Public Roads in proximity of the Radius of Exposure (ROE)

There are no public roads that would be within the 500 PPM ROE. The closest public road is New Mexico Highway 128, which is 1.13 miles from the location. County Road 2B is 2554' from this location.

Section 7.0 – Hazard Communication**I. Physical Characteristics of Hydrogen Sulfide Gas**

Hydrogen sulfide (H₂S) is a colorless, poisonous gas that is soluble in water. It can be present in crude oils, condensates, natural gas and wastewater streams.

H₂S is heavier than air with a vapor density of 1.189 (air = 1.0); however, H₂S is most often mixed with other gases. These mixtures of H₂S and other gases can be heavier or lighter than air. If the H₂S-containing

Centennial Resource Production, LLC.	H ₂ S Contingency Plan Raider Federal Com 102H & 103H	Lea County, New Mexico
--------------------------------------	---	------------------------

mixture is heavier, it can collect in low areas such as ditches, ravines, firewalls, and pits; in storage tanks; and in areas of poor ventilation. Please see physical properties in **Table 7.0**.

With H₂S the sense of smell is rapidly lost allowing lethal concentrations to be accumulated without warning. The toxicity of hydrogen sulfide at varying concentrations is indicated in the **Table 7.1**.

Warning: Do not use the mouth-to-mouth method if a victim ingested or inhaled hydrogen sulfide. Give artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device.

Table 7.0. Physical Properties of H₂S

Properties of H ₂ S	Description
Vapor Density > 1 = 1.189 Air = 1	- H₂S gas is slightly heavier than air, which can cause it to settle in low places and build in concentration. - Produced as a mixture with other gases associated with oil and gas production.
Flammable Range 4.3%-46% 43000 ppm – 460000 ppm	H₂S can be extremely flammable / explosive when these concentrations are reached by volume in air.

Although H₂S is primarily a respiratory hazard, it is also flammable and forms an explosive mixture at concentrations of 4.3%–46.0% (40,000ppm – 460,000 ppm) by volume in air.

H₂S can be encountered when:

- Venting and draining equipment.
- Opening equipment (separators, pumps, and tanks).
- Opening piping connections (“line breaking”).
- Gauging and sampling storage tanks.
- Entering confined spaces.
- Working around wastewater pits, skimmers, and treatment facilities.

II. Human Health Hazards - Toxicological Information

Table 7.1. Hazards & Toxicity

Concentration (ppm)	Symptoms/Effects
0.00011-0.00033 ppm	Typical background concentrations
0.01-1.5 ppm	Odor threshold (when rotten egg smell is first noticeable to some). Odor becomes more offensive at 3-5 ppm. Above 30 ppm, odor described as sweet or sickeningly sweet.

Centennial Resource Production, LLC.	H ₂ S Contingency Plan Raider Federal Com 102H & 103H	Lea County, New Mexico
--------------------------------------	---	------------------------

2-5 ppm	Prolonged exposure may cause nausea, tearing of the eyes, headaches or loss of sleep. Airway problems (bronchial constriction) in some asthma patients.
20 ppm	Possible fatigue, loss of appetite, headache, irritability, poor memory, dizziness.
50-100 ppm	Slight conjunctivitis ("gas eye") and respiratory tract irritation after 1 hour. May cause digestive upset and loss of appetite.
100 ppm	Coughing, eye irritation, loss of smell after 2-15 minutes (olfactory fatigue). Altered breathing, drowsiness after 15-30 minutes. Throat irritation after 1 hour. Gradual increase in severity of symptoms over several hours. Death may occur after 48 hours.
100-150 ppm	Loss of smell (olfactory fatigue or paralysis).
200-300 ppm	Marked conjunctivitis and respiratory tract irritation after 1 hour. Pulmonary edema may occur from prolonged exposure.
500-700 ppm	Staggering, collapse in 5 minutes. Serious damage to the eyes in 30 minutes. Death after 30-60 minutes.
700-1000 ppm	Rapid unconsciousness, "knockdown" or immediate collapse within 1 to 2 breaths, breathing stops, death within minutes.
1000-2000 ppm	Nearly instant death

III. Environmental Hazards

H₂S and its associated byproducts from combustion presents a serious environmental hazard. Sulphur Dioxide SO₂ is produced as a constituent of flaring H₂S Gas and can present hazards associated, which are similar to H₂S. Although SO₂ is heavier than air, it will be picked up by a breeze and carried downwind at elevated temperatures. Since Sulfur Dioxide is extremely irritating to the eyes and mucous membranes of the upper respiratory tract, it has exceptionally good warning powers in this respect. The following table indicates the toxic nature of the gas. Please see the attached SDS in Appendix B for reference.

SULFUR DIOXIDE TOXICITY		
Concentration		Effects
%SO ₂	PPM	
0.0005	3 to 5	Pungent odor-normally a person can detect SO ₂ in this range.
0.0012	12	Throat irritation, coughing, and constriction of the chest tearing and smarting of eyes.
0.15	150	So irritating that it can only be endured for a few minutes.

Centennial Resource Production, LLC.	H ₂ S Contingency Plan Raider Federal Com 102H & 103H	Lea County, New Mexico
--------------------------------------	---	------------------------

0.05	500	Causes a sense of suffocation, even with first breath.
------	-----	--

Section 8.0 - Regulatory Information

I. OSHA & NIOSH Information

II. Table 8.0. OSHA & NIOSH H₂S Information

PEL, IDLH, TLV	Description
NIOSH PEL 10 PPM	PEL is the Permissible Exposure Limit that an employee may be exposed up to 8 hr / day.
OSHA General Industry Ceiling PEL – 20 PPM	The maximum exposure limit, which cannot be exceeded for any length of time.
IDLH 100 PPM	Immediately Dangerous to Life and Health
Centennial PEL 10 PPM	Centennial Policy Regarding H₂S for employee safety

III. New Mexico OCD & BLM – H₂S Concentration Threshold Requirements

New Mexico NMAC 19.15.11 and Onshore Order #6 identify two Radii of Exposure (ROE) that identify potential danger to the public and require additional compliance measures. Centennial is required to install safety devices, establish safety procedures and develop a written H₂S contingency plan for sites where the H₂S concentrations are as follows.

Table 8.1. Calculating H₂S Radius of Exposure

H ₂ S Radius of Exposure	Description	Control and Equipment Requirements
100 ppm	Distance from a release to where the H ₂ S concentration in the air will dilute below 100ppm	ROE > 50-ft and includes any part of a “public area” (residence, school, business, etc., or any area that can be expected to be populated). ROE > 3,000-ft
500 ppm	Distance from a release to where the H ₂ S concentration in the air will dilute below 500ppm	ROE > 50-ft and includes any part of a public road (public roads are tax supported roads or any road used for public access or use)

Calculating H₂S Radius of Exposure

The ROE of an H₂S release is calculated to determine if a potentially hazardous volume of H₂S gas at 100 or 500 parts per million (ppm) is within a regulated distance requiring further action. If information about the concentration of H₂S and the potential gas release volume is known, the location of the Muster Areas will be set, and safety measures will be implemented based on the calculated radius of exposure (ROE). NMAC 19.15.11 – Hydrogen Sulfide Safety defines the ROE as the radius constructed with the gas’s point

Centennial Resource Production, LLC.	H ₂ S Contingency Plan Raider Federal Com 102H & 103H	Lea County, New Mexico
--------------------------------------	---	------------------------

of escape as its center and its length calculated by the following Pasquill-Gifford equations:

To determine the extent of the **100 ppm ROE**:

$$x = [(1.589) (\text{mole fraction H}_2\text{S})(Q)]^{(.6258)}.$$

To determine the extent of the **500 ppm ROE**:

$$x = [(0.4546) (\text{mole fraction H}_2\text{S})(Q)]^{(.6258)}.$$

Table 8.2. Calculating H₂S Radius of Exposure

ROE Variable	Description
X =	ROE in feet
Q =	Max volume of gas released determined to be released in cubic feet per day (ft³/d) normalized to standard temperature and pressure, 60°F and 14.65 psia
Mole fraction H ₂ S =	Mole fraction of H ₂ S in the gaseous mixture released.

The volume used as the escape rate in determining the ROE is specified in the rule as follows:

- The maximum daily volume rate of gas containing H₂S handled by that system element for which the ROE is calculated.
- For existing gas wells, the current adjusted open-flow rate, or the operator's estimate of the well's capacity to flow against zero back-pressure at the wellhead.

New Mexico Oil Conservation Division & BLM Site Requirements under NMAC 19.15.11 & Onshore Order #6

- Two cleared areas will be designated as Safe Briefing Areas. During an emergency, personnel will assemble in one of these areas for instructions from the Centennial Person-in-Charge. Prevailing wind direction should be considered in locating the briefing areas 200' or more on either side of the well head. One area should offset the other at an angle of 45° to 90° with respect to prevailing wind direction to allow for wind shifts during the work period.
- In the event of either an intentional or accidental releases of hydrogen sulfide, safeguards to protect the general public from the harmful effects of hydrogen sulfide must be in place for operations. A summary of the provisions in each of three H₂S ROE cases is included in **Table 8.3**.
 - **CASE 1** -100 ppm ROE < 50'
 - **CASE 2** - 100 ppm ROE is 50' or greater, but < 3000' and does not penetrate public area.
 - **CASE 3** -100 ppm ROE is 50' or greater and penetrates a public area or 500 ppm ROE includes a public road. Also if 100 ppm ROE > 3000' regardless of public area.

Table 8.3. NMAC 19.15.11 Compliance Requirements Drilling & Production

NMAC 19.15.11 & BLM COMPLIANCE REQUIREMENTS - DRILLING & PRODUCTION			
PROVISION	CASE 1	CASE 2	CASE 3
H ₂ S Concentration Test	X	X	X
H-9	X	X	X
Training	X	X	X
District Office Notification	X	X	X
Drill Stem Tests Restricted	X*	X*	X
BOP Test	X*	X*	X

Centennial Resource Production, LLC.	H ₂ S Contingency Plan Raider Federal Com 102H & 103H	Lea County, New Mexico
--------------------------------------	---	------------------------

Materials		X	X
Warning and Marker		X	X
Security		X	X
Contingency Plan			X
Control and Equipment Safety			X
Monitors		X**	X**
Mud (ph Control or Scavenger)			X*
Wind Indicators		X**	X
Protective Breathing Equipment		X**	X
Choke Manifold, Secondary Remote Control, and Mud-Gas Separator			X
Flare Stacks			X*

Section 9.0 - Training Requirements

Training

The following elements are considered a minimum level of training for personnel assigned to operations who may encounter H₂S as part of routine or maintenance work.

- The hazards, characteristics, and properties of hydrogen sulfide (H₂S) and (SO₂).
- Sources of H₂S and SO₂.
- Proper use of H₂S and SO₂ detection methods used at the workplace.
- Recognition of, and proper response to, the warning signals initiated by H₂S and SO₂ detection systems in use at the workplace.
- Symptoms of H₂S exposure; symptoms of SO₂ exposure
- Rescue techniques and first aid to victims of H₂S and SO₂ exposure.
- Proper use and maintenance of breathing equipment for working in H₂S and SO₂ atmospheres, as appropriate theory and hands-on practice, with demonstrated proficiency (29 CFR Part 1910.134).
- Workplace practices and relevant maintenance procedures that have been established to protect personnel from the hazards of H₂S and SO₂.
- Wind direction awareness and routes of egress.
- Confined space and enclosed facility entry procedures (if applicable).
- Emergency response procedures that have been developed for the facility or operations.
- Locations and use of safety equipment.
- Locations of safe briefing areas.

Refresher training will be conducted annually.

Section 10.0 - Personal Protective Equipment

I. Personal H₂S Monitors

All personnel engaged in planned or unplanned work activity to mitigate the release of a hazardous concentration of H₂S shall have on their person a personal H₂S monitor.

II. Fixed H₂S Detection and Alarms

- 4 channel H₂S monitor

Centennial Resource Production, LLC.	H ₂ S Contingency Plan Raider Federal Com 102H & 103H	Lea County, New Mexico
--------------------------------------	---	------------------------

- 4 wireless H₂S monitors
- H₂S alarm system (Audible/Red strobe)
- Personal gas monitor for each person on location
- Gas sample tubes

III. Flame Resistant Clothing

All personnel engaged in planned or unplanned work activity associated with this Plan shall have on the appropriate level of FRC clothing.

IV. Respiratory Protection

The following respiratory protection equipment shall be available at each drilling location.

- Working cascade system available on rig floor and pit system & 750' of air line hose
- Four (4) breathing air manifolds
- Four (4) 30-minute rescue packs
- Five (5) work/Escape units
- Five (5) escape units
- One (1) filler hose for the work/escape/rescue units

Supplied air (airline or SCBA) respiratory protection against hydrogen sulfide exposure is required in the following situations:

- When routine or maintenance work tasks involve exposure to H₂S concentrations of 10 ppm or greater.
- When a fixed location area monitor alarms, and re-entry to the work area is required to complete a job.
- When confined spaces are to be entered without knowledge of H₂S levels present, or if initial measurements are to be taken of H₂S levels.
- During rescue of employees suspected of H₂S overexposure.
- For specific tasks identified with significant exposure potential and outlined in local program guidelines.
- All respiratory equipment for hydrogen sulfide must be of the supplied-air type, equipped with pressure-demand regulators and operated in the pressure-demand mode only. This is the only type of respiratory protection recommended for hydrogen sulfide application. Equipment should be approved by NIOSH/MSHA or other recognized national authority as required. If airline units are used, a five-minute egress bottle should also be carried.
- Gas masks or other air-purifying respirators MUST NEVER BE USED FOR HYDROGEN SULFIDE due to the poor warning properties of the gas.
- Use of respiratory protection should be accompanied by a written respiratory protection program.

Centennial Resource Production, LLC.	H ₂ S Contingency Plan Raider Federal Com 102H & 103H	Lea County, New Mexico
--------------------------------------	---	------------------------

Appendix A
H₂S SDS

Centennial Resource Production, LLC.	H ₂ S Contingency Plan Raider Federal Com 102H & 103H	Lea County, New Mexico
--------------------------------------	---	------------------------



Hydrogen sulfide
Safety Data Sheet E-4611
according to the Hazardous Products Regulation (February 11, 2015)
Date of issue: 10-15-1979 Revision date: 08-10-2016 Supersedes: 10-15-2013

SECTION 1: Identification	
1.1. Product identifier	
Product form	: Substance
Name	: Hydrogen sulfide
CAS No	: 7783-06-4
Formula	: H ₂ S
Other means of identification	: Hydrogen sulfide
Product group	: Core Products
1.2. Recommended use and restrictions on use	
Recommended uses and restrictions	: Industrial use Use as directed
1.3. Supplier	
Praxair Canada inc. 1200 – 1 City Centre Drive Mississauga - Canada L5B 1M2 T 1-905-803-1600 - F 1-905-803-1682 www.praxair.ca	
1.4. Emergency telephone number	
Emergency number	: 1-800-363-0042 Call emergency number 24 hours a day only for spills, leaks, fire, exposure, or accidents involving this product. For routine information, contact your supplier or Praxair sales representative.
SECTION 2: Hazard identification	
2.1. Classification of the substance or mixture	
GHS-CA classification	
Flam. Gas 1	H220
Liquefied gas	H280
Acute Tox. 2 (Inhalation: gas)	H330
STOT SE 3	H335
2.2. GHS Label elements, including precautionary statements	
GHS-CA labelling	
Hazard pictograms	:  GHS02 GHS04 GHS06 GHS07
Signal word	: DANGER
Hazard statements	: EXTREMELY FLAMMABLE GAS CONTAINS GAS UNDER PRESSURE; MAY EXPLODE IF HEATED FATAL IF INHALED MAY CAUSE RESPIRATORY IRRITATION MAY FORM EXPLOSIVE MIXTURES WITH AIR SYMPTOMS MAY BE DELAYED EXTENDED EXPOSURE TO GAS REDUCES THE ABILITY TO SMELL SULFIDES
Precautionary statements	: Do not handle until all safety precautions have been read and understood Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking

Centennial Resource Production, LLC.	H ₂ S Contingency Plan Raider Federal Com 102H & 103H	Lea County, New Mexico
--------------------------------------	---	------------------------



Hydrogen sulfide

Safety Data Sheet E-4611

according to the Hazardous Products Regulation (February 11, 2015)

Date of issue: 10-15-1979

Revision date: 08-10-2016

Supersedes: 10-15-2013

Do not breathe gas
Use and store only outdoors or in a well-ventilated area
Avoid release to the environment
Wear protective gloves, protective clothing, eye protection, respiratory protection, and/or face protection
Leaking gas fire: Do not extinguish, unless leak can be stopped safely
In case of leakage, eliminate all ignition sources
Store locked up
Dispose of contents/container in accordance with container Supplier/owner instructions
Protect from sunlight when ambient temperature exceeds 52°C (125°F)
Close valve after each use and when empty
Do not open valve until connected to equipment prepared for use
When returning cylinder, install leak tight valve outlet cap or plug
Do not depend on odour to detect the presence of gas

2.3. Other hazards

Other hazards not contributing to the classification : Contact with liquid may cause cold burns/frostbite.

2.4. Unknown acute toxicity (GHS-CA)

No data available

SECTION 3: Composition/information on ingredients

3.1. Substances

Name	CAS No.	% (Vol.)	Common Name (synonyms)
Hydrogen sulfide (Main constituent)	(CAS No) 7783-06-4	100	Hydrogen sulfide (H ₂ S) / Hydrogen sulphide / Sulfur hydride / Sulfureted hydrogen / Dihydrogen sulphide / Hydrogensulfide

3.2. Mixtures

Not applicable

SECTION 4: First-aid measures

4.1. Description of first aid measures

First-aid measures after inhalation : Remove to fresh air and keep at rest in a position comfortable for breathing. If not breathing, give artificial respiration. If breathing is difficult, trained personnel should give oxygen. Call a physician.

First-aid measures after skin contact : The liquid may cause frostbite. For exposure to liquid, immediately warm frostbite area with warm water not to exceed 105°F (41°C). Water temperature should be tolerable to normal skin. Maintain skin warming for at least 15 minutes or until normal coloring and sensation have returned to the affected area. In case of massive exposure, remove clothing while showering with warm water. Seek medical evaluation and treatment as soon as possible.

First-aid measures after eye contact : Immediately flush eyes thoroughly with water for at least 15 minutes. Hold the eyelids open and away from the eyeballs to ensure that all surfaces are flushed thoroughly. Contact an ophthalmologist immediately.

First-aid measures after ingestion : Ingestion is not considered a potential route of exposure.

4.2. Most important symptoms and effects (acute and delayed)

No additional information available

4.3. Immediate medical attention and special treatment, if necessary

Other medical advice or treatment : Obtain medical assistance. Treat with corticosteroid spray as soon as possible after inhalation.

SECTION 5: Fire-fighting measures

5.1. Suitable extinguishing media

Suitable extinguishing media : Carbon dioxide, Dry chemical, Water spray or fog. Use extinguishing media appropriate for surrounding fire.

5.2. Unsuitable extinguishing media

No additional information available

This document is only controlled while on the Praxair Canada Inc. website and a copy of this controlled version is available for download. Praxair cannot assure the integrity or accuracy of any version of this document after it has been downloaded or removed from our website.

EN (English)

SDS ID : E-4611

2/9

Centennial Resource Production, LLC.	H ₂ S Contingency Plan Raider Federal Com 102H & 103H	Lea County, New Mexico
--------------------------------------	---	------------------------



Hydrogen sulfide

Safety Data Sheet E-4611

according to the Hazardous Products Regulation (February 11, 2015)

Date of issue: 10-15-1979

Revision date: 08-10-2016

Supersedes: 10-15-2013

5.3. Specific hazards arising from the hazardous product

Fire hazard	: EXTREMELY FLAMMABLE GAS. If venting or leaking gas catches fire, do not extinguish flames. Flammable vapors may spread from leak, creating an explosive reignition hazard. Vapors can be ignited by pilot lights, other flames, smoking, sparks, heaters, electrical equipment, static discharge, or other ignition sources at locations distant from product handling point. Explosive atmospheres may linger. Before entering an area, especially a confined area, check the atmosphere with an appropriate device.
Explosion hazard	: EXTREMELY FLAMMABLE GAS. Forms explosive mixtures with air and oxidizing agents.
Reactivity	: No reactivity hazard other than the effects described in sub-sections below.
Reactivity in case of fire	: No reactivity hazard other than the effects described in sub-sections below.

5.4. Special protective equipment and precautions for fire-fighters

Firefighting instructions	: DANGER! Toxic, flammable liquefied gas Evacuate all personnel from the danger area. Use self-contained breathing apparatus (SCBA) and protective clothing. Immediately cool containers with water from maximum distance. Stop flow of gas if safe to do so, while continuing cooling water spray. Remove ignition sources if safe to do so. Remove containers from area of fire if safe to do so. On-site fire brigades must comply with their provincial and local fire code regulations.
Special protective equipment for fire fighters	: Standard protective clothing and equipment (Self Contained Breathing Apparatus) for fire fighters.
Other information	: Containers are equipped with a pressure relief device. (Exceptions may exist where authorized by TC.).

SECTION 6: Accidental release measures

6.1. Personal precautions, protective equipment and emergency procedures

General measures	: DANGER! Toxic, flammable liquefied gas. Forms explosive mixtures with air and oxidizing agents. Immediately evacuate all personnel from danger area. Use self-contained breathing apparatus where needed. Remove all sources of ignition if safe to do so. Reduce vapors with fog or fine water spray, taking care not to spread liquid with water. Shut off flow if safe to do so. Ventilate area or move container to a well-ventilated area. Flammable vapors may spread from leak and could explode if reignited by sparks or flames. Explosive atmospheres may linger. Before entering area, especially confined areas, check atmosphere with an appropriate device.
------------------	--

6.2. Methods and materials for containment and cleaning up

Methods for cleaning up	: Try to stop release. Reduce vapour with fog or fine water spray. Prevent waste from contaminating the surrounding environment. Prevent soil and water pollution. Dispose of contents/container in accordance with local/regional/national/international regulations. Contact supplier for any special requirements.
-------------------------	---

6.3. Reference to other sections

For further information refer to section 8: Exposure controls/personal protection

SECTION 7: Handling and storage

7.1. Precautions for safe handling

Precautions for safe handling	: Leak-check system with soapy water; never use a flame All piped systems and associated equipment must be grounded Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Use only non-sparking tools. Use only explosion-proof equipment Wear leather safety gloves and safety shoes when handling cylinders. Protect cylinders from physical damage; do not drag, roll, slide or drop. While moving cylinder, always keep in place removable valve cover. Never attempt to lift a cylinder by its cap; the cap is intended solely to protect the valve. When moving cylinders, even for short distances, use a cart (trolley, hand truck, etc.) designed to transport cylinders. Never insert an object (e.g. wrench, screwdriver, pry bar) into cap openings; doing so may damage the valve and cause a leak. Use an adjustable strap wrench to remove over-tight or rusted caps. Slowly open the valve. If the valve is hard to open, discontinue use and contact your supplier. Close the container valve after each use; keep closed even when empty. Never apply flame or localized heat directly to any part of the container. High temperatures may damage the container and could cause the pressure relief device to fail prematurely, venting the container contents. For other precautions in using this product, see section 16.
-------------------------------	--

This document is only controlled while on the Praxair Canada Inc. website and a copy of this controlled version is available for download. Praxair cannot assure the integrity or accuracy of any version of this document after it has been downloaded or removed from our website.

EN (English)

SDS ID : E-4611

3/9

Centennial Resource Production, LLC.	H ₂ S Contingency Plan Raider Federal Com 102H & 103H	Lea County, New Mexico
--------------------------------------	---	------------------------



Hydrogen sulfide

Safety Data Sheet E-4611

according to the Hazardous Products Regulation (February 11, 2015)

Date of issue: 10-15-1979

Revision date: 08-10-2016

Supersedes: 10-15-2013

7.2. Conditions for safe storage, including any incompatibilities

Storage conditions

: Store only where temperature will not exceed 125°F (52°C). Post "No Smoking/No Open Flames" signs in storage and use areas. There must be no sources of ignition. Separate packages and protect against potential fire and/or explosion damage following appropriate codes and requirements (e.g. NFPA 30, NFPA 55, NFPA 70, and/or NFPA 221 in the U.S.) or according to requirements determined by the Authority Having Jurisdiction (AHJ). Always secure containers upright to keep them from falling or being knocked over. Install valve protection cap, if provided, firmly in place by hand when the container is not in use. Store full and empty containers separately. Use a first-in, first-out inventory system to prevent storing full containers for long periods. For other precautions in using this product, see section 16

OTHER PRECAUTIONS FOR HANDLING, STORAGE, AND USE: When handling product under pressure, use piping and equipment adequately designed to withstand the pressures to be encountered. Never work on a pressurized system. Use a back flow preventive device in the piping. Gases can cause rapid suffocation because of oxygen deficiency; store and use with adequate ventilation. If a leak occurs, close the container valve and blow down the system in a safe and environmentally correct manner in compliance with all international, federal/national, state/provincial, and local laws; then repair the leak. Never place a container where it may become part of an electrical circuit.

SECTION 8: Exposure controls/personal protection

8.1. Control parameters

Hydrogen sulfide (7783-06-4)		
USA - ACGIH	ACGIH TLV-TWA (ppm)	1 ppm
USA - ACGIH	ACGIH TLV-STEL (ppm)	5 ppm
USA - OSHA	OSHA PEL (Ceiling) (ppm)	20 ppm
Canada (Quebec)	VECD (mg/m ³)	21 mg/m ³
Canada (Quebec)	VECD (ppm)	15 ppm
Canada (Quebec)	VEMP (mg/m ³)	14 mg/m ³
Canada (Quebec)	VEMP (ppm)	10 ppm
Alberta	OEL Ceiling (mg/m ³)	21 mg/m ³
Alberta	OEL Ceiling (ppm)	15 ppm
Alberta	OEL TWA (mg/m ³)	14 mg/m ³
Alberta	OEL TWA (ppm)	10 ppm
British Columbia	OEL Ceiling (ppm)	10 ppm
Manitoba	OEL STEL (ppm)	5 ppm
Manitoba	OEL TWA (ppm)	1 ppm
New Brunswick	OEL STEL (mg/m ³)	21 mg/m ³
New Brunswick	OEL STEL (ppm)	15 ppm
New Brunswick	OEL TWA (mg/m ³)	14 mg/m ³
New Brunswick	OEL TWA (ppm)	10 ppm
New Foundland & Labrador	OEL STEL (ppm)	5 ppm
New Foundland & Labrador	OEL TWA (ppm)	1 ppm
Nova Scotia	OEL STEL (ppm)	5 ppm
Nova Scotia	OEL TWA (ppm)	1 ppm
Nunavut	OEL Ceiling (mg/m ³)	28 mg/m ³
Nunavut	OEL Ceiling (ppm)	20 ppm
Nunavut	OEL STEL (mg/m ³)	21 mg/m ³
Nunavut	OEL STEL (ppm)	15 ppm
Nunavut	OEL TWA (mg/m ³)	14 mg/m ³
Nunavut	OEL TWA (ppm)	10 ppm
Northwest Territories	OEL STEL (ppm)	15 ppm

This document is only controlled while on the Praxair Canada Inc. website and a copy of this controlled version is available for download. Praxair cannot assure the integrity or accuracy of any version of this document after it has been downloaded or removed from our website.

EN (English)

SDS ID : E-4611

4/9

Centennial Resource Production, LLC.	H ₂ S Contingency Plan Raider Federal Com 102H & 103H	Lea County, New Mexico
--------------------------------------	---	------------------------



Hydrogen sulfide

Safety Data Sheet E-4611

according to the Hazardous Products Regulation (February 11, 2015)

Date of issue: 10-15-1979

Revision date: 08-10-2016

Supersedes: 10-15-2013

Hydrogen sulfide (7783-06-4)		
Northwest Territories	OEL TWA (ppm)	10 ppm
Ontario	OEL STEL (ppm)	15 ppm
Ontario	OEL TWA (ppm)	10 ppm
Prince Edward Island	OEL STEL (ppm)	5 ppm
Prince Edward Island	OEL TWA (ppm)	1 ppm
Québec	VECD (mg/m ³)	21 mg/m ³
Québec	VECD (ppm)	15 ppm
Québec	VEMP (mg/m ³)	14 mg/m ³
Québec	VEMP (ppm)	10 ppm
Saskatchewan	OEL STEL (ppm)	15 ppm
Saskatchewan	OEL TWA (ppm)	10 ppm
Yukon	OEL STEL (mg/m ³)	27 mg/m ³
Yukon	OEL STEL (ppm)	15 ppm
Yukon	OEL TWA (mg/m ³)	15 mg/m ³
Yukon	OEL TWA (ppm)	10 ppm

8.2. Appropriate engineering controls

Appropriate engineering controls : Use corrosion-resistant equipment. Use an explosion-proof local exhaust system. Local exhaust and general ventilation must be adequate to meet exposure standards. MECHANICAL (GENERAL): **Inadequate - Use only in a closed system.** Use explosion proof equipment and lighting.

8.3. Individual protection measures/Personal protective equipment

Personal protective equipment : Safety glasses. Face shield. Gloves.



Hand protection : Wear work gloves when handling containers. Wear heavy rubber gloves where contact with product may occur.

Eye protection : Wear goggles and a face shield when transfilling or breaking transfer connections. Select in accordance with the current CSA standard Z94.3, "Industrial Eye and Face Protection", and any provincial regulations, local bylaws or guidelines.

Respiratory protection : **Respiratory protection:** Use respirable fume respirator or air supplied respirator when working in confined space or where local exhaust or ventilation does not keep exposure below TLV. Select in accordance with provincial regulations, local bylaws or guidelines. Selection should be based on the current CSA standard Z94.4, "Selection, Care, and Use of Respirators." Respirators should also be approved by NIOSH and MSHA. For emergencies or instances with unknown exposure levels, use a self-contained breathing apparatus (SCBA).

Thermal hazard protection : Wear cold insulating gloves when transfilling or breaking transfer connections. Standard EN 511 - Cold insulating gloves.

Other information : **Other protection :** Safety shoes for general handling at customer sites. Metatarsal shoes and cuffless trousers for cylinder handling at packaging and filling plants. Select in accordance with the current CSA standard Z195, "Protective Foot Wear", and any provincial regulations, local bylaws or guidelines. For working with flammable and oxidizing materials, consider the use of flame resistant anti-static safety clothing.

SECTION 9: Physical and chemical properties

9.1. Information on basic physical and chemical properties

Physical state : Gas

Appearance : Colorless gas. Colorless liquid at low temperature or under high pressure.

Molecular mass : 34 g/mol

Colour : Colourless.

Odour : Odour can persist. Poor warning properties at low concentrations. Rotten eggs.

Odour threshold : Odour threshold is subjective and inadequate to warn of overexposure.

This document is only controlled while on the Praxair Canada Inc. website and a copy of this controlled version is available for download. Praxair cannot assure the integrity or accuracy of any version of this document after it has been downloaded or removed from our website.

EN (English)

SDS ID : E-4611

5/9

Centennial Resource Production, LLC.	H ₂ S Contingency Plan Raider Federal Com 102H & 103H	Lea County, New Mexico
--------------------------------------	---	------------------------



Hydrogen sulfide

Safety Data Sheet E-4611

according to the Hazardous Products Regulation (February 11, 2015)

Date of issue: 10-15-1979

Revision date: 08-10-2016

Supersedes: 10-15-2013

pH	: Not applicable.
pH solution	: No data available
Relative evaporation rate (butylacetate=1)	: No data available
Relative evaporation rate (ether=1)	: Not applicable.
Melting point	: -86 °C
Freezing point	: -82.9 °C
Boiling point	: -60.3 °C
Flash point	: Not applicable.
Critical temperature	: 100.4 °C
Auto-ignition temperature	: 260 °C
Decomposition temperature	: No data available
Vapour pressure	: 1880 kPa
Vapour pressure at 50 °C	: No data available
Critical pressure	: 8940 kPa
Relative vapour density at 20 °C	: >=
Relative density	: No data available
Relative density of saturated gas/air mixture	: No data available
Density	: No data available
Relative gas density	: 1.2
Solubility	: Water: 3980 mg/l
Log Pow	: Not applicable.
Log Kow	: Not applicable.
Viscosity, kinematic	: Not applicable.
Viscosity, dynamic	: Not applicable.
Viscosity, kinematic (calculated value) (40 °C)	: No data available
Explosive properties	: Not applicable.
Oxidizing properties	: None.
Flammability (solid, gas)	: 4.3 - 46 vol %

9.2. Other information

Gas group	: Liquefied gas
Additional information	: Gas/vapour heavier than air. May accumulate in confined spaces, particularly at or below ground level

SECTION 10: Stability and reactivity

10.1. Reactivity

Reactivity	: No reactivity hazard other than the effects described in sub-sections below.
Chemical stability	: Stable under normal conditions.
Possibility of hazardous reactions	: May react violently with oxidants. Can form explosive mixture with air.
Conditions to avoid	: Avoid moisture in installation systems. Keep away from heat/sparks/open flames/hot surfaces. – No smoking.
Incompatible materials	: Ammonia. Bases. Bromine pentafluoride. Chlorine trifluoride. chromium trioxide. (and heat). Copper. (powdered). Fluorine. Lead. Lead oxide. Mercury. Nitric acid. Nitrogen trifluoride. nitrogen sulfide. Organic compounds. Oxidizing agents. Oxygen difluoride. Rubber. Sodium. (and moisture). Water.
Hazardous decomposition products	: Thermal decomposition may produce : Sulfur. Hydrogen.

SECTION 11: Toxicological information

11.1. Information on toxicological effects

Acute toxicity (oral)	: Not classified
Acute toxicity (dermal)	: Not classified

This document is only controlled while on the Praxair Canada Inc. website and a copy of this controlled version is available for download. Praxair cannot assure the integrity or accuracy of any version of this document after it has been downloaded or removed from our website.

EN (English)

SDS ID : E-4611

6/9

Centennial Resource Production, LLC.	H ₂ S Contingency Plan Raider Federal Com 102H & 103H	Lea County, New Mexico
--------------------------------------	---	------------------------



Hydrogen sulfide

Safety Data Sheet E-4611

according to the Hazardous Products Regulation (February 11, 2015)

Date of issue: 10-15-1979

Revision date: 08-10-2016

Supersedes: 10-15-2013

Acute toxicity (inhalation) : Inhalation:gas: FATAL IF INHALED.

Hydrogen sulfide (f)7783-06-4

LC50 inhalation rat (mg/l)	0.99 mg/l (Exposure time: 1 h)
LC50 inhalation rat (ppm)	356 ppm/4h
ATE CA (gases)	356.00000000 ppmv/4h
ATE CA (vapours)	0.99000000 mg/l/4h
ATE CA (dust,mist)	0.99000000 mg/l/4h

Skin corrosion/irritation : Not classified

pH: Not applicable.

Serious eye damage/irritation : Not classified

pH: Not applicable.

Respiratory or skin sensitization : Not classified

Germ cell mutagenicity : Not classified

Carcinogenicity : Not classified

Reproductive toxicity : Not classified

Specific target organ toxicity (single exposure) : MAY CAUSE RESPIRATORY IRRITATION.

Specific target organ toxicity (repeated exposure) : Not classified

Aspiration hazard : Not classified

SECTION 12: Ecological information

12.1. Toxicity

Ecology - general : VERY TOXIC TO AQUATIC LIFE.

Hydrogen sulfide (7783-06-4)

LC50 fish 1	0.0448 mg/l (Exposure time: 96 h - Species: Lepomis macrochirus [flow-through])
LC50 fish 2	0.016 mg/l (Exposure time: 96 h - Species: Pimephales promelas [flow-through])

12.2. Persistence and degradability

Hydrogen sulfide (7783-06-4)

Persistence and degradability	Not applicable for inorganic gases.
-------------------------------	-------------------------------------

12.3. Bioaccumulative potential

Hydrogen sulfide (7783-06-4)

BCF fish 1	(no bioaccumulation expected)
Log Pow	Not applicable.
Log Kow	Not applicable.
Bioaccumulative potential	No data available.

12.4. Mobility in soil

Hydrogen sulfide (7783-06-4)

Mobility in soil	No data available.
Log Pow	Not applicable.
Log Kow	Not applicable.
Ecology - soil	Because of its high volatility, the product is unlikely to cause ground or water pollution.

12.5. Other adverse effects

Other adverse effects : May cause pH changes in aqueous ecological systems.

Effect on the ozone layer : None

Effect on global warming : No known effects from this product

This document is only controlled while on the Praxair Canada Inc. website and a copy of this controlled version is available for download. Praxair cannot assure the integrity or accuracy of any version of this document after it has been downloaded or removed from our website.

EN (English)

SDS ID : E-4611

7/9

Centennial Resource Production, LLC.	H ₂ S Contingency Plan Raider Federal Com 102H & 103H	Lea County, New Mexico
--------------------------------------	---	------------------------



Hydrogen sulfide

Safety Data Sheet E-4611

according to the Hazardous Products Regulation (February 11, 2015)

Date of issue: 10-15-1979

Revision date: 08-10-2016

Supersedes: 10-15-2013

SECTION 13: Disposal considerations

13.1. Disposal methods

Waste disposal recommendations : Do not attempt to dispose of residual or unused quantities. Return container to supplier.

SECTION 14: Transport information

14.1. Basic shipping description

In accordance with TDG

TDG

UN-No. (TDG) : UN1053
 TDG Primary Hazard Classes : 2.3 - Class 2.3 - Toxic Gas.
 TDG Subsidiary Classes : 2.1
 Proper shipping name : HYDROGEN SULPHIDE

ERAP Index : 500
 Explosive Limit and Limited Quantity Index : 0
 Passenger Carrying Ship Index : Forbidden
 Passenger Carrying Road Vehicle or Passenger : Forbidden
 Carrying Railway Vehicle Index

14.3. Air and sea transport

IMDG

UN-No. (IMDG) : 1053
 Proper Shipping Name (IMDG) : HYDROGEN SULPHIDE
 Class (IMDG) : 2 - Gases
 MFAG-No : 117

IATA

UN-No. (IATA) : 1053
 Proper Shipping Name (IATA) : Hydrogen sulphide
 Class (IATA) : 2

SECTION 15: Regulatory information

15.1. National regulations

Hydrogen sulfide (7783-06-4)

Listed on the Canadian DSL (Domestic Substances List)

15.2. International regulations

Hydrogen sulfide (7783-06-4)

Listed on the AICS (Australian Inventory of Chemical Substances)
 Listed on IECSC (Inventory of Existing Chemical Substances Produced or Imported in China)
 Listed on the EEC inventory EINECS (European Inventory of Existing Commercial Chemical Substances)
 Listed on the Japanese ENCS (Existing & New Chemical Substances) inventory
 Listed on the Korean ECL (Existing Chemicals List)
 Listed on NZIoC (New Zealand Inventory of Chemicals)
 Listed on PICCS (Philippines Inventory of Chemicals and Chemical Substances)
 Listed on the United States TSCA (Toxic Substances Control Act) inventory
 Listed on INSQ (Mexican national Inventory of Chemical Substances)

SECTION 16: Other information

Date of issue : 15/10/1979
 Revision date : 10/08/2016
 Supersedes : 15/10/2013

Indication of changes:

Training advice : Users of breathing apparatus must be trained. Ensure operators understand the toxicity hazard.
 Ensure operators understand the flammability hazard.

This document is only controlled while on the Praxair Canada Inc. website and a copy of this controlled version is available for download. Praxair cannot assure the integrity or accuracy of any version of this document after it has been downloaded or removed from our website.

EN (English)

SDS ID : E-4611

8/9

Centennial Resource Production, LLC.	H ₂ S Contingency Plan Raider Federal Com 102H & 103H	Lea County, New Mexico
--------------------------------------	---	------------------------



Hydrogen sulfide

Safety Data Sheet E-4611

according to the Hazardous Products Regulation (February 11, 2015)

Date of issue: 10-15-1979

Revision date: 08-10-2016

Supersedes: 10-15-2013

Other information

: When you mix two or more chemicals, you can create additional, unexpected hazards. Obtain and evaluate the safety information for each component before you produce the mixture. Consult an industrial hygienist or other trained person when you evaluate the end product. Before using any plastics, confirm their compatibility with this product

Praxair asks users of this product to study this SDS and become aware of the product hazards and safety information. To promote safe use of this product, a user should (1) notify employees, agents, and contractors of the information in this SDS and of any other known product hazards and safety information, (2) furnish this information to each purchaser of the product, and (3) ask each purchaser to notify its employees and customers of the product hazards and safety information

The opinions expressed herein are those of qualified experts within Praxair Canada Inc. We believe that the information contained herein is current as of the date of this Safety Data Sheet. Since the use of this information and the conditions of use are not within the control of Praxair Canada Inc, it is the user's obligation to determine the conditions of safe use of the product. Praxair Canada Inc, SDSs are furnished on sale or delivery by Praxair Canada Inc, or the independent distributors and suppliers who package and sell our products. To obtain current SDSs for these products, contact your Praxair sales representative, local distributor, or supplier, or download from www.praxair.ca. If you have questions regarding Praxair SDSs, would like the document number and date of the latest SDS, or would like the names of the Praxair suppliers in your area, phone or write Praxair Canada Inc, (Phone: 1-888-257-5149; Address: Praxair Canada Inc, 1 City Centre Drive, Suite 1200, Mississauga, Ontario, L5B 1M2).

PRAXAIR and the Flowing Airstream design are trademarks or registered trademarks of Praxair Technology, Inc. in the United States and/or other countries.

NFPA health hazard


: 4 - Very short exposure could cause death or serious residual injury even though prompt medical attention was given.

NFPA fire hazard

: 4 - Will rapidly or completely vaporize at normal pressure and temperature, or is readily dispersed in air and will burn readily.

NFPA reactivity

: 0 - Normally stable, even under fire exposure conditions, and are not reactive with water.



HMS III Rating

Health

: 2 Moderate Hazard - Temporary or minor injury may occur

Flammability

: 4 Severe Hazard - Flammable gases, or very volatile flammable liquids with flash points below 73 F, and boiling points below 100 F. Materials may ignite spontaneously with air. (Class IA)

Physical

: 2 Moderate Hazard - Materials that are unstable and may undergo violent chemical changes at normal temperature and pressure with low risk for explosion. Materials may react violently with water or form peroxides upon exposure to air.

SDS Canada (GHS) - Praxair

This information is based on our current knowledge and is intended to describe the product for the purposes of health, safety and environmental requirements only. It should not therefore be construed as guaranteeing any specific property of the product.

This document is only controlled while on the Praxair Canada Inc. website and a copy of this controlled version is available for download. Praxair cannot assure the integrity or accuracy of any version of this document after it has been downloaded or removed from our website.

EN (English)

SDS ID : E-4611

9/9

Appendix B

Centennial Resource Production, LLC.	H ₂ S Contingency Plan Raider Federal Com 102H & 103H	Lea County, New Mexico
--------------------------------------	---	------------------------

SO₂ SDS

Safety Data Sheet

Material Name: SULFUR DIOXIDE

SDS ID: MAT22290

Section 1 - PRODUCT AND COMPANY IDENTIFICATION**Material Name**

SULFUR DIOXIDE

Synonyms

MTG MSDS 80; SULFUROUS ACID ANHYDRIDE; SULFUROUS OXIDE; SULPHUR DIOXIDE;
SULFUROUS ANHYDRIDE; FERMENTICIDE LIQUID; SULFUR DIOXIDE(SO₂); SULFUR OXIDE;
SULFUR OXIDE(SO₂)

Chemical Family

inorganic, gas

Product Description

Classification determined in accordance with Compressed Gas Association standards.

Product Use

Industrial and Specialty Gas Applications.

Restrictions on Use

None known.

Details of the supplier of the safety data sheet

MATHESON TRI-GAS, INC.

3 Mountainview Road

Warren, NJ 07059

General Information: 1-800-416-2505

Emergency #: 1-800-424-9300 (CHEMTREC)

Outside the US: 703-527-3887 (Call collect)

Section 2 - HAZARDS IDENTIFICATION

Classification in accordance with paragraph (d) of 29 CFR 1910.1200.

Gases Under Pressure - Liquefied gas

Acute Toxicity - Inhalation - Gas - Category 3

Skin Corrosion/Irritation - Category 1B

Serious Eye Damage/Eye Irritation - Category 1

Simple Asphyxiant

GHS Label Elements**Symbol(s)****Signal Word**

Danger

Hazard Statement(s)

Contains gas under pressure; may explode if heated.

Toxic if inhaled.

Causes severe skin burns and eye damage.

May displace oxygen and cause rapid suffocation.

Precautionary Statement(s)**Prevention**

Use only outdoors or in a well-ventilated area.

Wear protective gloves/protective clothing/eye protection/face protection.

Centennial Resource Production, LLC.	H ₂ S Contingency Plan Raider Federal Com 102H & 103H	Lea County, New Mexico
--------------------------------------	---	------------------------



Safety Data Sheet

Material Name: SULFUR DIOXIDE

SDS ID: MAT22290

Wash thoroughly after handling.

Do not breathe dusts or mists.

Response

IF INHALED: Remove person to fresh air and keep comfortable for breathing.

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do.

Continue rinsing.

IF ON SKIN (or hair): Remove/take off immediately all contaminated clothing. Rinse skin with water/shower.

Wash contaminated clothing before reuse.

IF SWALLOWED: Rinse mouth. Do NOT induce vomiting.

Immediately call a POISON CENTER or doctor.

Specific treatment (see label).

Storage

Store in a well-ventilated place. Keep container tightly closed.

Store locked up.

Protect from sunlight.

Disposal

Dispose of contents/container in accordance with local/regional/national/international regulations.

Other Hazards

Contact with liquified gas may cause frostbite.

Section 3 - COMPOSITION / INFORMATION ON INGREDIENTS

CAS	Component Name	Percent
7446-09-5	Sulfur dioxide	100.0

Section 4 - FIRST AID MEASURES

Inhalation

IF INHALED: Remove person to fresh air and keep at rest in a position comfortable for breathing. Get immediate medical attention.

Skin

IF ON SKIN (or hair): Remove/take off immediately all contaminated clothing. Rinse skin with water/shower. Wash contaminated clothing before reuse. If frostbite or freezing occur, immediately flush with plenty of lukewarm water (105-115°F; 41-46°C). If warm water is not available, gently wrap affected parts in blankets. DO NOT induce vomiting. Get immediate medical attention.

Eyes

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do.

Continue rinsing. Get immediate medical attention.

Ingestion

IF SWALLOWED: Rinse mouth. Do NOT induce vomiting. Get immediate medical attention.

Most Important Symptoms/Effects

Acute

Toxic if inhaled, frostbite, suffocation, respiratory tract burns, skin burns, eye burns

Delayed

No information on significant adverse effects.

Indication of any immediate medical attention and special treatment needed

Treat symptomatically and supportively.

Note to Physicians

For inhalation, consider oxygen.

Centennial Resource Production, LLC.	H ₂ S Contingency Plan Raider Federal Com 102H & 103H	Lea County, New Mexico
--------------------------------------	---	------------------------



Safety Data Sheet

Material Name: SULFUR DIOXIDE

SDS ID: MAT22290

Section 5 - FIRE FIGHTING MEASURES

Extinguishing Media

Suitable Extinguishing Media

carbon dioxide, regular dry chemical, Large fires: Use regular foam or flood with fine water spray.

Unsuitable Extinguishing Media

None known.

Special Hazards Arising from the Chemical

Negligible fire hazard.

Hazardous Combustion Products

sulfur oxides

Fire Fighting Measures

Move container from fire area if it can be done without risk. Cool containers with water spray until well after the fire is out. Stay away from the ends of tanks. Keep unnecessary people away, isolate hazard area and deny entry.

Special Protective Equipment and Precautions for Firefighters

Wear full protective fire fighting gear including self contained breathing apparatus (SCBA) for protection against possible exposure.

Section 6 - ACCIDENTAL RELEASE MEASURES

Personal Precautions, Protective Equipment and Emergency Procedures

Wear personal protective clothing and equipment, see Section 8.

Methods and Materials for Containment and Cleaning Up

Keep unnecessary people away, isolate hazard area and deny entry. Stay upwind and keep out of low areas.

Ventilate closed spaces before entering. Evacuation radius: 150 feet. Stop leak if possible without personal risk.

Reduce vapors with water spray. Do not get water directly on material.

Environmental Precautions

Avoid release to the environment.

Section 7 - HANDLING AND STORAGE

Precautions for Safe Handling

Do not get in eyes, on skin, or on clothing. Do not breathe gas, fumes, vapor, or spray. Wash hands thoroughly after handling. Use only outdoors or in a well-ventilated area. Wear protective gloves/protective clothing/eye protection/face protection. Contaminated work clothing should not be allowed out of the workplace. Do not eat, drink or smoke when using this product. Keep only in original container. Avoid release to the environment.

Conditions for Safe Storage, Including any Incompatibilities

Store in a well-ventilated place. Keep container tightly closed.

Store locked up.

Protect from sunlight.

Store and handle in accordance with all current regulations and standards. Protect from physical damage. Store outside or in a detached building. Keep separated from incompatible substances.

Incompatible Materials

bases, combustible materials, halogens, metal carbide, metal oxides, metals, oxidizing materials, peroxides, reducing agents

Section 8 - EXPOSURE CONTROLS / PERSONAL PROTECTION

Component Exposure Limits

Sulfur dioxide	7446-09-5
ACGIH:	0.25 ppm STEL

Centennial Resource Production, LLC.	H ₂ S Contingency Plan Raider Federal Com 102H & 103H	Lea County, New Mexico
--------------------------------------	---	------------------------



Safety Data Sheet

Material Name: SULFUR DIOXIDE

SDS ID: MAT22290

NIOSH:	2 ppm TWA ; 5 mg/m ³ TWA
	5 ppm STEL ; 13 mg/m ³ STEL
	100 ppm IDLH
OSHA (US):	5 ppm TWA ; 13 mg/m ³ TWA
Mexico:	0.25 ppm STEL [PPT-CT]

ACGIH - Threshold Limit Values - Biological Exposure Indices (BEI)

There are no biological limit values for any of this product's components.

Engineering Controls

Provide local exhaust or process enclosure ventilation system. Ensure compliance with applicable exposure limits.

Individual Protection Measures, such as Personal Protective Equipment

Eye/face protection

Wear splash resistant safety goggles with a faceshield. Contact lenses should not be worn. Provide an emergency eye wash fountain and quick drench shower in the immediate work area.

Skin Protection

Wear appropriate chemical resistant clothing. Wear chemical resistant clothing to prevent skin contact.

Respiratory Protection

Any self-contained breathing apparatus that has a full facepiece and is operated in a pressure-demand or other positive-pressure mode.

Glove Recommendations

Wear appropriate chemical resistant gloves.

Section 9 - PHYSICAL AND CHEMICAL PROPERTIES

Appearance	colorless gas	Physical State	gas
Odor	irritating odor	Color	colorless
Odor Threshold	3 - 5 ppm	pH	(Acidic in solution)
Melting Point	-73 °C (-99 °F)	Boiling Point	-10 °C (14 °F)
Boiling Point Range	Not available	Freezing point	Not available
Evaporation Rate	>1 (Butyl acetate = 1)	Flammability (solid, gas)	Not available
Autoignition Temperature	Not available	Flash Point	(Not flammable)
Lower Explosive Limit	Not available	Decomposition temperature	Not available
Upper Explosive Limit	Not available	Vapor Pressure	2432 mmHg @ 20 °C
Vapor Density (air=1)	2.26	Specific Gravity (water=1)	1.462 at -10 °C

Centennial Resource Production, LLC.	H ₂ S Contingency Plan Raider Federal Com 102H & 103H	Lea County, New Mexico
--------------------------------------	---	------------------------

**MATHESON**

ask. . .The Gas Professionals™

Safety Data Sheet**Material Name: SULFUR DIOXIDE****SDS ID: MAT22290**

Water Solubility	22.8 % (@ 0 °C)	Partition coefficient: n-octanol/water	Not available
Viscosity	Not available	Kinematic viscosity	Not available
Solubility (Other)	Not available	Density	Not available
Physical Form	liquified gas	Molecular Formula	S-O ₂
Molecular Weight	64.06		

Solvent Solubility**Soluble**

alcohol, acetic acid, sulfuric acid, ether, chloroform, Benzene, sulfuryl chloride, nitrobenzenes, Toluene, acetone

Section 10 - STABILITY AND REACTIVITY**Reactivity**

No reactivity hazard is expected.

Chemical Stability

Stable at normal temperatures and pressure.

Possibility of Hazardous Reactions

Will not polymerize.

Conditions to Avoid

Minimize contact with material. Containers may rupture or explode if exposed to heat.

Incompatible Materials

bases, combustible materials, halogens, metal carbide, metal oxides, metals, oxidizing materials, peroxides, reducing agents

Hazardous decomposition products

oxides of sulfur

Section 11 - TOXICOLOGICAL INFORMATION**Information on Likely Routes of Exposure****Inhalation**

Toxic if inhaled. Causes damage to respiratory system, burns, difficulty breathing

Skin Contact

skin burns

Eye Contact

eye burns

Ingestion

burns, nausea, vomiting, diarrhea, stomach pain

Acute and Chronic Toxicity**Component Analysis - LD50/LC50**

The components of this material have been reviewed in various sources and the following selected endpoints are published:

Sulfur dioxide (7446-09-5)

Inhalation LC50 Rat 965 - 1168 ppm 4 h

Product Toxicity Data**Acute Toxicity Estimate**

No data available.

Immediate Effects

Centennial Resource Production, LLC.	H ₂ S Contingency Plan Raider Federal Com 102H & 103H	Lea County, New Mexico
--------------------------------------	---	------------------------

**MATHESON**

ask. . The Gas Professionals™

Safety Data Sheet**Material Name: SULFUR DIOXIDE****SDS ID: MAT22290**

Toxic if inhaled, frostbite, suffocation, respiratory tract burns, skin burns, eye burns

Delayed Effects

No information on significant adverse effects.

Irritation/Corrosivity Data

respiratory tract burns, skin burns, eye burns

Respiratory Sensitization

No data available.

Dermal Sensitization

No data available.

Component Carcinogenicity

Sulfur dioxide	7446-09-5
ACGIH:	A4 - Not Classifiable as a Human Carcinogen
IARC:	Monograph 54 [1992] (Group 3 (not classifiable))

Germ Cell Mutagenicity

No data available.

Tumorigenic Data

No data available.

Reproductive Toxicity

No data available.

Specific Target Organ Toxicity - Single Exposure

No target organs identified.

Specific Target Organ Toxicity - Repeated Exposure

No target organs identified.

Aspiration hazard

Not applicable.

Medical Conditions Aggravated by Exposure

respiratory disorders

Section 12 - ECOLOGICAL INFORMATION**Component Analysis - Aquatic Toxicity**

No LOLI ecotoxicity data are available for this product's components.

Persistence and Degradability

No data available.

Bioaccumulative Potential

No data available.

Mobility

No data available.

Section 13 - DISPOSAL CONSIDERATIONS**Disposal Methods**

Dispose of contents/container in accordance with local/regional/national/international regulations.

Component Waste Numbers

The U.S. EPA has not published waste numbers for this product's components.

Section 14 - TRANSPORT INFORMATION**US DOT Information:****Shipping Name:** SULFUR DIOXIDE

Centennial Resource Production, LLC.	H ₂ S Contingency Plan Raider Federal Com 102H & 103H	Lea County, New Mexico
--------------------------------------	---	------------------------

**MATHESON**

ask. . The Gas Professionals™

Safety Data Sheet**Material Name: SULFUR DIOXIDE****SDS ID: MAT22290****Hazard Class: 2.3****UN/NA #: UN1079****Required Label(s): 2.3****IMDG Information:****Shipping Name: SULPHUR DIOXIDE****Hazard Class: 2.3****UN#: UN1079****Required Label(s): 2.3****TDG Information:****Shipping Name: SULFUR DIOXIDE****Hazard Class: 2.3****UN#: UN1079****Required Label(s): 2.3****International Bulk Chemical Code**

This material does not contain any chemicals required by the IBC Code to be identified as dangerous chemicals in bulk.

Section 15 - REGULATORY INFORMATION**U.S. Federal Regulations**

This material contains one or more of the following chemicals required to be identified under SARA Section 302 (40 CFR 355 Appendix A), SARA Section 313 (40 CFR 372.65), CERCLA (40 CFR 302.4), TSCA 12(b), and/or require an OSHA process safety plan.

Sulfur dioxide	7446-09-5
SARA 302:	500 lb TPQ
OSHA (safety):	1000 lb TQ (Liquid)
SARA 304:	500 lb EPCRA RQ

SARA Section 311/312 (40 CFR 370 Subparts B and C) reporting categories

Gas Under Pressure; Acute toxicity; Skin Corrosion/Irritation; Serious Eye Damage/Eye Irritation; Simple Asphyxiant

U.S. State Regulations

The following components appear on one or more of the following state hazardous substances lists:

Component	CAS	CA	MA	MN	NJ	PA
Sulfur dioxide	7446-09-5	Yes	Yes	Yes	Yes	Yes

California Safe Drinking Water and Toxic Enforcement Act (Proposition 65)**WARNING**This product can expose you to chemicals including Sulfur dioxide , which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Centennial Resource Production, LLC.	H ₂ S Contingency Plan Raider Federal Com 102H & 103H	Lea County, New Mexico
--------------------------------------	---	------------------------

**MATHESON**

ask. . The Gas Professionals™

Safety Data Sheet**Material Name: SULFUR DIOXIDE****SDS ID: MAT22290**

Sulfur dioxide	7446-09-5
Repro/Dev. Tox	developmental toxicity , 7/29/2011

Component Analysis - Inventory**Sulfur dioxide (7446-09-5)**

US	CA	AU	CN	EU	JP - ENCS	JP - ISHL	KR KECI - Annex 1	KR KECI - Annex 2
Yes	DSL	Yes	Yes	EIN	Yes	Yes	Yes	No

KR - REACH CCA	MX	NZ	PH	TH-TECI	TW, CN	VN (Draft)
No	Yes	Yes	Yes	Yes	Yes	Yes

Section 16 - OTHER INFORMATION**NFPA Ratings**

Health: 3 Fire: 0 Instability: 0

Hazard Scale: 0 = Minimal 1 = Slight 2 = Moderate 3 = Serious 4 = Severe

Summary of Changes

SDS update: 02/10/2016

Key / Legend

ACGIH - American Conference of Governmental Industrial Hygienists; ADR - European Road Transport; AU - Australia; BOD - Biochemical Oxygen Demand; C - Celsius; CA - Canada; CA/MA/MN/NJ/PA - California/Massachusetts/Minnesota/New Jersey/Pennsylvania*; CAS - Chemical Abstracts Service; CERCLA - Comprehensive Environmental Response, Compensation, and Liability Act; CFR - Code of Federal Regulations (US); CLP - Classification, Labelling, and Packaging; CN - China; CPR - Controlled Products Regulations; DFG - Deutsche Forschungsgemeinschaft; DOT - Department of Transportation; DSD - Dangerous Substance Directive; DSL - Domestic Substances List; EC - European Commission; EEC - European Economic Community; EIN - European Inventory of (Existing Commercial Chemical Substances); EINECS - European Inventory of Existing Commercial Chemical Substances; ENCS - Japan Existing and New Chemical Substance Inventory; EPA - Environmental Protection Agency; EU - European Union; F - Fahrenheit; F - Background (for Venezuela Biological Exposure Indices); IARC - International Agency for Research on Cancer; IATA - International Air Transport Association; ICAO - International Civil Aviation Organization; IDL - Ingredient Disclosure List; IDLH - Immediately Dangerous to Life and Health; IMDG - International Maritime Dangerous Goods; ISHL - Japan Industrial Safety and Health Law; IUCLID - International Uniform Chemical Information Database; JP - Japan; Kow - Octanol/water partition coefficient; KR KECI Annex 1 - Korea Existing Chemicals Inventory (KECI) / Korea Existing Chemicals List (KECL); KR KECI Annex 2 - Korea Existing Chemicals Inventory (KECI) / Korea Existing Chemicals List (KECL); KR - Korea; LD50/LC50 - Lethal Dose/ Lethal Concentration; KR REACH CCA - Korea Registration and Evaluation of Chemical Substances Chemical Control Act; LEL - Lower Explosive Limit; LLV - Level Limit Value; LOLI - List Of Lists™ - ChemADVISOR's Regulatory Database; MAK - Maximum Concentration Value in the Workplace; MEL - Maximum Exposure Limits; MX - Mexico; Ne- Non-specific; NFPA - National Fire Protection Agency; NIOSH - National Institute for Occupational Safety and Health; NJTSR - New Jersey Trade Secret Registry; Nq - Non-quantitative; NSL - Non-Domestic Substance List (Canada); NTP - National Toxicology Program; NZ - New Zealand; OSHA - Occupational Safety and Health Administration; PEL - Permissible Exposure Limit; PH - Philippines; RCRA - Resource Conservation and Recovery Act; REACH - Registration, Evaluation, Authorisation, and restriction of Chemicals; RID - European Rail Transport; SARA - Superfund Amendments and Reauthorization Act; Sc - Semi-quantitative; STEL - Short-term Exposure Limit;

Operator Name: CENTENNIAL RESOURCE PRODUCTION LLC

Well Name: RAIDER FEDERAL COMWell Number: 103H

Safe containmant attachment:

Waste disposal type: HAUL TO COMMERCIAL FACILITY Disposal location ownership: COMMERCIAL

Disposal type description: Commercial

Disposal location description: state approved disposal facility

Reserve Pit

Reserve Pit being used? NO

Temporary disposal of produced water into reserve pit? NO

Reserve pit length (ft.) Reserve pit width (ft.)

Reserve pit depth (ft.) Reserve pit volume (cu. yd.)

Is at least 50% of the reserve pit in cut?

Reserve pit liner

Reserve pit liner specifications and installation description

Cuttings Area

Cuttings Area being used? NO

Are you storing cuttings on location? Y

Description of cuttings location Drill cuttings will be properly disposed of into a steel tank and taken to an NMOCD approved disposal facility.

Cuttings area length (ft.) Cuttings area width (ft.)

Cuttings area depth (ft.) Cuttings area volume (cu. yd.)

Is at least 50% of the cuttings area in cut?

WCuttings area liner

Cuttings area liner specifications and installation description

Section 8 - Ancillary

Are you requesting any Ancillary Facilities?: N

Ancillary Facilities

Comments:

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

ACKNOWLEDGMENTS

Action 495859

ACKNOWLEDGMENTS

Operator: Permian Resources Operating, LLC 300 N. Marienfeld St Ste 1000 Midland, TX 79701	OGRID: 372165
	Action Number: 495859
	Action Type: [C-101] BLM - Federal/Indian Land Lease (Form 3160-3)

ACKNOWLEDGMENTS

☐	I hereby certify that no additives containing PFAS chemicals will be added to the completion or recompletion of this well.
--------------------------	--

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/oed/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 495859

CONDITIONS

Operator: Permian Resources Operating, LLC 300 N. Marienfeld St Ste 1000 Midland, TX 79701	OGRID: 372165
	Action Number: 495859
	Action Type: [C-101] BLM - Federal/Indian Land Lease (Form 3160-3)

CONDITIONS

Created By	Condition	Condition Date
clevans	Cement is required to circulate on both surface and intermediate1 strings of casing.	8/14/2025
clevans	If cement does not circulate on any string, a Cement Bond Log (CBL) is required for that string of casing.	8/14/2025
ward.rikala	Notify the OCD 24 hours prior to casing & cement.	9/22/2025
ward.rikala	File As Drilled C-102 and a directional Survey with C-104 completion packet.	9/22/2025
ward.rikala	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string.	9/22/2025
ward.rikala	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system.	9/22/2025
ward.rikala	No additives containing PFAS chemicals will be added to the drilling fluids or completion fluids used during drilling, completions, or recompletions operations.	9/22/2025