State of New Mexico Energy, Minerals & Natural Resources

Form C-101 May 27, 2004

1625 N. French Dr., Hobbs, NM 88240 District II 1301 W. Grand Avenue, Artesia, NM 88210 District III 1000 Rio Brazo District IV 1220 S. St. Fr.

Oil Conservation Divsiion

Submit to appropriate District Office

os Rd., Aztec, NM 87410	1220 S. St. Francis Dr.	
ancis Dr., Santa Fe, NM 87505	Santa Fe, NM 87505	AMENDED REPORT
ICATION FOR PERMIT	TO DRILL, RE-ENTER, DEEPEN, P	LUGBACK, OR ADD A ZONE
Operator Name	and Address AM 11 06	<sup>2</sup> OGRID Number <b>16696</b>
nc.		<sup>3</sup> API Number

APPLIC	ATION	FC						R, DEEPEN, I					
						RM 11 06				<sup>2</sup> OGRID Number 1 <b>6696</b>			
OXY USA Inc. P.O. Box 502		dl an		79710-025				ļ	20 001 7	<sup>3</sup> API Number			
	ty Code	1) arm	<u> </u>	/9/10-050	<u>,,,, , , , , , , , , , , , , , , , , ,</u>	<sup>5</sup> Property	Name		30-021-2	<u>√0 5 6 5</u>	il No.		
271				Br	ravo Dom			e Gas Unit 20	032	- S			
			roposed Po	ool l					16 Proposed Po				
Bravo Dome	Bravo Dome Carbon Dioxide Gas 640 96010												
	<sup>7</sup> Surface Location												
UL or lot no.	Section	1	wnship	Range	Lot. Idn			North/South Line	Feet from the	East/West line	County		
F	3	121	ON	32 E	<u> </u>	1700		North	1700	west	Harding		
·				~ · · · · · · ·				Different From			<del>,</del>		
UL or lot no.	Section	Tov	wnship	Range	Lot. Idn	n Feet from t	the	North/South Line	Feet from the	East/West line	County		
					A	dditional W							
11 Work Typ N	-		12 ,	Well Type Cod	ie				e Type Code LO5802	-(૬	15 Ground Level Elevation		
<sup>16</sup> Multi <b>N</b> d	-		17 7	Proposed Depth 2600'	h				ontractor N/A	<sup>20</sup> Spi	20 Spud Date		
Depth to ground		>100	0'		Distance fr	from nearest fresh >10	water w	ell [	Distance from nearest surface water >1000'				
Pit: Liner: Syn	nhetic X_	12	mils thi	nick Clar	у	Pit Volume _40	000	bbls Drilling Meth	od:				
1	oop System							ater D Brine	Diesel/Oi	il-based 🔲	Gas/Air 🔲		
				<sup>21</sup> F	Propose	d Casing ar	ıd Cei	ment Program	·				
Hole S	ize	I	Casin	ng Size	Casing weight/foot		1	Setting Depth	Sacks of Cemen	ıt E:	stimated TOC		
12-1/	4"	1	8-5	/8"	1	24#		700'	300sx	Surface			
7-7/8	3"		5-1	-1/2" 5.9		#FG/15.5#		2600'	300sx		Surface		
		$\perp$											
		1							<del></del>	_			
Describe the proposed program. If this application is to DEEPEN or PLUG BACK, give the data on the present productive zone and proposed new productive zone. Describe the blowout prevention program, if any. Use additional sheets if necessary.										new productive zone.			
See Attachment													
	<del></del>			<del></del>						<del></del>			
1 hereby certify that the information given above is true and complete to the best of my knowledge and belief. I further certify that the drilling pit will be				OIL CONSERVATION DIVISION									
	id belief. I fur	rther o	certify tha	at <u>the</u> drillin	g pit will l	he	Ĭ	OIL C	5110DEC17111				
my knowledge and constructed acco an (attached) alto Signature:	nd belief. I fur ording to NM	rther o 40CD	certify tha D guideline	nat the drillin nes X a g	ng pit will b	be rmit 🔲 , or	Appro	oved by:	7 Mars	<del>L</del>			

Sr. Regulatory Analyst Expiration Date: 3/13/08 Title: Approval Date: E-mail Address: david stewart@oxy.com Date: Phone: Conditions of Approval: 3/8/07 432-685-5717 Attached [

## ATTACHMENT C-101 BDCDGU Z032-03 (

PROPOSED TD:

2600' TVD

BOP PROGRAM:

0-700'

None

700-26001

8" 2M annular hydril preventer.

CASING:

Surface:

8-5/8" OD 24# J55 8rd ST&C new casing set at 700'

12-1/4" hole

Centralizers from TD-Surf, every fourth joint

Production:

5-1/2" OD new casing from 0-2600'

300'~15.5# J55 8rd LTC 2300'-5.9# 10rd FG

7-7/8" hole - 5 centralizers

\*This well will have fiberglass casing from surface to the productive interval (Tubb). Steel casing will be used across the Tubb. The fiberglass casing must penetrate the Cimarron at a minimum. The optimum point for setting the fiberglass casing is at the midpoint of the Cimarron formation.

CEMENT:

Surface - Circulate cement with 300sx Premium Plus with 2% CaCl<sub>2</sub> + .25#/sx Poly E Flake, (WT-14.8ppg, Yld-1.34cf/sx, FW-6.3g/sx)

Production - Cement with 150sx Premium Plus with 3%  $CaCl_2 + .25\#/sx$  Poly E Flake, (WT-11.1ppg, Yld-3.27cf/sx, FW-20.47g/sx) followed by 150sx Premium Plus with 3%  $CaCl_2 + .25\#/sx$  Poly E Flake, (WT-13.2ppg, Yld-1.86cf/sx, FW-9.93g/sx)

MUD:

0-700'

Fresh water/native mud.

Wt 8.6-9.2ppg, Vis 32-36sec

700-26001

Fresh water/Starch/Gel pH control as needed.

Wt 9.0-9.2ppg, Vis 28-29sec

District I 1625 N. French Dr., Hobbs, NM 88240 District II 811 South First, Artesia, NM 88210 District III

1000 Rio Brazos Rd., Aztec, NM 87410


State of New Mexico Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION 2040 South Pacheco Santa Fe, NM 87505 Form C-102
Revised October 18, 1994
Instructions on back
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

District IV 2040 South Pacheco, Santa Fe, NM 87505

AMENDED REPORT

	Pool Name									
30-021-20363 96010 BRAVO DOME CARBON DIOXIDE GA	BRAVO DOME CARBON DIOXIDE GAS 640									
Property Code Property Name Well 1	Number									
27111 BRAVO DOME CARBON DIOXIDE GAS UNIT 2032 03	31									
	vation									
	10.0									
Surface Location										
UL or lot no. Section Township Range Lot Idn. Feet from the North/South line Feet from the East/West line Co	ounty									
F 3 20 N 32 E 1700' NORTH 1700' WEST H	EST HARDING									
Bottom Hole Location If Different From Surface										
UL or lot no. Section Township Range Lot Idn. Feet from the North/South line Feet from the East/West line Go	ounty									
Dedicated Acres   Joint or Infill   Consolidation Code   Order No.										
640 N										
NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSC	DLIDATED									
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION										
OPERATOR CERTIFIC	CATION									
I hereby certify that the information contains true and complete to the best of my knowled										
	age and benes.									
002										
Signature										
David Stewar	t									
NM-E NAD27 Lot - 35° 59'39.88"  Sr. Regulatory Ans	n1 wa+									
Lon - 103° 31'49.45"	aryst									
X - 737519.52 Y - 1818170.65 3 (8(ο)										
Date										
SURVEYOR CERTIFIC	CATION									
I hereby certify that the well location shows										
was plotted from field notes of acqual street	eys made by									
me or under my supervision, and that the and correct to the best of my belief.	Table is true									
February 05, 20	>0.Z\									
Date of Survey ( 15079)	18									
Signature and Seat of Professional Surveyor	of May									
A POFESSIONAL LA	/									
Tana Dave Zh	2007									
Terry Asel										
Certificate Number 15079										

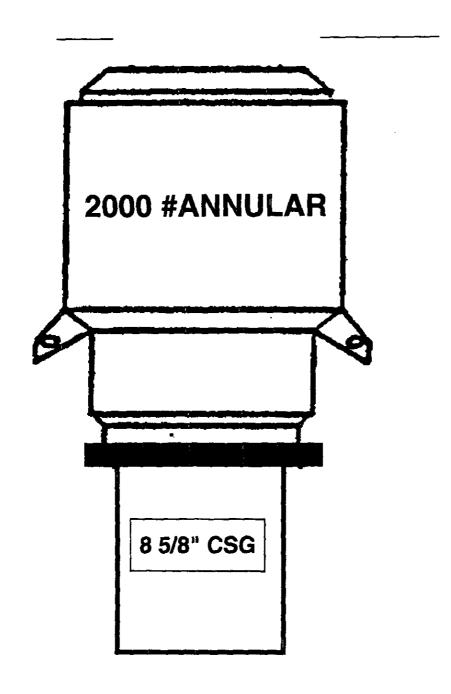

**BRAVO DOME 2003 DRILLING PROJECT BOP DIAGRAM** 

80, 80

Bravo Dome Unit Location and Pit Design Cheyenne Rig 8

## Bravo Dome Unit Cellar and Sump Pit Cheyenne Rig 8

