District I

1625 N. French Dr., Hobbs, NM 88240

District II
1301 W. Grand Avenue, Artesia, NM 88210
District III

State of New Mexico Energy, Minerals & Natural Resources

Form C-101 May 27, 2004

Oil Conservation Divsiion MAR 26 2007 Submit to appropriate District Office

000 Rio Brazos Rd., Aztec, NM 87410 1220 S. St. 1										 -				
1220 S. St. Franci											NDED REPORT			
APPLIC	CATION	FO	R PEI	RMIT T	O DRI	ILL, RE-EN	TER	, DEEPEN,	LUGBACI	ξ OR ADD	A ZONE			
Operator Name and Address								- Omiti-	² OGRID Number					
OXY USA Inc.								16696						
P.O. Box 50250 Midland, TX 79710-0250								30~ 021- 2 0 37/						
⁴ Property Code Sproperty 27111 Bravo Dome Carbon D														
9 Proposed Pool I Bravo Dome Carbon Dioxide Gas 640 96010							¹⁰ Proposed Pool 2							
PLAAO DOME	: Carbon	DIOX	rue ua	12 04U		⁷ Surface I	ocati	on						
UL or lot no.	Section	Tou	vnship	Range	Lot, Id			North/South Line	Feet from the	East/West line	County			
G	٦	l e	-	32 E		1700		i i		east	Harding			
8 Proposed Bottom Hole Location If Different From Surface							<u> </u>	<u></u>						
UL or lot no.	Section	Tov	vnship	Range	Lot. Id			North/South Line	Feet from the	East/West line	County			
L	<u> </u>	<u> </u>		<u> </u>	L	dditional W	ell Lo	cation		1				
11 Work Ty	pe Code	- (ī2 ·	Well Type Cod		13 Cable/Re					evel Elevation			
\	\			C		R		5-6-461		<u> </u>				
¹⁶ Multiple NO			17 Proposed Depth 2600			18 Format Tub				20 Spud Date				
Depth to ground					Distance i	from nearest fresh				arest surface water				
	>100' >1000' >1000'													
Pit: Liner: Syr	nthetic X.	12_	_ mils th	ick Clay	<i>i</i> 🗀	Pit Volume _40	100 P	bls Drilling Meth	od:					
Closed-La	oop System [F	resh Wa	ter X Brine	Diesel/O	il-based 🔲	Gas/Air 🔲			
				²¹ H	ropos	ed Casing an	d Cer	nent Program	·					
Hole Size Casing Size					Casir	ng weight/foot	Setting Depth		Sacks of Cemer	nt Es				
12-1/4"			8-5/8"			24#		700'	300sx	Surface				
7-7/8"			5-1/2"			5.9#FG/15.5#		2600'	300sx	Surface				
<u> </u>		┦—			 _		 							
 		4		 -										
		1_			<u> </u>		<u> </u>							
Describe the blow							K, give	the data on the pre	sent productive zo	ne and proposed	new productive zone.			
Describe the blov	vout preventi	on pro	grani, n a	niy. Ose add	MIOTAL SHE	ets it necessary.								
						See Attack	nment							
}														
		 .												
23 I hereby certify that the information given above is true and complete to the best of							OIL CONSERVATION DIVISION							
my knowledge and belief. I further certify that the drilling pit will be constructed according to NMOCD guidelines a general permit, or							Approved by A							
an (attached) alternative OCD approved plan . Signature:								Approved by:						
Printed name: David Stewart							Title: DISTRICT SUPERVISOR							
Title: Sr. Regulatory Analyst								Approval Date: 4-3-07 Expiration Date: 4-3-08						
E-mail Address:	david st	ewar	rt@oxy	.com				,						
Date: Phone: 432-685-5717							Conditions of Approval:							
432-685-5717						717	Attached							

ATTACHMENT C-101' BDCDGU 1832-091

PROPOSED TD:

2600' TVD

BOP PROGRAM:

0-700'

None

700-26001

8" 2M annular hydril preventer.

CASING:

Surface:

8-5/8" OD 24# J55 8rd ST&C new casing set at 700'

12-1/4" hole

Centralizers from TD-Surf, every fourth joint

Production:

5-1/2" OD new casing from 0-2600'

300'-15.5# J55 8rd LTC 2300'-5.9# 10rd FG

7-7/8" hole - 5 centralizers

*This well will have fiberglass casing from surface to the productive interval (Tubb). Steel casing will be used across the Tubb. The fiberglass casing must penetrate the Cimarron at a minimum. The optimum point for setting the fiberglass casing is at the midpoint of the Cimarron formation.

CEMENT:

Surface - Circulate cement with 300sx Premium Plus with 2% CaCl₂ + .25#/sx Poly E Flake, (WT-14.8ppg, Yld-1.34cf/sx, FW-6.3g/sx)

Production - Cement with 150sx Premium Plus with 3% $CaCl_2 + .25\#/sx$ Poly E Flake, (WT-11.1ppg, Yld-3.27cf/sx, FW-20.47g/sx) followed by 150sx Premium Plus with 3% $CaCl_2 + .25\#/sx$ Poly E Flake, (WT-13.2ppg, Yld-1.86cf/sx, FW-9.93g/sx)

MUD:

0-700'

Fresh water/native mud.

Wt 8.6-9.2ppg, Vis 32-36sec

700-26001

Fresh water/Starch/Gel pH control as needed.

Wt 9.0-9.2ppg, Vis 28-29sec

District I 1625 N. French Dr., Hobbs, NM 88240 District II 811 South First, Artesia, NM 88210

1000 Rio Brazos Rd., Aztec, NM 87410

State of New Mexico
Energy, Minerals & Natural Resources Department


Form C-102
Revised October 18, 1994
Instructions on back
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

OIL CONSERVATION DIVISION 2040 South Pacheco Santa Fe, NM 87505

AMENDED REPORT

District IV 2040 South Pacheco, Santa Fe, NM 87505

		WEI	L LO	CATION	AND A	.CR	EAGE DEDIC	CAT	ΓΙΟΝ PI	LAT			
£		Pool Cod	ì				Pool Na			0.40			
30-021-20371				96010		BRAVO DOME CARBON DIOXIDE GAS 640							
Property 0	, , ,	W4E 0	Prope			1 1	Well Number						
			0 00	D DOME CARBON DIOXIDE GAS L					_ 				
ogrid no. 16696			Operator Name OXY USA INC.						Elevation 4593.6				
Surface Location													
UL or lot no. Section		Township	Range	Lot Idn.	Feet from the		North/South line F		Feet from the East/Wes		line County		
G	9 18 N		32 E		1700'		NORTH		1700' E		ST HARDING		
Bottom Hole Location If Different From Surface													
UL or lot no.	Section	Township	Range	Lot Idn.	Feet from th	1e	North/South line	Fe	et from the	East/West	line	County	
Dedicated Acre	e Toint	or Infili C	oneolidation	Code	Irder No			<u></u>					
Dedicated Acres Joint or Infill Consolidation Code Order No.													
NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED													
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION													
9									OPERATOR CERTIFICATION				
									I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief.				
!),					, , , , , , , , , , , , , , , , , , ,		mo,,,auge mu benesi	
	\ 1				1700								
	ł					İ		j	}	1			
	· \								Signature Signature				
	ļ			1 NM-E NAD27		1700′		11 5			ld Stewart		
	1								Printed Nam		latory Analyst		
	ļ				- 35° 48'26.37 - 103° 32'26.32			Sr. Regulatory Analyst					
	-	X - 735042. Y - 1750046							3(23(07				
			·						Date	<u> </u>			
	Í							Í				IFICATION	
	}					1		Ì				shown on this plat al surveys made by	
	j l) l		Į		my supervisie	on, and the	at the same is true	
	[- }		ļ		vente		2006	
						1		l					
						-			Date of Surve Signature and	Seal of Red	icssione \$	úrsveyor	
	}							}	{	GIST	15079		
	}					{		}	0	KEN.	\mathcal{I}	Alon-	
	}							}	den	グ	SSIONAL	(1) (1007)	
	\ 					1		1	Certificate Nu		779 279	<u>e</u>	
کینے ہے۔						<u> </u>		<u>_</u>			J/3		

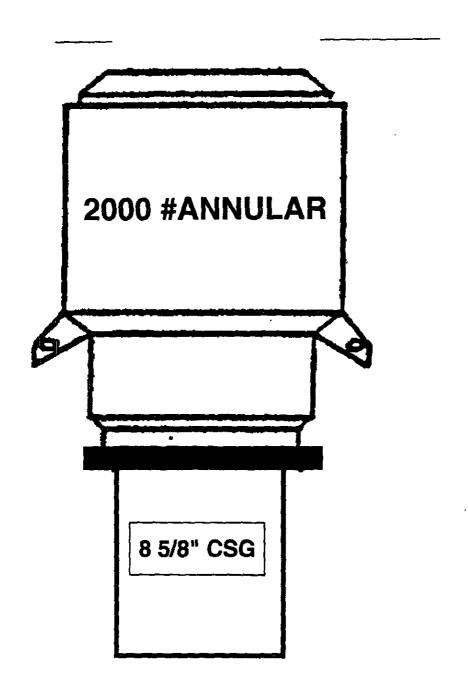

BRAVO DOME 2003 DRILLING PROJECT BOP DIAGRAM

80, 25 89

Bravo Dome Unit Location and Pit Design Cheyenne Rig 8

Bravo Dome Unit Cellar and Sump Pit Cheyenne Rig 8

