District I

1625 N. French Dr., Hobbs, NM 88240

District II

1301 W. Grand Avenue, Artesia, NM 88210

District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV

State of New Mexico Energy, Minerals & Natural Resource EIVED

Oil Conservation Divsiion

MAR 26 2007 bmit to appropriate District Office

1220 S. St. Francis Dr.

Sente Ea NIM 97505

Oil Consequation Private AMENDED REPORT

Form C-101 May 27, 2004

1220 S. St. Francis	s Dr., Santa l	Fe, NM 875	35 .	2	Santa Fe, NN	M 8/303 3	1220 S. St. Francis	MARINE ANTE	INDED REPORT		
APPLIC	ATION	FOR P	ERMIT T	O DRIL	L, RE-ENT	TER, DEEPF	EN, PLUGBAC				
	-	¹ Op	7	OGRID Number							
OXY USA Inc.							ļ	16696 ³ API Number			
P.O. Box 502	250 Mic	17 and, T)	79710-025	30- 021-	30-021-20372						
	ty Code		Б	2	⁵ Property Na	ame 6Well No.					
271	.11	9 Proposed		'avo Dome	Carbon Diox	xide Gas Unit	t (832 Proposed		<u> </u>		
 Bravo Dome	Carbon			ţ	96010		Proposed	P001 2	ļ		
⁷ Surface Location											
UL or lot no.	UL or lot no. Section Township Range			Lot. Idn Feet from				East/West line	County		
G	U	18 N	32 E	<u></u>	1700	noute		east	Harding		
⁸ Proposed Bottom Hole Location If Different From Surface											
UL or lot no.	Section	Township	Range	Lot. Idn	Feet from the			East/West line	County		
<u></u>	Additional Well Location										
¹¹ Work Typ N			12 Well Type Cod	le l	13 Cable/Rota R	ary 14 Lease Type Code			Level Elevation		
¹⁶ Multi	ple	* 442	17 Proposed Depti	pth 18 Fort			19 Contractor	²⁰ S ₁	⁰ Spud Date		
Depth to ground			2600'	Distance from	Tubb m nearest fresh wa			(,107			
Depth to ground	water	>100'		Distance non	n nearest fresh wa >1000		well Distance from nearest surface water >1000'				
Pit: Liner: Syn	thetic X_	12 mils	thick Clay	y P	it Volume400	0 bbls Drilling	g Method:				
 Closed-Lo	oop System [Fre	esh Water X	Brine Diesel	/Oil-based	Gas/Air		
			217	Proposed	Casing and	Cement Pro	Oram				
Hole S	:-a	T				d Cement Program Setting Depth Sacks of Cement Estimated TOC					
Hole Si			sing Size	† 	weight/foot	Setting Depth		nent r			
12-1/			8-5/8"		24#	700'	300sx		Surface		
7-7/8"		- 5	5-1/2"		G/15.5#	2600'	300sx		Surface		
						<u> </u>					
				 							
		<u> </u>		<u> </u>							
Describe the property Describe the blow						, give the data on t	the present productive	zone and proposed	l new productive zone.		
Describe the orow	Out breacher	On program,	пану. Озе аци	Monai succes	if necessary.						
See Attachment											
						,,,,					
²³ I hereby certify	that the info	ormation give	n above is true	and complete	to the best of	OH CONCERNATION DIVIGION					
my knowledge and	d belief. I fu	rther certify	that the drillin	ng pit will be	·	OIL CONSERVATION DIVISION					
constructed according to NMOCD guidelines a general permit, or an (attached) alternative OCD-approved plan						Approved by:					
Signature:	Va -	<u> </u>				Ed 11/artino					
Printed name: Da	avid Ste	wart			7	Title: OIST	RICT SUPE	RVISOR	<u>.</u>		
Title: Sr	r. Regula	atory Ana	ılyst		Į.	Approval Date: 4	4-3-07	Expiration Date:	4-3-08		
E-mail Address:	david s	tewart@o	(y.com								
Date:	_ 1		Phone:			Conditions of Appr	roval:				
3/23	67		432 - 685 - 5		.7 <u>[</u> إ	Attached					

ATTACHMENT C-101' BDCDGU 1832-111

PROPOSED TD:

2600' TVD

BOP PROGRAM:

0-7001

None

700-26001

8" 2M annular hydril preventer.

CASING:

Surface:

8-5/8" OD 24# J55 8rd ST&C new casing set at 700'

12-1/4" hole

Centralizers from TD-Surf, every fourth joint

Production:

5-1/2" OD new casing from 0-2600'

300'-15.5# J55 8rd LTC 2300'-5.9# 10rd FG

7-7/8" hole - 5 centralizers

*This well will have fiberglass casing from surface to the productive interval (Tubb). Steel casing will be used across the Tubb. The fiberglass casing must penetrate the Cimarron at a minimum. The optimum point for setting the fiberglass casing is at the midpoint of the Cimarron formation.

CEMENT:

Surface - Circulate cement with 300sx Premium Plus with 2% CaCl₂ + .25#/sx Poly E Flake, (WT-14.8ppg, Yld-1.34cf/sx, FW-6.3g/sx)

Production - Cement with 150sx Premium Plus with 3% $CaCl_2 + .25\#/sx$ Poly E Flake, (WT-11.1ppg, Yld-3.27cf/sx, FW-20.47g/sx) followed by 150sx Premium Plus with 3% $CaCl_2 + .25\#/sx$ Poly E Flake, (WT-13.2ppg, Yld-1.86cf/sx, FW-9.93g/sx)

MUD:

0-7001

Fresh water/native mud.

Wt 8.6-9.2ppg, Vis 32-36sec

700-26001

Fresh water/Starch/Gel pH control as needed.

Wt 9.0-9.2ppg, Vis 28-29sec

District I 1625 N. French Dr., Hobbs, NM 88240 District II 811 South First, Artesia, NM 88210

State of New Mexico
Energy, Minerals & Natural Resources Department


OIL CONSERVATION DIVISION 2040 South Pacheco Santa Fe. NM 87505

Form C-102 Revised October 18, 1994 Instructions on back Submit to Appropriate District Office State Lease – 4 Copies
Fee Lease – 3 Copies

1000 Rio Brazos Rd., Aztec, NM 87410				Santa Fe, NM 87505							Fee Lease - 3 Copies		
District IV 2040 South Pache	eco, Santa I	e, NM 87505								AMEN	DED REPORT		
	LL LO	LOCATION AND ACREAGE DEDICATION PLA											
	API Number			Pool Co		Pool Name							
	30-021-20372			9601			BRAVO DOME CARBON L			1			
Property Code		, o . o .	Property Name					Well Number					
27111 BRAVO			O DC	ME C			OXIDE GAS	UNII 18	T 1832				
	OGRID No.				perator 115		4690.1						
1009	16696			OXY USA INC. Surface Location							1000.7		
UL or lot no.	Section	Township	Range	Lot Idn.	Feet from		North/South line	line Feet from the East/W			County		
G	11	18 N	32 E		1700) '	NORTH	1700'	EΑ	ST	HARDING		
			Bott	om Ho	ole Locat		If Different Fro	om Surface					
UL or lot no.	Section	Township	Range	Lot Idn.	Feet from	the		Feet from the	East/West line		County		
							'		1				
Dedicated Acre	s Joint	or Infill C	onsolidatio	n Code	Order No.		<u> </u>						
640	\ N												
NO ALLOV	WABLE '						ON UNTIL ALL EEN APPROVED			EEN CC	ONSOLIDATED		
11									• • •	СЕВТ	IFICATION		
	Ï					İ		III .			contained herein is		
						İ					knowledge and belief.		
	·				1700,	į							
					- 17	1							
	·					L			1.0	1	A. Carrier of the Contract of		
								Signature	/ a / b /				
					7	1700′		Printed Name					
					M-E NAD27			li "	-	atorv	Analyst		
				Lo	it - 35° 48'26 on - 103° 30'11	7.56"		Title					
					- 745648.03 - 1750128.5			Date	3/23	107			
								II			IFICATION		
	 					 					shown on this plat al surveys made by		
}}	, !) 		me or under	, 1	•	at the same is true		
	į.								verte		3 006		
								Date of Surve	W C C C C C C C C C C C C C C C C C C C		3.		
	- — —'							Signature and	Seal of Ph	ofessional 8	urveyor		
	1								<i>ᄩ (< (</i>	15079			
	j					j			REGISTERED X				
	i					i			\ \&\X	1 0	Salala		

Certificate Number

15079

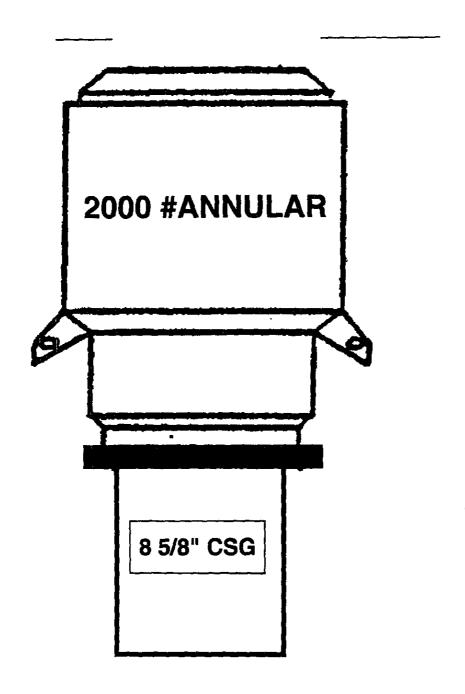

BRAVO DOME 2003 DRILLING PROJECT BOP DIAGRAM

80, 8 80.

Bravo Dome Unit Location and Pit Design Cheyenne Rig 8

Bravo Dome Unit Cellar and Sump Pit Cheyenne Rig 8

